



Technical Bulletin T743

Product: A/V Receiver

Hardware Technical Bulletin: T743-H2005-05R

Date: March 7/05

Subject: Static protection for muting transistors

Note: Implemented in production from serial number:R49T74310201

Previous T.B.'s required: Revised from T743-H2005-05

YES


NO

DESCRIPTION: You may have the complaint that the subwoofer or other channels are popping when switching inputs or when turning on and off.

REASON: The channel that is popping may have a muting transistor damaged due to an external source or subwoofer causing static damage to the transistor.

SOLUTION: Replace the transistor and install a 4700 pF capacitor between the base and collector on the pre amp pc board , as shown in the following two schematics. The use of a surface mount capacitor is recommended. Placing the capacitor on the bottom of the board between the base and collector of each muting transistor is preferred . See figure 2 on page 2.


Note: It is recommended to install this capacitor to each channel's muting transistor. The following are the designations of the muting transistors, Q608,Q609,Q610,Q611,Q615,Q617.

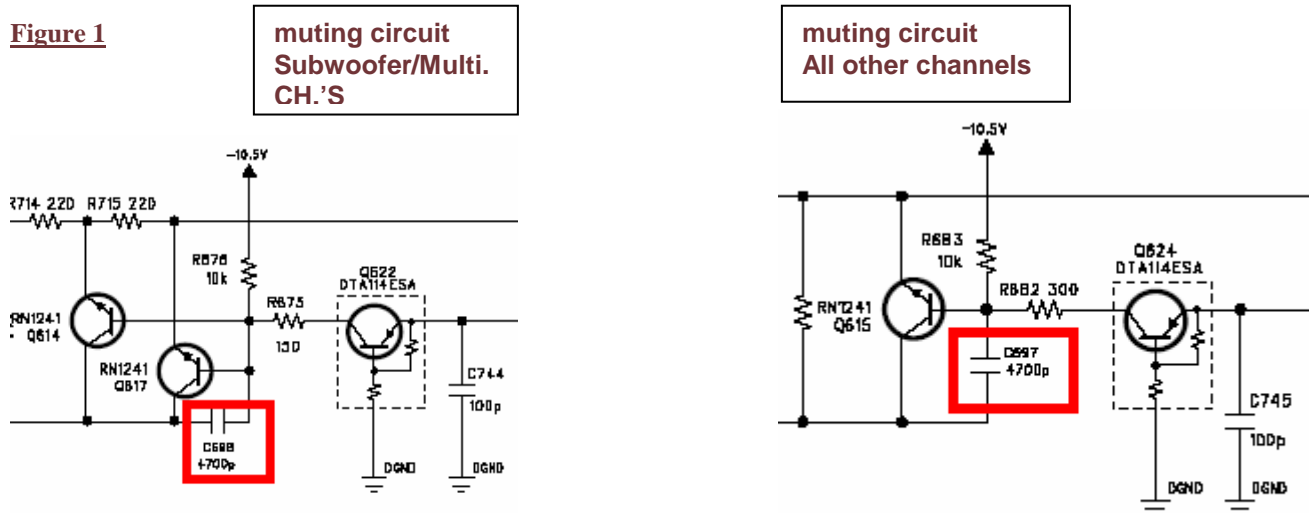

Product: A/V Receiver

Hardware Technical Bulletin: T743-H2005-05R

Figure 2

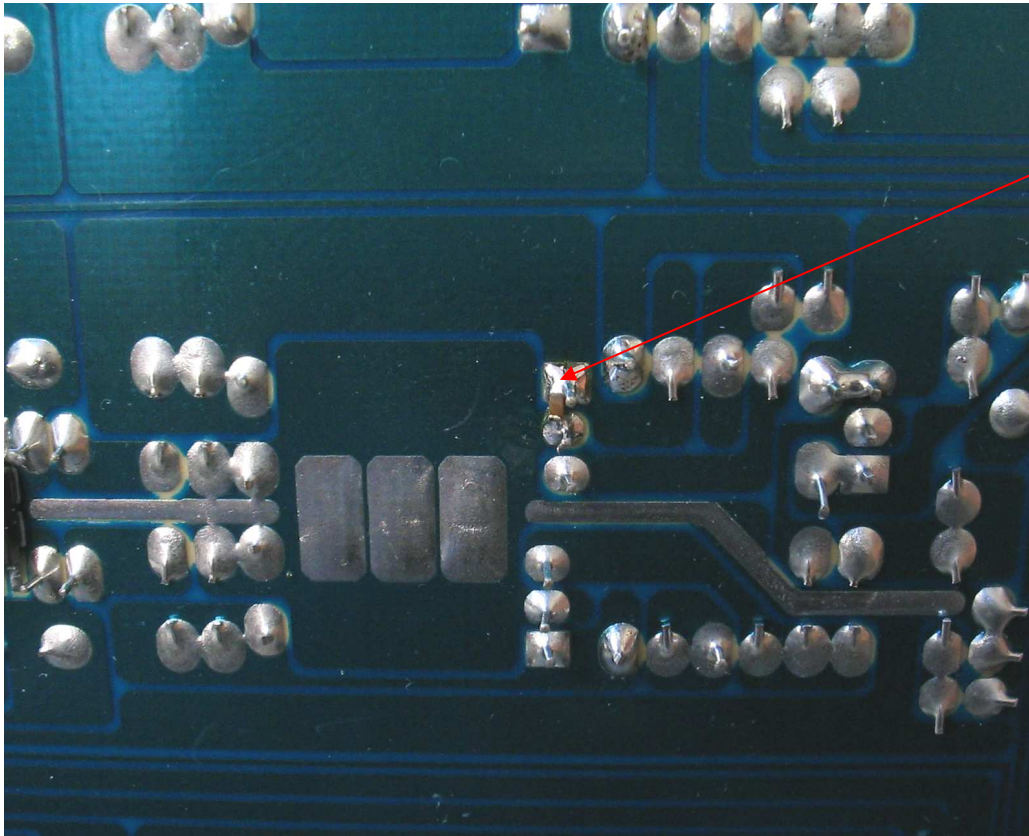

4700pF surface mount capacitor between base and collector pins of muting transistor on the pre amp pc board

Contact:
NAD Electronics International
633 Granite Court
Pickering, ON Canada L1K 3K1
Voice: 905-831-0799 FAX 905-837-6357
www.nadelectronics.com