

AIWA CO..LTD UTSUNOMIYA FACTORY

2620, TOKUJIROU-MACHI, UTSUNOMIYA-SHI, TOCHIGI 321-21, JAPAN

SERVICE TECHNICAL INFORMATION

ONE POINT REPAIR

UTSUNOMIYA, November 30, 1994

REF. NO.: SI-94-030 CUSTOMER SERVICE H.Q.

MODEL **SUBJECT** LCX-50/65

No display

SYMPTOM :

If the unit is operating and power is turned off for a very short period (less than 1 minute) due to a blackout, etc., the display may not appear after the power recovers. In such cases, take the

following measures.

REMEDY


Change the front board chip condenser.

Ref. No. C18

C-CAP 0.033µF

C-CAP 0.022µF BK

CAP M 0.1µF

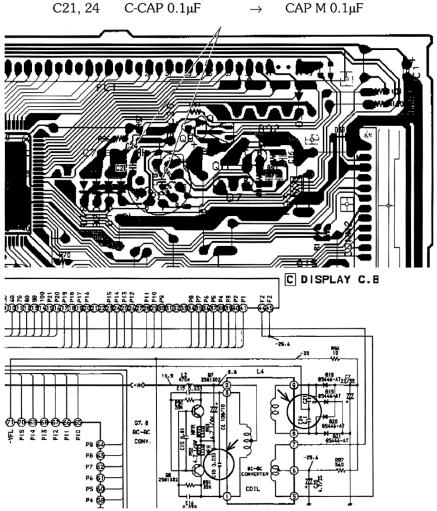

Ref.	Part Name	Part Number
C18	C-CAP, S 0.022-25B	87-010-198-089
C21, 24	CAP, M 0.1-50J	88-700-910-819