



Service Manual

Created: 24 March 2015



EUROPORT EPA300

**Ultra-Compact 300-Watt 6-Channel Portable PA System
with Digital Effects and FBQ Feedback Detection**

Specifications	2
PCB Schematic	3
Parts List	17
Exploded Drawing	42

behringer.com





© 2015 MUSIC Group IP Ltd. All third party trademarks mentioned belong to their respective owners and are not affiliated with MUSIC Group IP Ltd. All information (including drawings and diagrams) contained in this document is the property of MUSIC Group IP Ltd., its subsidiaries or content providers, and is protected by intellectual property (copyright, trademark, patents, etc) laws, international treaty provisions and other laws. Any unauthorized disclosure, use, application, reproduction, modification, lease, sale, transmission or any other dealings in the information may violate applicable laws and result in civil and/or (where applicable) criminal liabilities and penalties.


EUROPORT EPA300


Specifications


- Ultra-compact 300-Watt, 6-channel portable PA system
- Enormous power, incredible sonic performance, and super-light weight means no more lugging around dead weight
- Extremely powerful 8" woofers and 1.35" aluminum-diaphragm compression drivers for incredible sound reproduction
- Studio-grade 24-bit stereo FX processor with 100 awesome presets including reverb, chorus, flanger, delay, pitch shifter and various multi-effects
- Revolutionary FBQ Feedback Detection system instantly reveals critical frequencies for easy feedback removal
- 6-channel mixer section features 2 mono and 2 stereo channels plus separate CD inputs
- 2 high-quality mic preamps with switchable +48 V phantom power for condenser microphones
- Effective, extremely musical 2-band EQ, switchable Pad and Clip LEDs on all mono channels
- Stereo 5-band graphic EQ allows precise frequency correction of main outputs
- Voice Canceller function removes singer's voice from recordings for Karaoke applications
- Comes with one BEHRINGER XM1800S microphone, mic clip and 20' cables
- Integrated storage compartment for microphone, cables, and accessories
- "Planet Earth" switching power supply for maximum flexibility (100 - 240 V~), noise-free audio, superior transient response plus low power consumption for energy savings
- 3-Year Warranty Program*
- Conceived and designed by BEHRINGER Germany

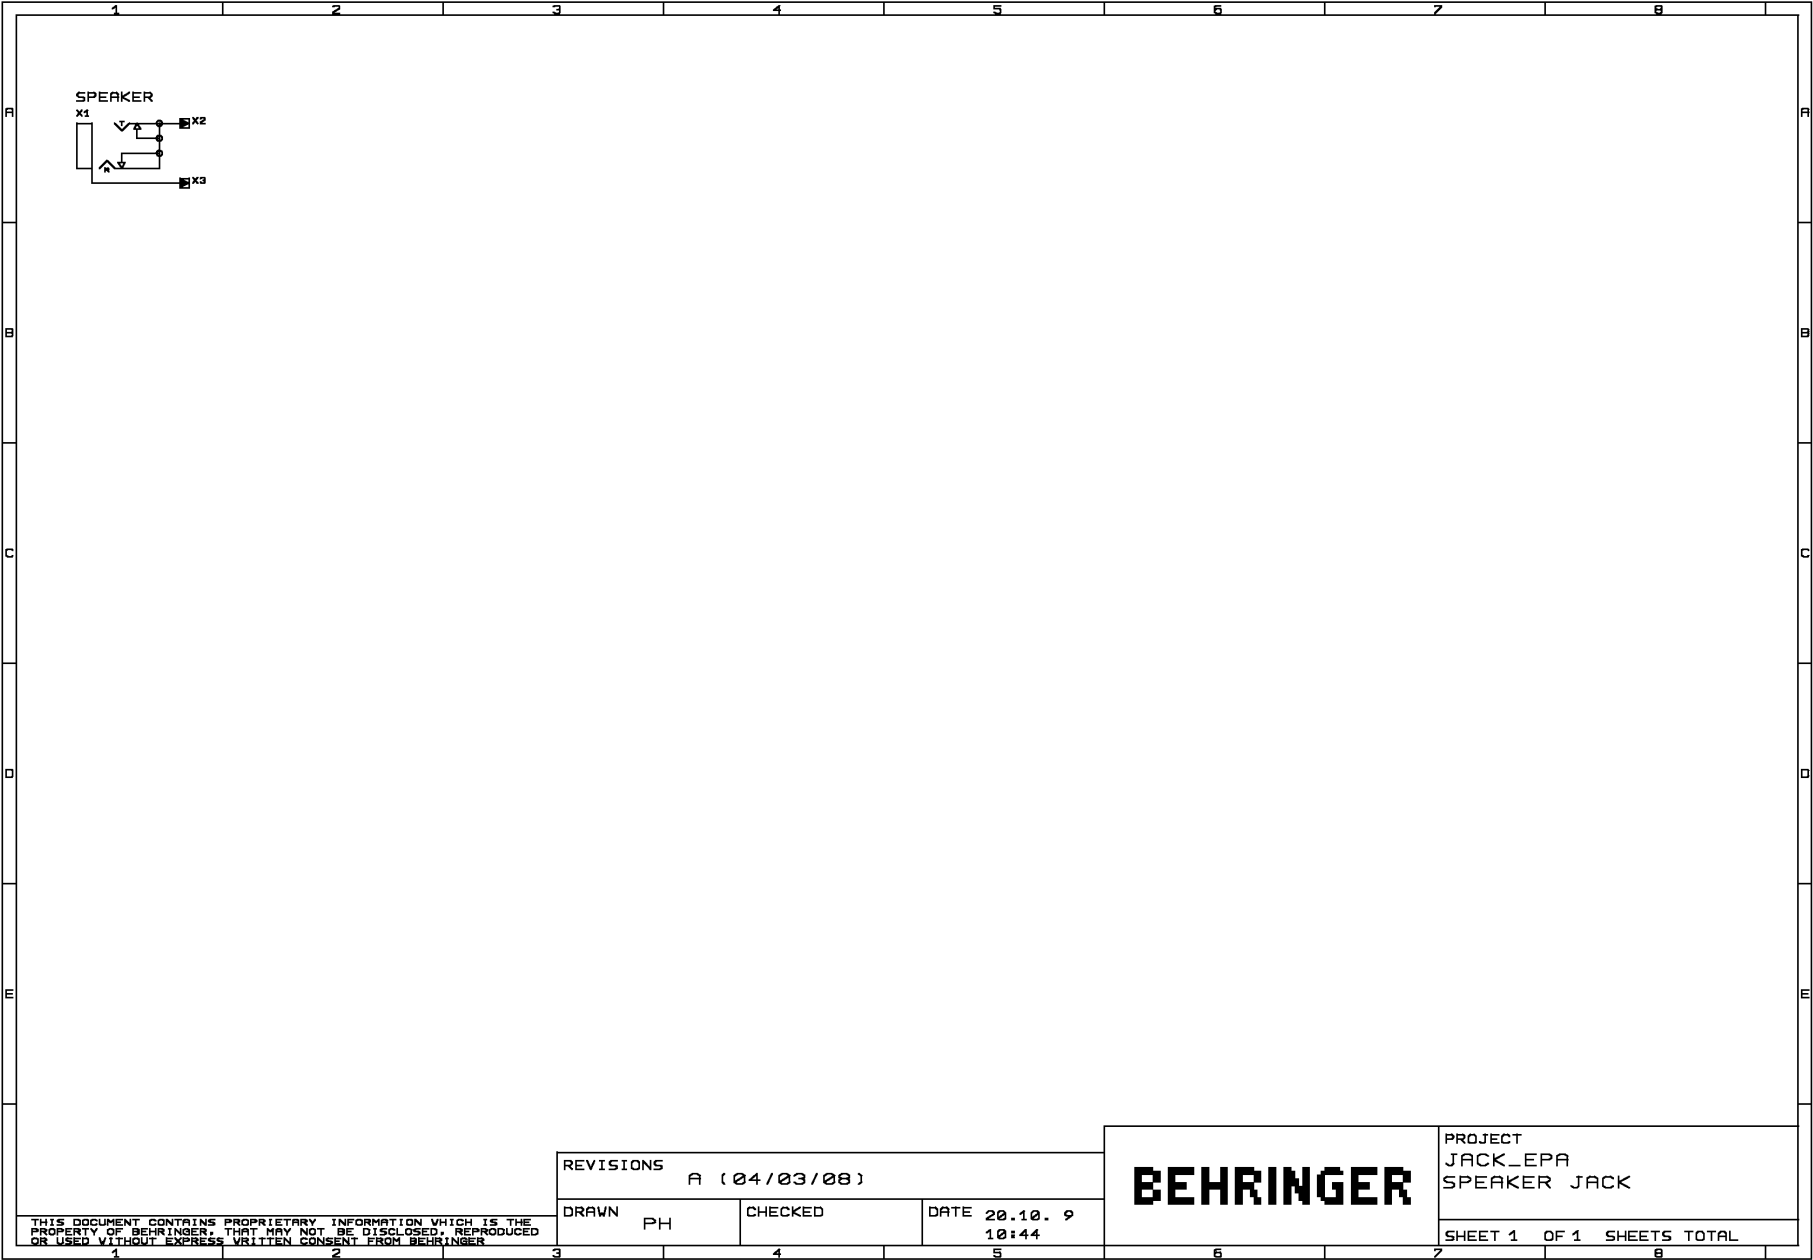


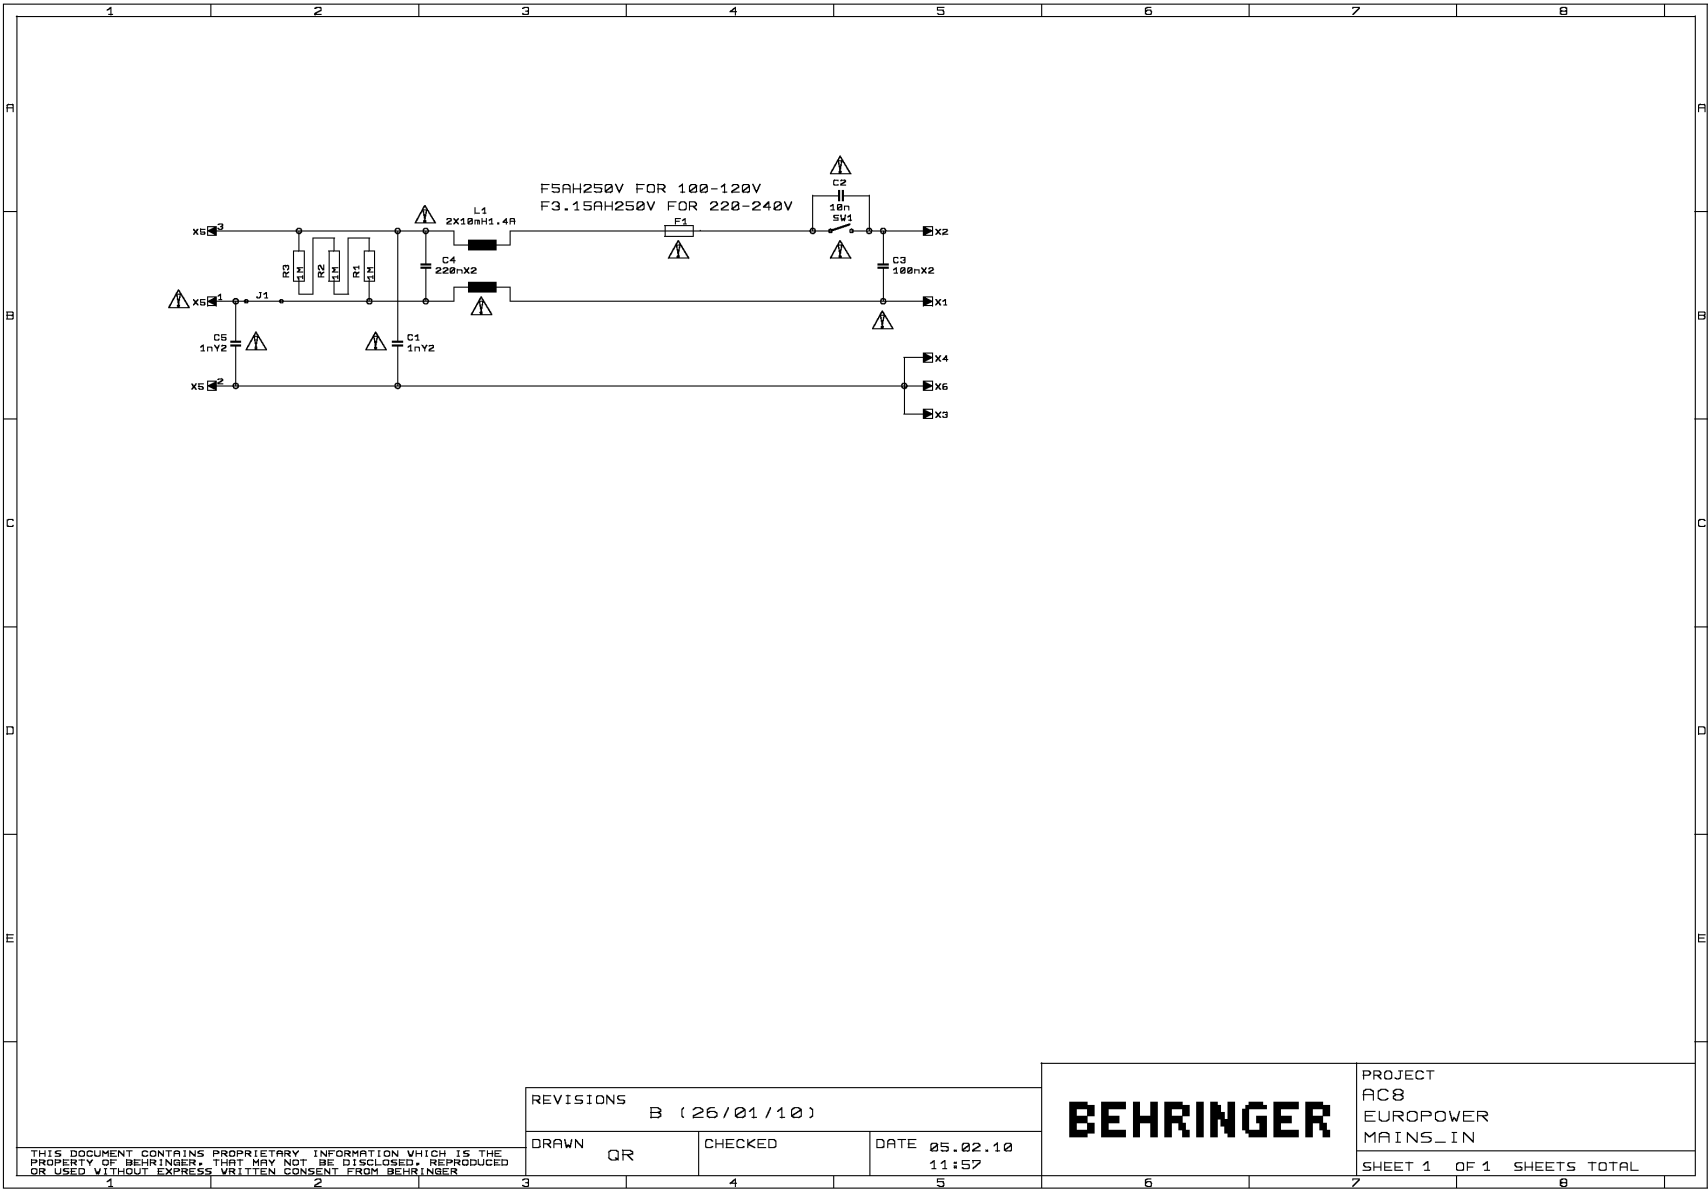


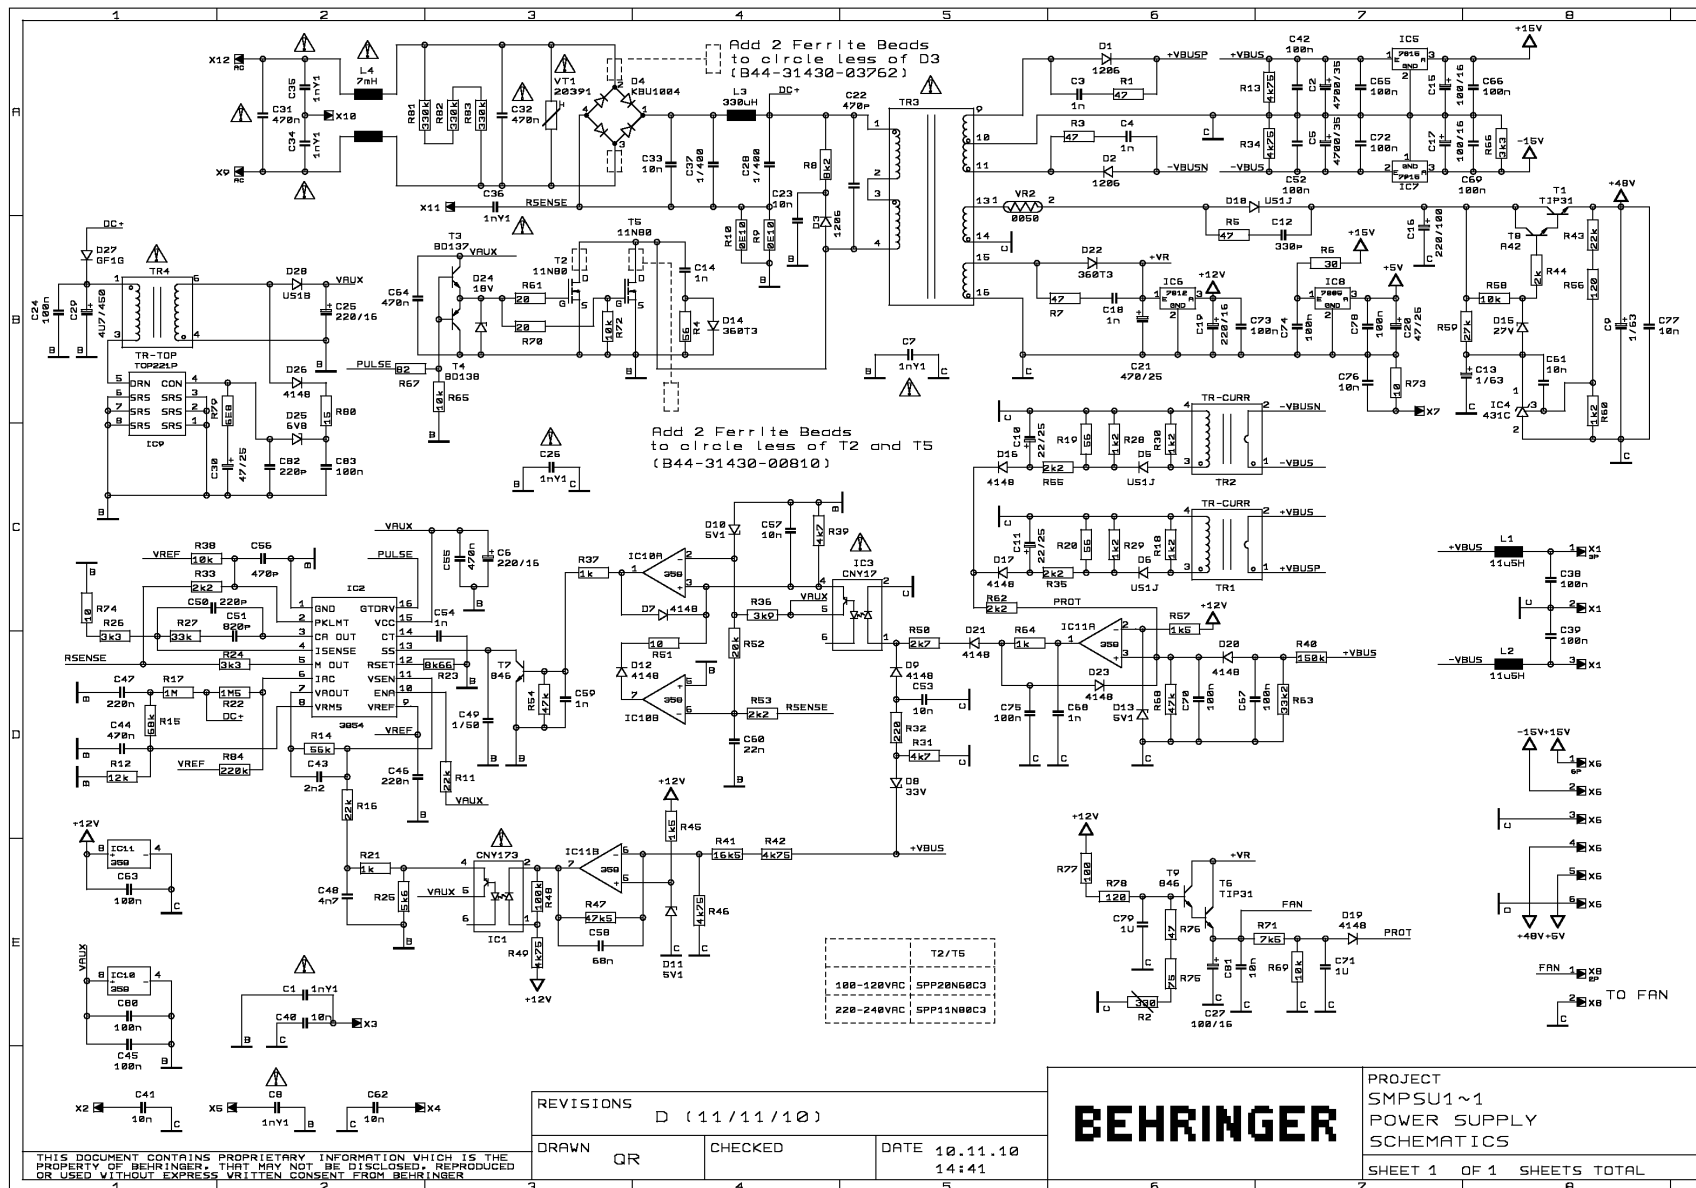

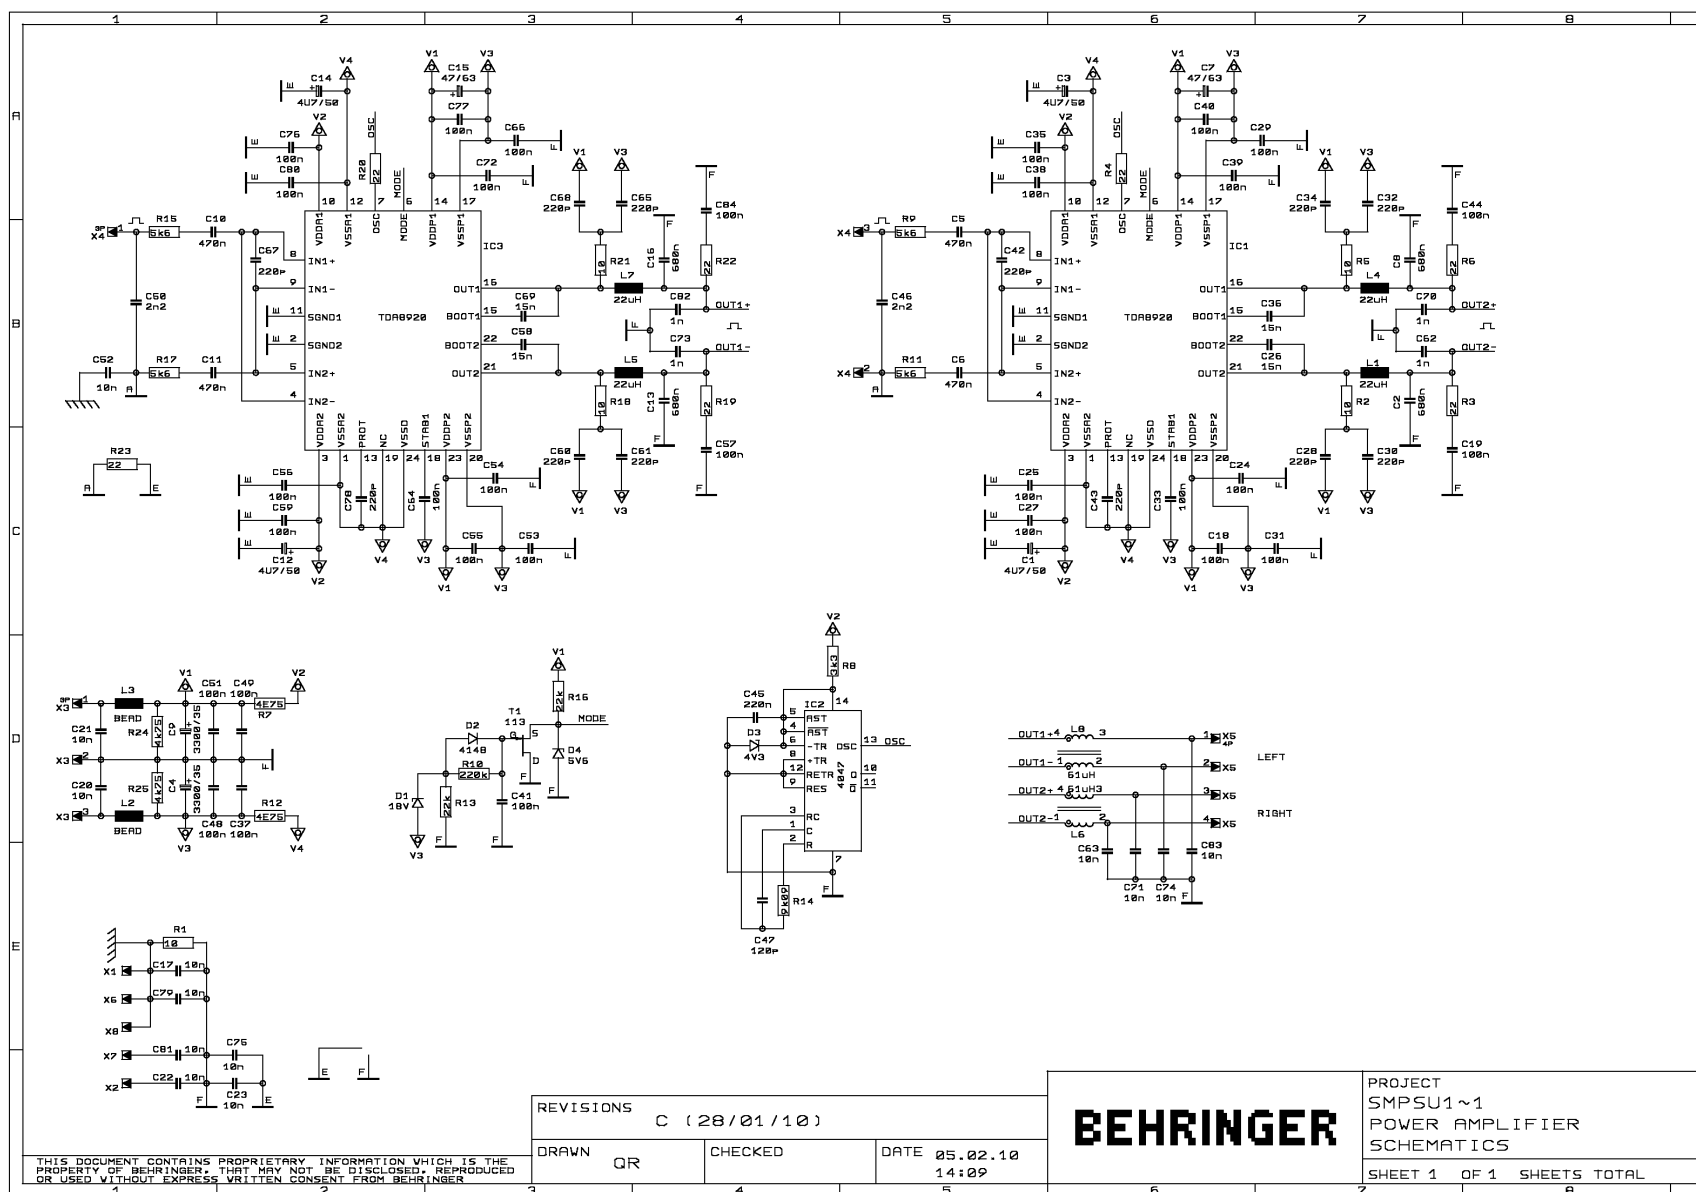


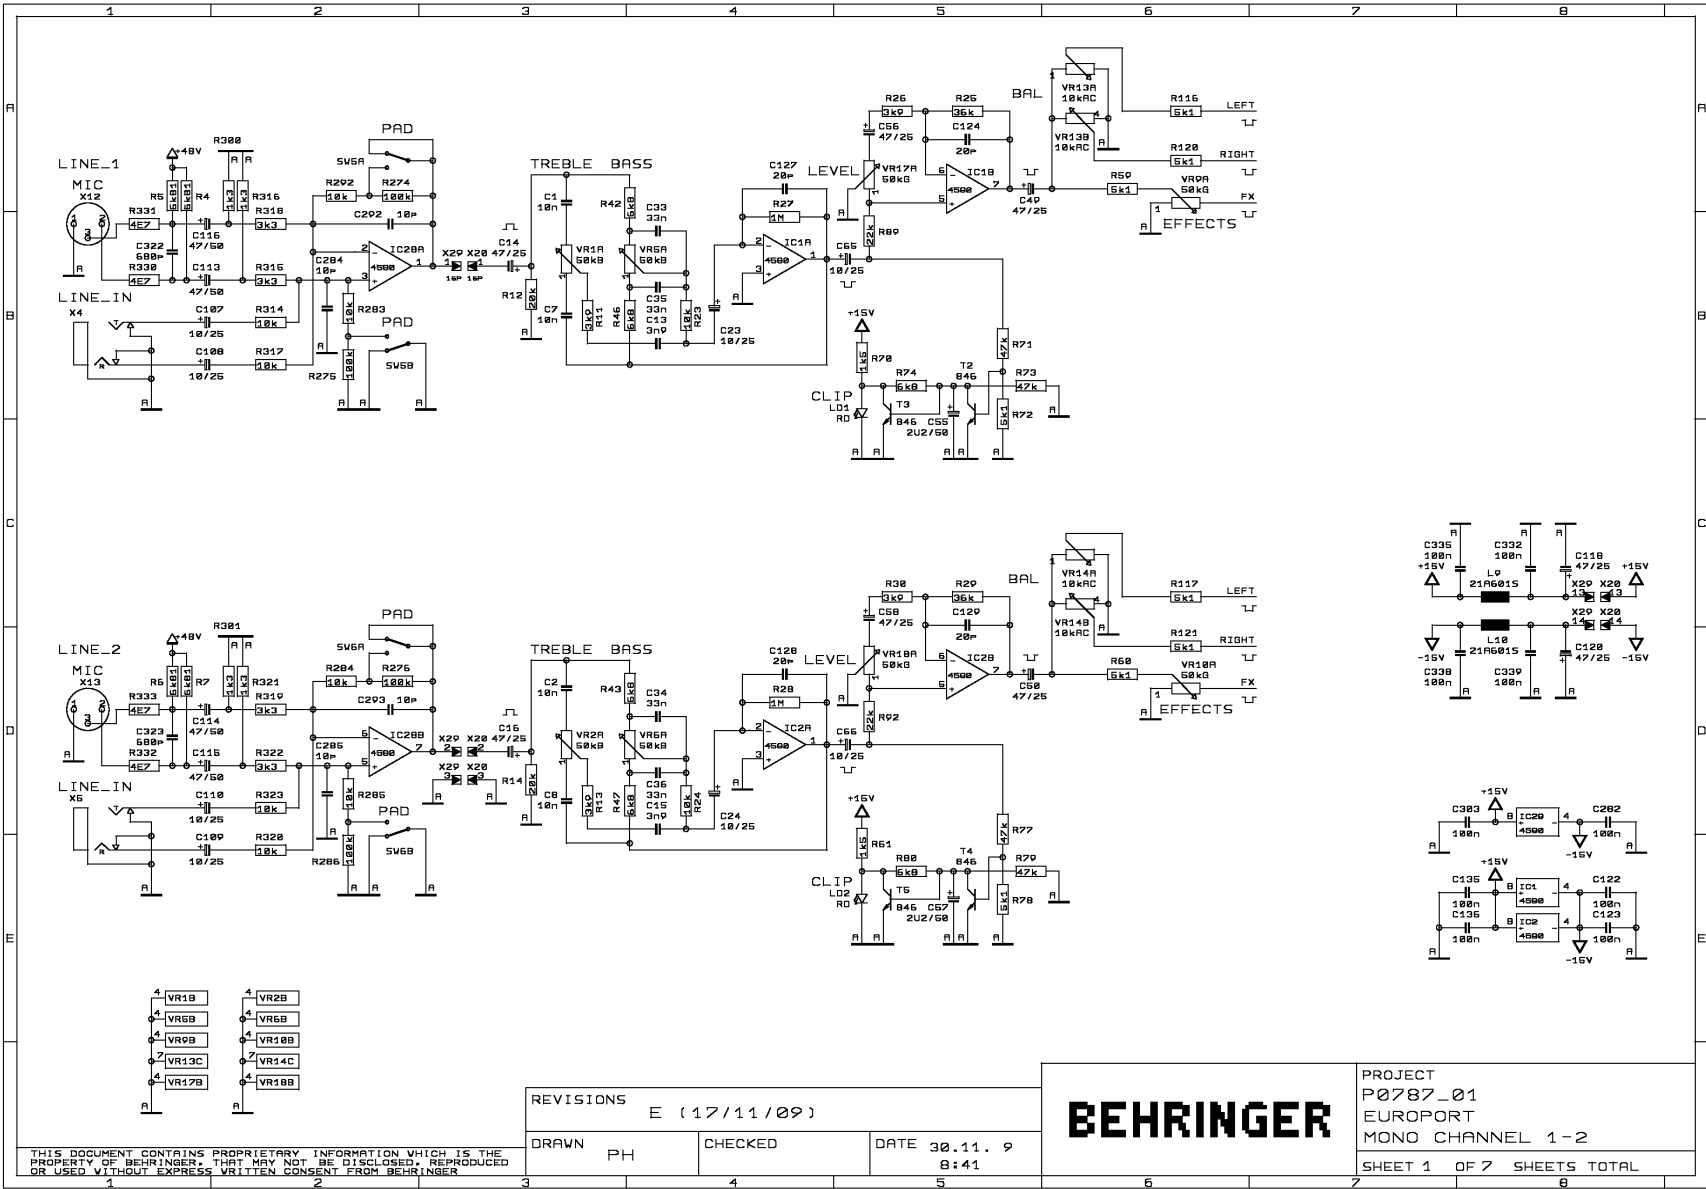


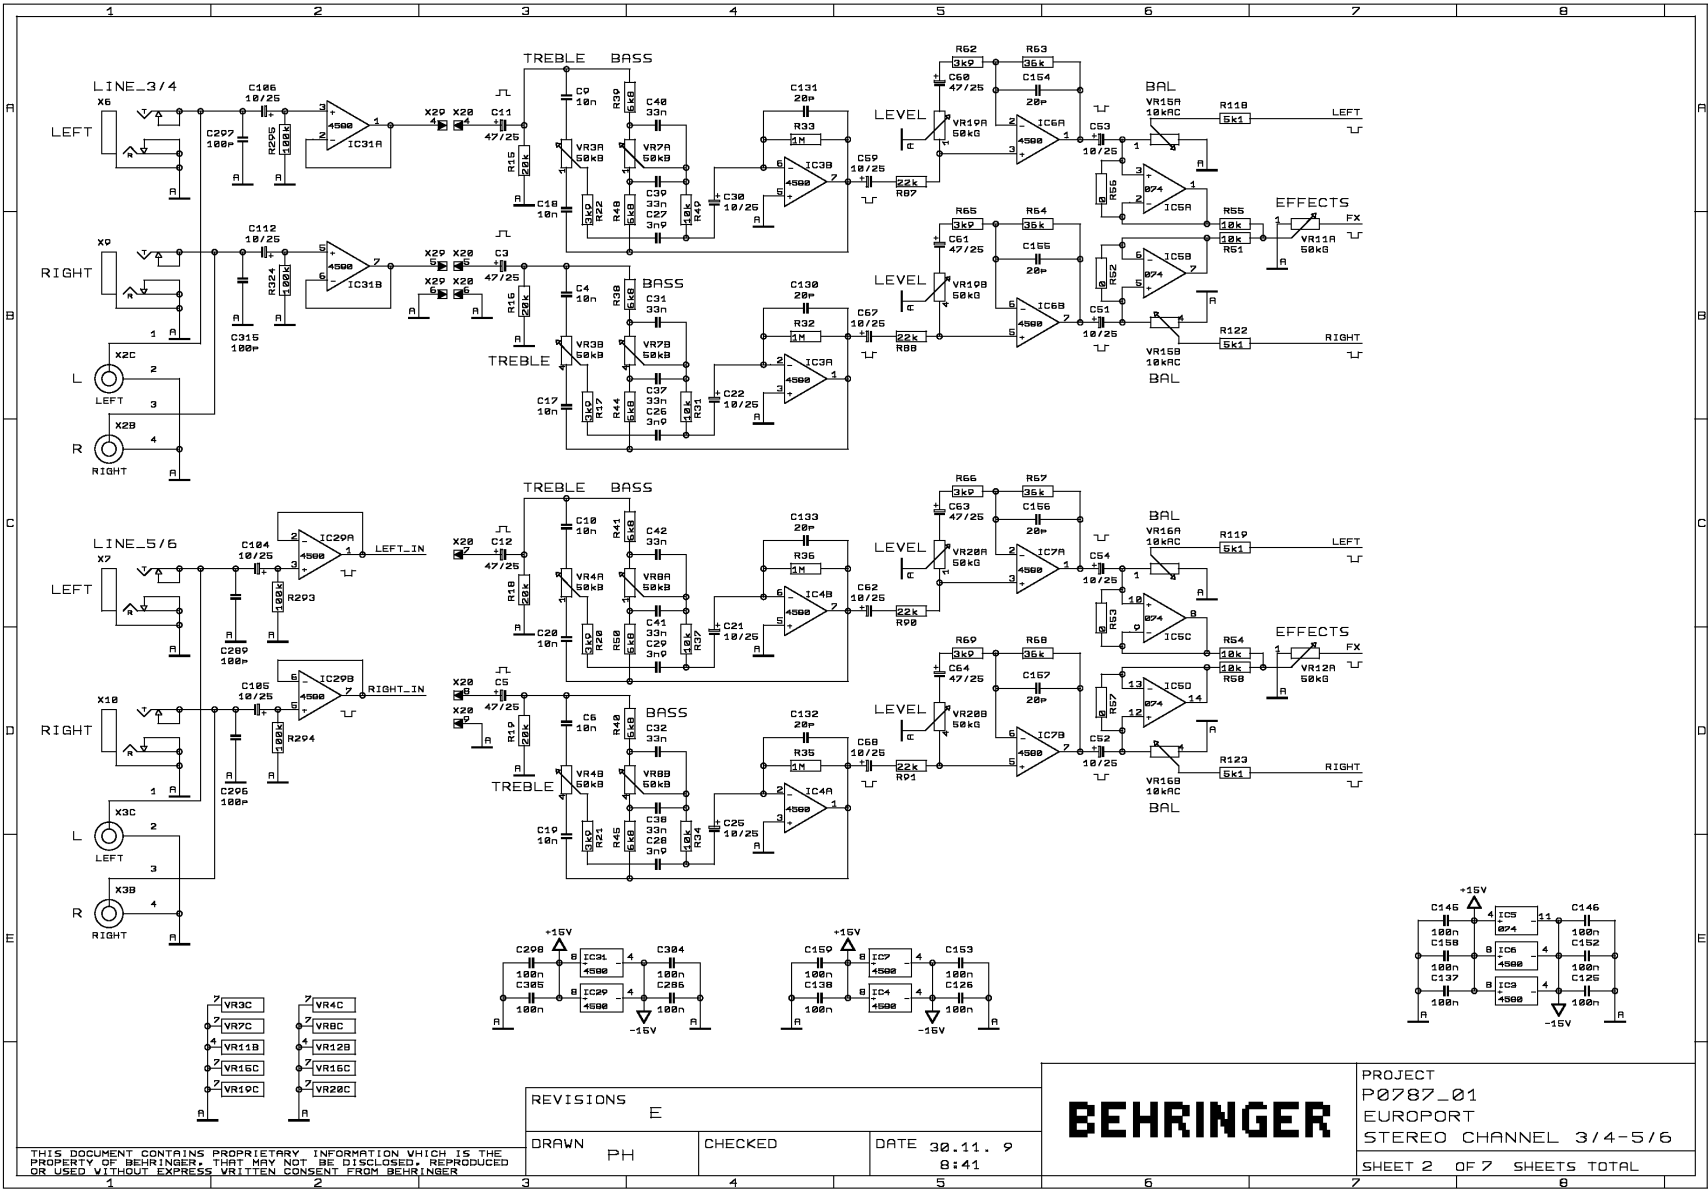


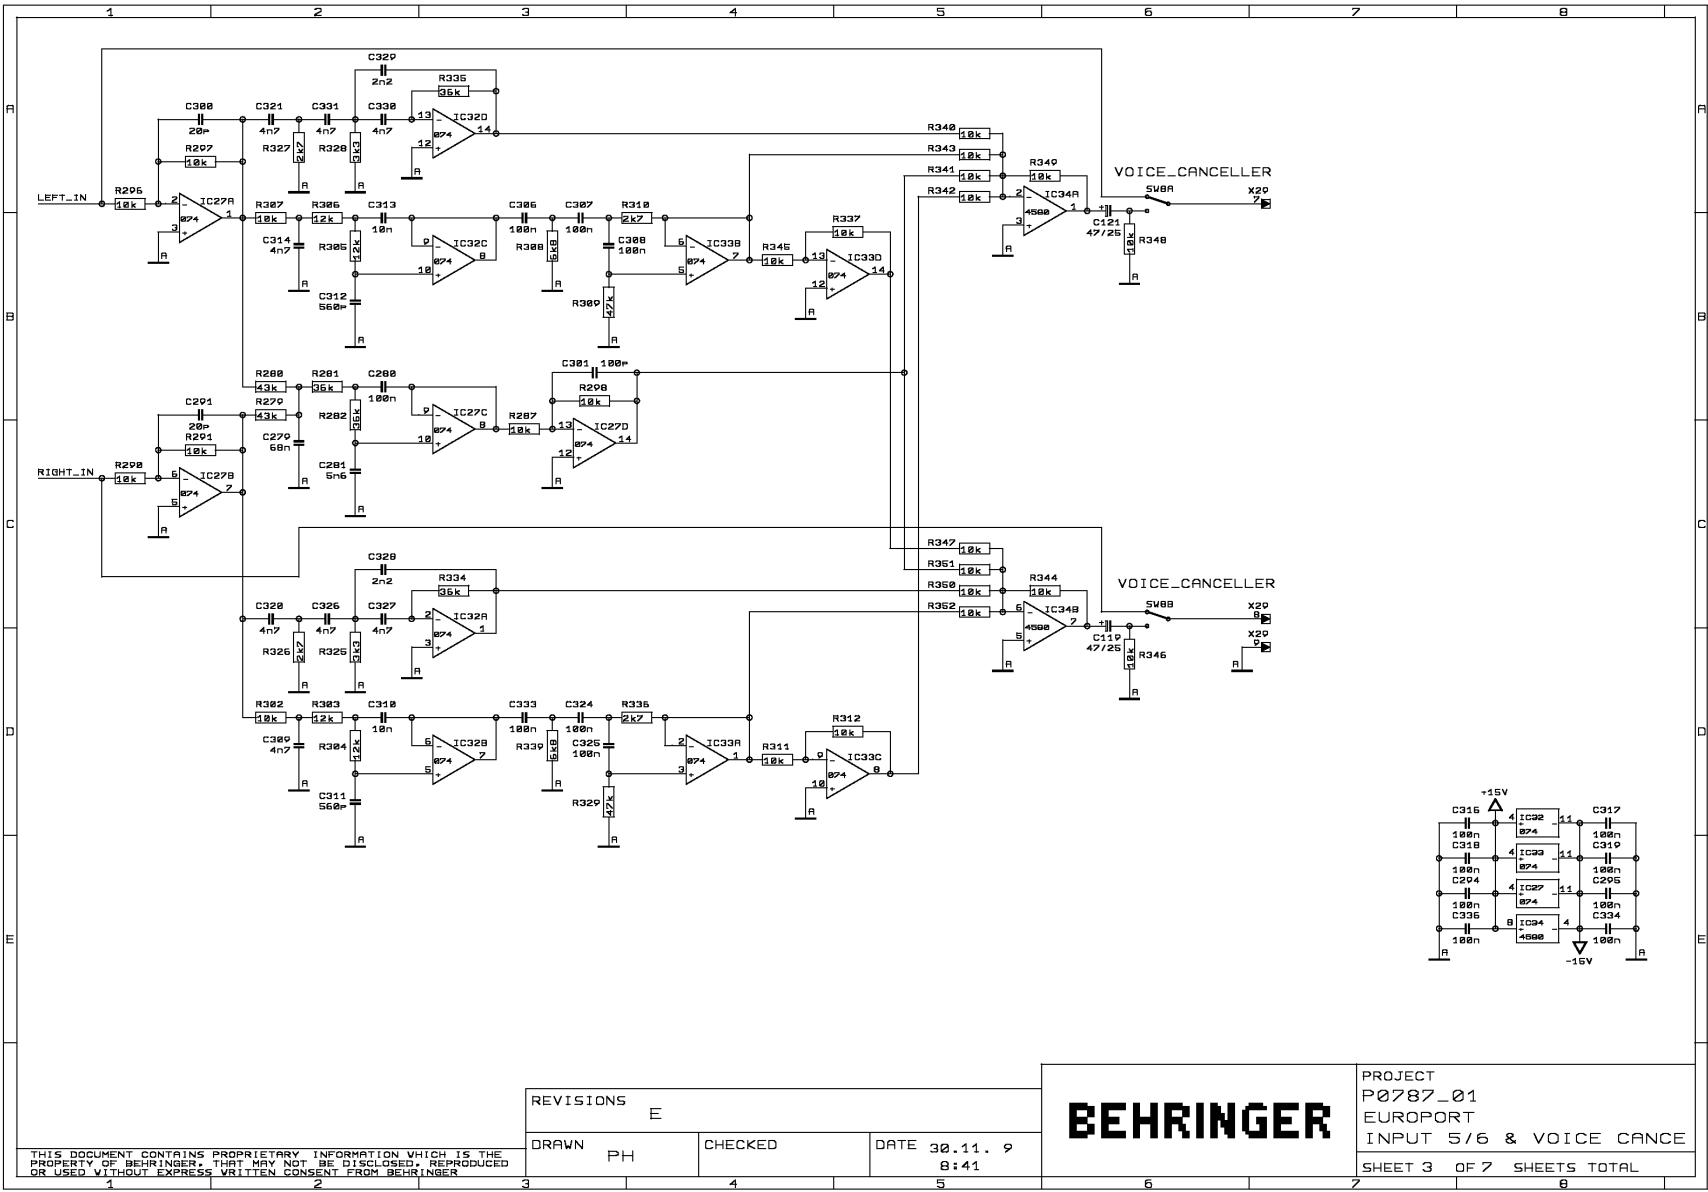




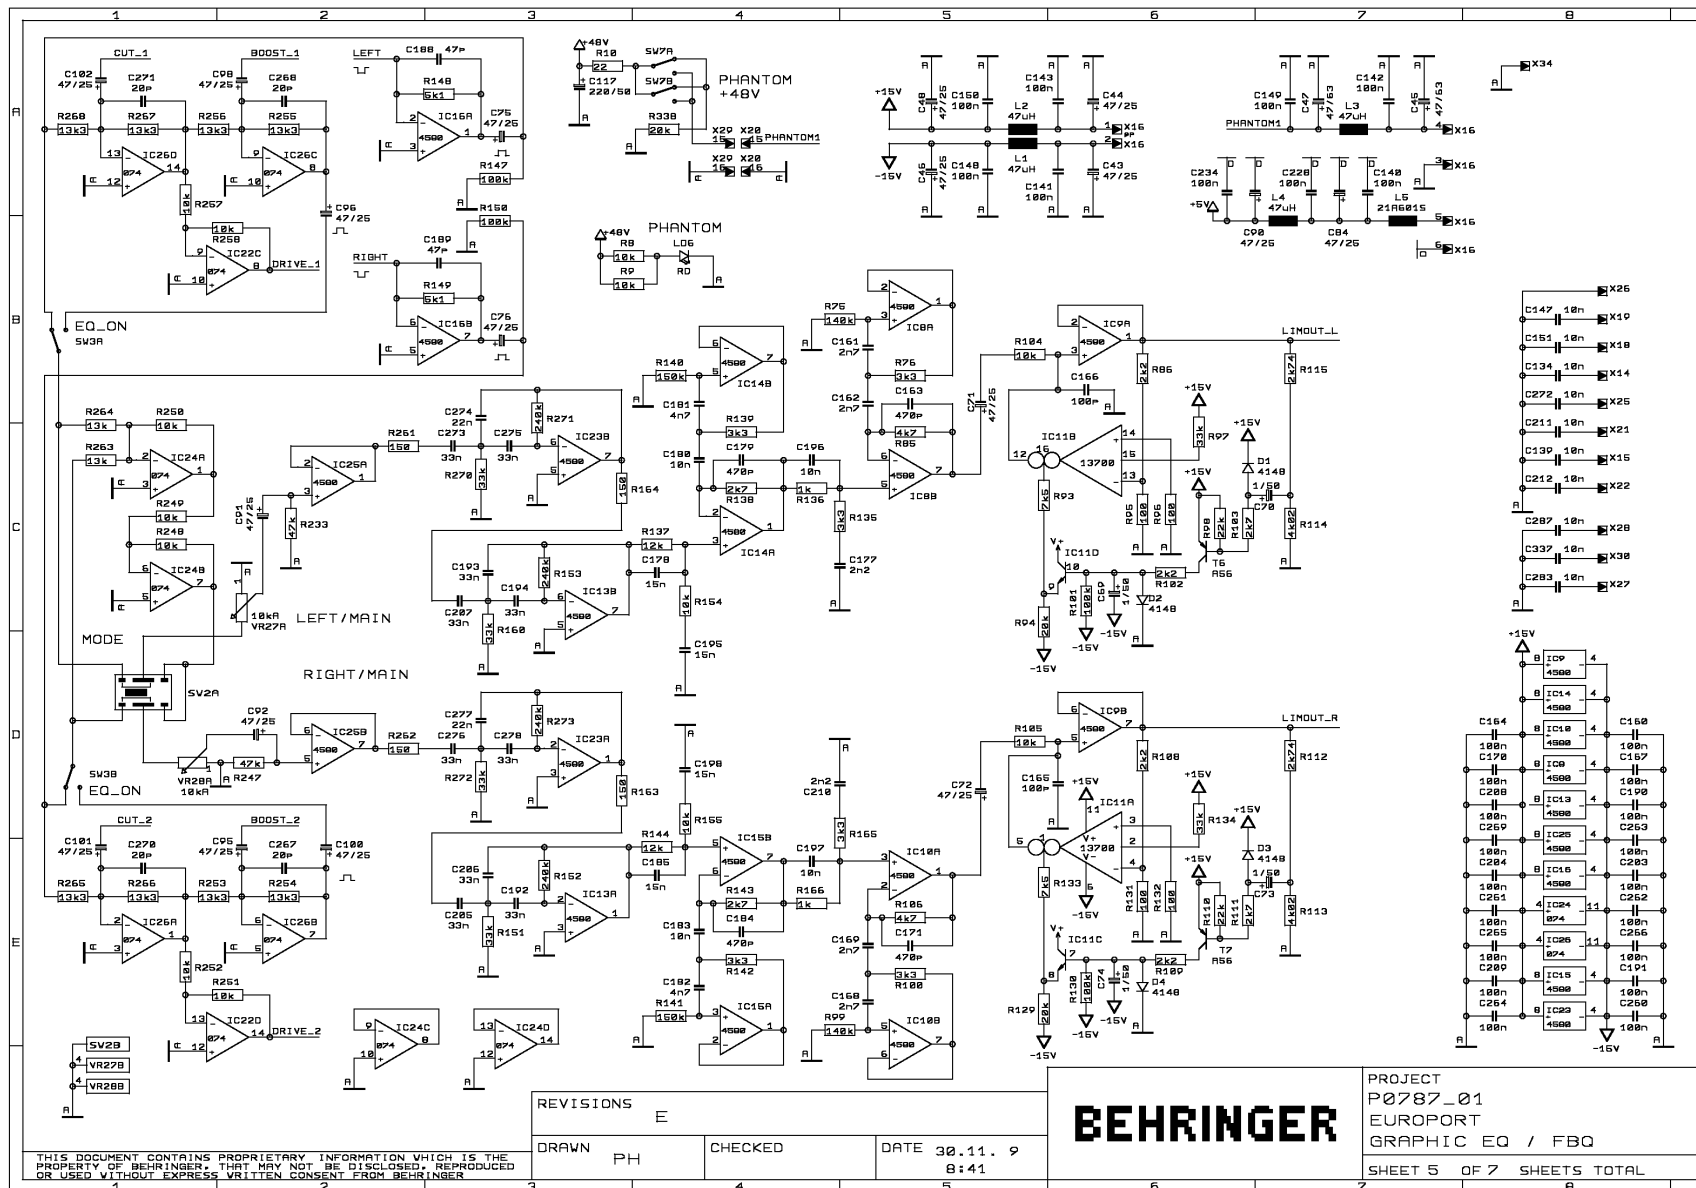

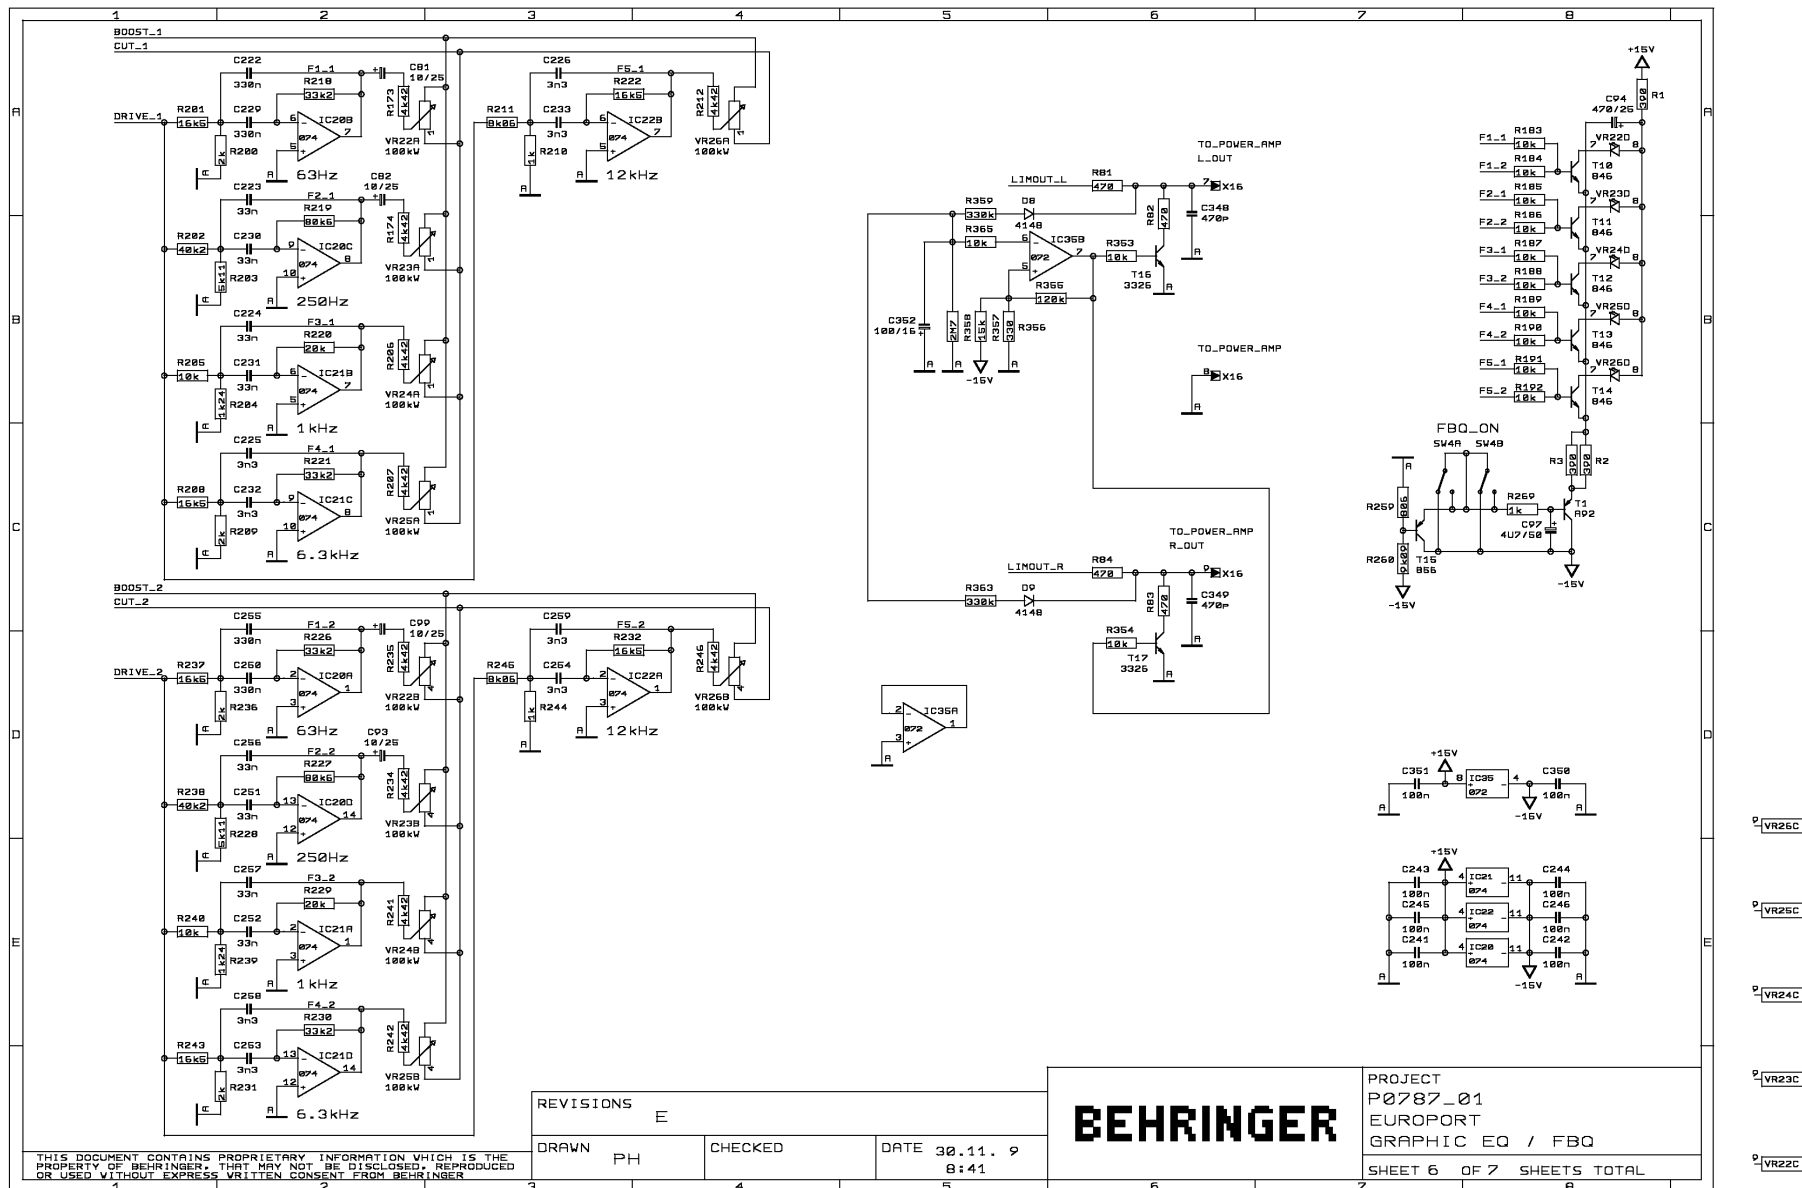

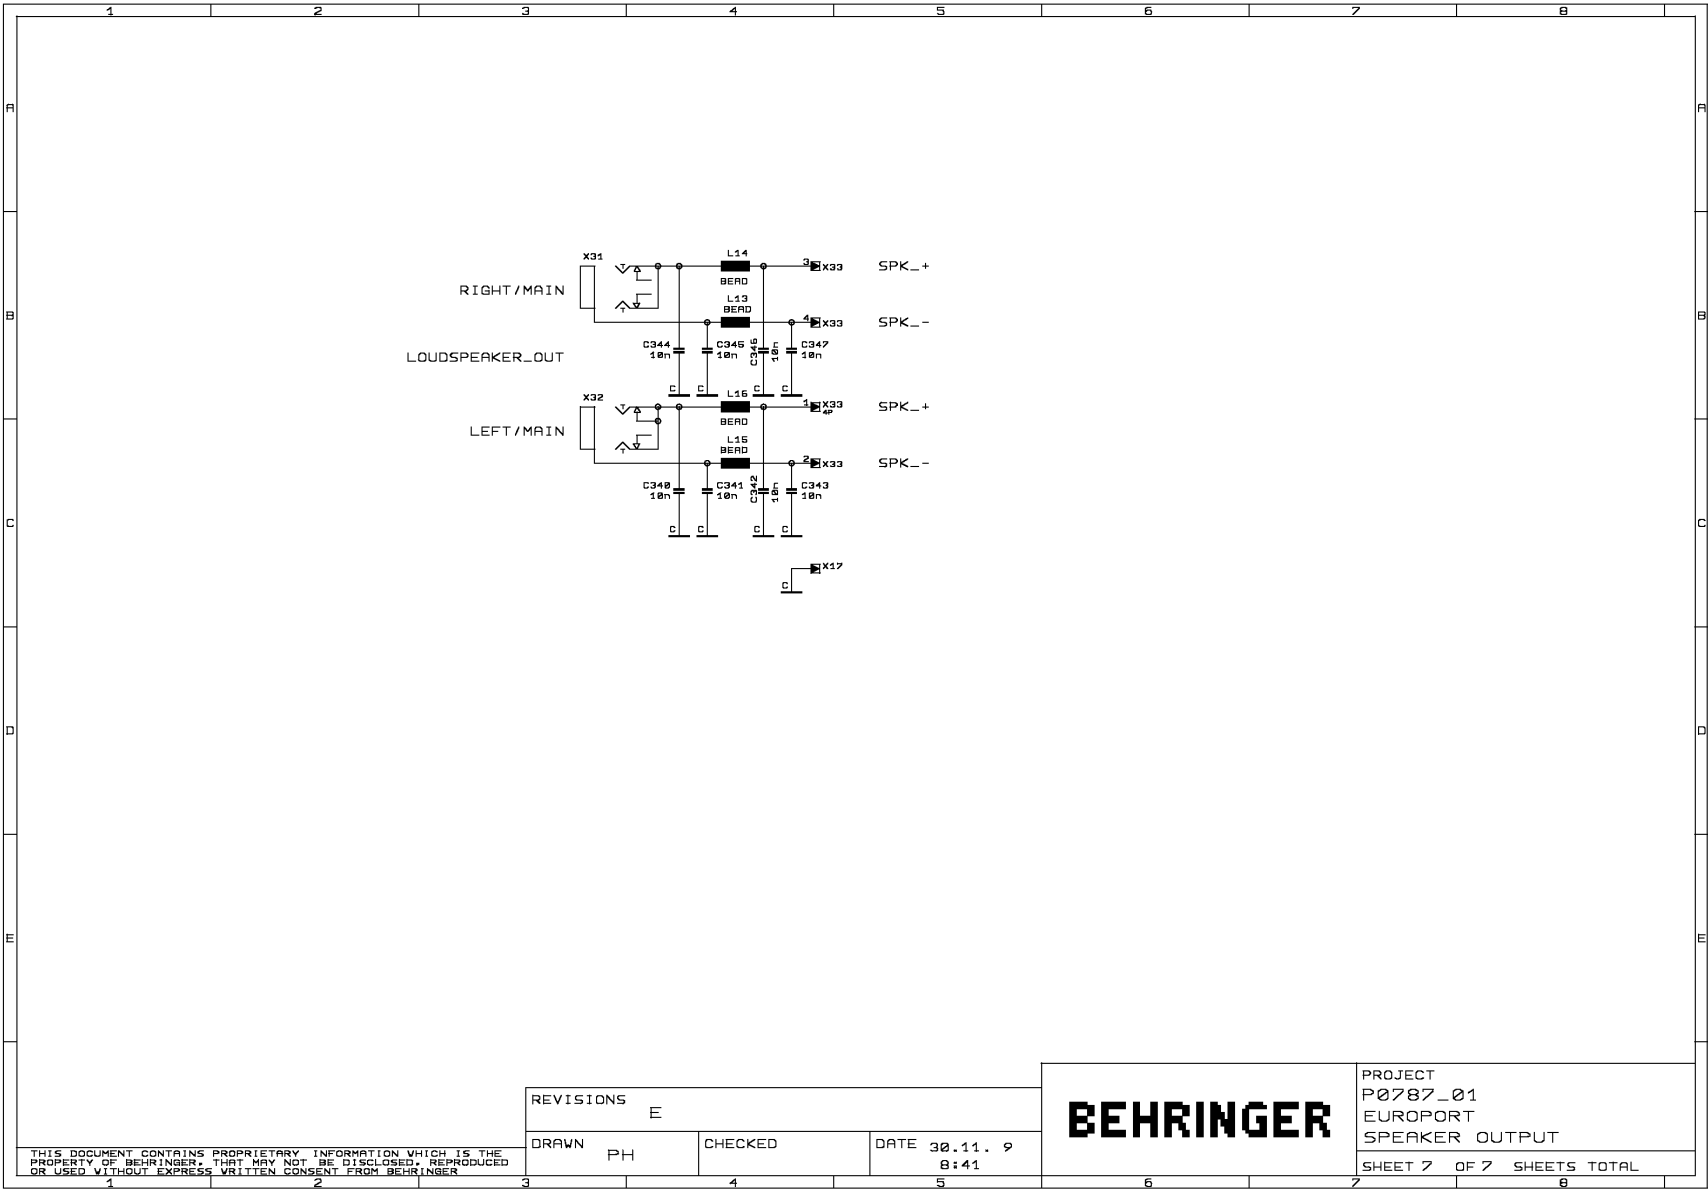

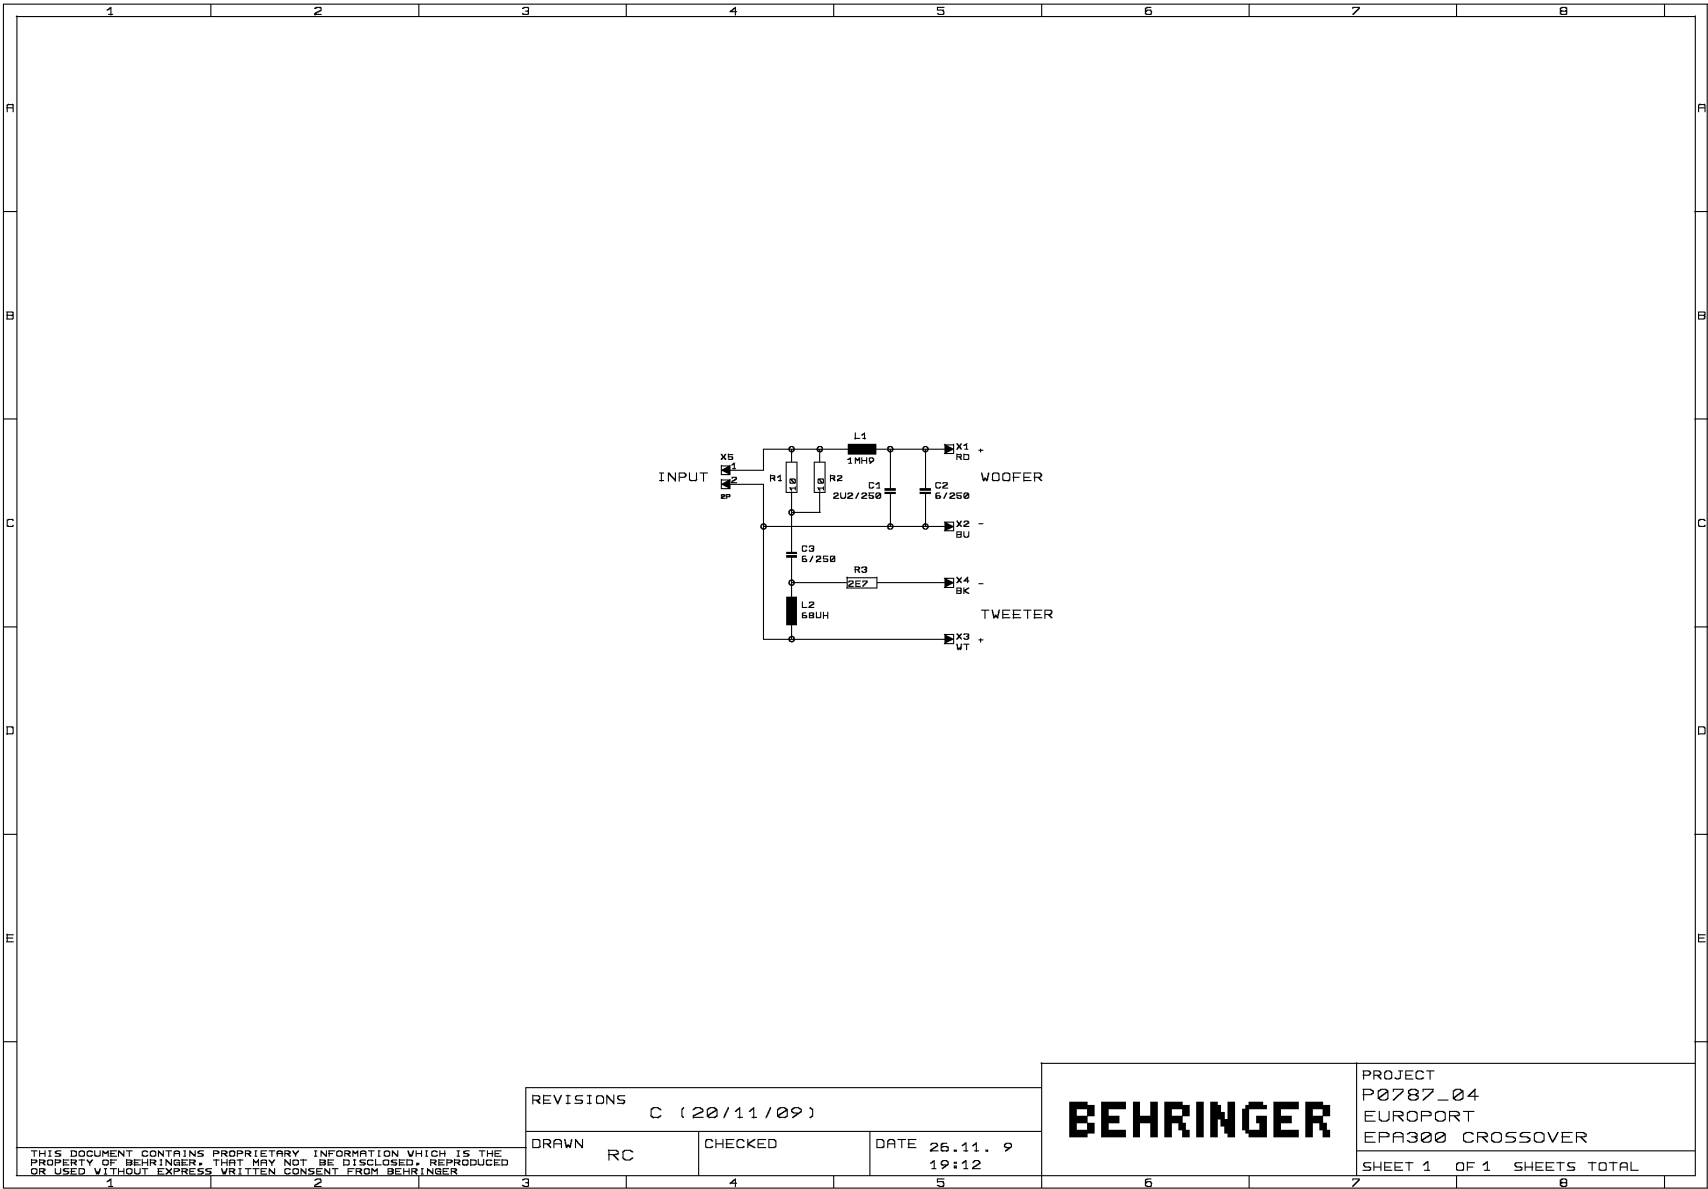

REVISIONS

C (20/11/09)

DRAWN

RC

CHECKED

DATE

26.11. 9

19:12

BEHRINGER

PROJECT

P0787_04

EUROPORT

EPA300 CROSSOVER

SHEET 1

OF 1

SHEETS TOTAL

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE PROPERTY OF BEHRINGER. THAT MAY NOT BE DISCLOSED, REPRODUCED OR USED WITHOUT EXPRESS WRITTEN CONSENT FROM BEHRINGER

1

2

3


4


5

6

7

8

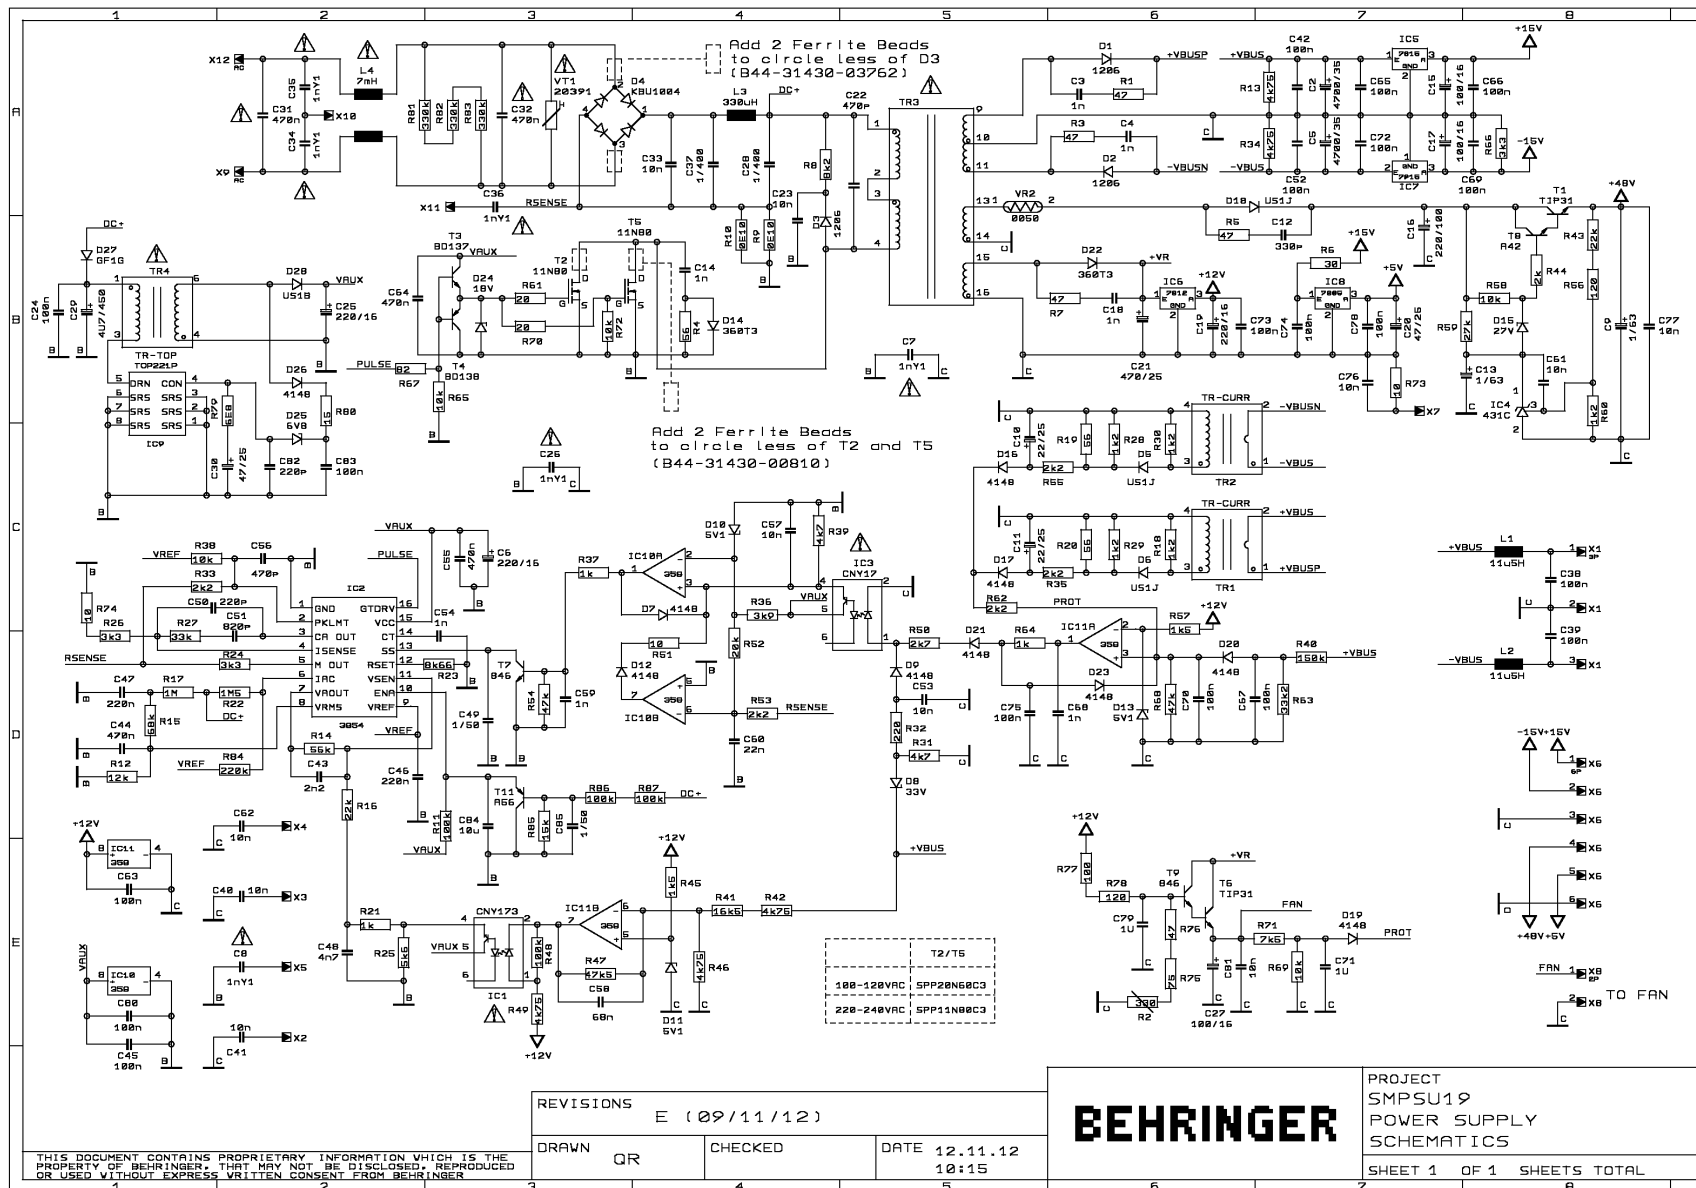

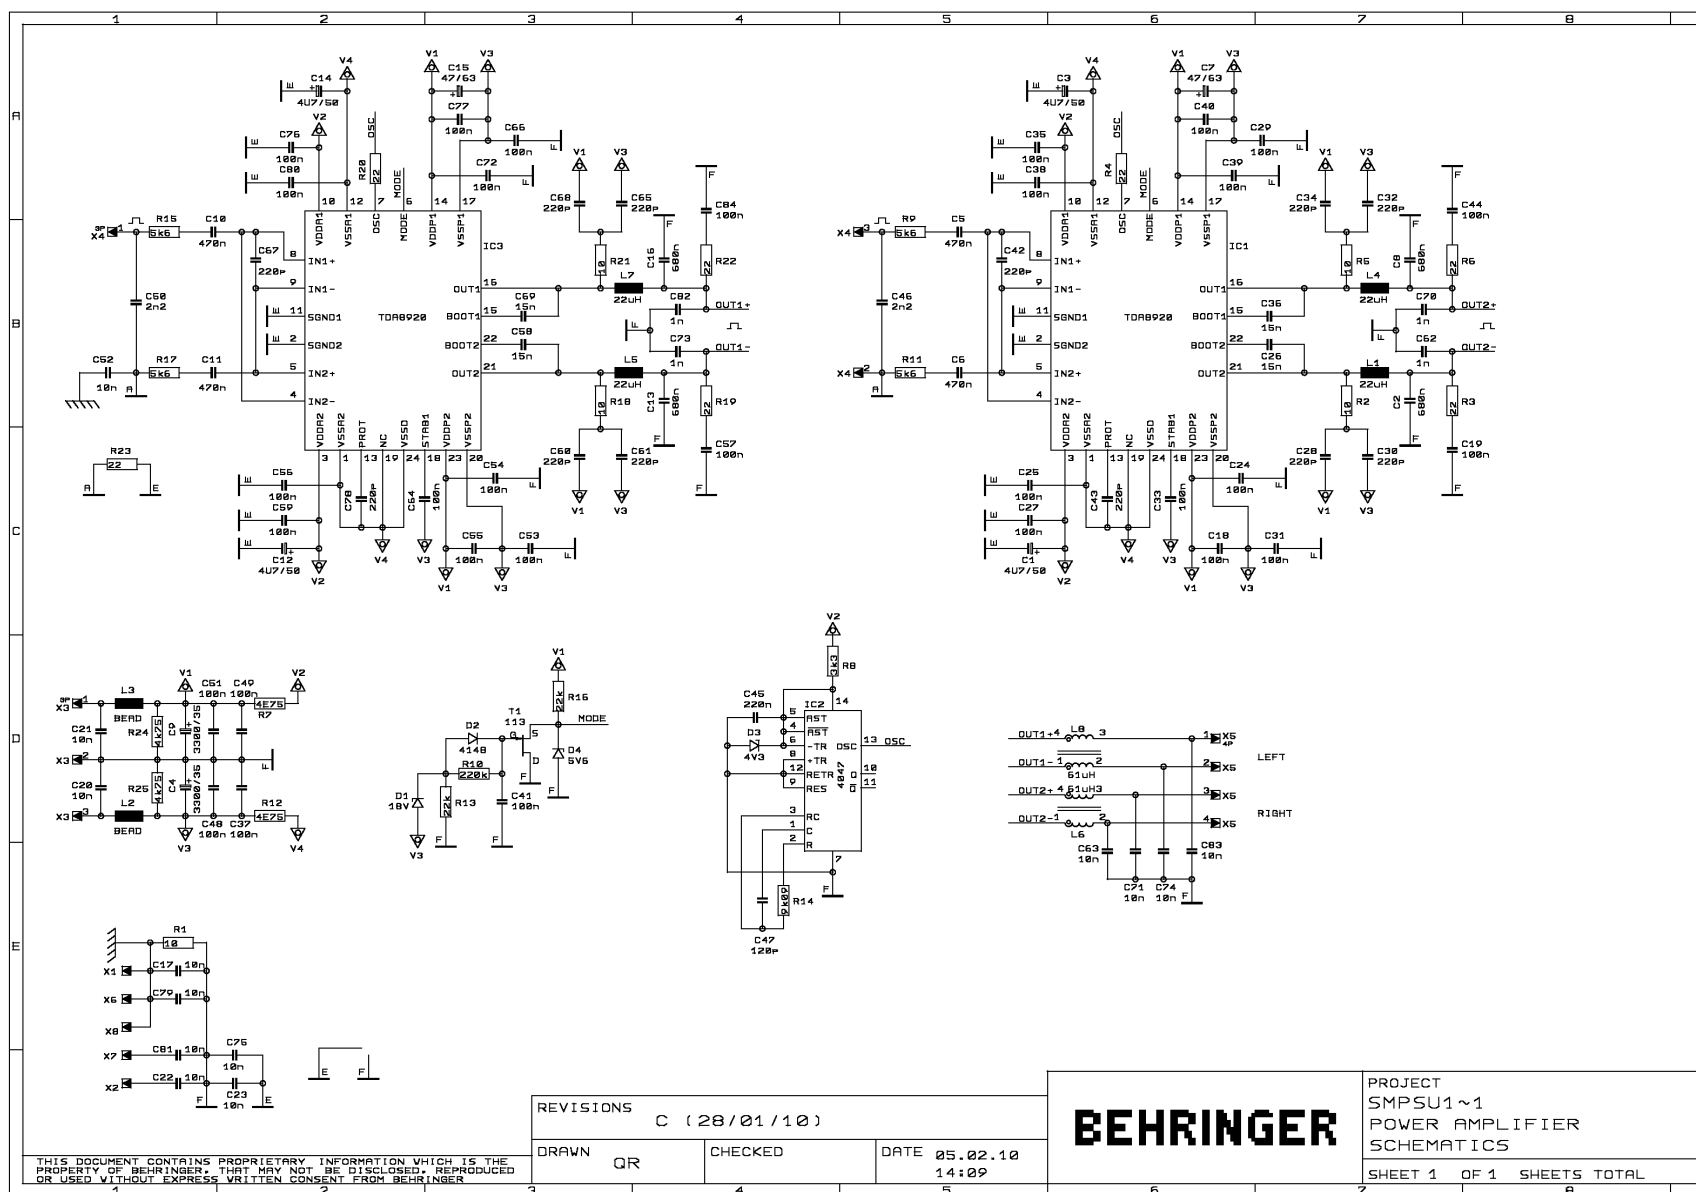

Hi Pcb Assemblies

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
1	2.0000	PC		A05-00000-05137	PCB ASSEMBLY;JACK_EPA;REV:A;HAND INSERT;NO:804030		
2	1.0000	PC	Q05-00002-00103	A05-00002-00103	PCB ASSEMBLY;;2;C;HI;SMPSU19;PCB NO:028011		
3	1.0000	PC	Q05-78701-00105	A05-78701-00105	PCB ASSEMBLY;P0787;1;E;HI;MAIN;PCB NO:917110		
4	1.0000	PC		A05-78702-00105	PCB ASSEMBLY;P0787;2;E;HI;IN/OUT;PCB NO:918110		
5	1.0000	PC	Q05-78703-00105	A05-78703-00105	PCB ASSEMBLY;P0787;3;E;HI;OUTPUT;PCB NO:919110		
6	2.0000	PC	Q05-78704-00103	A05-78704-00103	PCB ASSEMBLY;P0787;4;C;HI;CROSSOVER;PCB NO:920110		
7	1.0000	PC		A05-78700-00100	PCB ASSEMBLY;;B;HI;AC8;JP/UL;PCB NO:026011		(UL, JP, BR, HM, SH)
8	1.0000	PC		A05-00000-00100	PCB ASSEMBLY;B;HI;AC8/EU/UK/SAA/CCC;PCB NO:026011		(EU, UK, SAA, AR, RU)
9	1.0000	PC		A05-00001-00104	PCB ASSEMBLY;;1;D;HI;SMPSU19;EU_UK_SAA_CCC		(EU, UK, SAA, AR, RU)
10	1.0000	PC		A05-78701-00104	PCB ASSEMBLY;P0787;1;D;HI;SMPSU19;JP_UL		(UL, JP, BR, HM, SH)
11	1.0000	PC		A05-00001-00104	PCB ASSEMBLY;;1;D;HI;SMPSU19;EU_UK_SAA_CCC		

Service Assemblies

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
1			Q04-78703-00000	A04-78703-00000	SUB ASSEMBLY;P0787;VERSION:PSU19_SMPS ASSEMBLY MODULE;JP	[EXTRA SPARE]	
2			Q04-78700-05959	A04-78700-05959	SUB ASSEMBLY;P0787;VERSION:PSU19_SMPS ASSEMBLY MODULE;EU	[EXTRA SPARE]	
3				A04-78702-09297	SUB ASSEMBLY;P0787;UL VERSION:AC8 ASSEMBLY MODULE	[EXTRA SPARE]	
4				A04-78701-09296	SUB ASSEMBLY;P0787;EU VERSION:AC8 ASSEMBLY MODULE	[EXTRA SPARE]	

Cable

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
1	2.0000	PC	Q70-61011-04824	A70-61011-04824	CABLE;SPEAKER;BLACK RIGHT ANGLE PLUGS;SILVER WHITE;PHONE PLUG 6mm3 MONO+BLACK OD:6mm5 PVC+PHONE PLUG 6mm3 MONO		
2	1.0000	PC	Q70-61031-02507	A70-61031-02507	CABLE;XLR FEMALE PLUG +6m10+XLR MALE PLUG;MIC;BLACK		
3	0.1850	M		A74-00000-00716	WIRE;RAW FLAT CABLE;UL2651;AWG:28;POLES;16;GRAY;PIN1:RED;PITCH:1mm27		
4	1.0000	PC		A74-00000-08094	CABLE;FLAT;AWG:28;UL2651;2.54 MM;16;COMMON;170 MM;ALL GREY PIN1 RED	[P0787:02: {1.0}(X29)]	
5	0.0000	PC		A74-00040-17716	CABLE;FLAT;P2mm54;LENGTH:170mm;AWG:28;FC2/FD;+10/-0mm;POLES:16	[P0787:02: {0.0}(X29)]	
6	0.0000	PC		A81-00000-00622	WIRE HARNESS;AWG:18;UL1015;3.96 MM;4;COMMON;70 MM;BLACK/RED;JS4008;JS1121	[P0787:03: {0.0}(X33)]	
7	1.0000	PC		A81-00000-08090	WIRE HARNESS;AWG:18;UL1015;3.96 MM;4;COMMON;70 MM;ALL BLACK PIN1 RED	[P0787:03: {1.0}(X33)]	
8	1.0000	PC		A85-00000-00618	WIRE HARNESS;AWG:26;UL2547;2 MM;9;COMMON;250 MM;BLACK/RED;UL1007,SPECIAL		
9	0.0000	PC		A88-40019-04709	CABLE;LENGTH:400mm;STRIP LENGTH:7mm;POLES:2;AWG16;UL1007		
10	2.0000	PC		A88-40019-06574	CABLE;LENGTH:400mm;ZEE;STRIP LENGTH:7mm;POLES:2;AWG16;UL1007		
11	1.0000	PC		A81-00000-08091	WIRE HARNESS;AWG:18;UL1015;3.96 MM;3;COMMON;200 MM;ALL BLACK PIN1 RED	[00001: {1.0}(X1)]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
12	1.0000	PC	Q76-15020-00253	A76-15020-00253	CABLE;AC-CORD;CLASS II;JAPAN;W/POLYBAG;LENGTH:150cm;POLES:3;APPROVAL:PSE;PLUG S;M744 + VCTF 3x2.0mm2 + V1625BS;(VOLEX 052603/2)		(JP, HM, SH)
13	0.0000	PC		A76-15020-45715	CABLE;AC-CORD;W/POLYBAG;LENGTH:150cm;POLES:3;APPROVALS:UL/CSA;PLUGS:PHP-301 +SJT14/3 105C BWG BLK PVC LEAD-FREE + PHS301		(UL)
14	1.0000	PC	Q76-00000-13573	A76-00000-13573	CABLE;AC-CORD;3;AR;1500 MM;Plug + Connector:321+730;H05VV-F 3G0.75		(AR)
15	0.0000	PC		A76-18050-06505	CABLE;AC-CORD;LENGTH:180cm;VERSION:SAA;PLUG:HE105 ISOLATED;SAA H05VV-F 3x0.75mm2;CONN.HP-3;PANYU		(SAA)
16	1.0000	PC	Q76-18050-47490	A76-18050-47490	CABLE;AC-CORD;LENGTH:180cm;VERSION:SAA;PLUG:HE105 ISOLATED;SAA H05VV-F 3x0.75mm2;CONN.HP-3;SPEC.NO:47490		(SAA)
17	0.0000	PC		A81-00000-00631	WIRE HARNESS;AWG:18;UL1015;3.96 MM;3;COMMON;200 MM;BLACK/RED;JS4008;JS1121	[P0787:01: {0.0}(X1)]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
18	1.0000	PC	Q76-00000-01873	A76-00000-01873	CABLE;AC-CORD;AWG:14;UL1571;3;1500 MM;CABL;AC-CORD;3P;AWG14;150cm		(UL)
19	1.0000	PC	Q76-15042-05624	A76-15042-05624	CABLE;AC-CORD;W/POLYBAG;LENGTH:150cm;H05VV-F3G0.75MM2;VERSION:UK;SPEC.NO:05624		(UK)
20	1.0000	PC	Q76-00000-05305	A76-00000-05305	CABLE;AC-CORD;3;BR;1500 MM;Plug + Connector:375+730;H05VV-F 3G0.75		(BR)
21	1.0000	PC		A81-00000-08091	WIRE HARNESS;AWG:18;UL1015;3.96 MM;3;COMMON;200 MM;ALL BLACK PIN1 RED	[P0787:01: {1.0}(X1)]	
22	1.0000	PC	Q76-15212-03119	A76-15212-03119	CABLE;AC-CORD;W/POLYBAG;LENGTH:152cm;H05VV-F 3G 0.75MM2;VERSION:EU;SPEC.NO:03119		(EU, RU)
23	0.0000	PC		A81-00000-00631	WIRE HARNESS;AWG:18;UL1015;3.96 MM;3;COMMON;200 MM;BLACK/RED;JS4008;JS1121	[00001: {0.0}(X1)]	REPLACED PLACEHOLDER CODE: X-P4008-03/XX[R]

Capacitor

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
1	1.0000	PC			CAP E;47uF;16V;PITCH:2mm5;5mm x 11mm;VERTICAL 12.7-15-9mm	[P0787:01: {1.0}(C88)]	*NOT available in DP
2	4.0000	PC			CAP E;100uF;16V;PITCH:2mm5;5mm x 11mm;VERTICAL 12.7-15-9mm	[P0787:01: {1.0}(C352)]	*NOT available in DP
3	3.0000	PC			CAP E;220uF;16V;PITCH:2mm5;6mm3 x 12mm;VERTICAL 12.7-15-9mm	[P0787:01: {3.0}(C6,C19,C25)]	*NOT available in DP
4	3.0000	PC			CAP E;4uF;25V;PITCH:2mm5;5mm x 11mm;VERTICAL 12.7-15-9mm	[P0787:01: {3.0}(C85-C87)]	*NOT available in DP
5	31.0000	PC			CAP E;10uF;25V;PITCH:2mm5;5mm x 11mm;VERTICAL 12.7-15-9mm	[P0787:01: {2.0}(C30,C82)]	*NOT available in DP
6	40.0000	PC			CAP E;47uF;25V;PITCH:2mm5;5mm x 11mm;VERTICAL 12.7-15-9mm	[P0787:01: {2.0}(C75,C95)]	*NOT available in DP
7	1.0000	PC			CAP E;470uF;25V;PITCH:5mm;10mm x 13mm;VERTICAL 12.7-15-9mm	[P0787:01: {1.0}(C94)]	*NOT available in DP
8	6.0000	PC			CAP E;1uF;50V;PITCH:2mm5;5mm x 11mm;VERTICAL 12.7-15-9mm	[P0787:01: {4.0}(C69,C74,C80,C89)]	*NOT available in DP
9	2.0000	PC			CAP E;2uF2;50V;PITCH:2mm5;5mm x 11mm;VERTICAL 12.7-15-9mm	[P0787:01: {2.0}(C55,C57)]	*NOT available in DP
10	5.0000	PC			CAP E;4uF;50V;PITCH:2mm5;5mm x 11mm;VERTICAL 12.7-15-9mm	[P0787:01: {1.0}(C97)]	*NOT available in DP
11	4.0000	PC			CAP E;47uF;50V;PITCH:2mm5;6mm x 11mm;VERTICAL 12.7-15-9mm	[P0787:02: {4.0}(C113-C116)]	*NOT available in DP
12	2.0000	PC			CAP E;1uF;63V;PITCH:2mm5;5mm x 11mm;VERTICAL 12.7-15-9mm	[P0787:01: {2.0}(C9,C13)]	*NOT available in DP
13	4.0000	PC			CAP E;47uF;63V;PITCH:2mm5;6mm x 11mm;VERTICAL 12.7-15-9mm	[P0787:01: {2.0}(C45,C47)]	*NOT available in DP
14	2.0000	PC			CAP E;3mF3;35V;PITCH:7mm5;16mm x 35mm;PRECUT:3mm2 - 0/+0mm2	[00002: {2.0}(C4,C9)]	*NOT available in DP
15	1.0000	PC			CAP E;220uF;50V;PITCH:3mm5;8mm x 16mm;PRECUT:3mm2 - 0/+0mm2	[P0787:02: {1.0}(C117)]	*NOT available in DP
16	3.0000	PC			CAP CER;470nF;25V;X7R;10%;SMT805	[00001: {3.0}(C44,C55,C64)]	*NOT available in DP
17	4.0000	PC			CAP CER;10pF;50V;10%;SMT603	[P0787:02: {4.0}(C284-C285,C292-C293)]	*NOT available in DP
18	20.0000	PC			CAP CER;20pF;50V;20%;SMT603	[P0787:01: {18.0}(C124,C127-C133,C154-C157,C219,C227,C267-C268,C270-C271)]	*NOT available in DP
19	2.0000	PC			CAP CER;47pF;50V;5%;COG(NPO);SMT603	[P0787:01: {2.0}(C188-C189)]	*NOT available in DP
20	1.0000	PC			CAP CER;100pF;50V;5%;C0G;SMD603	[00001: {1.0}(C50)]	*NOT available in DP
21	9.0000	PC			CAP CER;100pF;50V;20%;SMT603	[P0787:01: {2.0}(C165-C166)]	*NOT available in DP
22	1.0000	PC			CAP CER;120pF;50V;10%;SMT603	[00002: {1.0}(C47)]	*NOT available in DP
23	17.0000	PC			CAP CER;220pF;50V;10%;SMT603	[P0787:01: {5.0}(C172-C175,C199)]	*NOT available in DP
24	7.0000	PC			CAP CER;470pF;50V;10%;SMT603	[P0787:01: {6.0}(C163,C171,C179,C184,C348-C349)]	*NOT available in DP
25	2.0000	PC			CAP CER;560pF;50V;10%;SMT603	[P0787:02: {2.0}(C311-C312)]	*NOT available in DP
26	2.0000	PC			CAP CER;680pF;50V;10%;SMT603	[P0787:02: {2.0}(C322-C323)]	*NOT available in DP
27	6.0000	PC			CAP CER;1nF;50V;10%;SMT603	[00002: {4.0}(C62,C70,C73,C82)]	*NOT available in DP
28	8.0000	PC			CAP CER;2nF2;50V;10%;SMT603	[P0787:01: {3.0}(C177,C210,C221)]	*NOT available in DP
29	4.0000	PC			CAP CER;2nF7;50V;10%;SMT603	[P0787:01: {4.0}(C161-C162,C168-C169)]	*NOT available in DP
30	6.0000	PC			CAP CER;3nF3;50V;10%;SMT603	[P0787:01: {6.0}(C213-C214,C226,C233,C254,C259)]	*NOT available in DP
31	11.0000	PC			CAP CER;4nF7;50V;10%;SMT603	[P0787:01: {2.0}(C181-C182)]	*NOT available in DP
32	1.0000	PC			CAP CER;5nF6;50V;10%;SMT603	[P0787:02: {1.0}(C281)]	*NOT available in DP
33	2.0000	PC			CAP CER;8nF2;50V;10%;SMT603	[P0787:01: {2.0}(C176,C200)]	*NOT available in DP
34	30.0000	PC			CAP CER;10nF;50V;10%;SMT603	[P0787:01: {2.0}(C180,C183)]	*NOT available in DP
35	8.0000	PC			CAP CER;15nF;50V;10%;SMT603	[P0787:01: {4.0}(C178,C185,C195,C198)]	*NOT available in DP
36	3.0000	PC			CAP CER;22nF;50V;10%;SMT603	[P0787:01: {2.0}(C274,C277)]	*NOT available in DP
37	10.0000	PC			CAP CER;33nF;50V;10%;SMT603	[P0787:01: {10.0}(C192-C194,C205-C207,C273,C275-C276,C278)]	*NOT available in DP
38	26.0000	PC			CAP CER;100nF;50V;10%;SMT603	[00002: {18.0}(C24-C25,C27,C29,C31,C33,C35,C38-C39,C53-C54,C56,C59,C64,C66,C72,C76,C80)]	*NOT available in DP
39	1.0000	PC			CAP CER;220pF;50V;10%;SMT805	[00001: {1.0}(C82)]	*NOT available in DP
40	1.0000	PC			CAP CER;1nF;50V;10%;SMT805	[00001: {1.0}(C59)]	*NOT available in DP

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
41	1.0000	PC			CAP CER;1nF;50V;C0G;5%;SMD805	[00001: {1.0}]{C54}]	*NOT available in DP
42	4.0000	PC			CAP CER;3nF3;50V;X7R;10%;SMD805	[P0787:01: {4.0}]{C225,C232,C253,C258}]	*NOT available in DP
43	10.0000	PC			CAP CER;10nF;50V;10%;SMT805	[P0787:01: {5.0}]{C134,C147,C151,C211-C212}]	*NOT available in DP
44	1.0000	PC			CAP CER;10nF;50V;X7R;10%;SMD805	[00001: {1.0}]{C61}]	*NOT available in DP
45	8.0000	PC			CAP CER;33nF;50V;X7R;10%;SMD805	[P0787:01: {8.0}]{C223-C224,C230-C231,C251-C252,C256-C257}]	*NOT available in DP
46	1.0000	PC			CAP CER;68nF;50V;10%;SMT805;X7R	[P0787:02: {1.0}]{C279}]	*NOT available in DP
47	111.0000	PC			CAP CER;100nF;50V;X7R;10%;SMT805	[P0787:01: {68.0}]{C122-C123,C125-C126,C135-C138,C140-C146,C148-C150,C152-C153,C158-C160,C164,C167,C170,C186-C187,C190-C191,C201-C204,C208-C209,C215-C218,C220,C228,C234-C249,C260-C266,C269,C350-C351}]	*NOT available in DP
48	3.0000	PC			CAP CER;220nF;50V;10%;SMT805	[00002: {1.0}]{C45}]	*NOT available in DP
49	4.0000	PC			CAP CER;330nF;50V;10%;SMT805	[P0787:01: {4.0}]{C222,C229,C250,C255}]	*NOT available in DP
50	2.0000	PC			CAP CER;1uF;50V;X7R;10%;SMD805	[00001: {2.0}]{C71,C79}]	*NOT available in DP
51	4.0000	PC			CAP CER;100nF;50V;Z5U;20%;SMT1206	[00002: {4.0}]{C19,C44,C57,C84}]	*NOT available in DP
52	1.0000	PC			CAP CER;1uF;50V;X7R;20%;SMT1206	[00001: {1.0}]{C49}]	*NOT available in DP
53	1.0000	PC			CAP CER;10nF;100V;10%;SMT805	[00001: {1.0}]{C77}]	*NOT available in DP
54	4.0000	PC			CAP CER;100nF;100V;X7R;10%;SMD1206	[00002: {4.0}]{C18,C40,C55,C77}]	*NOT available in DP
55	12.0000	PC			CAP MYL;33nF;50V;10%;PITCH:5mm;DIPPED;VERTICAL 12.7-15-9mm	[P0787:01: {12.0}]{C31-C42}]	*NOT available in DP
56	6.0000	PC			CAP MYL;3nF9;50V;10%;PITCH:3mm5;DIPPED;PRECUT 3mm1+/-0mm5	[P0787:01: {6.0}]{C13,C15,C26-C29}]	*NOT available in DP
57	12.0000	PC			CAP MYL;10nF;100V;10%;PITCH:4mm;DIPPED;PRECUT 3mm1+/-0mm5	[P0787:01: {12.0}]{C1-C2,C4,C6-C10,C17-C20}]	*NOT available in DP
58	4.0000	PC			CAP FILM;470nF;63V;MPF;10%;PITCH:5mm;BOX;VERTICAL 12.7-15-9mm	[00002: {3.0}]{C5-C6,C10}]	*NOT available in DP
59	4.0000	PC			CAP FILM;680nF;100V;MPF;10%;PITCH:5mm;BOX;VERTICAL 12.7-15-9mm	[P0787:00: {4.0}]{C2,C8,C13,C16}]	*NOT available in DP
60	1.0000	PC			CAP E;4uF7;450V;PITCH:5mm;10mm x 18mm;105C;VERTICAL 12.7-15-9mm	[P0787:01: {1.0}]{C29}]	*NOT available in DP
61	1.0000	PC			CAP CER;330pF;1KV;20%;PITCH:5mm;DISC;VERTICAL 12.7-15-9mm	[P0787:01: {1.0}]{C12}]	*NOT available in DP
62	4.0000	PC			CAP CER;1nF;1KV;20%;PITCH:5mm;DISC;VERTICAL 12.7-15-9mm	[P0787:01: {4.0}]{C3-C4,C14,C18}]	*NOT available in DP
63	2.0000	PC			CAP FILM;2uF2;250V;MPF;AXIAL;PRECUT 25+-1 mm	[P0787:04: {1.0}]{C1}]	*NOT available in DP
64	4.0000	PC			CAP FILM;6uF;250V;MPF;AXIAL; PRECUT 25+-1 mm	[P0787:04: {2.0}]{C2-C3}]	*NOT available in DP
65	2.0000	PC			CAP E;22uF;25V;PITCH:2mm5;5mmx11mm;VERTICAL 12.7-15-9mm	[P0787:01: {2.0}]{C10-C11}]	*NOT available in DP
66	1.0000	PC			CAP E;47uF;25V;PITCH:2mm5;5mm x 11mm;105C;VERTICAL 12.7-15-9mm	[P0787:01: {1.0}]{C20}]	*NOT available in DP
67	1.0000	PC			CAP E;220uF;100V;PITCH:5mm;13mm x 25mm;PRECUT:3mm2 - 0/+0mm2;105C	[00001: {1.0}]{C16}]	*NOT available in DP
68	1.0000	PC			CAP CER;470pF;1KV;20%;PITCH:7mm5;DISC CASE:4 x 10mm;PRECUT:3mm1 +/-0mm5	[P0787:01: {1.0}]{C22}]	*NOT available in DP
69	3.0000	PC			CAP Y1;1nF;275V;PITCH:10mm;Y1	[P0787:01: {3.0}]{C7,C34-C35}]	*NOT available in DP
70	2.0000	PC			CAP CER;10nF;1KV;20%;PITCH:7mm5;DISC CASE:4 x 13mm5;PRECUT:3mm1 +/-0mm5	[00001: {2.0}]{C23,C33}]	*NOT available in DP
71	1.0000	PC			CAP E;470uF;25V;PITCH:3mm5;8mm x 14mm;PRECUT:3mm2 - 0/+0mm2;105C	[00001: {1.0}]{C21}]	*NOT available in DP
72	2.0000	PC			CAP FILM;MKP;400VDC;10%;PITCH:27mm5;CASE:11 x 31.5mm;-45/+105	[00001: {2.0}]{C28,C37}]	*NOT available in DP
73	1.0000	PC			CAP E;470uF;25V;PITCH:3mm5;8mm x 14mm;PRECUT:3mm2 - 0/+0mm2;105C	[P0787:01: {1.0}]{C21}]	*NOT available in DP
74	1.0000	PC			CAP FILM;100nF;400V;MPF;PITCH:10mm;PRECUT:3mm1 +/-0mm5	[00001: {1.0}]{C24}]	*NOT available in DP
75	1.0000	PC	R12-32100-04351	B12-32100-04351	CAP X2;100nF;275V;PITCH:15mm;CASE:8mm5 x 18mm;CASE:8mm5 x 18mm;PRECUT:3.1mm+/-0mm5	[78700: {1.0}]{C3}]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
76	2.0000	PC	R12-32470-31378	B12-32470-31378	CAP X2;470nF;275V;PITCH:22mm5;CASE:11mm x 26mm;CASE:11mm x 26mm;PRE-CUT:3.2+/-0.5mm	[P0787:01: {2.0}(C31-C32)]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
77	2.0000	PC			CAP Y2;1nF;250V;PITCH:7mm5	[B:00: {2.0}(C1,C5)]	*NOT available in DP
78	2.0000	PC			CAP E;4mF;35V;PITCH:7mm5;18mm x 35mm;PRECUT:3mm2 - 0/+0mm2	[P0787:01: {2.0}(C2,C5)]	*NOT available in DP
79	1.0000	PC			CAP FILM;100nF;400V;MPF;PITCH:10mm;PRECUT:3mm1 +/-0mm5	[P0787:01: {1.0}(C24)]	*NOT available in DP
80	2.0000	PC			CAP E;4mF;35V;PITCH:7mm5;18mm x 35mm;PRECUT:3mm2 - 0/+0mm2	[00001: {2.0}(C2,C5)]	*NOT available in DP
81	1.0000	PC		B12-32220-41107	CAP X2;220nF;275V;PITCH:15mm;PRE-CUT:3.2+/-0.5mm	[78700: {1.0}(C4)]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
82	2.0000	PC	R12-32470-31378	B12-32470-31378	CAP X2;470nF;275V;PITCH:22mm5;CASE:11mm x 26mm;CASE:11mm x 26mm;PRE-CUT:3.2+/-0.5mm	[00001: {2.0}(C31-C32)]	
83	1.0000	PC	R12-32100-04351	B12-32100-04351	CAP X2;100nF;275V;PITCH:15mm;CASE:8mm5 x 18mm;CASE:8mm5 x 18mm;PRECUT:3.1mm+/-0mm5	[B:00: {1.0}(C3)]	
84	2.0000	PC			CAP Y2;1nF;250V;PITCH:7mm5	[78700: {2.0}(C1,C5)]	*NOT available in DP
85	1.0000	PC			CAP CER;1uF;50V;X7R;20%;SMT1206	[00001: {1.0}(C49)]	*NOT available in DP
86	1.0000	PC			CAP E;220uF;100V;PITCH:5mm;13mm x 25mm;PRECUT:3mm2 - 0/+0mm2;105C	[P0787:01: {1.0}(C16)]	*NOT available in DP
87	1.0000	PC			CAP CER;470pF;1KV;20%;PITCH:7mm5;DISC CASE:4 x 10mm;PRECUT:3mm1 +/-0mm5	[00001: {1.0}(C22)]	*NOT available in DP
88	1.0000	PC		B12-32220-41107	CAP X2;220nF;275V;PITCH:15mm;PRE-CUT:3.2+/-0.5mm	[B:00: {1.0}(C4)]	
89	2.0000	PC			CAP FILM;MKP;400VDC;10%;PITCH:27mm5;CASE:11 x 31.5mm;- 45/+105	[P0787:01: {2.0}(C28,C37)]	*NOT available in DP
90	3.0000	PC			CAP Y1;1nF;275V;PITCH:10mm;Y1	[00001: {3.0}(C7,C34-C35)]	*NOT available in DP
91	2.0000	PC			CAP CER;10nF;1KV;20%;PITCH:7mm5;DISC CASE:4 x 13mm5;PRECUT:3mm1 +/-0mm5	[P0787:01: {2.0}(C23,C33)]	*NOT available in DP

Circuit Protector

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
1	1.0000	PC		B22-60073-10003	FUSE;1812L050-C;0A5 HOLD;15V MAX;SMD1812;LITTELFUSE;	[00001: {1.0}(VR2)]	CUTOFF: IDENTIFIED FROM F-1812L050-C-SMD
2	1.0000	PC		B22-00613-50001	FUSE;5A;250V;5mm*20mm;FAST;HIGH BREAKING CAPACITY		(UL, JP, BR, HM, SH)
3	1.0000	PC		B22-01613-31501	FUSE;3A15;250V;FAST BLOW;H-TYPE;5mm x 20mm		(EU, UK, SAA, AR, RU)
4	1.0000	PC		B22-60073-10003	FUSE;1812L050-C;0A5 HOLD;15V MAX;SMD1812;LITTELFUSE;	[00001: {1.0}(VR2)]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH)

Coil

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
1	3.0000	PC		B32-14702-46000	COIL;AXIAL;47uH;375mA;PITCH:10mm;(CECL-470K-812220)	[P0787:01: {3.0}(L1-L3)]	Change L4 from 47uH to 0 ohm
2	4.0000	PC	R33-12200-03030	B33-12200-03030	COIL;22uH;PITCH:7mm52;TURNS:11.5;RAD;(3L:FS1618-220K-B3.5)	[00002: {4.0}(L1,L4-L5,L7)]	
3	2.0000	PC		B33-16800-02149	COIL;68uH;PITCH:17mm;CORE SIZE:24mm x 10mm x 10mm TURNS:85;RAD;WIRE DIA.:0mm7	[P0787:04: {1.0}(L2)]	
4	2.0000	PC		B33-31900-02150	COIL;1mH9;PITCH:33mm47;CORE SIZE:35mm62 x 30mm x 7mm TURNS:126.5;RAD;WIRE DIA.:1mm	[P0787:04: {1.0}(L1)]	
5	2.0000	PC		B37-76100-05127	COIL;CHOKE;61uH;P:6MM;T10X6X5	[00002: {2.0}(L6,L8)]	
6	2.0000	PC	R39-00000-03394	B39-00000-03394	COIL;SMD;BEAD;SMD0805;(BLM21BD751SN1D)	[P0787:01: {2.0}(L6-L7)]	
7	4.0000	PC	R39-26000-21049	B39-26000-21049	COIL;SMD;BEAD;(BLM21AG601S)	[P0787:01: {2.0}(L5,L8)]	
8	6.0000	PC		B44-30000-00000	COIL;BEAD;7A;Pitch:5;3.5X5X0.8	[00002: {2.0}(L2-L3)]	
9	2.0000	PC		B44-31430-00810	COIL;BEAD;IMPEDANCE AT 25MHz:43ohm;INNER DIA:1MM2;LENGTH:4MM	FOR T2,FOR T5]	CUTOFF: IDENTIFIED FROM L-BEAD-043E00-001MM2
10	2.0000	PC		B44-31430-03762	COIL;BEAD;IMPEDANCE AT 25MHz:43ohm;INNER DIA:1MM5;LENGTH:6MM;(3L:1-RH-3.5X6X1.5-C5A)	FOR D4 PIN2,FOR D4 PIN3]	CUTOFF: IDENTIFIED FROM L-BEAD-043E00-001MM5
11	1.0000	PC		B40-37000-03763	COIL;TOROID;7mH;SIZE:18 x 36mm;TURNS:25+25;WIRE DIA.:0.7mm;m(3L:LFTB2512-7MH-3A)	[P0787:01: {1.0}(L4)]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
12	1.0000	PC	R37-41000-39390	B37-41000-39390	COIL;CHOKE;10mH;1.4A	[B:00: {1.0}(L1)]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
13	3.0000	PC		B32-14702-46000	COIL;AXIAL;47uH;375mA;PITCH:10mm;(CECL-470K-812220)	[P0787:01: {3.0}(L1-L3)]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH)
14	1.0000	PC		B40-23301-31241	COIL;TOROID;330uH;10%;SIZE:19 x 38mm;TURNS:60;WIRE DIA.:0mm9	[P0787:01: {1.0}(L3)]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
15	1.0000	PC		B40-23301-31241	COIL;TOROID;330uH;10%;SIZE:19 x 38mm;TURNS:60;WIRE DIA.:0mm9	[00001: {1.0}(L3)]	
16	2.0000	PC		B44-31430-00810	COIL;BEAD;IMPEDANCE AT 25MHz:43ohm;INNER DIA:1MM2;LENGTH:4MM	FOR T2,FOR T5]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH)
17	2.0000	PC		B40-21152-39393	COIL;11uH5;5A;PITCH:10mm;TOR;RAD	[00001: {2.0}(L1-L2)]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
18	1.0000	PC		B40-37000-03763	COIL;TOROID;7mH;SIZE:18 x 36mm;TURNS:25+25;WIRE DIA.:0.7mm;m(3L:LFTB2512-7MH-3A)	[00001: {1.0}(L4)]	CUTOFF: IDENTIFIED FROM L-TOR-007M00-18X36-T
19	1.0000	PC	R37-41000-39390	B37-41000-39390	COIL;CHOKE;10mH;1.4A	[78700: {1.0}(L1)]	
20	2.0000	PC		B40-21152-39393	COIL;11uH5;5A;PITCH:10mm;TOR;RAD	[P0787:01: {2.0}(L1-L2)]	CUTOFF: IDENTIFIED FROM L-TOR-011U50-A5000-P
21	2.0000	PC		B44-31430-03762	COIL;BEAD;IMPEDANCE AT 25MHz:43ohm;INNER DIA:1MM5;LENGTH:6MM;(3L:1-RH-3.5X6X1.5-C5A)	FOR D4 PIN2,FOR D4 PIN3]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH)

Connector

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
1	4.0000	PC	R84-00000-01617	B84-00000-01617	AMP TERMINAL;BRASS;707A-BS-2		
2	2.0000	PC	R84-00000-01620	B84-00000-01620	AMP TERMINAL;BRASS W TIN;7205A-BS-2		
3	2.0000	PC	R84-00000-01623	B84-00000-01623	AMP TERMINAL;BRASS;71155-BS-2		
4	7.0000	PC	R84-19056-06015	B84-19056-06015	CONNECTOR;TERMINAL;BRASS W TIN;AWG16-22;JS-4008-T		
5	11.0000	PC	R84-22000-06018	B84-22000-06018	CRIMP TERMINAL;PITCH:3mm96;AWG18-22;A3963TOP-2		
6	18.0000	PC	R84-25016-06014	B84-25016-06014	CRIMP TERMINAL;PITCH:2mm0;AWG24-30;A2008TOP-2		
7	2.0000	PC	R84-30000-06293	B84-30000-06293	JACKET;FOR 205 TERMINAL.;DIA:4mm		
8	2.0000	PC		B84-30046-41035	CONNECTOR;AMP CONN TERMINAL;MATERIAL:PAPER FIBRE;QUADRUPE;(BGT20503002-TERMINAL-REVA.DWG)		
9	2.0000	PC	R84-30050-06302	B84-30050-06302	JACKET;110-3.5;DIA:3mm5		
10	4.0000	PC	R84-30055-53405	B84-30055-53405	CONNECTOR;AMP CONN TERMINAL;MALE;ANGLED;MATERIAL:BRASS 0mm7;PLATING:ZINC;SINGLE;W/ HOLES 2xDIA 3mm9 + 1xDIA 2mm;(LS-TR13_4B0_7A-REVC.DWG)		
11	2.0000	PC	R84-30060-06007	B84-30060-06007	JACKET;FOR 6mm35 AMP CONNECTOR;PVC;STRAIGHT;DIAMETER:3mm		
12	4.0000	PC	R84-30060-06009	B84-30060-06009	JACKET;FOR 6mm35 AMP CONNECTOR;PVC;STRAIGHT;DIAMETER:4mm		
13	2.0000	PC		B84-32050-05839	CRIMP CONNECTOR;AMP;RECEPTABLE;6mm3 x 7mm5;AWG 14-18;WIRE MOUNT;STRAIGHT;250 SERIES		
14	2.0000	PC		B84-42050-00155	CRIMP CONNECTOR;LUG;INNER DIA:4mm3;AWG 14-18;WIRE MOUNT;STRAIGHT		
15	2.0000	PC	R95-01340-03300	B95-01340-03300	CONNECTOR;XLR;SOCKET;FEMALE;STRAIGHT;POLES:3	[P0787:02: {2.0}{X12-X13}]	
16	2.0000	PC		B84-39000-26095	CONNECTOR;AMP;PCB;PCB MOUNTANGLED;PITCH:5mm;WIDTH:6mm3	[B:00: {2.0}{X1-X2}]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
17	2.0000	PC		B84-39000-26095	CONNECTOR;AMP;PCB;PCB MOUNTANGLED;PITCH:5mm;WIDTH:6mm3	[78700: {2.0}{X1-X2}]	
18	1.0000	PC	R93-61007-01172	B93-61007-01172	CONNECTOR;BARE JUMPER;WIRE DIAMETER:0mm7;LENGTH:10mm	[78700: {1.0}{J1}]	(UL, JP, BR, HM, SH)

Diode

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
1	20.0000	PC			DIODE;LL4148;LL34;TEMIC OR FC	[P0787:01: {9.0}{D1-D9}]	*NOT available in DP
2	1.0000	PC			DIODE;ZMM04V3;SMD1206	[00002: {1.0}{D3}]	*NOT available in DP
3	1.0000	PC			DIODE;ZMM05V6;SMD1206	[00002: {1.0}{D4}]	*NOT available in DP
4	1.0000	PC			DIODE;ZMM06V8;SMD1206;SMD	[00001: {1.0}{D25}]	*NOT available in DP
5	2.0000	PC			DIODE;ZMM18V0;SMD1206	[00002: {1.0}{D1}]	*NOT available in DP
6	1.0000	PC			DIODE;ZMM27V0;SMD1206	[00001: {1.0}{D15}]	*NOT available in DP
7	1.0000	PC			DIODE;ZMM33V0;SMD1206	[00001: {1.0}{D8}]	*NOT available in DP
8	3.0000	PC			DIODE;ZENERDIODE;TZMB5V1;ZENER VOLTAGE:5V1;2%;MINIMELF;VISHAY	[00001: {3.0}{D10-D11,D13}]	*NOT available in DP
9	1.0000	PC			DIODE;US1B;DO-214AC	[00001: {1.0}{D28}]	*NOT available in DP
10	1.0000	PC			DIODE;GF1G;DO-214AC	[00001: {1.0}{D27}]	*NOT available in DP
11	3.0000	PC			DIODE;US1J;DO-214AC;SMD	[00001: {3.0}{D5-D6,D18}]	*NOT available in DP
12	2.0000	PC			DIODE;ULTRAFAST RECTIFIER;MURS360T3;600V;3A;SMC;ON-SEMI	[00001: {2.0}{D14,D22}]	*NOT available in DP
13	3.0000	PC			DIODE;RECTIFIER;STTA1206D;TO220	[00001: {3.0}{D1-D3}]	*NOT available in DP
14	1.0000	PC	X80-25221-00400	H80-25221-00400	RECTIFIER;BRIDGE;10A;KBU1004	[00001: {1.0}{D4}]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
15	3.0000	PC			DIODE;RECTIFIER;STTA1206D;TO220	[P0787:01: {3.0}{D1-D3}]	*NOT available in DP
16	1.0000	PC	X80-25221-00400	H80-25221-00400	RECTIFIER;BRIDGE;10A;KBU1004	[P0787:01: {1.0}{D4}]	

Display

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
1	1.0000	PC	S28-27030-37066	C28-27030-37066	DISPLAY;LED;HEIGHT:0in3;PATTERN:8.8.;RD;STRONG BASE:E3-2030AHR3-P10	[P0787:01: {1.0}{LD4}]	CUTOFF: IDENTIFIED FROM LD-7SEG E3-2030AHR3-
2	1.0000	PC	S28-27030-37066	C28-27030-37066	DISPLAY;LED;HEIGHT:0in3;PATTERN:8.8.;RD;STRONG BASE:E3-2030AHR3-P10	[P0787:01: {1.0}{LD4}]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH)

Hardware

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
1	6.0000	PC			CABLE TIE;WIDTH:3mm;LENGTH:150mm		*NOT available in DP
2	1.0000	PC			CABLE TIE;NYLON;4in;COLOR:		*NOT available in DP
3	1.9800	G			SCREWLOCK;SPEC.NO:01090		*NOT available in DP
4	5.0000	PC			HEX.NUT;INNER DIA;M3mm;SURFACE:ZINC		*NOT available in DP
5	4.0000	PC			HEX.NUT;M3;SURFACE:CR(III)		*NOT available in DP
6	5.0000	PC			HEX. NUT;INNER DIA;M4mm;SURFACE:ZINC		*NOT available in DP
7	2.0000	PC			STEEL ROUND NUT WITH HOLE;INNER DIA:9mm5;M3/8-32T;ROUND;PITCH=0.75mm;SURFACE:NICKEL		*NOT available in DP
8	10.0000	PC			HEX. NUT;FOR JACK;M 3/8in;HEXWRENCH:11mm;THICKNESS:2mm4;SURFACE:NICKEL/SILVER		*NOT available in DP
9	1.0000	PC		F87-00100-14248	ELECTRIC FOAM;P0431;DST.NO:001;DPT.NO:14248;(P0431-ELECTRIC_FOAM-REVA.DWG)		
10	1.0000	PC	V87-00200-10103	F87-00200-10103	RUBBER BUSHING;I00172P;DST.NO:002;DPT.NO:10103;(I00172P-RUBBER_BUSHING-REVB.dwg)		RUBBER BUSHING
11	4.0000	PC			SCREW;M3mm*15mm;PITCH:0mm5;HEAD:FLAT;DIA:5mm2;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
12	5.0000	PC			SCREW;M3mm*6mm;HEAD:PAN;INSERT:PHILLIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
13	8.0000	PC			SCREW;A3mm*8mm;HEAD:PAN;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
14	8.0000	PC			SCREW;M3mm*8mm;HEAD:PAN;INSERT:PHILLIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
15	15.0000	PC			SCREW;M03mm*08mm;HEAD:PAN SPRING WASHER;INSERT:PHILIPS REC.;SURFACE:SILVER/ZINC		*NOT available in DP
16	2.0000	PC			SCREW;M3mm*9mm;HEAD:PAN;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
17	16.0000	PC			SCREW;A3mm*12mm;HEAD:PAN;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
18	8.0000	PC			SCREW;M3mm*15mm;HEAD:PAN;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
19	9.0000	PC			SCREW;M4mm*8mm;HEAD:BINDING;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
20	3.0000	PC			SCREW;M4mm*12mm;HEAD:PAN;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
21	4.0000	PC			SCREW;A4mm*13mm;HEAD:FLAT;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
22	8.0000	PC			SCREW;M4mm*22mm;HEAD:PAN;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
23	8.0000	PC			SCREW;BT4mm*25mm;HEAD:BINDING;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
24	4.0000	PC			SCREW;M4mm*40mm;HEAD:PAN;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
25	16.0000	PC			SCREW;A5mm*35mm;HEAD:BINDING;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
26	2.0000	PC		F89-43000-05325	INSULATION SHEET;GLIMMER;TO220 W/HOLE;HOLE-DIAMETER:2-3MM1(IN-GLTO220_2-3MM1-REVA.DWG)		
27	1.0000	PC			METAL SHIELD;NATURAL;MIXER PCB;P0787;REVA		*NOT available in DP
28	1.0000	PC			SILICA GEL;MASS;30g;SPEC.NO:30QB-BB2001-4		*NOT available in DP
29	4.0000	PC			STUD;THREAD-DIA;3mm;LENGTH:5mm;EXT/INT;EXT;7mm		*NOT available in DP
30	4.0000	PC			STUD;THREAD-DIA;3mm;LENGTH:13mm1;EXT/INT;EXT;5mm		*NOT available in DP
31	8.0000	PC			STUD;THREAD-DIA;3mm;LENGTH:13mm8;INT/INT		*NOT available in DP
32	0.0240	M			SHRINKING TUBE;INNER DIA;3mm;SPEC.NO:01097		*NOT available in DP

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
33	0.2700	M			SHRINKING TUBE;INNER DIA:6mm;SPEC.NO:01099		*NOT available in DP
34	6.0000	PC			WASHER;PLAIN;INNER DIA:3mm;OUTER DIA:6mm;THICKNESS:0mm5		*NOT available in DP
35	2.0000	PC			WASHER;PLAIN;INNER DIA:3mm;OUTER DIA:6mm;THICKNESS:0mm5;CR(III)		*NOT available in DP
36	4.0000	PC			WASHER;PLAIN;INNER DIA:4mm;OUTER DIA:8mm;THICKNESS:0mm8;PLATING:NICKEL		*NOT available in DP
37	2.0000	PC			WASHER;PLAIN;INNER DIA:9mm4;OUTER DIA:13mm;THICKNESS:0mm5;PLATING:NICKEL		*NOT available in DP
38	10.0000	PC			WASHER;PLAIN;INNER DIA:9mm6;OUTER DIA:13mm;THICKNESS:0mm5;PLATING:NICKEL		*NOT available in DP
39	4.0000	PC			WASHER;EXTERNAL TEETH;INNER DIA:3mm;OUTER DIA:6mm;THICKNESS:0mm5		*NOT available in DP
40	2.0000	PC			WASHER;EXTERNAL TEETH;INNER DIA:3mm;OUTER DIA:6mm;THICKNESS:0mm5;PLATING:CR(III)		*NOT available in DP
41	2.0000	PC			WASHER;EXTERNAL TEETH;INNER DIA:3mm;OUTER DIA:6mm;THICKNESS:1mm;PLATING:CR(III)		*NOT available in DP
42	6.0000	PC			WASHER;EXTERNAL TEETH;INNER DIA:4mm;OUTER DIA:7mm;THICKNESS:1mm7		*NOT available in DP
43	1.0000	PC		F97-00100-00481	SHEET;PMX8805;SLIDE-SWITCH;PVC;DST.NO:001;DPT.NO:00481;(PMX8805-SLIDE-SWPVC-SHEET-REVA.DWG)		eCR-20080201101025
44	1.9000	G	V97-00100-03175	F97-00100-03175	PAPER,KRAFT;WIDTH:300mm;THICKNESS:0mm1		
45	2.0000	PC		F97-00200-15009	FOAM SHEET;ACOUSTICAL FOAM;P0787;DST.NO:002;DPT.NO:15009;(P0787-ACOUSTICAL_FOAM-REVB.DWG)		
46	2.0000	PC		F89-00100-01145	INSULATION SHEET;GLIMMER;TO220 W/O_HOLE;DST.NO:001;DPT.NO:01145;(IN-GLTO220WH-REVA.DWG)		(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
47	2.0000	PC		F89-00100-01145	INSULATION SHEET;GLIMMER;TO220 W/O_HOLE;DST.NO:001;DPT.NO:01145;(IN-GLTO220WH-REVA.DWG)		
48	20.5280	G			THERM-GREASE;COLOR:WHT;SPEC.NO:09286		*NOT available in DP
49	4.0000	PC			SCREW;A4mm*13mm;HEAD:FLAT;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
50	20.5280	G			THERM-GREASE;COLOR:WHT;SPEC.NO:09286		*NOT available in DP
51	18.0000	PC			SCREW;M3mm*10mm;HEAD:PAN;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
52	5.0000	PC			STUD;THREAD-DIA:3mm;LENGTH:10mm;INT/INT		*NOT available in DP
53	5.0000	PC			STUD;THREAD-DIA:3mm;LENGTH:10mm;INT/INT		*NOT available in DP
54	0.1520	M			SHRINKING TUBE;INNER DIA:1mm;SPEC.NO:43217		*NOT available in DP
55	8.0000	PC			SCREW;M3mm*8mm;HEAD:PAN;INSERT:PHILLIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
56	2.0000	PC			STUD;THREAD-DIA:3mm;LENGTH:13mm5;INT/INT		*NOT available in DP
57	2.0000	PC			WASHER;PLAIN;INNER DIA:4mm;OUTER DIA:10mm;THICKNESS:1mm;PLATING:BLACK/ZINC		*NOT available in DP
58	1.0000	PC		F97-00000-04420	SHEET;NATURAL;INSULATION SHEET;PSU19;P0787;REVC		(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
59	2.0000	PC			WASHER;PLAIN;INNER DIA:4mm;OUTER DIA:10mm;THICKNESS:1mm;PLATING:BLACK/ZINC		*NOT available in DP
60	1.0000	PC		F97-00000-04420	SHEET;NATURAL;INSULATION SHEET;PSU19;P0787;REVC		
61	1.0000	PC		F97-00100-00481	SHEET;PMX8805;SLIDE-SWITCH;PVC;DST.NO:001;DPT.NO:00481;(PMX8805-SLIDE-SWPVC-SHEET-REVA.DWG)		(EU, UL, JP, UK, SAA, BR, AR, HM, SH)
62	12.0000	PC			SCREW;A3mm*10mm;HEAD:PAN;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
63	12.0000	PC			SCREW;A3mm*10mm;HEAD:PAN;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
64	8.0000	PC			SCREW;M4mm*12mm;HEAD:BINDING;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
65	5.0000	PC			SCREW;M3mm*6mm;HEAD:PAN;INSERT:PHILLIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
66	8.0000	PC			SCREW;M4mm*12mm;HEAD:BINDING;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
67	6.0000	PC			SCREW;A4mm*25mm;HEAD:BINDING;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
68	6.0000	PC			SCREW;A4mm*25mm;HEAD:BINDING;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
69	2.0000	PC	V89-07022-00121	F89-07022-00121	INSULATION SHEET;SI-RUBBER;TO220;COVER		(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
70	4.0000	PC			SCREW;M4mm*40mm;HEAD:PAN;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
71	1.0000	PC			SCREW;M3mm*8mm;HEAD:FLAT;INSERT:PHILLIPS REC.;SURFACE:ZINC/BLACK		*NOT available in DP
72	4.0000	PC			SCREW;M4mm*16mm;HEAD:BINDING;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
73	1.0000	PC		F97-00200-02015	INSULATION SHEET;GLIMMER;IC18_22;DST.NO:002;DPT.NO:02015;(IN- GLTO18_22-REVB.DWG)		(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
74	1.0000	PC			SCREW;M3mm*8mm;HEAD:FLAT;INSERT:PHILLIPS REC.;SURFACE:ZINC/BLACK		*NOT available in DP
75	2.0000	PC		F87-00100-06121	RUBBER FOOT2;P0431;DST.NO:001;DPT.NO:06121(P0431- RUBBER_FOOT2-REVA.DWG)		(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
76	2.0000	PC		F87-00100-06121	RUBBER FOOT2;P0431;DST.NO:001;DPT.NO:06121(P0431- RUBBER_FOOT2-REVA.DWG)		RUBBER FOOTING
77	0.5280	G			THERM-GREASE;COLOR:WHT;SPEC.NO:09286		*NOT available in DP
78	4.0000	PC			SCREW;M4mm*16mm;HEAD:BINDING;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
79	1.0000	PC		F97-00200-02015	INSULATION SHEET;GLIMMER;IC18_22;DST.NO:002;DPT.NO:02015;(IN- GLTO18_22-REVB.DWG)		
80	0.0560	M			SHRINKING TUBE;INNER DIA:1mm;SPEC.NO:43217		*NOT available in DP
81	2.0000	PC	V89-07022-00121	F89-07022-00121	INSULATION SHEET;SI-RUBBER;TO220;COVER		
82	6.0000	PC			WASHER;EXTERNAL TEETH;INNER DIA:4mm;OUTER DIA:7mm;THICKNESS:1mm7		*NOT available in DP
83	8.0000	PC			SCREW;A3mm*16mm;HEAD:PAN;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
84	8.0000	PC			SCREW;A3mm*16mm;HEAD:PAN;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
85	2.0000	PC			WASHER;PLAIN;INNER DIA:3mm;OUTER DIA:6mm;THICKNESS:0mm5;CR(III)		*NOT available in DP
86	16.0000	PC			SCREW;M3mm*12mm;HEAD:PAN;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
87	16.0000	PC			SCREW;M3mm*12mm;HEAD:PAN;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
88	8.0000	PC			SCREW;M3mm*10mm;HEAD:PAN;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
89	2.0000	PC			STUD;THREAD-DIA:3mm;LENGTH:13mm5;INT/INT		*NOT available in DP
90	1.0000	PC	V87-00200-10103	F87-00200-10103	RUBBER BUSHING;I00172P;DST.NO:002;DPT.NO:10103;(I00172P- RUBBER_BUSHING-REVB.dwg)		(EU, UL, JP, UK, SAA, BR, AR, HM, SH)
91	2.0000	PC			SCREW;BT5mm*45mm;HEAD:BINDING;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
92	2.0000	PC			WASHER;PLAIN;INNER DIA:3mm;OUTER DIA:8mm;THICKNESS:1mm;PLATING:NICKEL		*NOT available in DP

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
93	2.0000	PC			SCREW;BT5mm*45mm;HEAD:BINDING;INSERT:PHILIPS REC.;SURFACE:BLACK/ZINC		*NOT available in DP
94	2.0000	PC			WASHER;PLAIN;INNER DIA:3mm;OUTER DIA:8mm;THICKNESS:1mm;PLATING:NICKEL		*NOT available in DP
95	1.0000	PC			SCREW;M3mm*12mm;HEAD:PAN SPRING WASHER;INSERT:PHILIPS REC.;SURFACE:SILVER/ZINC		*NOT available in DP
96	1.0000	PC			SCREW;M3mm*12mm;HEAD:PAN SPRING WASHER;INSERT:PHILIPS REC.;SURFACE:SILVER/ZINC		*NOT available in DP
97	2.0000	PC			WASHER;EXTERNAL TEETH;INNER DIA:3mm;OUTER DIA:6mm;THICKNESS:0mm5;PLATING:CR(III)		*NOT available in DP
98	5.0000	PC			HEX. NUT;INNER DIA:M4mm;SURFACE:ZINC		*NOT available in DP
99	2.0000	PC		F87-00100-06116	RUBBER FOOT1;P0431;DST.NO:001;DPT.NO:06116(P0431-RUBBER_FOOT1-REVA.DWG)		(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
100	2.0000	PC		F87-00100-06116	RUBBER FOOT1;P0431;DST.NO:001;DPT.NO:06116(P0431-RUBBER_FOOT1-REVA.DWG)		RUBBER FOOTING

Ic

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
1	1.0000	PC	S60-54422-00528	C60-22422-00528	IC;AD/DA;V4220M;SSOP	[P0787:01: {1.0}({IC18})]	
2	2.0000	PC	S61-43892-01724	C61-00000-28801	IC;POWER AMP;SOP;HSOP24;TDA8920CTH	[00002: {2.0}({IC1,IC3})]	
3	20.0000	PC		C73-00000-29050	IC;OPAMP;SMD;SOP;8;BA4580RF	[P0787:01: {15.0}({IC1-IC4,IC6-IC10,IC13-IC16,IC23,IC25})]	
4	1.0000	PC	S73-22370-00516	C73-22370-00516	IC;OPAMP OPAMP;V13700M;SOP	[P0787:01: {1.0}({IC11})]	
5	9.0000	PC	S73-58007-40514	C73-31007-40514	IC;OPAMP OPAMP;TL074;SOP;	[P0787:01: {6.0}({IC12,IC20-IC22,IC24,IC26})]	
6	2.0000	PC	S73-55035-80508	C73-55035-80508	IC;OPAMP OPAMP;LM358;SOP 8D	[00001: {2.0}({IC10-IC11})]	
7	1.0000	PC	S73-58007-22208	C73-58007-22208	IC;OPAMP OPAMP;TL072;SOP;BRAND:ST ONLY	[P0787:01: {1.0}({IC35})]	
8	15.0000	PC	S73-59458-00508	C73-59458-00508	IC;OPAMP OPAMP;NJM4580;SOP		
9	1.0000	PC	T12-00100-02216	D12-00100-02217	IC;DIG COMM.;EUROTEC;V1000;SOIC	[P0787:01: {1.0}({IC17})]	
10	1.0000	PC	T22-00000-05463	D22-00000-05463	IC;LOGIC;SOP;14;HEF4047BT;SOT108-1;PHILIPS	[00002: {1.0}({IC2})]	
11	1.0000	PC	T24-18081-61832	D24-18081-61832	IC;MICROCONTROLLER;ATMEGA8A-AU;SMD;TQFP32	[P0787:01: {1.0}({IC19})]	
12	1.0000	PC	S74-61043-10803	C74-61043-10803	IC;POWER-CONVERSION;VOLT.REFERENCE;TO-92;TL431ACZ	[00001: {1.0}({IC4})]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
13	1.0000	PC	S77-05107-03110	C77-05107-03110	IC;VOLT.REGULATOR;7805F;FULLPACK;TO220	[00001: {1.0}({IC8})]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
14	1.0000	PC	S74-41022-10108	C74-41022-10108	IC;POWER-CONVERSION;TOP221P;DIP	[00001: {1.0}({IC9})]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
15	1.0000	PC	S77-15207-03015	C77-15207-03015	IC;VOLT.REGULATOR;BRAND:ST MICROELECTRONICS;L7915;TO220	[P0787:01: {1.0}({IC7})]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
16	1.0000	PC	S74-73385-40120	C74-73385-40120	IC;CONVERTER;UC3854BN;POWER-CONV;DIL	[00001: {1.0}({IC2})]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
17	1.0000	PC	S77-12107-03110	C77-12107-03110	IC;VOLT.REGULATOR;7812F;FULLPACK;TO220	[00001: {1.0}({IC6})]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
18	1.0000	PC	S77-05107-03110	C77-05107-03110	IC;VOLT.REGULATOR;7805F;FULLPACK;TO220	[P0787:01: {1.0}({IC8})]	
19	1.0000	PC	S77-15207-03015	C77-15207-03015	IC;VOLT.REGULATOR;BRAND:ST MICROELECTRONICS;L7915;TO220	[00001: {1.0}({IC7})]	
20	1.0000	PC	S77-12107-03110	C77-12107-03110	IC;VOLT.REGULATOR;7812F;FULLPACK;TO220	[P0787:01: {1.0}({IC6})]	
21	1.0000	PC	S77-15107-03010	C77-15107-03010	IC;VOLT.REGULATOR;7815;TO220	[00001: {1.0}({IC5})]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
22	1.0000	PC	S77-15107-03010	C77-15107-03010	IC;VOLT.REGULATOR;7815;TO220	[P0787:01: {1.0}({IC5})]	
23	1.0000	PC	S74-73385-40120	C74-73385-40120	IC;CONVERTER;UC3854BN;POWER-CONV;DIL	[P0787:01: {1.0}({IC2})]	
24	1.0000	PC	S74-41022-10108	C74-41022-10108	IC;POWER-CONVERSION;TOP221P;DIP	[P0787:01: {1.0}({IC9})]	
25	1.0000	PC	S74-61043-10803	C74-61043-10803	IC;POWER-CONVERSION;VOLT.REFERENCE;TO-92;TL431ACZ	[P0787:01: {1.0}({IC4})]	

Led

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
1	1.0000	PC	U10-33565-00578	E10-33565-00578	LED H1B;2mm x 5mm;GREEN	[P0787:01: {1.0} (LD5)]	
2	1.0000	PC		E12-37630-00579	LED;2mm x 5mm;RD	[P0787:01: {1.0} (LD3)]	
3	3.0000	PC	U12-57630-00590	E12-57630-00590	LED;3mm ROUND;RD	[P0787:01: {2.0} (LD1-LD2)]	

Metal Part

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
1	2.0000	EA		A60-00000-63446	METAL;P0787;SPCC 1.0mm;GRILL;STAMPING;SPRAYING;BLACK;REV:C		
2	2.0000	PC		A60-00100-12038	METAL;PLATE;ZINC;TP85S02B;85mm x 35mm36 x 5H;PLATING:ZINC;DST.NO:001;DPT.NO:12038;(LS-TP85S02B- REVA.DWG)		
3	2.0000	PC		A60-00100-12966	METAL;PLATE IC;P0642;DST.NO:001;DPT.NO:12966;(P0642- PLATE_IC-REVA.DWG)		
4	2.0000	PC		A62-00100-04835	METAL;SPEAKER FRAME;FR217S02A;MATERIAL:SPCC 0mm8;8in;BLACK;DST.NO:001;DPT.NO:04835;(LS-FR217S02A- REVA.DWG)		
5	1.0000	PC		A63-00000-00577	METAL;HEATSINK;P0787;ALU 3.5mm;BENDING;NATURAL;PSU19;REVD		
6	1.0000	PC		A65-00000-00578	METAL;P0787;SECC 0.8mm;CASING;BENDING + MACHINING;REVB		METAL CASING
7	2.0000	PC	Q65-00000-67995	A65-00000-67995	METAL;P0854;BLACK;LS-ME29_2S01A		
8	2.0000	PC		A65-00100-02610	METAL;YOKE;P0060;TY85S02A;85mm x 35mm x 21mm5 x 16mm5;PLATING:ZINC;(LS-TY85S02A-REVA.DWG)		
9	2.0000	PC		A65-00100-03403	METAL;MESH;P0201;STAINLESS STEEL 0.2 mm;DIAMETER:25 mm;DST.NO:001;DPT.NO:03403;(LS-ME25S0_2A-REVA.DWG)		
10	2.2000	G		A65-00100-04831	METAL;FOIL;KAPTON;WIDTH:32 mm;THICKNESS:0.125 mm;DST.NO:001;DPT.NO:04831		
11	0.9400	G	Q65-00100-08668	A65-00100-08668	ALUMINUM ALLOY;TDM61AL0_05A;ALUMINUM 5056- O;THICKNESS:0MM05;DST.NO:001;DPT.NO:08668;(LS- TDM61AL0_05A-REVA.DWG)		
12	2.0000	PC	Q65-00100-12037	A65-00100-12037	TWEETER DOME;TD51A6A;MATERIAL:ALUMINIUM 0mm05;DIAMETER:51mm;HIGH:6MM;DST.NO:001;DPT.NO:12037;(LS- TD51A6A-REVA.DWG)		
13	2.0000	PC		A65-00100-12959	METAL;BRACKET IC;P0642;DST.NO:001;DPT.NO:12959;(P0642- BRACKET_IC-REVA.DWG)		
14	2.0000	PC		A65-00100-14834	METAL;YOKE;DST.NO:001;DPT.NO:14834;(LS-TY102S02A[R]- REVA.DWG)		
15	2.0000	PC		A65-00100-14835	METAL;TOP;DST.NO:001;DPT.NO:14835;(LS-TP102S02A[R]- REVA.DWG)		
16	1.0000	PC	Q65-00100-14871	A65-00100-14871	METAL;LOCK CLASP PLATE P0431;DST.NO:001;DPT.NO:14871;(P0431-LOCK_CLASP_PLATE- REVA.DWG)		
17	1.0000	PC		A65-09000-25912	METAL;FAN GUARD;DIAMETER:80mm;TYP:G;NO:01;SPEC:NO:25912		METAL FANGUARD
18	6.0000	PC	Q65-23000-24593	A65-23000-24593	METAL CLIP;DSP2000;DWG.NO:24593;(R14-DSP2000-CLIP- REVC.DWG)		
19	1.0000	PC		J02-00000-33694	METAL;P0787;SECC 1.2mm;PANEL;PUNCHING;SPRAYING;429;FRONT MIXER PANEL;C002		METAL PANEL
20	1.0000	PC		J02-00000-33695	METAL;P0787;REAR;MIXER PANEL;E003		METAL PANEL
21	1.0000	PC		J05-00000-02154	METAL;P0787;LOCK;CLASP;A001		
22	1.0000	PC	Q65-00000-24959	A65-00000-24959	METAL;P0274;SPCC 0.8mm;MOUNT;BENDING + PUNCHING;PLATING TIN;MOUNTING HELP;J00053P;REV:B	[B:00: {1.0}(M1)]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
23	1.0000	PC		A65-00000-00578	METAL;P0787;SECC 0.8mm;CASING;BENDING + MACHINING;REVB		(EU, UL, JP, UK, SAA, BR, AR, HM, SH)
24	1.0000	PC		A65-00100-11450	METAL;WHEEL BRACKET;P0787;DST.NO:001;DPT.NO:11450;(P0787- WHEEL_BRACKET-REVA.DWG)		(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
25	1.0000	PC		A65-00100-11450	METAL;WHEEL BRACKET;P0787;DST.NO:001;DPT.NO:11450;(P0787- WHEEL_BRACKET-REVA.DWG)		METAL BRACKET
26	1.0000	PC		A60-00100-11453	METAL;HANDLE PLATE RIGHT;DST.NO:001;DPT.NO:11453;(P0787- HANDLE_PLATE_RIGHT-REVA.DWG)		(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
27	1.0000	PC		A60-00100-11453	METAL;HANDLE PLATE RIGHT;DST.NO:001;DPT.NO:11453;(P0787- HANDLE_PLATE_RIGHT-REVA.DWG)		METAL PLATE RIGHT

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
28	1.0000	PC		A60-00100-11451	METAL;THREADED PLATE;DST.NO:001;DPT.NO:11451;(P0787-THREADED_PLATE-REVA.DWG)		(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
29	1.0000	PC		A60-00100-11451	METAL;THREADED PLATE;DST.NO:001;DPT.NO:11451;(P0787-THREADED_PLATE-REVA.DWG)		METAL THREADED PLATE
30	1.0000	PC		A65-09000-25912	METAL;FAN GUARD;DIAMETER:80mm;TYP:G;NO:01;SPEC.NO:25912		(EU, UL, JP, UK, SAA, BR, AR, HM, SH)
31	1.0000	PC		J02-00000-33695	METAL;P0787;REAR;MIXER PANEL;E003		(EU, UL, JP, UK, SAA, BR, AR, HM, SH)
32	1.0000	PC		A60-00100-11454	METAL;HANDLE PLATE LEFT;P0787;DST.NO:001;DPT.NO:11454;(P0787-HANDLE_PLATE_LEFT-REVA.DWG)		(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
33	1.0000	PC		A60-00100-11454	METAL;HANDLE PLATE LEFT;P0787;DST.NO:001;DPT.NO:11454;(P0787-HANDLE_PLATE_LEFT-REVA.DWG)		METAL PLATE LEFT
34	4.0000	PC		A65-00200-14502	METAL;MIXER SCREW FLANGE;P0787;DST.NO:002;DPT.NO:14502;(P0787-MIXER_SCREW_FLANGE-REVB.DWG)		(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
35	1.0000	PC	Q65-00000-24959	A65-00000-24959	METAL;P0274;SPCC 0.8mm;MOUNT;BENDING + PUNCHING;PLATING TIN;MOUNTING HELP;I00053P;REV:B	[78700: {1.0}{M1}]	
36	1.0000	PC		A65-00200-12901	HANDLE;P0431;DST.NO:002;DPT.NO:12901;(P0431-HANDLE-REVB.DWG)		(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
37	2.0000	PC		A65-00100-11247	METAL;REAR PANEL BRACKET;P0787;DST.NO:001;DPT.NO:11247;(P0787-REAR_PANEL_BRACKET-REVA.pdf)		(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
38	4.0000	PC		A65-00100-11245	METAL;MIXER PANEL BRACKET;P0787;DST.NO:001;DPT.NO:11245;(P0787-MIXER_PANEL_BRACKET-REVA.pdf)		(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
39	4.0000	PC		A65-00100-11245	METAL;MIXER PANEL BRACKET;P0787;DST.NO:001;DPT.NO:11245;(P0787-MIXER_PANEL_BRACKET-REVA.pdf)		METAL BRACKET
40	2.0000	PC		A65-00100-11247	METAL;REAR PANEL BRACKET;P0787;DST.NO:001;DPT.NO:11247;(P0787-REAR_PANEL_BRACKET-REVA.pdf)		METAL BRACKET
41	4.0000	PC		A65-00200-14502	METAL;MIXER SCREW FLANGE;P0787;DST.NO:002;DPT.NO:14502;(P0787-MIXER_SCREW_FLANGE-REVB.DWG)		METAL FLANGE
42	1.0000	PC		A65-00200-12901	HANDLE;P0431;DST.NO:002;DPT.NO:12901;(P0431-HANDLE-REVB.DWG)		METAL BRACE
43	1.0000	PC		J02-00000-33694	METAL;P0787;SECC 1.2mm;PANEL;PUNCHING;SPRAYING;429;FRONT MIXER PANEL;C002		(EU, UL, JP, UK, SAA, BR, AR, HM, SH)

Plastic Part

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
1	1.0000	PC	W52-00000-12223	G52-00000-12223	PLASTIC;P0431;ABS;KNOB;MOULDING;YS1282A;PANTONE 431;ENCODER KNOB;I00124P;REV:C		
2	1.0000	PC		G52-00000-93820	PLASTIC;KNOB;P0A4Q;ABS;INJECTION MOULDING;YS1284A;BLACK;POWER_KNOB;REV:B		
3	5.0000	PC	W52-00200-08623	G52-00200-08623	KNOB;FADER;FAD30MMKNOB 1;BLACK;DST.NO:002;DPT.NO:08623;(FADERKNOBBLK1-REVB.DWG)		PLASTIC FADER KNOB
4	8.0000	PC		G52-00200-14250	KNOB;POT;I00123P;431C;BLACK INK MARK;DST.NO:002;DPT.NO:14250;(I00123P-POTKNOB-REVB.DWG)		PLASTIC POTKNOB
5	2.0000	PC		G52-00200-14251	KNOB;POT;I00123P;429C;BLACK INK MARK;DST.NO:002;DPT.NO:14251;(I00123P-POTKNOB-REVB.DWG)		PLASTIC POTKNOB
6	8.0000	PC		G52-00200-14252	KNOB;POT;I00123P;431C;PANTONE 3025C INK MARK;DST.NO:002;DPT.NO:14252;(I00123P-POTKNOB-REVB.DWG)		PLASTIC POTKNOB
7	5.0000	PC		G52-00200-14253	KNOB;POT;I00123P;431C;PANTONE 201C INK MARK;DST.NO:002;DPT.NO:14253;(I00123P-POTKNOB-REVB.DWG)		PLASTIC POTKNOB
8	3.0000	PC		G52-00500-11203	KNOB;SWITCH;UB-S;7mm4;429C;DST.NO:005;DPT.NO:11203;(R20-UB-S_SWKNOB-REVE.DWG)		
9	3.0000	PC		G52-00500-11205	KNOB;SWITCH;UB-S;7mm4;431C;DST.NO:005;DPT.NO:11205;(R20-UB-S_SWKNOB-REVE.pdf)		
10	4.0000	PC	W53-14000-01976	G53-14000-01976	PLASTIC;SPACER;ABS;BLACK;LENGTH:14MM2;(SWITCHSPACER14_2 MM.DWG)		
11	1.0000	PC		G53-18900-02513	PLASTIC;MICROPHONE MICCLIP;P0199		
12	2.0000	PC	W56-00000-16226	G56-00000-64481	PLASTIC;P0787;AV161;REAR;INJECTION MOULDING;YS3292;SPRAYING;BLACK;REAR CABINET;REV:E		
13	2.0000	PC	W58-00000-07135	G58-00000-07135	PLASTIC;P0969;PC + GLASS FIBER;PHASE PLUG;BLACK;PLUG;PP25_2PC13_7A		
14	2.0000	PC	W58-00000-16225	G58-00000-16225	PLASTIC;P0787;PP (POLYPROPYLENE);FRONT;MOULDING;YS3292;BLACK;SPEAKER FRONT PANEL		
15	2.0000	PC		G58-00000-16347	PLASTIC;P0787;RUBBER 50degC;GASKET;EXTRUSION;BLACK;SPEAKER CABINET GASKET		
16	2.0000	PC		G58-00100-02618	PLASTIC;PHASE PLUG COVER;MATERIAL:ABS 160ã;DIAMETER:76.5mm;14.8H;DST.NO:001;DPT.NO:02618;(LS-PP76_5ABS14_8A-REVA.DWG)		
17	300.0000	MM	W58-00100-03180	G58-00100-03180	GASKET;SPEAKER;RGA15EVA1_5A;MATERIAL:EVA;BLACK;WIDTH:15 mm;HEIGHT:1mm5;DST.NO:001;DPT.NO:03180;(LS-RGA15EVA1_5A-REVA.DWG)		
18	2.0000	PC		G58-00100-05851	PLASTIC;LED SPACER;P0486;MOULDING;BLACK;I00084P;INNER DIA:3MM1;LENGTH:11MM75;DST.NO:001;DPT.NO:05851;(I00084P-PLA-LED_SPACER-REVA.DWG)		
19	4.0000	PC		G58-00100-14503	PLASTIC;CABINET GASKET;P0787;DST.NO:001;DPT.NO:14503;(P0787-CABINET_GASKET-REVA.DWG)		
20	1.0000	PC	W58-00200-02452	G58-00200-02452	PLASTIC;INLET;ABS;PRO SERIES (POWER SWITCH);SIZE:0in58*0in58;ABS;DST.NO:002;DPT.NO:02452;(PRO-PWRSWIT-REVB.DWG)		
21	1.0000	PC		G58-00300-11128	PLASTIC;SPACER;P0062;MOULDING;BLACK;LED SPACER2;DI100 DSP110;DST.NO:003;DPT.NO:11128;(R14-DI100-LEDSPACER2-REVC.DWG)		
22	1.0000	PC		G58-00300-14053	PLASTIC;LED HOLDER;UB1002_1202FX;DST.NO:003;DPT.NO:14053;(UB1002FX-7SEGMENT_LED_HOLDER-REVC.DWG)		
23	1.0000	PC		G58-53200-23567	PLASTIC;SHEET;DWG.NO:23567;(R2-PMX2000-POWERPVC-REVA.DWG)		
24	1.0000	PC		I64-00100-03907	PLASTIC;LED WINDOW;P0381;ACRYL;MATERIAL:PMMA;PRINTED;FST.NO:001;DPT.NO:03907;(P0381-PLA LED WINDOW-REVB.DWG)		PLASTIC WINDOW
25	3.0000	PC	Y68-00000-07221	I68-00000-07221	PLASTIC;P0431;NYLON 66;LOCK;BLACK;C001		

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
26	4.0000	PC		I68-00000-45508	PLASTIC;P0000;SILVER CHROME;BEHLOGO12;BKSR;68.38mm;A002		
27	8.0000	PC		G52-00200-14250	KNOB;POT;I00123P;431C;BLACK INK MARK;DST.NO:002;DPT.NO:14250;(I00123P-POTKNOB-REVB.DWG)		(EU, UL, JP, UK, SAA, BR, AR, HM, SH)
28	1.0000	PC		G58-00200-13188	PLASTIC;COMPARTMENT;P0787;DST.NO:002;DPT.NO:13188;(P0787-COMPARTMENT-REVB.DWG)		(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
29	1.0000	PC		G58-00200-13188	PLASTIC;COMPARTMENT;P0787;DST.NO:002;DPT.NO:13188;(P0787-COMPARTMENT-REVB.DWG)		PLASTIC COMPARTMENT
30	1.0000	PC	W53-26000-22762	G53-26000-22762	FUSE HOLDER;TYPE:FH-B13HA;250V/10A;SPEC:22762	[78700: {1.0}(F1)]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
31	5.0000	PC		G52-00200-14253	KNOB;POT;I00123P;431C;PANTONE 201 C INK MARK;DST.NO:002;DPT.NO:14253;(I00123P-POTKNOB-REVB.DWG)		(EU, UL, JP, UK, SAA, BR, AR, HM, SH)
32	1.0000	PC	W56-00200-15223	G56-00200-15223	PLASTIC;MIXER CABINET 1;P0787;DST.NO:002;DPT.NO:15223;(P0787-MIXER_CABINET_1-REVB.DWG)		(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
33	1.0000	PC	W56-00200-15223	G56-00200-15223	PLASTIC;MIXER CABINET 1;P0787;DST.NO:002;DPT.NO:15223;(P0787-MIXER_CABINET_1-REVB.DWG)		PLASTIC CASING 1
34	1.0000	PC		G58-00000-93355	PLASTIC;COVER;P0787;ABS;INJECTION COLORED MOULDING;MATT;BLACK MATT;P0787-MIXER-COVER REVB		(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
35	1.0000	PC	W53-26000-22762	G53-26000-22762	FUSE HOLDER;TYPE:FH-B13HA;250V/10A;SPEC:22762	[B:00: {1.0}(F1)]	
36	1.0000	PC		G58-00000-93355	PLASTIC;COVER;P0787;ABS;INJECTION COLORED MOULDING;MATT;BLACK MATT;P0787-MIXER-COVER REVB		
37	1.0000	PC		I64-00100-03907	PLASTIC;LED WINDOW;P0381;ACRYL;MATERIAL:PMMA;PRINTED;FST.NO:001;DPT.NO:03907;(P0381-PLA LED WINDOW-REVB.DWG)		(EU, UL, JP, UK, SAA, BR, AR, HM, SH)
38	2.0000	PC	W58-00100-14979	G58-00100-14979	PLASTIC;BASE FOOT;P0787;DST.NO:001;DPT.NO:14979;(P0787-BASE_FOOT-REVA.dwg)		(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
39	2.0000	PC	W58-00100-14979	G58-00100-14979	PLASTIC;BASE FOOT;P0787;DST.NO:001;DPT.NO:14979;(P0787-BASE_FOOT-REVA.dwg)		CASTER WHEEL
40	1.0000	PC	W56-00200-15224	G56-00200-15224	PLASTIC;MIXER CABINET 2;P0787;DST.NO:002;DPT.NO:15224;(P0787-MIXER_CABINET_2-REVB.DWG)		(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
41	1.0000	PC	W56-00200-15224	G56-00200-15224	PLASTIC;MIXER CABINET 2;P0787;DST.NO:002;DPT.NO:15224;(P0787-MIXER_CABINET_2-REVB.DWG)		PLASTIC CASING 2
42	1.0000	PC		G58-00200-14413	PLASTIC;COMPARTMENT COVER;P0787;DST.NO:002;DPT.NO:14413;(P0787-COMPARTMENT_COVER-REVB.DWG)		(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
43	1.0000	PC		G58-00200-14413	PLASTIC;COMPARTMENT COVER;P0787;DST.NO:002;DPT.NO:14413;(P0787-COMPARTMENT_COVER-REVB.DWG)		PLASTIC COVER
44	2.0000	PC		G52-00200-14251	KNOB;POT;I00123P;429C;BLACK INK MARK;DST.NO:002;DPT.NO:14251;(I00123P-POTKNOB-REVB.DWG)		(EU, UL, JP, UK, SAA, BR, AR, HM, SH)
45	8.0000	PC		G52-00200-14252	KNOB;POT;I00123P;431C;PANTONE 3025C INK MARK;DST.NO:002;DPT.NO:14252;(I00123P-POTKNOB-REVB.DWG)		(EU, UL, JP, UK, SAA, BR, AR, HM, SH)
46	5.0000	PC	W52-00200-08623	G52-00200-08623	KNOB;FADER;FAD30MMKNOB 1;BLACK;DST.NO:002;DPT.NO:08623;(FADERKNOBBLK1-REVB.DWG)		(EU, UL, JP, UK, SAA, BR, AR, HM, SH)
47	1.0000	PC	W58-00200-11638	G58-00200-11638	PLASTIC;HANDLE BASE;P0431;DST.NO:002;DPT.NO:11638;(P0431-HANDLE_BASE-REVB.DWG)		(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
48	1.0000	PC	W58-00200-11638	G58-00200-11638	PLASTIC;HANDLE BASE;P0431;DST.NO:002;DPT.NO:11638;(P0431-HANDLE_BASE-REVB.DWG)		HANDLE BASE

Plug Socket

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
1	1.0000	PC		G61-65216-03292	BOX HEADER;POLES:16;2 ROW;STRAIGHT;PITCH:2mm54;SCM-16S	[P0787:01: {1.0}{X20}]	
2	1.0000	PC		G61-75216-13427	CABLE HEADER;POLES:16;2 ROW;IDE;STRAIGHT;PITCH:2mm54;FC-16P		
3	1.0000	PC		G61-85216-08163	TRANSITION PLUG;FLAT CABLE;POLES:16;ROWS:2;STRAIGHT;PITCH:2mm54;BLACK;FD-16P		
4	8.0000	PC	W64-01211-03174	G64-01211-03174	PLUG;JACK STEREO 6mm3;STRAIGHT SOLDER;W/O MET.RNG.;MET.BUSH.;NO NUT/WASHER;(JY-6351G-02-250)	[P0787:02: {8.0}{X4-X11}]	
5	1.0000	PC		G64-01400-54568	PLUG;PCB;PLUG;JACK STEREO 3mm5;STRAIGHT PCB-MT.;(JY-3569-01-070)	[P0787:02: {1.0}{X1}]	
6	2.0000	PC	W64-14152-03710	G64-14152-03710	PLUG;PCB;PLUG;JACK PHONE;STRAIGHTPCB LUGS;MONO 6mm3;DUAL TIP/NO RING CONTACTS;NO NUT/WASHER;METAL BUSHING;(CHUNSHENG PJ-622HA-EP)	[P0787:03: {2.0}{X31-X32}]	
7	2.0000	PC	W64-16112-00062	G64-16112-00062	PLUG;JACK MONO 6mm3;STRAIGHT SOLDER;DUAL TIP/NO RING CONTACTS;MET.BUSH.;NO NUT/WASHER;(CHUNSHENG PJ-636HA)	[00000: {1.0}{X1}]	
8	2.0000	PC		G68-14002-03283	PLUG;RCA;SOCKET;RCAJACK2P/S;FEMALE;POLES:02;STRAIGHT;SEPA RATE GROUNDS	[P0787:02: {2.0}{X2-X3}]	
9	1.0000	PC		G71-00000-03961	WAFER;V1000-14B,0.35um;LOGIC-3.3V(1P4M)		
10	1.0000	PC	W71-23103-04757	G71-23103-04757	WAFER;POLES:3;STRAIGHT;PITCH:2 mm;1 ROW;TYPE:A2006WV-3P	[00002: {1.0}{X4}]	
11	1.0000	PC		G71-23109-04748	WAFER;POLES:9;STRAIGHT;PITCH:2 mm;1 ROW;TYPE:A2006WV-9P	[P0787:01: {1.0}{X16}]	
12	2.0000	PC	W71-27102-04759	G71-27102-04759	WAFER;POLES:2;STRAIGHT;PITCH:3.96 mm;1 ROW;JS1120-02	[P0787:04: {1.0}{X5}]	
13	1.0000	PC		G71-27103-04449	WAFER;POLES:3;STRAIGHT;PITCH:3.96 mm;1 ROW;JS1120-03	[00002: {1.0}{X3}]	
14	1.0000	PC	W71-27104-04415	G71-27104-04415	WAFER;POLES:4;STRAIGHT;PITCH:3.96 mm;1 ROW;JS1120-04	[00002: {1.0}{X5}]	
15	1.0000	PC	W71-43103-05995	G71-43103-05995	PLUG;HOUSING;POLES:3;ROWS:1;STRAIGHT;PITCH:2mm;TYP:A2008		
16	1.0000	PC	W71-43106-05998	G71-43106-05998	PLUG;HOUSING;POLES:6;ROWS:1;STRAIGHT;PITCH:2mm;TYP:A2008		
17	1.0000	PC		G71-43109-06001	PLUG;HOUSING;POLES:9;ROWS:1;STRAIGHT;PITCH:2mm;TYP:A2008		
18	2.0000	PC	W71-47102-05844	G71-47102-05844	PLUG;HOUSING;A3963H02;PITCH:3mm96;POLES:2;ROWS:1;UL94-V0;STRAIGHT		
19	1.0000	PC	W71-47103-05845	G71-47103-05845	PLUG;HOUSING;A3963H02;PITCH:3mm96;POLES:3;ROWS:1;UL94-V0;STRAIGHT		
20	1.0000	PC	W71-47103-06756	G71-47103-06756	PLUG;HOUSING;P:3mm96;STRAIGHT;ROWS:1;POLES:3;TYP:JS4008		
21	1.0000	PC	W71-47104-05846	G71-47104-05846	PLUG;HOUSING;A3963H02;PITCH:3mm96;POLES:4;ROWS:1;UL94-V0;STRAIGHT		
22	1.0000	PC	W71-47104-06757	G71-47104-06757	PLUG;HOUSING;P:3mm96;STRAIGHT;ROWS:1;POLES:4;TYP:JS4008		
23	1.0000	PC	W67-30103-01811	G67-30103-01811	SOCKET;AC:SNAP-IN;UL94V-0;10/15A 250VAC;PCB MOUNT;COLOR:BLK;POLES:03;(RONG-FENG SS-7B-1-T7)	[78700: {1.0}{X5}]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
24	1.0000	PC	W71-23106-04965	G71-23106-04965	WAFER;POLES:6;STRAIGHT;PITCH:2 mm;1 ROW;TYPE:A2006WV-6P	[P0787:01: {1.0}{X6}]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
25	1.0000	PC		G71-23102-04756	WAFER;POLES:2;STRAIGHT;PITCH:2 mm;1 ROW;TYPE:A2006WV-2P	[00001: {1.0}{X8}]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
26	1.0000	PC	W67-30103-01811	G67-30103-01811	SOCKET;AC:SNAP-IN;UL94V-0;10/15A 250VAC;PCB MOUNT;COLOR:BLK;POLES:03;(RONG-FENG SS-7B-1-T7)	[B:00: {1.0}{X5}]	
27	1.0000	PC		G71-23102-04756	WAFER;POLES:2;STRAIGHT;PITCH:2 mm;1 ROW;TYPE:A2006WV-2P	[P0787:01: {1.0}{X8}]	
28	1.0000	PC	W71-23106-04965	G71-23106-04965	WAFER;POLES:6;STRAIGHT;PITCH:2 mm;1 ROW;TYPE:A2006WV-6P	[00001: {1.0}{X6}]	

Power Supply

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
1	2.0000	PC	Z61-81700-31242	J61-81700-31242	TRANSFORMER;SPS600;TR-2/3;5mH;35A;PULSE PE067050	[P0787:01: {2.0}(TR1-TR2)]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
2	1.0000	PC		J69-00000-00996	TRAFO;SWITCH MODE;P0787;COMMON;60uH;DA XIN:KB1332-12233	[00001: {1.0}(TR3)]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
3	1.0000	PC		J69-00000-00996	TRAFO;SWITCH MODE;P0787;COMMON;60uH;DA XIN:KB1332-12233	[P0787:01: {1.0}(TR3)]	
4	1.0000	PC	Z63-31700-31240	J63-31700-31240	TRANSFORMER;SPS600;TR-4;33mH;CORE:EE16;BILLION 915-082	[00001: {1.0}(TR4)]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
5	1.0000	PC	Z63-31700-31240	J63-31700-31240	TRANSFORMER;SPS600;TR-4;33mH;CORE:EE16;BILLION 915-082	[P0787:01: {1.0}(TR4)]	
6	2.0000	PC	Z61-81700-31242	J61-81700-31242	TRANSFORMER;SPS600;TR-2/3;5mH;35A;PULSE PE067050	[00001: {2.0}(TR1-TR2)]	

Quarz

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
1	1.0000	PC	X65-40471-00000	H65-40471-00000	QUARZ;RESONATOR;10MHz;HC49/S;FUNDAMENTAL	[P0787:01: {1.0}(Q1)]	

Resistor

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
1	1.0000	PC			RESISTOR;CARBON;10 kohm;0W125;1 %;100 PPM;SMD805;THICK FILM	[00001: {1.0}(R23)]	*NOT available in DP
2	2.0000	PC			RESISTOR;CARBON;13Kohm;5%;0W063;SMD603	[P0787:01: {2.0}(R263-R264)]	*NOT available in DP
3	4.0000	PC			RESISTOR;CARBON;0ohm;5%;0W063;SMD603	[P0787:01: {4.0}(R52-R53,R56-R57)]	*NOT available in DP
4	1.0000	PC			RESISTOR;CARBON;2ohm2;5%;0W063;SMD603	[P0787:01: {1.0}(R225)]	*NOT available in DP
5	4.0000	PC			RESISTOR;CARBON;4ohm7;5%;0W063;SMD603	[P0787:02: {4.0}(R330-R333)]	*NOT available in DP
6	3.0000	PC			RESISTOR;CARBON;10ohm;5%;0W063;SMD603	[00002: {1.0}(R1)]	*NOT available in DP
7	3.0000	PC			RESISTOR;CARBON;22ohm;5%;0W063;SMD603	[00002: {3.0}(R4,R20,R23)]	*NOT available in DP
8	1.0000	PC			RESISTOR;CARBON;120ohm;5%;0W063;SMD603	[00001: {1.0}(R56)]	*NOT available in DP
9	4.0000	PC			RESISTOR;CARBON;150ohm;5%;0W063;SMD603	[P0787:01: {4.0}(R163-R164,R261-R262)]	*NOT available in DP
10	3.0000	PC			RESISTOR;CARBON;220ohm;5%;0W063;SMD603	[P0787:01: {2.0}(R194,R196)]	*NOT available in DP
11	9.0000	PC			RESISTOR;CARBON;330ohm;5%;0W063;SMD603	[P0787:01: {9.0}(R193,R195,R197-R198,R213-R216,R356)]	*NOT available in DP
12	4.0000	PC			RESISTOR;CARBON;360ohm;5%;0W063;SMD603	[P0787:01: {4.0}(R107,R128,R158-R159)]	*NOT available in DP
13	4.0000	PC			RESISTOR;CARBON;470ohm;5%;0W063;SMD603	[P0787:01: {4.0}(R81-R84)]	*NOT available in DP
14	6.0000	PC			RESISTOR;CARBON;1Kohm;5%;0W063;SMD603	[P0787:01: {3.0}(R124,R136,R166)]	*NOT available in DP
15	5.0000	PC			RESISTOR;CARBON;1Kohm2;5%;0W063;SMD603	[P0787:01: {4.0}(R170-R172,R180)]	*NOT available in DP
16	4.0000	PC			RESISTOR;CARBON;1Kohm3;5%;0W063;SMD603	[P0787:02: {4.0}(R300-R301,R316,R321)]	*NOT available in DP
17	2.0000	PC			RESISTOR;CARBON;1Kohm5;5%;0W063;SMD603	[00001: {2.0}(R45,R57)]	*NOT available in DP
18	1.0000	PC			RESISTOR;CARBON;2Kohm;5%;0W063;SMD603	[00001: {1.0}(R44)]	*NOT available in DP
19	5.0000	PC			RESISTOR;CARBON;2Kohm2;5%;0W063;SMD603	[P0787:01: {4.0}(R177-R179,R181)]	*NOT available in DP
20	8.0000	PC			RESISTOR;CARBON;2Kohm7;5%;0W063;SMD603	[P0787:01: {2.0}(R138,R143)]	*NOT available in DP
21	13.0000	PC			RESISTOR;CARBON;3Kohm3;5%;0W063;SMD603	[P0787:01: {7.0}(R76,R100,R125,R135,R139,R142,R165)]	*NOT available in DP
22	13.0000	PC			RESISTOR;CARBON;3Kohm9;5%;0W063;SMD603	[P0787:01: {12.0}(R11,R13,R17,R20-R22,R26,R30,R62,R65-R66,R69)]	*NOT available in DP
23	5.0000	PC			RESISTOR;CARBON;4Kohm7;5%;0W063;SMD603	[P0787:01: {3.0}(R85,R106,R217)]	*NOT available in DP
24	18.0000	PC			RESISTOR;CARBON;5Kohm1;5%;0W063;SMD603	[P0787:01: {18.0}(R59-R60,R72,R78,R116-R123,R148-R149,R168-R169,R175-R176)]	*NOT available in DP
25	5.0000	PC			RESISTOR;CARBON;5Kohm6;5%;0W063;SMD603	[00002: {4.0}(R9,R11,R15,R17)]	*NOT available in DP
26	16.0000	PC			RESISTOR;CARBON;6Kohm8;5%;0W063;SMD603	[P0787:01: {14.0}(R38-R48,R50,R74,R80)]	*NOT available in DP
27	1.0000	PC			RESISTOR;CARBON;7Kohm5;5%;0W063;SMD603	[00001: {1.0}(R71)]	*NOT available in DP
28	75.0000	PC			RESISTOR;CARBON;10Kohm;5%;0W063;SMD603	[P0787:01: {33.0}(R23-R24,R31,R34,R37,R49,R51,R54-R55,R58,R104,R154-R155,R183-R192,R248-R252,R257-R258,R353-R354,R365)]	*NOT available in DP
29	6.0000	PC			RESISTOR;CARBON;12Kohm;5%;0W063;SMD603	[P0787:01: {2.0}(R137,R144)]	*NOT available in DP
30	1.0000	PC			RESISTOR;CARBON;15Kohm;5%;0W063;SMD603	[P0787:01: {1.0}(R357)]	*NOT available in DP
31	5.0000	PC			RESISTOR;CARBON;16Kohm;5%;0W063;SMD603	[P0787:01: {5.0}(R126-R127,R145-R146,R157)]	*NOT available in DP
32	8.0000	PC			RESISTOR;CARBON;20Kohm;5%;0W063;SMD603	[P0787:01: {6.0}(R12,R14-R16,R18-R19)]	*NOT available in DP
33	11.0000	PC			RESISTOR;CARBON;22Kohm;5%;0W063;SMD603	[P0787:01: {7.0}(R87-R92,R161)]	*NOT available in DP
34	5.0000	PC			RESISTOR;CARBON;33Kohm;5%;0W063;SMD603	[P0787:01: {4.0}(R151,R160,R270,R272)]	*NOT available in DP
35	10.0000	PC			RESISTOR;CARBON;36Kohm;5%;0W063;SMD603	[P0787:01: {6.0}(R25,R29,R63-R64,R67-R68)]	*NOT available in DP
36	2.0000	PC			RESISTOR;CARBON;43Kohm;5%;0W063;SMD603	[P0787:02: {2.0}(R279-R280)]	*NOT available in DP
37	11.0000	PC			RESISTOR;CARBON;47Kohm;5%;0W063;SMD603	[P0787:01: {7.0}(R71,R73,R77,R79,R162,R233,R247)]	*NOT available in DP
38	1.0000	PC			RESISTOR;CARBON;56Kohm;5%;0W063;SMD603	[00001: {1.0}(R14)]	*NOT available in DP
39	11.0000	PC			RESISTOR;CARBON;100Kohm;5%;0W063;SMD603	[P0787:01: {2.0}(R147,R150)]	*NOT available in DP
40	1.0000	PC			RESISTOR;CARBON;120Kohm;5%;0W063;SMD603	[P0787:01: {1.0}(R355)]	*NOT available in DP
41	2.0000	PC			RESISTOR;CARBON;150Kohm;5%;0W063;SMD603	[P0787:01: {2.0}(R140-R141)]	*NOT available in DP
42	1.0000	PC			RESISTOR;CARBON;220Kohm;5%;0W063;SMD603	[00002: {1.0}(R10)]	*NOT available in DP

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
43	4.0000	PC			RESISTOR;CARBON;240Kohm;5%;0W063;SMD603	[P0787:01: {4.0}(R152-R153,R271,R273)]	*NOT available in DP
44	2.0000	PC			RESISTOR;CARBON;330Kohm;5%;0W063;SMD603	[P0787:01: {2.0}(R359,R363)]	*NOT available in DP
45	7.0000	PC			RESISTOR;CARBON;1Mohm;5%;0W063;SMD603	[P0787:01: {7.0}(R27-R28,R32-R33,R35-R36,R199)]	*NOT available in DP
46	1.0000	PC			RESISTOR;CARBON;2Mohm;5%;0W063;SMD603	[P0787:01: {1.0}(R358)]	*NOT available in DP
47	4.0000	PC			RESISTOR;METAL;100ohm;1%;0W063;SMD603	[P0787:01: {4.0}(R95-R96,R131-R132)]	*NOT available in DP
48	1.0000	PC			RESISTOR;METAL;806ohm;1%;0W063;SMD603	[P0787:01: {1.0}(R259)]	*NOT available in DP
49	4.0000	PC			RESISTOR;METAL;1Kohm;1%;0W063;SMD603	[P0787:01: {4.0}(R156,R167,R210,R244)]	*NOT available in DP
50	2.0000	PC			RESISTOR;METAL;1Kohm24;1%;0W063;SMD603	[P0787:01: {2.0}(R204,R239)]	*NOT available in DP
51	4.0000	PC			RESISTOR;METAL;2Kohm;1%;0W063;SMD603	[P0787:01: {4.0}(R200,R209,R231,R236)]	*NOT available in DP
52	4.0000	PC			RESISTOR;METAL;2Kohm2;1%;0W063;SMD603	[P0787:01: {4.0}(R86,R102,R108-R109)]	*NOT available in DP
53	2.0000	PC			RESISTOR;SMT;2Kohm7;1%;METAL;0W063;SMD603	[P0787:01: {2.0}(R103,R111)]	*NOT available in DP
54	2.0000	PC			RESISTOR;METAL;2Kohm74;1%;0W063;SMD603	[P0787:01: {2.0}(R112,R115)]	*NOT available in DP
55	2.0000	PC			RESISTOR;METAL;4Kohm02;1%;0W063;SMD603	[P0787:01: {2.0}(R113-R114)]	*NOT available in DP
56	10.0000	PC			RESISTOR;METAL;4Kohm42;1%;0W063;SMD603	[P0787:01: {10.0}(R173-R174,R206-R207,R212,R234-R235,R241-R242,R246)]	*NOT available in DP
57	3.0000	PC			RESISTOR;METAL;4Kohm75;1%;0W063;SMD603	[00001: {3.0}(R42,R46,R49)]	*NOT available in DP
58	2.0000	PC			RESISTOR;METAL;5Kohm11;1%;0W063;SMD603	[P0787:01: {2.0}(R203,R228)]	*NOT available in DP
59	2.0000	PC			RESISTOR;METAL;7Kohm50;1%;0W063;SMD603	[P0787:01: {2.0}(R93,R133)]	*NOT available in DP
60	2.0000	PC			RESISTOR;METAL;8Kohm06;1%;0W063;SMD603	[P0787:01: {2.0}(R211,R245)]	*NOT available in DP
61	2.0000	PC			RESISTOR;METAL;9Kohm09;1%;0W063;SMD603	[P0787:01: {1.0}(R260)]	*NOT available in DP
62	3.0000	PC			RESISTOR;METAL;10Kohm;1%;0W063;SMD603	[P0787:01: {3.0}(R105,R205,R240)]	*NOT available in DP
63	8.0000	PC			RESISTOR;METAL;13Kohm3;1%;0W063;SMD603	[P0787:01: {8.0}(R253-R256,R265-R268)]	*NOT available in DP
64	6.0000	PC			RESISTOR;METAL;16Kohm5;1%;0W063;SMD603	[P0787:01: {6.0}(R201,R208,R222,R232,R237,R243)]	*NOT available in DP
65	4.0000	PC			RESISTOR;METAL;20Kohm;1%;0W063;SMD603	[P0787:01: {4.0}(R94,R129,R220,R229)]	*NOT available in DP
66	2.0000	PC			RESISTOR;METAL;22Kohm;1%;0W063;SMD603	[P0787:01: {2.0}(R98,R110)]	*NOT available in DP
67	2.0000	PC			RESISTOR;METAL;33Kohm;1%;0W063;SMD603	[P0787:01: {2.0}(R97,R134)]	*NOT available in DP
68	5.0000	PC			RESISTOR;METAL;33Kohm2;1%;0W063;SMD603	[P0787:01: {4.0}(R218,R221,R226,R230)]	*NOT available in DP
69	2.0000	PC			RESISTOR;METAL;40Kohm2;1%;0W063;SMD603	[P0787:01: {2.0}(R202,R238)]	*NOT available in DP
70	1.0000	PC			RESISTOR;METAL;47Kohm5;1%;0W063;SMD603	[00001: {1.0}(R47)]	*NOT available in DP
71	2.0000	PC			RESISTOR;METAL;80Kohm60;1%;0W063;SMD603	[P0787:01: {2.0}(R219,R227)]	*NOT available in DP
72	1.0000	PC			RESISTOR;METAL;91Kohm;1%;0W063;SMD603	[00001: {1.0}(R15)]	*NOT available in DP
73	2.0000	PC			RESISTOR;METAL;100Kohm;1%;0W063;SMD603	[P0787:01: {2.0}(R101,R130)]	*NOT available in DP
74	2.0000	PC			RESISTOR;METAL;140Kohm;1%;0W063;SMD603	[P0787:01: {2.0}(R75,R99)]	*NOT available in DP
75	1.0000	PC			RESISTOR;CARBON;2ohm2;5%;0W1;SMD805	[P0787:01: {1.0}(R223)]	*NOT available in DP
76	2.0000	PC			RESISTOR;CARBON;5ohm1;5%;0W1;SMD805	[P0787:01: {2.0}(R182,R224)]	*NOT available in DP
77	1.0000	PC			RESISTOR;CARBON;6ohm8;5%;0W1;SMD805	[00001: {1.0}(R79)]	*NOT available in DP
78	1.0000	PC			RESISTOR;CARBON;10ohm;5%;0W1;SMD805	[00001: {1.0}(R74)]	*NOT available in DP
79	1.0000	PC			RESISTOR;CARBON;15ohm;5%;0W1;SMD805	[00001: {1.0}(R80)]	*NOT available in DP
80	2.0000	PC			RESISTOR;CARBON;20ohm;5%;0W1;SMD805	[00001: {2.0}(R61,R70)]	*NOT available in DP
81	1.0000	PC			RESISTOR;CARBON;47ohm;5%;0W1;SMD805	[00001: {1.0}(R76)]	*NOT available in DP
82	1.0000	PC			RESISTOR;CARBON;75ohm;5%;0W1;SMD805	[00001: {1.0}(R75)]	*NOT available in DP
83	1.0000	PC			RESISTOR;CARBON;82ohm;5%;0W1;SMD805	[00001: {1.0}(R67)]	*NOT available in DP
84	1.0000	PC			RESISTOR;CARBON;100ohm;5%;0W1;SMD805	[00001: {1.0}(R77)]	*NOT available in DP
85	1.0000	PC			RESISTOR;CARBON;120ohm;5%;0W1;SMD805	[00001: {1.0}(R78)]	*NOT available in DP
86	1.0000	PC			RESISTOR;CARBON;1Kohm;5%;0W1;SMD805	[P0787:01: {1.0}(R269)]	*NOT available in DP
87	2.0000	PC			RESISTOR;CARBON;1Kohm5;5%;0W1;SMD805	[P0787:01: {2.0}(R61,R70)]	*NOT available in DP
88	2.0000	PC			RESISTOR;CARBON;2Kohm2;5%;0W1;SMD805	[00001: {2.0}(R35,R55)]	*NOT available in DP

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
89	2.0000	PC			RESISTOR;CARBON;3Kohm3;5%;0W1;SMD805	[00002: {1.0}(R8)]	*NOT available in DP
90	2.0000	PC			RESISTOR;CARBON;4Kohm7;5%;0W1;SMD805	[00001: {2.0}(R24,R26)]	*NOT available in DP
91	1.0000	PC			RESISTOR;CARBON;10Kohm;5%;0W1;SMD805	[00001: {1.0}(R58)]	*NOT available in DP
92	1.0000	PC			RESISTOR;CARBON;20Kohm;5%;0W1;SMD805	[P0787:02: {1.0}(R338)]	*NOT available in DP
93	1.0000	PC			RESISTOR;CARBON;22Kohm;5%;0W1;SMD805	[00001: {1.0}(R43)]	*NOT available in DP
94	1.0000	PC			RESISTOR;CARBON;27Kohm;5%;0W1;SMD805	[00001: {1.0}(R59)]	*NOT available in DP
95	3.0000	PC			RESISTOR;CARBON;330Kohm;5%;0W1;SMD805	[00001: {3.0}(R81-R83)]	*NOT available in DP
96	1.0000	PC			RESISTOR;CARBON;1Mohm;5%;0W1;SMD805	[00001: {1.0}(R17)]	*NOT available in DP
97	1.0000	PC			RESISTOR;CARBON;1Mohm5;5%;0W1;SMD805	[00001: {1.0}(R22)]	*NOT available in DP
98	1.0000	PC			RESISTOR;METAL;1Kohm8;1%;0W1;SMD805	[00001: {1.0}(R33)]	*NOT available in DP
99	1.0000	PC			RESISTOR;METAL;16Kohm5;1%;0W1;SMD805	[00001: {1.0}(R41)]	*NOT available in DP
100	1.0000	PC			RESISTOR;METAL;150Kohm;1%;0W1;SMD805	[00001: {1.0}(R40)]	*NOT available in DP
101	2.0000	PC			RESISTOR;METAL;4ohm75;1%;0W125;SMD1206	[00002: {2.0}(R7,R12)]	*NOT available in DP
102	4.0000	PC			RESISTOR;CARBON;10ohm;5%;0W25;SMD1206	[00002: {4.0}(R2,R5,R18,R21)]	*NOT available in DP
103	2.0000	PC			RESISTOR;CARBON;100ohm;5%;0W25;SMD1206	[00001: {2.0}(R28-R29)]	*NOT available in DP
104	2.0000	PC			RESISTOR;CARBON;1Kohm2;5%;0W25;SMD1206	[00001: {2.0}(R18,R30)]	*NOT available in DP
105	4.0000	PC			RESISTOR;CARBON;22ohm;5%;1W;SMD2512	[00002: {4.0}(R3,R6,R19,R22)]	*NOT available in DP
106	4.0000	PC			RESISTOR;METAL;4Kohm75;1%;1W;SMD2512	[00002: {2.0}(R24-R25)]	*NOT available in DP
107	2.0000	PC			RESISTOR;CARBON;56ohm;5%;0W33;SMD1210	[00001: {2.0}(R19-R20)]	*NOT available in DP
108	1.0000	PC			RESISTOR;CARBON;22ohm;5%;0W25;LEAD WIRE;HORIZONTAL 26-6mm	[P0787:02: {1.0}(R10)]	*NOT available in DP
109	2.0000	PC			RESISTOR;METAL;10Kohm;1%;0W25;LEAD WIRE;HORIZONTAL 26-6mm	[P0787:02: {2.0}(R8-R9)]	*NOT available in DP
110	4.0000	PC			RESISTOR;METAL;6.81 kohm;0W25;1 %;MET;HORIZONTAL 26-6mm	[P0787:02: {4.0}(R4-R7)]	*NOT available in DP
111	1.0000	PC			RESISTOR;CARBON;0ohm;5%;0W25;LEAD WIRE	[P0787:01: {1.0}(L4)]	*NOT available in DP
112	2.0000	PC			RESISTOR;METAL;390ohm;1%;0W25;LEAD WIRE	[P0787:01: {2.0}(R2-R3)]	*NOT available in DP
113	1.0000	PC			RESISTOR;CARBON;390ohm;5%;1W;LEAD WIRE	[P0787:01: {1.0}(R1)]	*NOT available in DP
114	4.0000	PC			RESISTOR;CEMENT;10ohm;5%;20W;LEAD WIRE; PRECUT 25+-1 mm	[P0787:04: {2.0}(R1-R2)]	*NOT available in DP
115	2.0000	PC			RESISTOR;CEMENT;2ohm7;10%;10W;LEAD WIRE; PRECUT 25+-1 mm	[P0787:04: {1.0}(R3)]	*NOT available in DP
116	2.0000	PC			RESISTOR;LEAD WIRE;0ohm10;1%;METAL;2W0	[P0787:01: {2.0}(R9-R10)]	*NOT available in DP
117	1.0000	PC		I04-23301-53364	THERMISTOR;PTC;330ohms;2Kohm2;20%;DIA;W/ LUG	[P0787:01: {1.0}(R2)]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
118	1.0000	PC			RESISTOR;METAL;56ohm;5%;5W;LEAD WIRE;VERTICAL;F-TYPE	[P0787:01: {1.0}(R4)]	*NOT available in DP
119	4.0000	PC			RESISTOR;CARBON;47ohm;5%;2W;LEAD WIRE	[00001: {4.0}(R1,R3,R5,R7)]	*NOT available in DP
120	3.0000	PC			RESISTOR;CARBON;1Mohm;5%;0W125;LEAD WIRE;HORIZONTAL 26-6mm	[P0787:00: {3.0}(R1-R3)]	*NOT available in DP
121	1.0000	PC			RESISTOR;WIREWOUND CEMENT;8Kohm20;10%;7W;LEAD WIRE;RADIAL;CASE:CEMENT;PITCH:5mm;PRECUT:3mm1+/-0mm5	[00001: {1.0}(R8)]	*NOT available in DP
122	3.0000	PC			RESISTOR;CARBON;1Mohm;5%;0W125;LEAD WIRE;HORIZONTAL 26-6mm	[P0787:00: {3.0}(R1-R3)]	*NOT available in DP
123	1.0000	PC	Y04-11000-00189	I04-11000-00189	THERMISTOR;NTC;10ohm;15%;6A;DIA;PITCH:10mm;(BQ 10D2-18 LD)	[B:00: {1.0}(J1)]	(EU, UK, SAA, AR, RU)
124	1.0000	PC			RESISTOR;CARBON;30ohm;5%;2W;LEAD WIRE;RADIAL;PITCH:5mm;PRECUT:7mm;F-TYPE	[00001: {1.0}(R6)]	*NOT available in DP
125	2.0000	PC			RESISTOR;CARBON;2Kohm2;5%;0W1;SMD805	[00001: {2.0}(R35,R55)]	*NOT available in DP
126	1.0000	PC			RESISTOR;CARBON;10Kohm;5%;0W1;SMD805	[00001: {1.0}(R58)]	*NOT available in DP
127	1.0000	PC			RESISTOR;CARBON;30ohm;5%;2W;LEAD WIRE;RADIAL;PITCH:5mm;PRECUT:7mm;F-TYPE	[P0787:01: {1.0}(R6)]	*NOT available in DP
128	1.0000	PC			VARIATOR;1 W;10 %;390V;PITCH:10 mm;Vrms:250 V	[00001: {1.0}(VT1)]	*NOT available in DP
129	1.0000	PC		I04-23301-53364	THERMISTOR;PTC;330ohms;2Kohm2;20%;DIA;W/ LUG	[00001: {1.0}(R2)]	CUTOFF: 2POSSIBLE CHOICES

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
130	1.0000	PC			RESISTOR;WIREWOUND CEMENT;8Kohm20;10%;7W;LEAD WIRE;RADIAL;CASE:CEMENT;PITCH:5mm;PRECUT:3mm1+/-0mm5	[P0787:01: {1.0}(R8)]	*NOT available in DP
131	1.0000	PC			RESISTOR;CARBON;0ohm;5%;0W25;LEAD WIRE	[P0787:01: {1.0}(L4)]	*NOT available in DP
132	4.0000	PC			RESISTOR;CARBON;47ohm;5%;2W;LEAD WIRE	[P0787:01: {4.0}(R1,R3,R5,R7)]	*NOT available in DP
133	1.0000	PC			VARIATOR;1 W;10 %;390V;PITCH:10 mm;Vrms:250 V	[P0787:01: {1.0}(VT1)]	*NOT available in DP
134	2.0000	PC			RESISTOR;LEAD WIRE;0ohm10;1%;METAL;2W0	[00001: {2.0}(R9-R10)]	*NOT available in DP
135	1.0000	PC			RESISTOR;METAL;56ohm;5%;5W;LEAD WIRE;VERTICAL;F-TYPE	[00001: {1.0}(R4)]	*NOT available in DP

Fader

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
1	5.0000	PC	Y00-92951-02422	I00-92951-02422	FADER;30mm;100Kohm;TAPER:W;STEREO;W/CC;(POLYSHINE F-3092E+C+E-W100K1-L9.5(J));RED LED	[P0787:01: {5.0}(VR22-VR26)]	CUTOFF: 2POSSIBLE CHOICES
2	5.0000	PC	Y00-92951-02422	I00-92951-02422	FADER;30mm;100Kohm;TAPER:W;STEREO;W/CC;(POLYSHINE F-3092E+C+E-W100K1-L9.5(J));RED LED	[P0787:01: {5.0}(VR22-VR26)]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH)

Potentiometer

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
1	6.0000	PC		I03-00000-91688	POTENTIOMETER;50 kohm;0.050W;TAPER:W;12 %;MONO;SHAFT:30MM;W/O CC;HHTORQUE 40-100GF;SOUNDWELL	[P0787:01: {6.0}(VR9-VR12,VR17-VR18)]	CUTOFF: IDENTIFIED FROM VR-09F30W503N00HHT*8
2	2.0000	PC		I03-00000-91689	POTENTIOMETER;10 kohm;0.050W;TAPER:15A;12 %;MONO;SHAFT:30MM;W/O CC;HHTORQUE:40-100GF;SOUNDWELL	[P0787:01: {2.0}(VR27-VR28)]	CUTOFF: IDENTIFIED FROM VR-09F30A103N00HHT/V
3	4.0000	PC		I03-00000-91690	POTENTIOMETER;50 kohm;0.050W;TAPER:1B;12 %;MONO;SHAFT:30MM;W/ CC;HHTORQUE:40-100GF;SOUNDWELL	[P0787:01: {4.0}(VR1-VR2,VR5-VR6)]	CUTOFF: IDENTIFIED FROM VR-09F30B503C01HHT*8
4	4.0000	PC		I03-00000-91692	POTENTIOMETER;10 kohm;0.050W;TAPER:AC;12 %;STEREO;SHAFT:30MM;W/ CC;40-100GF;HIGH TORQUE;SOUNDWELL	[P0787:01: {4.0}(VR13-VR16)]	CUTOFF: IDENTIFIED FROM VR-12F30AC103C01HT*8
5	4.0000	PC		I03-00000-91695	POTENTIOMETER;50 kohm;0.050W;TAPER:1B;12 %;STEREO;SHAFT:30MM;W/CC;40-100GF;HIGH TORQUE;SOUNDWELL	[P0787:01: {4.0}(VR3-VR4,VR7-VR8)]	
6	3.0000	PC		I03-00000-91698	POTENTIOMETER;50 kohm;0.050W;TAPER:W;12 %;STEREO;SHAFT:30MM;W/O CC;HIGH TORQUE;40-100GF;SOUNDWELL	[P0787:01: {3.0}(VR19-VR21)]	
7	4.0000	PC		I03-00000-91690	POTENTIOMETER;50 kohm;0.050W;TAPER:1B;12 %;MONO;SHAFT:30MM;W/ CC;HHTORQUE:40-100GF;SOUNDWELL	[P0787:01: {4.0}(VR1-VR2,VR5-VR6)]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH)
8	6.0000	PC		I03-00000-91688	POTENTIOMETER;50 kohm;0.050W;TAPER:W;12 %;MONO;SHAFT:30MM;W/O CC;HHTORQUE 40-100GF;SOUNDWELL	[P0787:01: {6.0}(VR9-VR12,VR17-VR18)]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH)
9	2.0000	PC		I03-00000-91689	POTENTIOMETER;10 kohm;0.050W;TAPER:15A;12 %;MONO;SHAFT:30MM;W/O CC;HHTORQUE:40-100GF;SOUNDWELL	[P0787:01: {2.0}(VR27-VR28)]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH)
10	4.0000	PC		I03-00000-91692	POTENTIOMETER;10 kohm;0.050W;TAPER:AC;12 %;STEREO;SHAFT:30MM;W/ CC;40-100GF;HIGH TORQUE;SOUNDWELL	[P0787:01: {4.0}(VR13-VR16)]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH)

Encoder

	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
1	1.0000	PC	Y32-32430-24605	I32-92430-02704	ENCODER;12mm;DETENTS:24;PULSES:24;30mm;W/SWITCH;NO NUT/WASHER;(POLYSHINE F-12E55H24B-P+C L30FX12(O))	[P0787:01: {1.0}(SW1)]	CUTOFF: IDENTIFIED FROM VE-F12E55H24*D24*V10
2	1.0000	PC	Y32-32430-24605	I32-92430-02704	ENCODER;12mm;DETENTS:24;PULSES:24;30mm;W/SWITCH;NO NUT/WASHER;(POLYSHINE F-12E55H24B-P+C L30FX12(O))	[P0787:01: {1.0}(SW1)]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH)

Speaker Part


	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
1	2.0000	PC	X71-60340-03681	H71-60340-03681	TWEETER;P0973;1.35 in;30 W;8 ohm;LS-34T120E8		
2	2.0000	PC	X77-60800-05620	H77-60800-05620	WOOFER; 8W600C8; 8inch; 150Watt; 6ohm		
3	2.0000	PC		H79-00000-82480	DOME;34T120E8;ASSY		
4	2.0000	PC	X79-00100-02611	H79-00100-02611	MAGNET;MG90FE14A;MATERIAL:Y30;90mm*36mm*15H;Y30;DST.N O:001;DPT.NO:02611;(LS-MG90FE14A-REVA.DWG)		
5	2.0000	PC		H79-00100-02613	VOICE COIL;VC34_4K6_3A;BOBBIN MATERIAL:KSV 0mm08;DIAMETER:34mm4;4.5H;DC RESISTANCE:6ohm3;WIRE:0mm05*0mm25;WINDING WIDTH:2mm2;DST.NO:001;DPT.NO:02613;(LS-VC34_4K6_3A-REVA.DWG)		
6	2.0000	PC	X79-00100-02614	H79-00100-02614	GASKET;GA62_5A1_3A;MATERIAL:ALUMINIUM 1mm3;DIAMETER:62mm5;DST.NO:001;DPT.NO:02614;(LS-GA62_5A1_3A-REVA.DWG)		
7	2.0000	PC	X79-00100-02615	H79-00100-02615	GASKET;GA62_5A0_8A;MATERIAL:ALUMINIUM 0mm8;DIAMETER:62mm5;DST.NO:001;DPT.NO:02615;(LS-GA62_5A0_8A-REVA.DWG)		
8	2.0000	PC	X79-00100-02616	H79-00100-02616	GASKET;GA62_5P0_1A;MATERIAL:PAPER 0mm1;DIAMETER:62mm5;DST.NO:001;DPT.NO:02616;(LS-GA62_5P0_1A-REVA.DWG)		
9	2.0000	PC		H79-00100-04840	GASKET;GA202EVA3A;MATERIAL:EVA;OUTER DIA:202mm;HEIGHT:3mm;DST.NO:001;DPT.NO:04840;(LS-GA202EVA3A-REVA.DWG)		
10	2.0000	PC		H79-00100-07869	MAGNET;MG110FE22A;110x60x20H;Y30;DST.NO:001;DPT.NO:07869;(LS-MG110FE22A-REVA.DWG)		
11	2.0000	PC		H79-00100-09984	DUST CAP;DC68P02D;MATERIAL:BLACK PAPER;OUTER DIAMETER:68mm;DST.NO:001;DPT.NO:09984;(LS-DC68P02D-REVA.DWG)		
12	2.0000	PC		H79-00100-14837	CONE PAPER,CP194_5P42_5A;CENTER HOLE DIAMETER:52mm5;DST.NO:001;DPT.NO:14837;(LS-CP194_5P42_5A[R]-REVA.DWG)		
13	2.0000	PC		H79-00100-14976	VOICE COIL;VC51_5K6_2A;DST.NO:001;DPT.NO:14976;(LS-VC51_5K6_2A[R]-REVA.DWG)		
14	2.0000	PC		H79-00100-15477	SPEAKER PART;DAMPER;DP111CX018;DST.NO:001;DPT.NO:15477;(LS-DP111CX018[R]-REVA.DWG)		


Switch


	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
1	6.0000	PC	Y77-03422-02778	I77-03422-02778	SWITCH;RADIAL;2P2T;PCB VERSION;LOCKING;NONSHORT;RAD2P	[P0787:01: {2.0}{(SW3-SW4)}]	
2	1.0000	PC	Y86-00422-32496	I86-00422-32496	SWITCH;SLIDE;2P2T;PCB VERSION;LOCKING;NONSHORT;SS-22H18-G7 NS	[P0787:01: {1.0}{(SW2)}]	
3	1.0000	PC	Y91-00000-93376	I91-00000-93376	SWITCH;PUSH;1;P2;TLOCKING;NONSHORT;LDONGNAN;PS4-A202C-60	[B:00: {1.0}{(SW1)}]	(EU, UL, JP, UK, SAA, BR, AR, HM, SH, RU)
4	1.0000	PC	Y91-00000-93376	I91-00000-93376	SWITCH;PUSH;1;P2;TLOCKING;NONSHORT;LDONGNAN;PS4-A202C-60	[78700: {1.0}{(SW1)}]	


Transistor


	Quantity	Unit	S.Sku	M.Sku	Description	Reference Designators	Notes
1	2.0000	PC			TRANSISTOR;2SC3326B;SOT	[P0787:01: {2.0}(T16-T17)]	*NOT available in DP
2	13.0000	PC			TRANSISTOR;BC846B;SOT;SMD	[P0787:01: {1.0}(T2-T5,T8-T14)]	*NOT available in DP
3	1.0000	PC			TRANSISTOR;BC856B;SOT;SMD	[P0787:01: {1.0}(T15)]	*NOT available in DP
4	1.0000	PC			TRANSISTOR;MBTA42;SOT	[00001: {1.0}(T8)]	*NOT available in DP
5	2.0000	PC			TRANSISTOR;MBTA56;SOT	[P0787:01: {2.0}(T6-T7)]	*NOT available in DP
6	1.0000	PC			TRANSISTOR;MPSA92;TO-92;TAPING	[P0787:01: {1.0}(T1)]	*NOT available in DP
7	1.0000	PC			TRANSISTOR;SST113;SOT	[00002: {1.0}(T1)]	*NOT available in DP
8	2.0000	PC			TRANSISTOR;SPP11N80C3	[00001: {2.0}(T2,T5)]	*NOT available in DP
9	2.0000	PC			TRANSISTOR;BD239C;TO220	[00001: {2.0}(T1,T6)]	*NOT available in DP
10	2.0000	PC			TRANSISTOR;SPP20N60C3; TO220	[P0787:01: {2.0}(T2,T5)]	*NOT available in DP
11	2.0000	PC			TRANSISTOR;BD239C;TO220	[P0787:01: {2.0}(T1,T6)]	*NOT available in DP
12	1.0000	PC			TRANSISTOR;BD138;TO126	[00001: {1.0}(T4)]	*NOT available in DP
13	1.0000	PC			TRANSISTOR;BD137;TO126	[00001: {1.0}(T3)]	*NOT available in DP
14	1.0000	PC			TRANSISTOR;BD138;TO126	[P0787:01: {1.0}(T4)]	*NOT available in DP
15	1.0000	PC			TRANSISTOR;BD137;TO126	[P0787:01: {1.0}(T3)]	*NOT available in DP

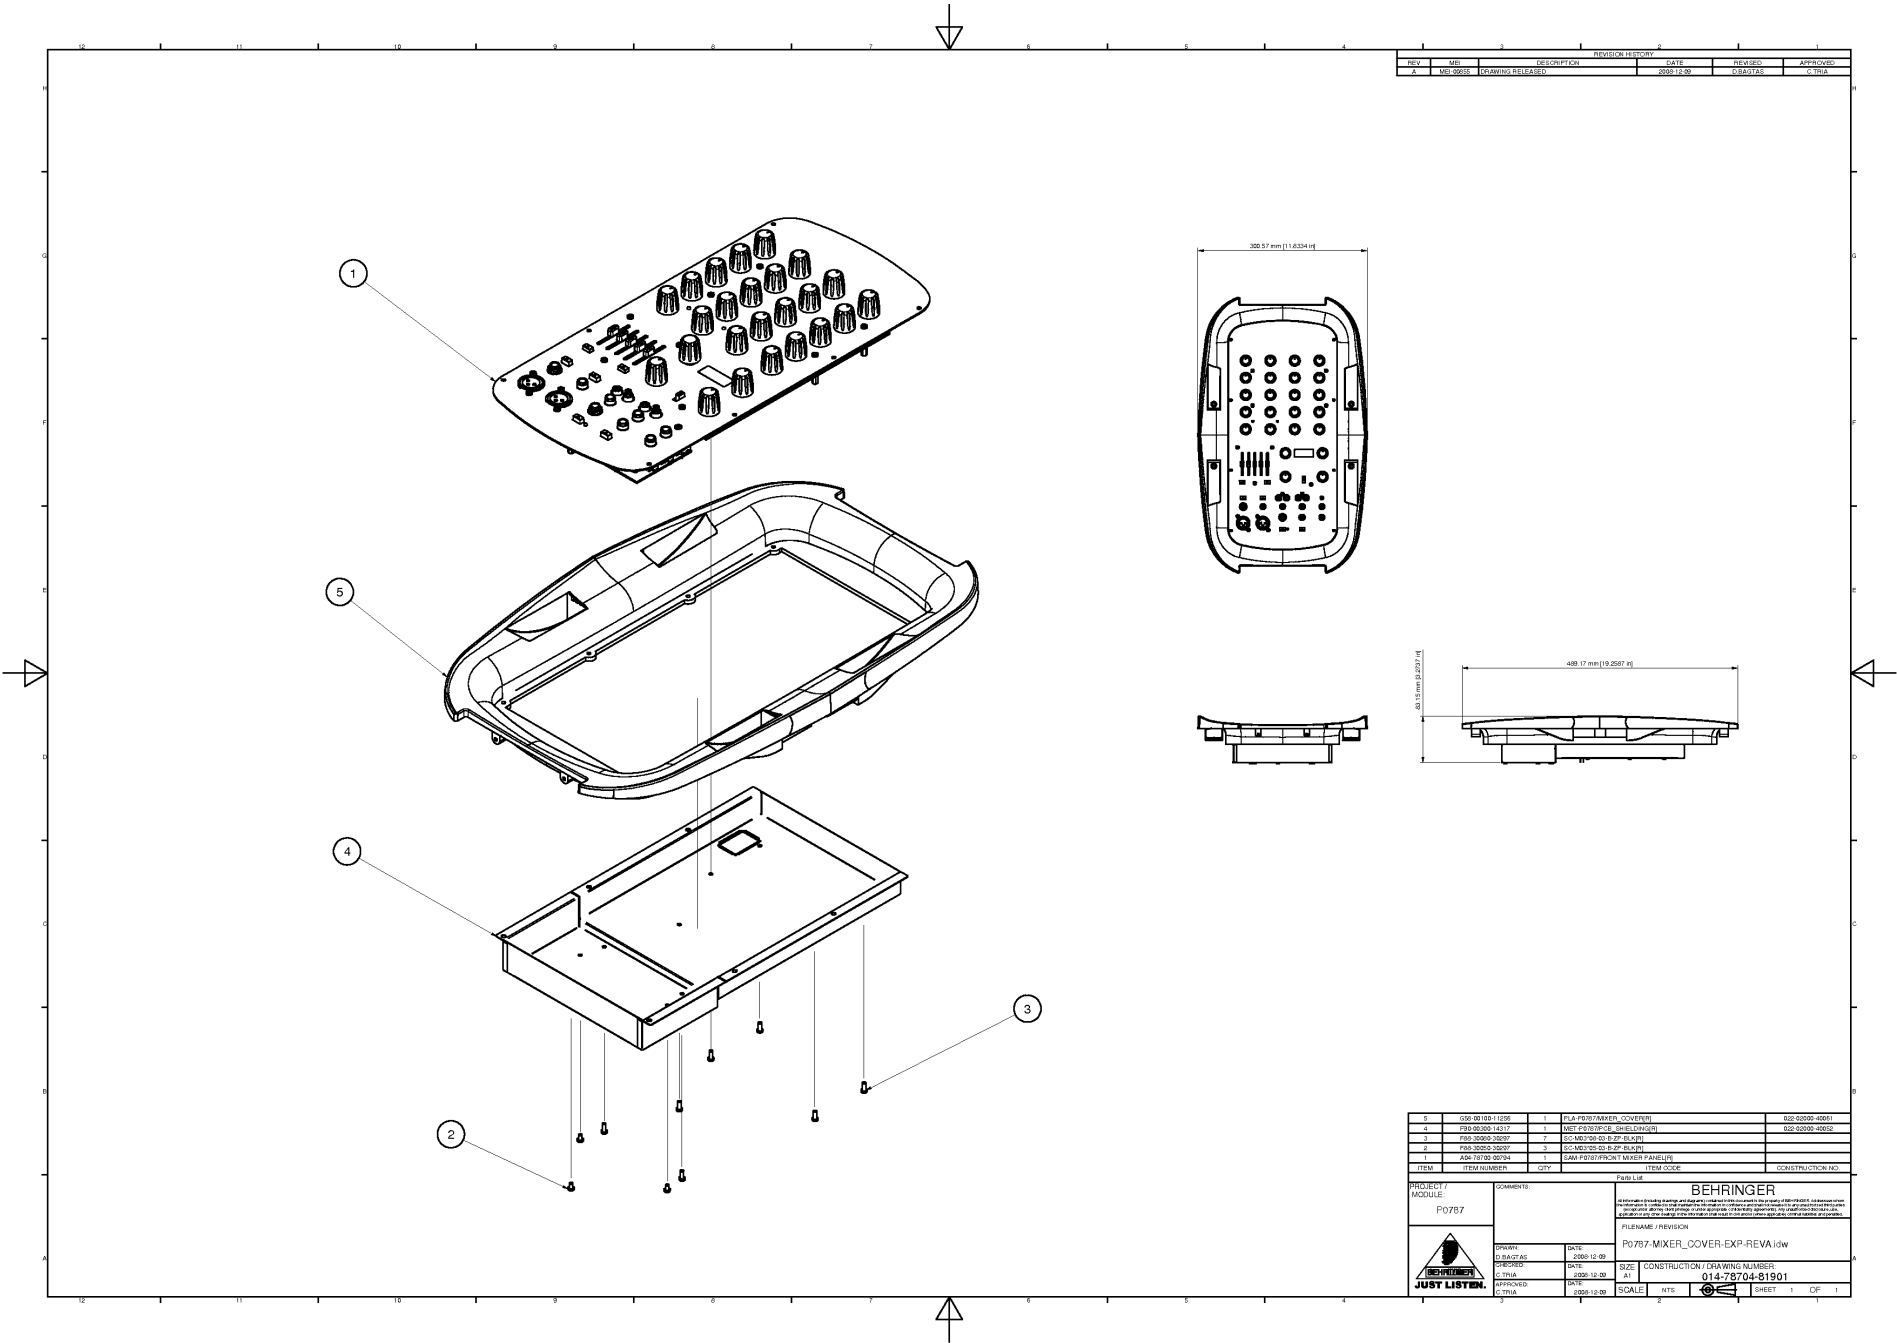

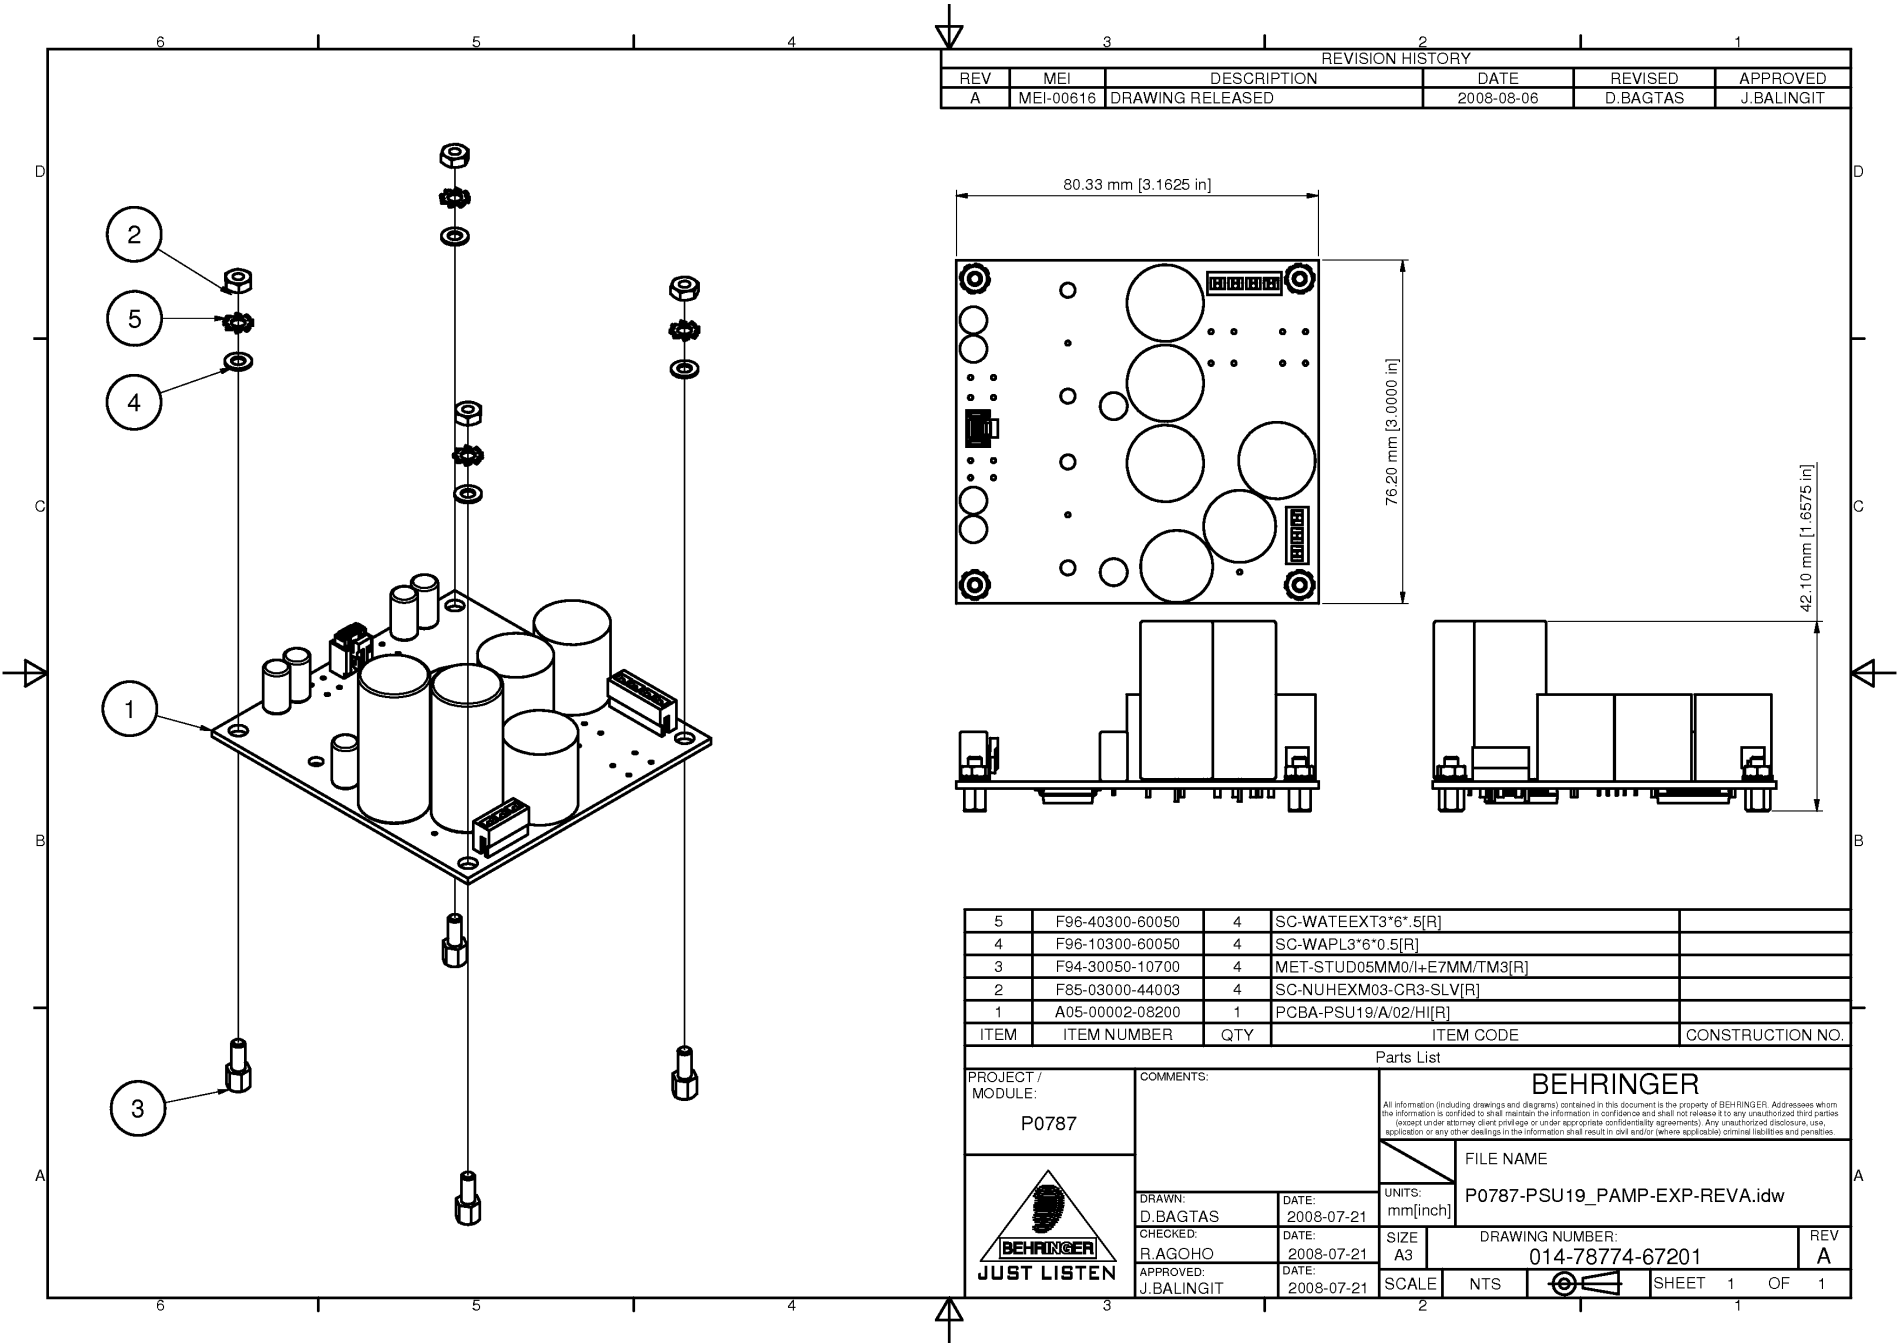


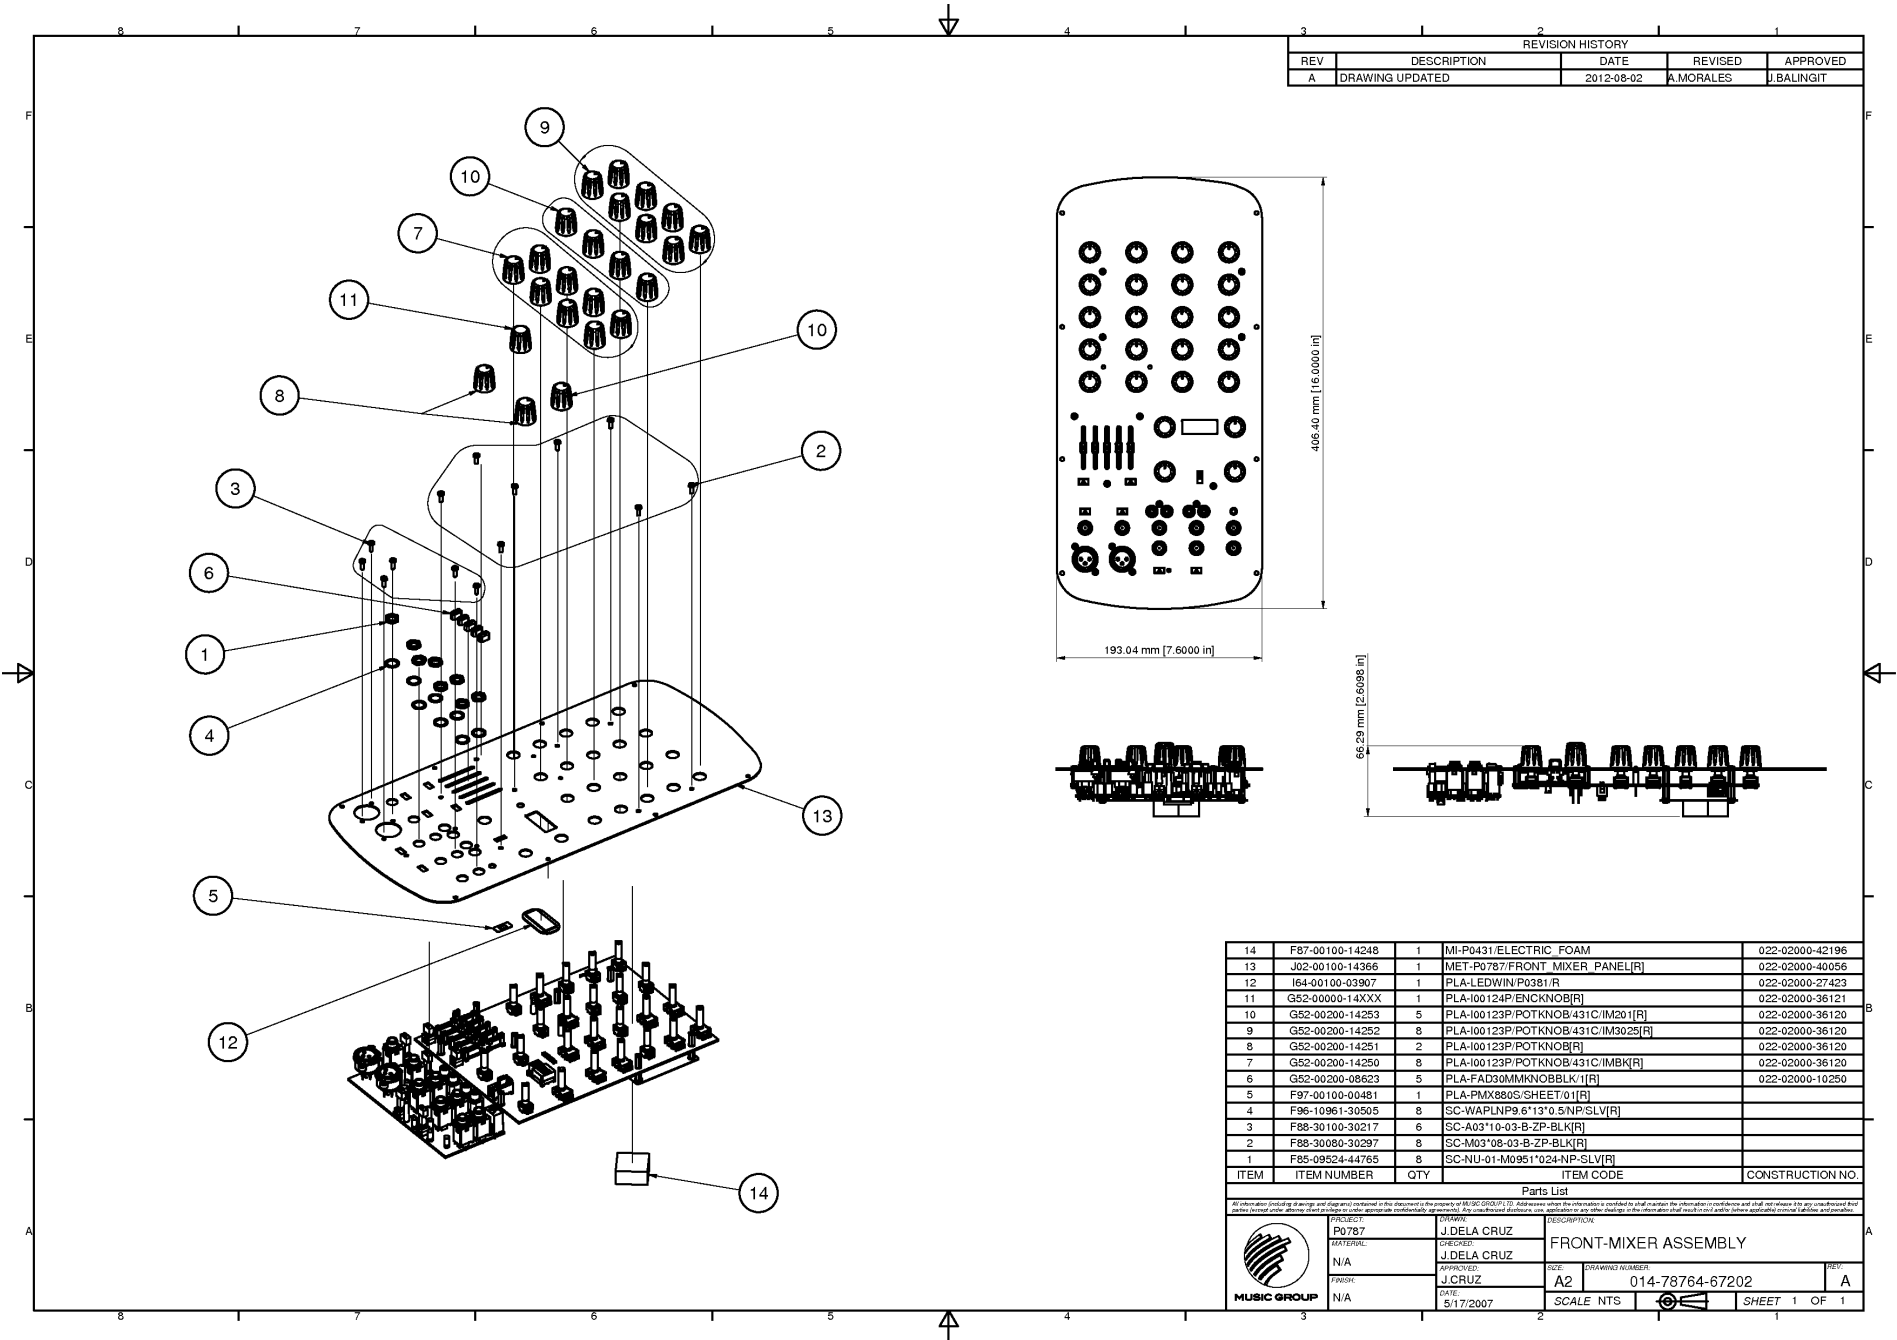

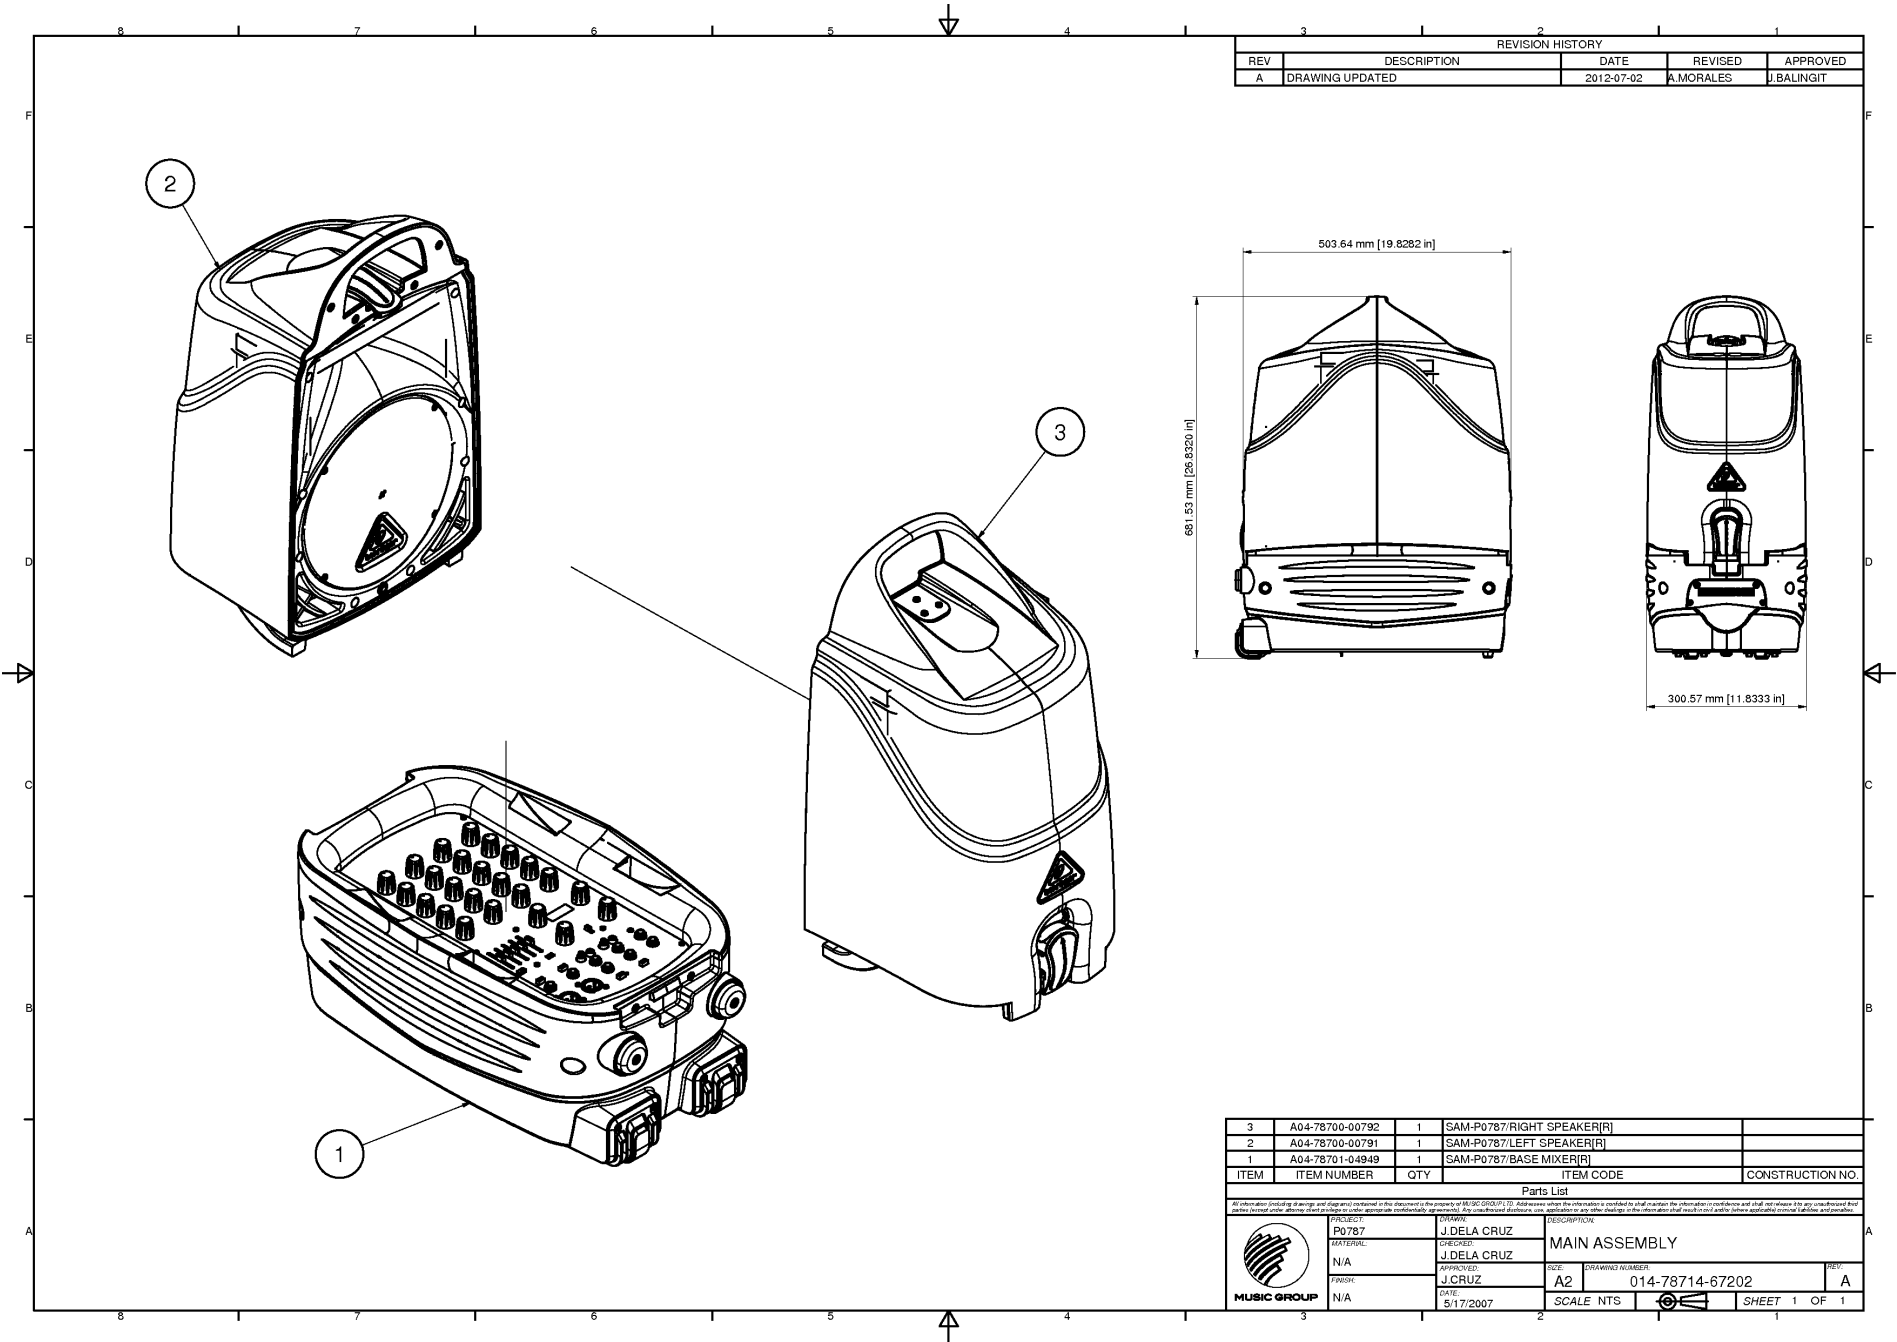

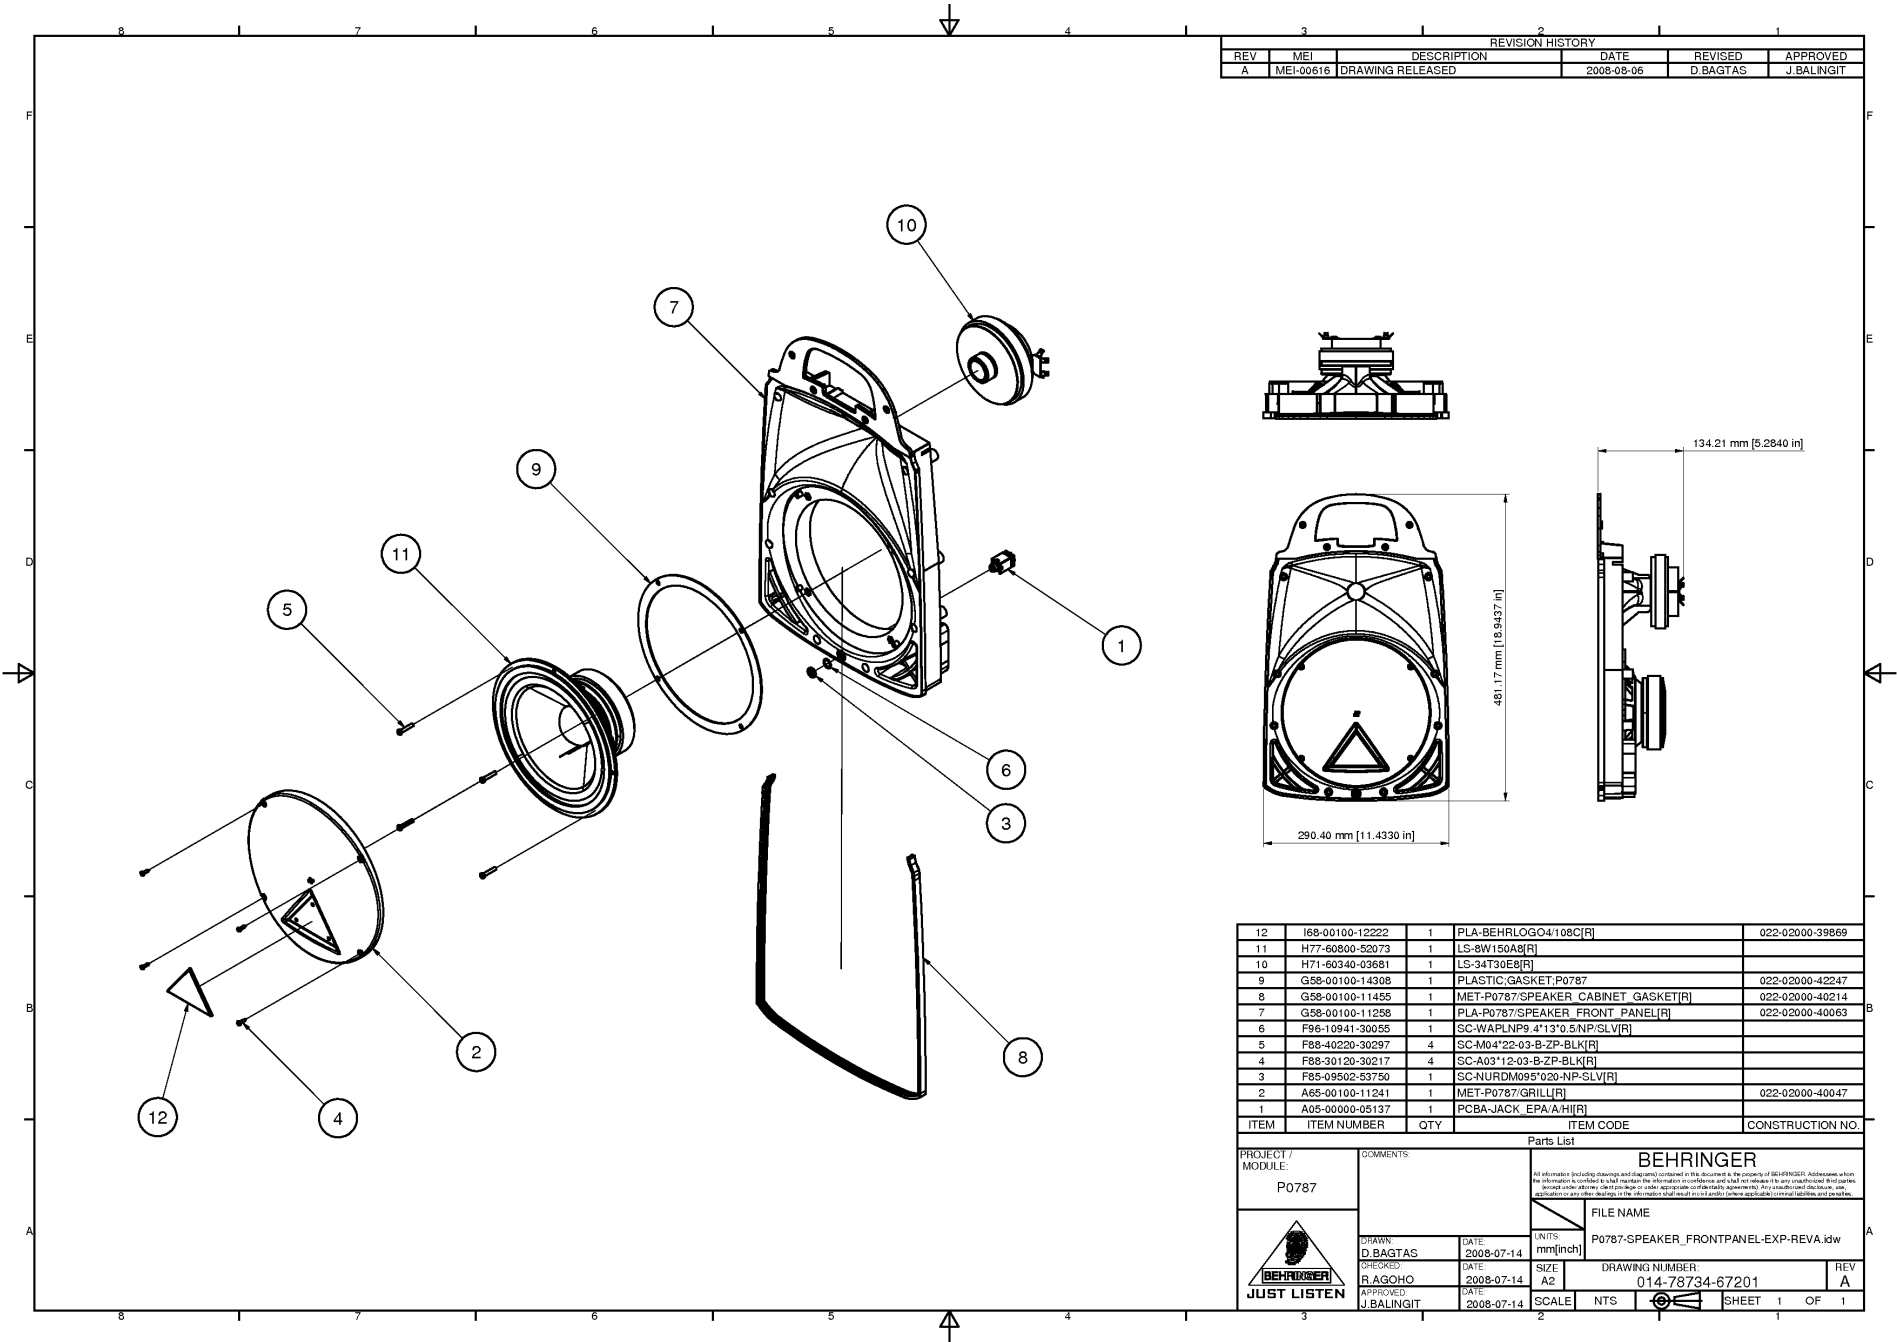



REVISION HISTORY					
REV	MEI	DESCRIPTION	DATE	REVISED	APPROVED
A	MEI-00616	DRAWING RELEASED	2008-08-06	D.BAGTAS	J.BALINGIT

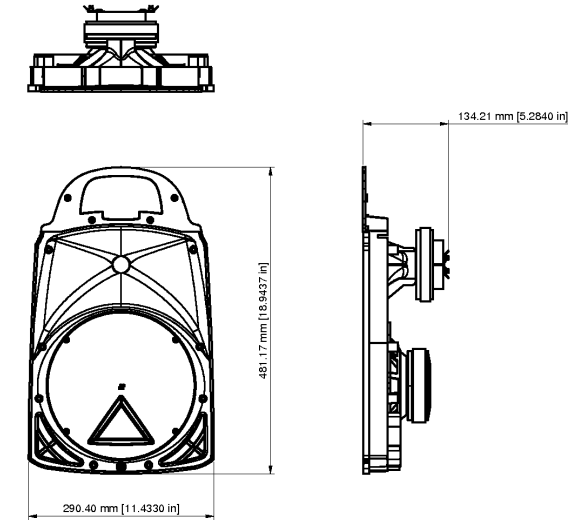



12	I68-00100-12222	1	PLA-BEHRLOGO4/108C[R]	022-02000-39869
11	H77-60800-52073	1	LS-8W150A8[R]	
10	H71-60340-03681	1	LS-34T30E8[R]	
9	G58-00100-14308	1	PLASTIC;GASKET;P0787	022-02000-42247
8	G58-00100-11455	1	MET-P0787/SPEAKER CABINET GASKET[R]	022-02000-40214
7	G58-00100-11258	1	PLA-P0787/SPEAKER FRONT PANEL[R]	022-02000-40063
6	F96-10941-30055	1	SC-WAPLNP9 4"13"0.5NP/SLV[R]	
5	F88-40220-30297	4	SC-M04*22-03-B-ZP-BLK[R]	
4	F88-30120-30217	4	SC-A03*12-03-B-ZP-BLK[R]	
3	F85-09502-53750	1	SC-NURDM095*020-NP-SLV[R]	
2	A65-00100-11241	1	MET-P0787/GRILL[R]	022-02000-40047
1	A05-00000-05137	1	PCBA-JACK EPA/A/H[R]	
ITEM	ITEM NUMBER	QTY	ITEM CODE	CONSTRUCTION NO.


Parts List			
PROJECT / MODULE: P0787		BEHRINGER	
DRAWN: D.BAGTAS		FILE NAME P0787-SPEAKER_FRONTANEL-EXP-REVA.idw	
CHECKED: R.AGOJO		DRAWING NUMBER: 014-78734-67201	
APPROVED: J.BALINGIT		REV A	
DATE 2008-07-14		SCALE 1 OF 1	

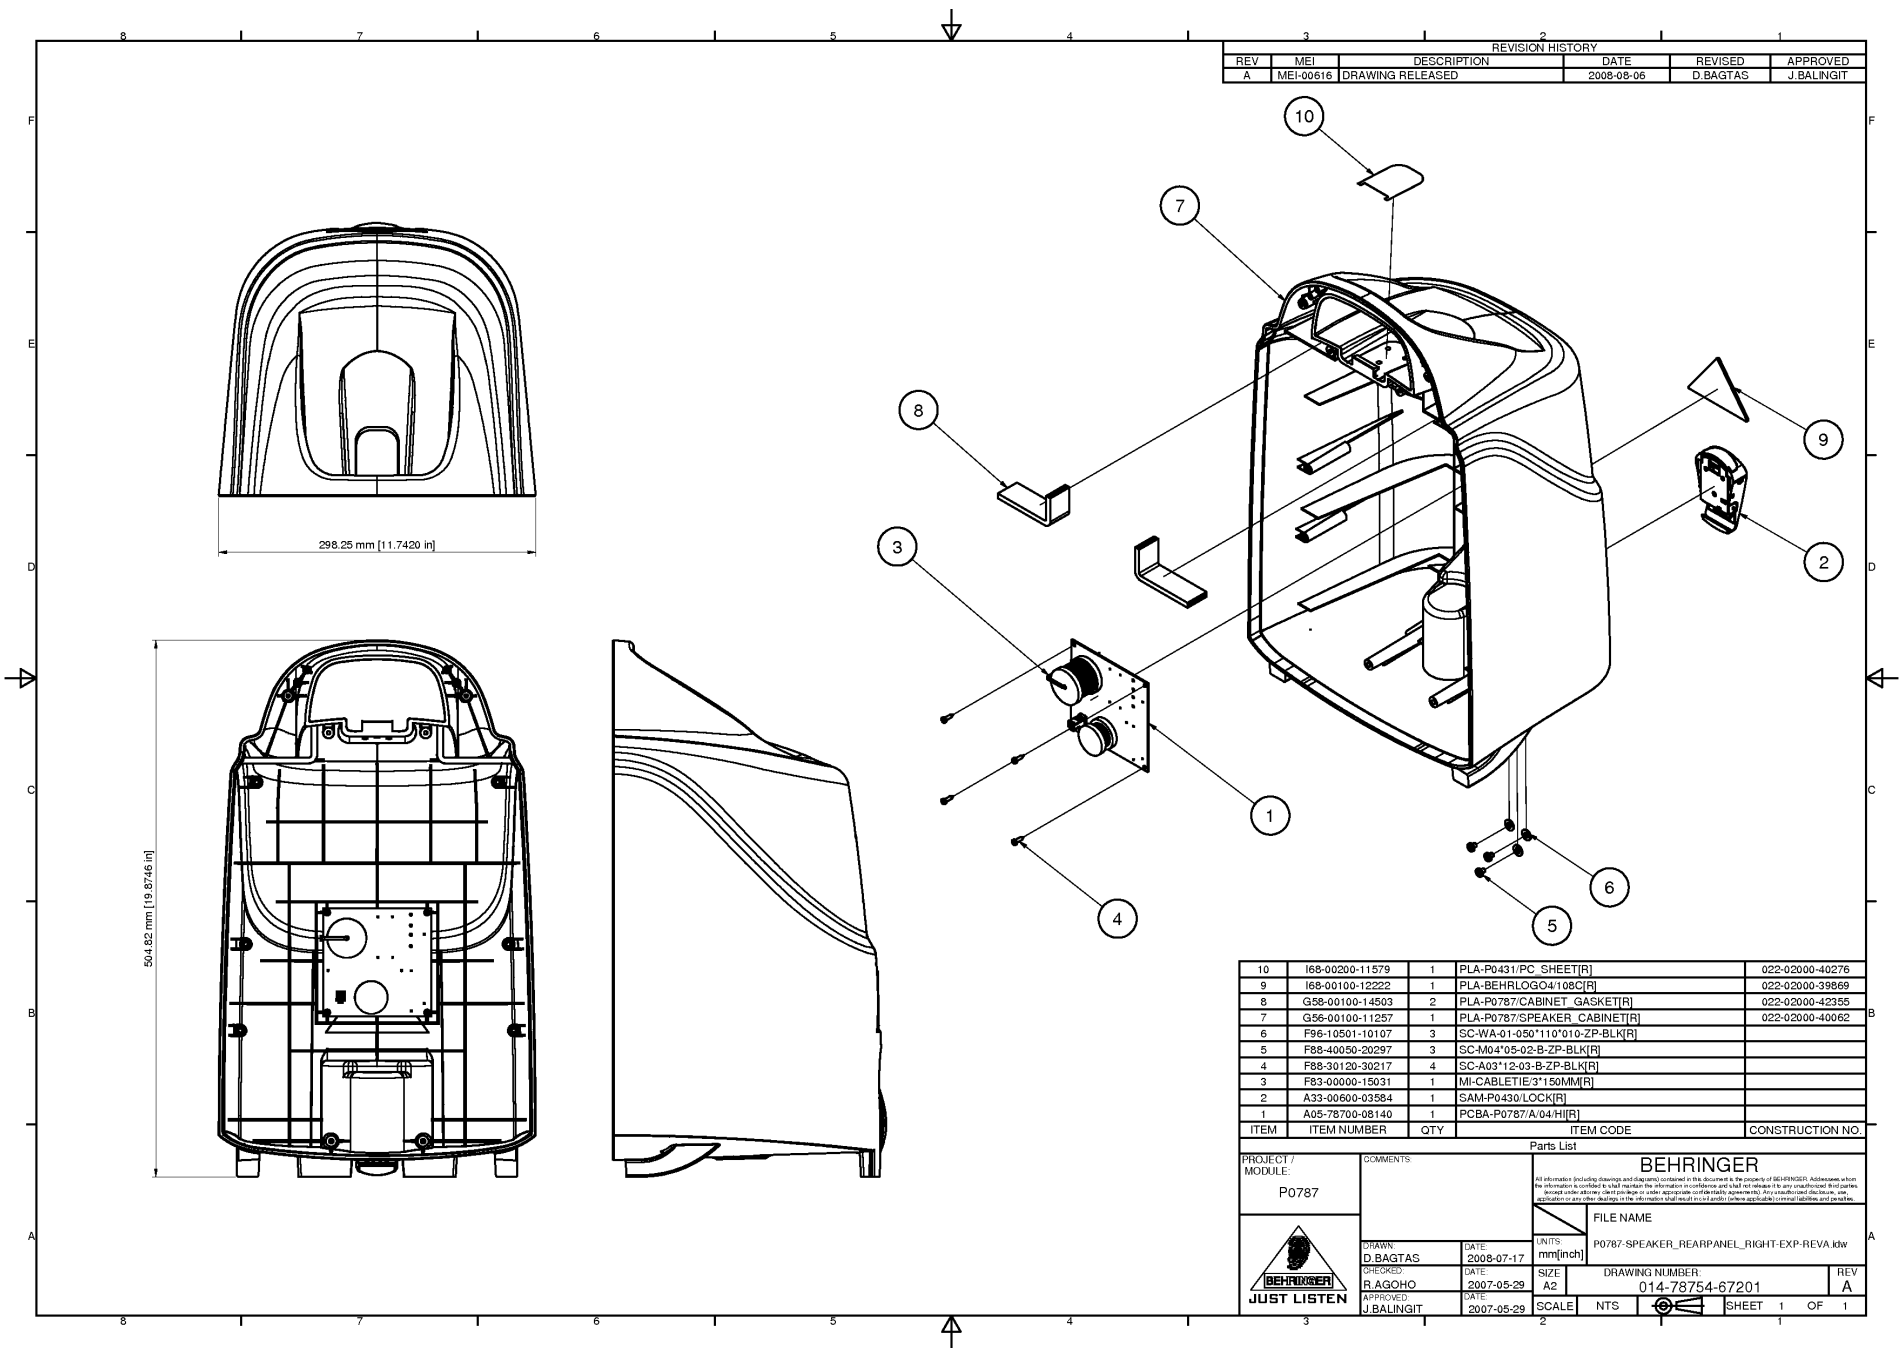

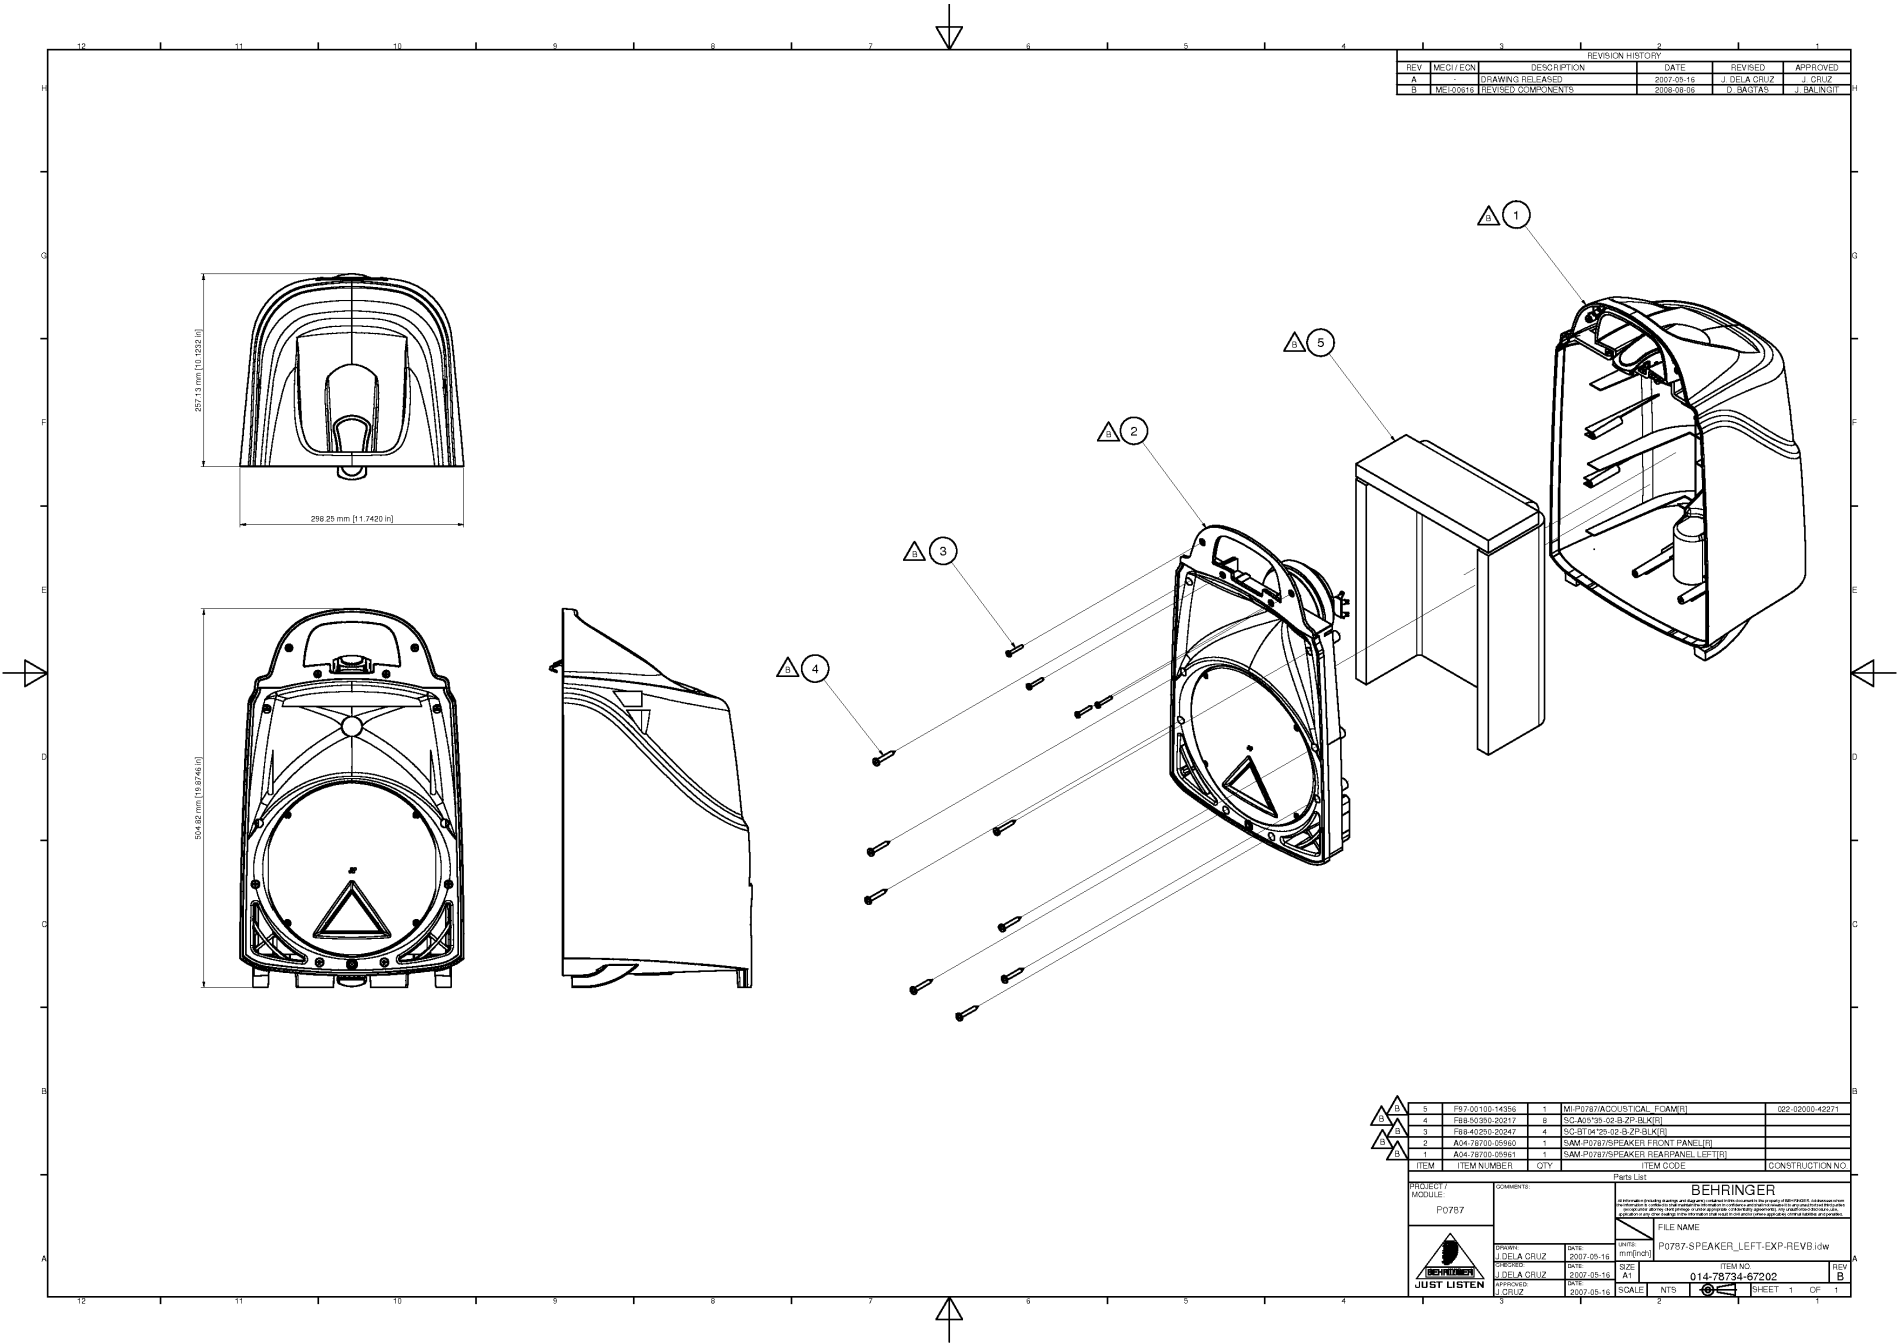


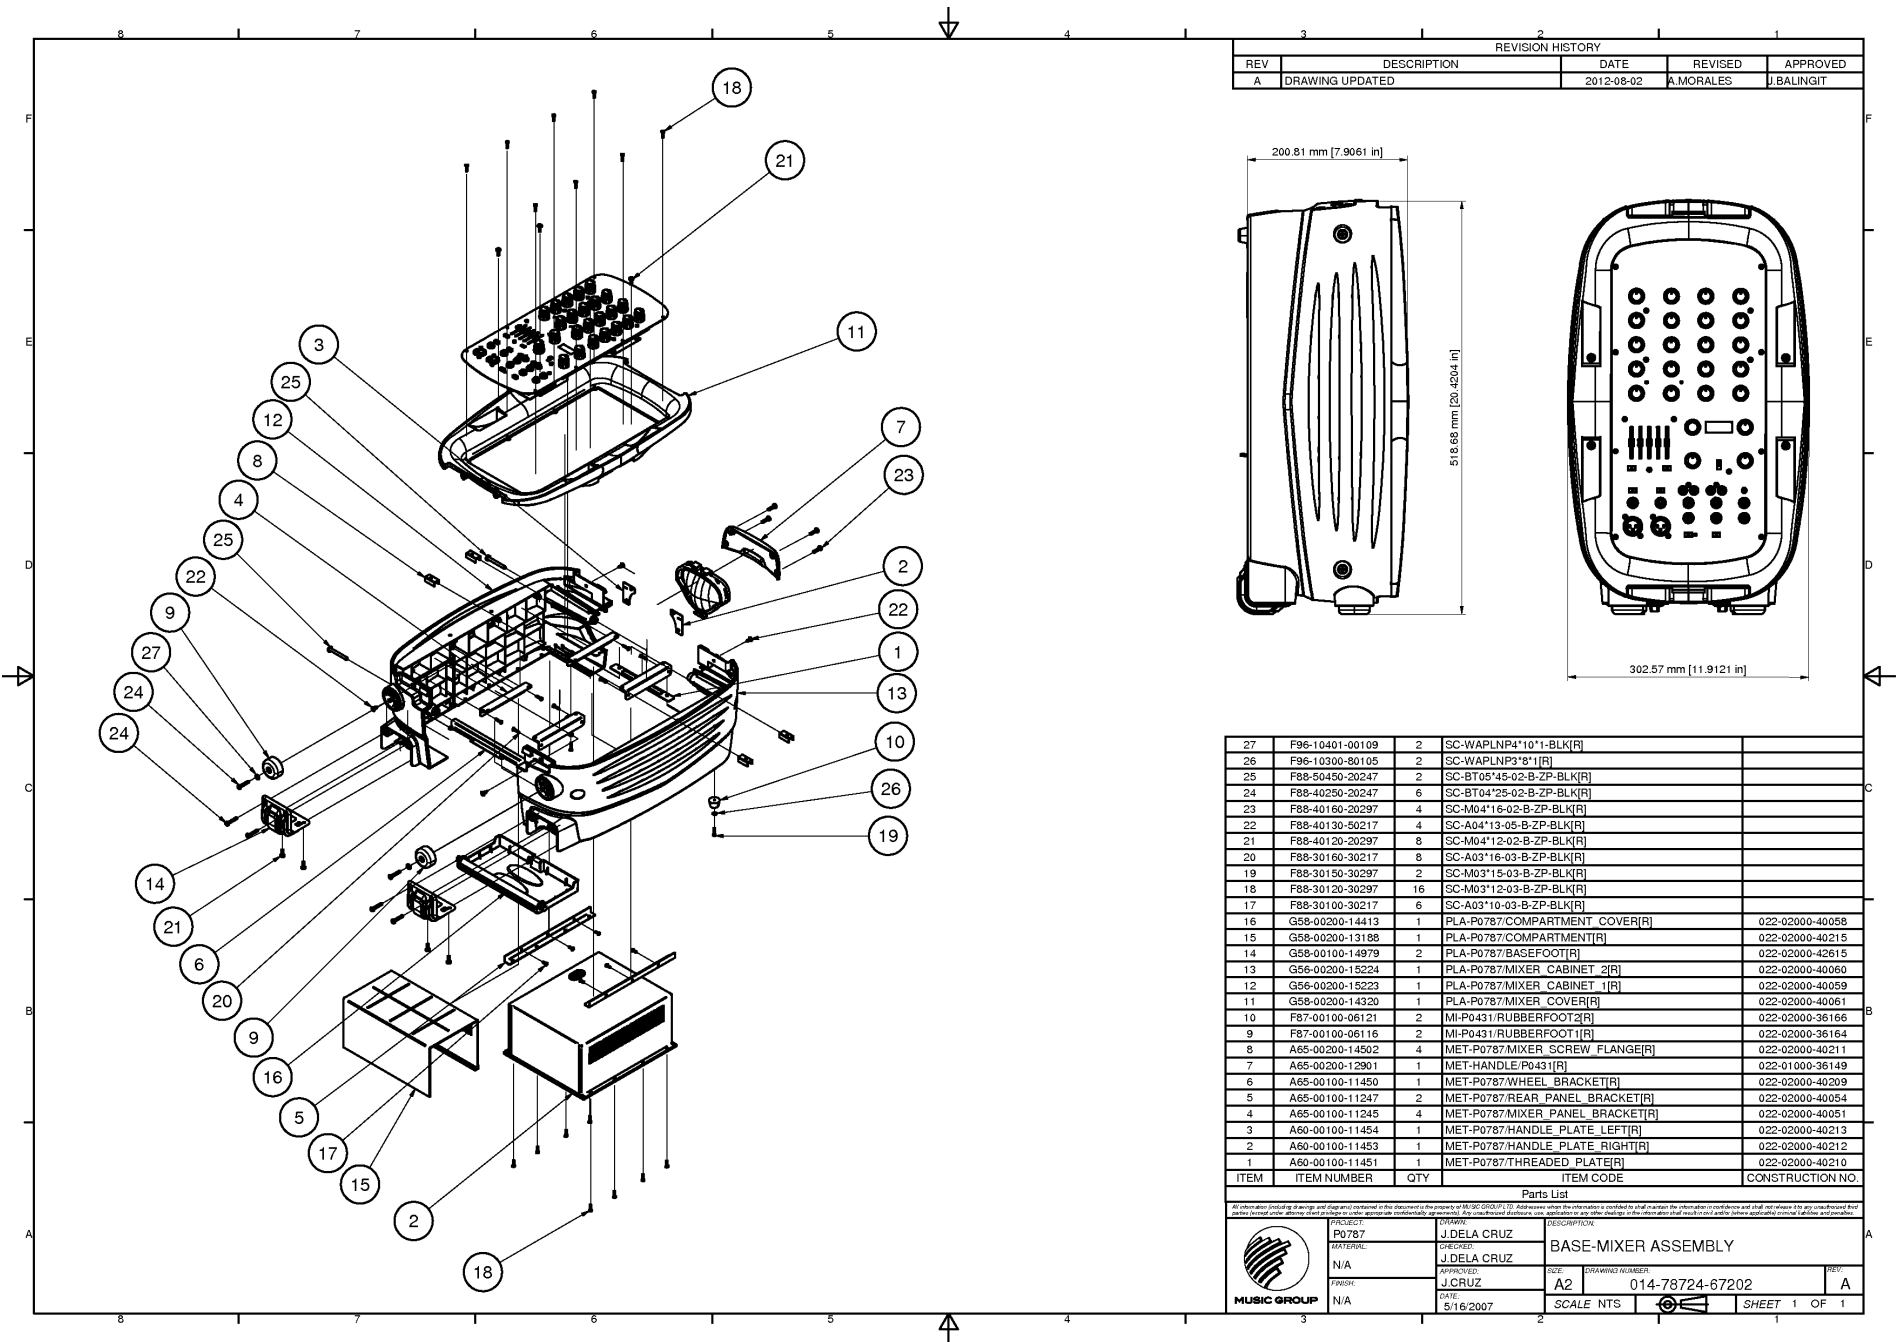

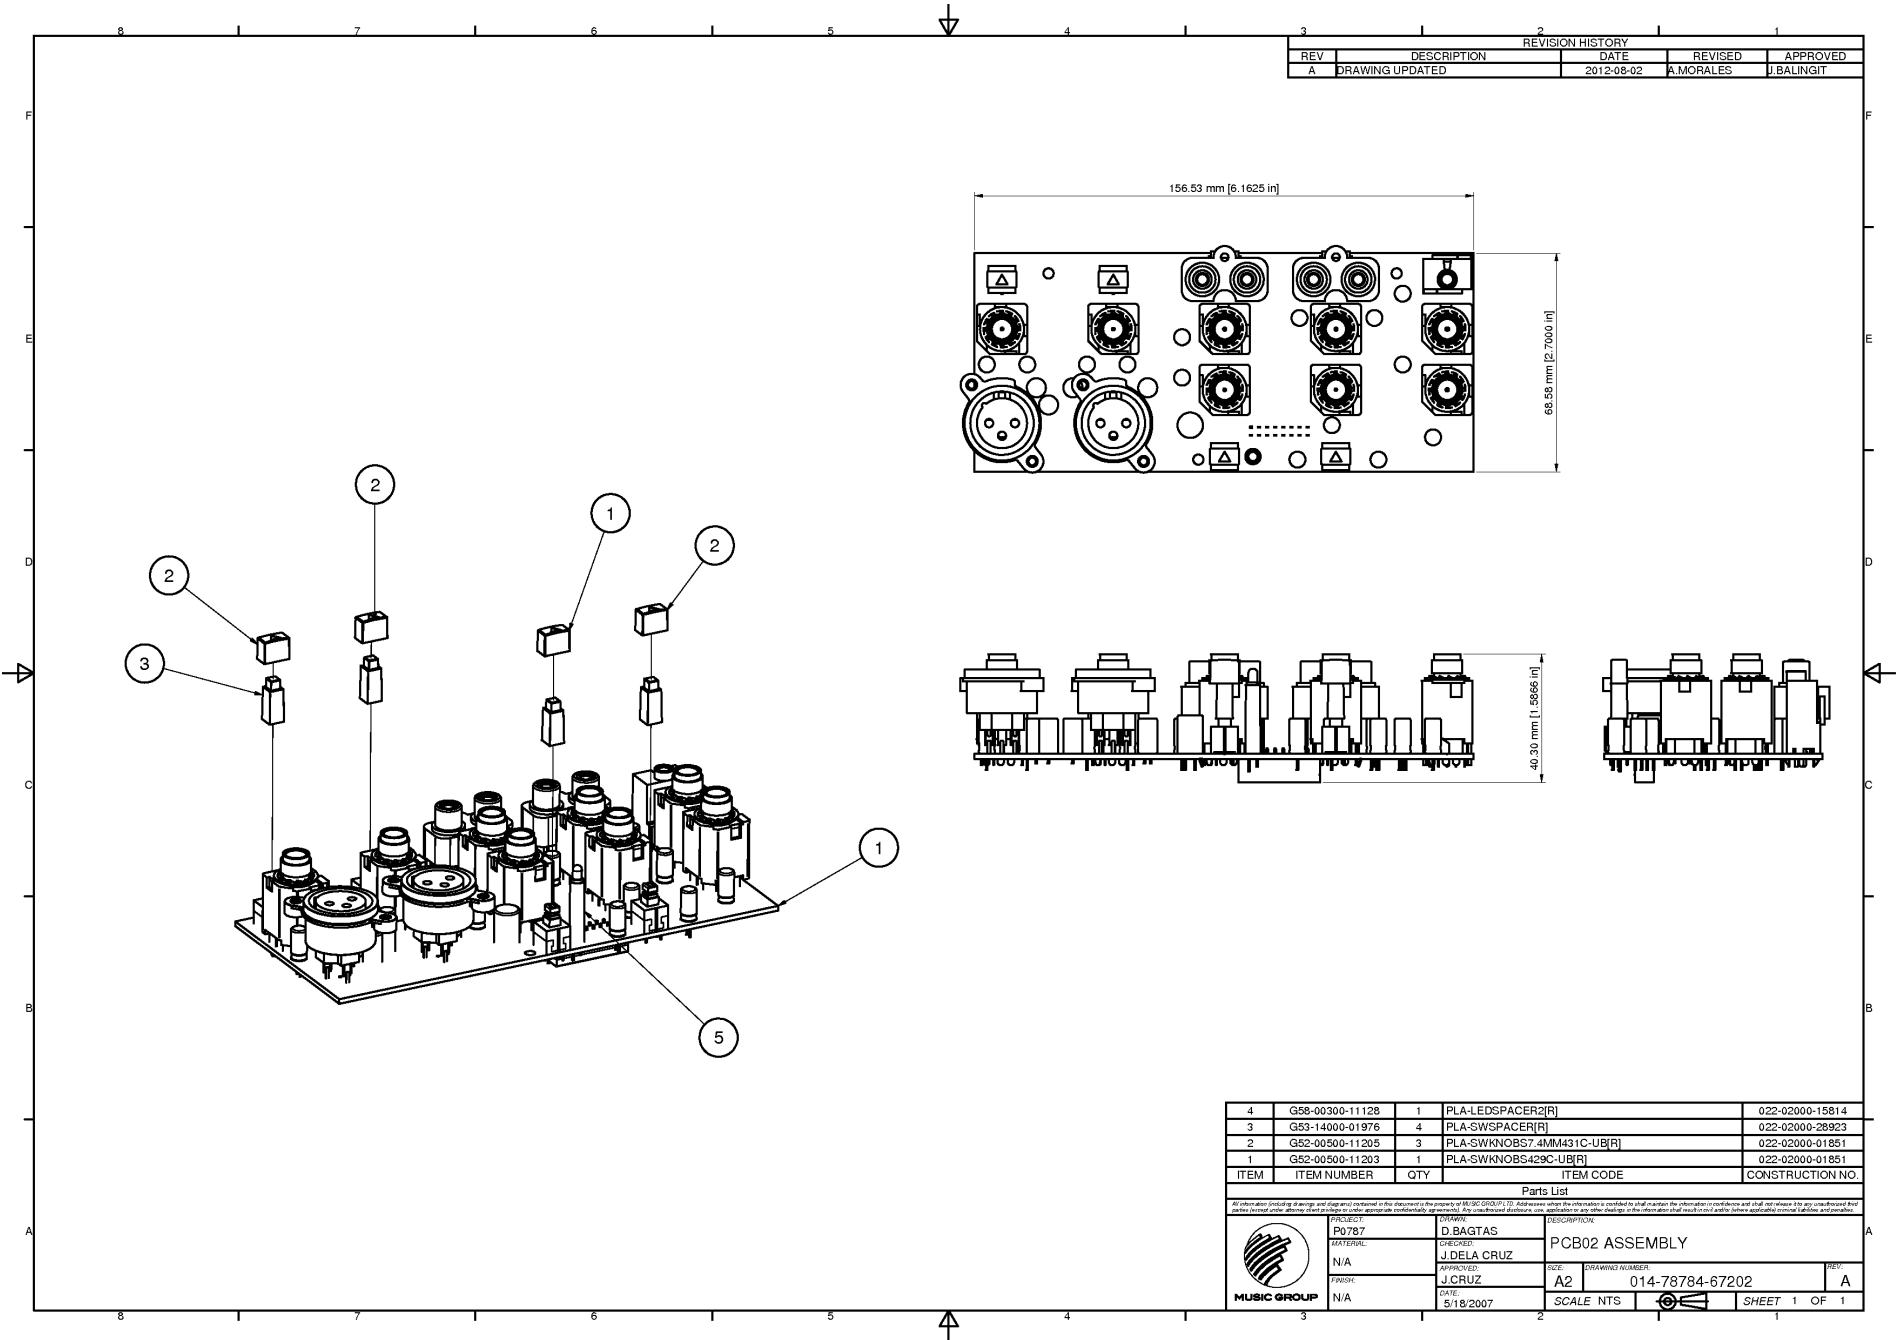

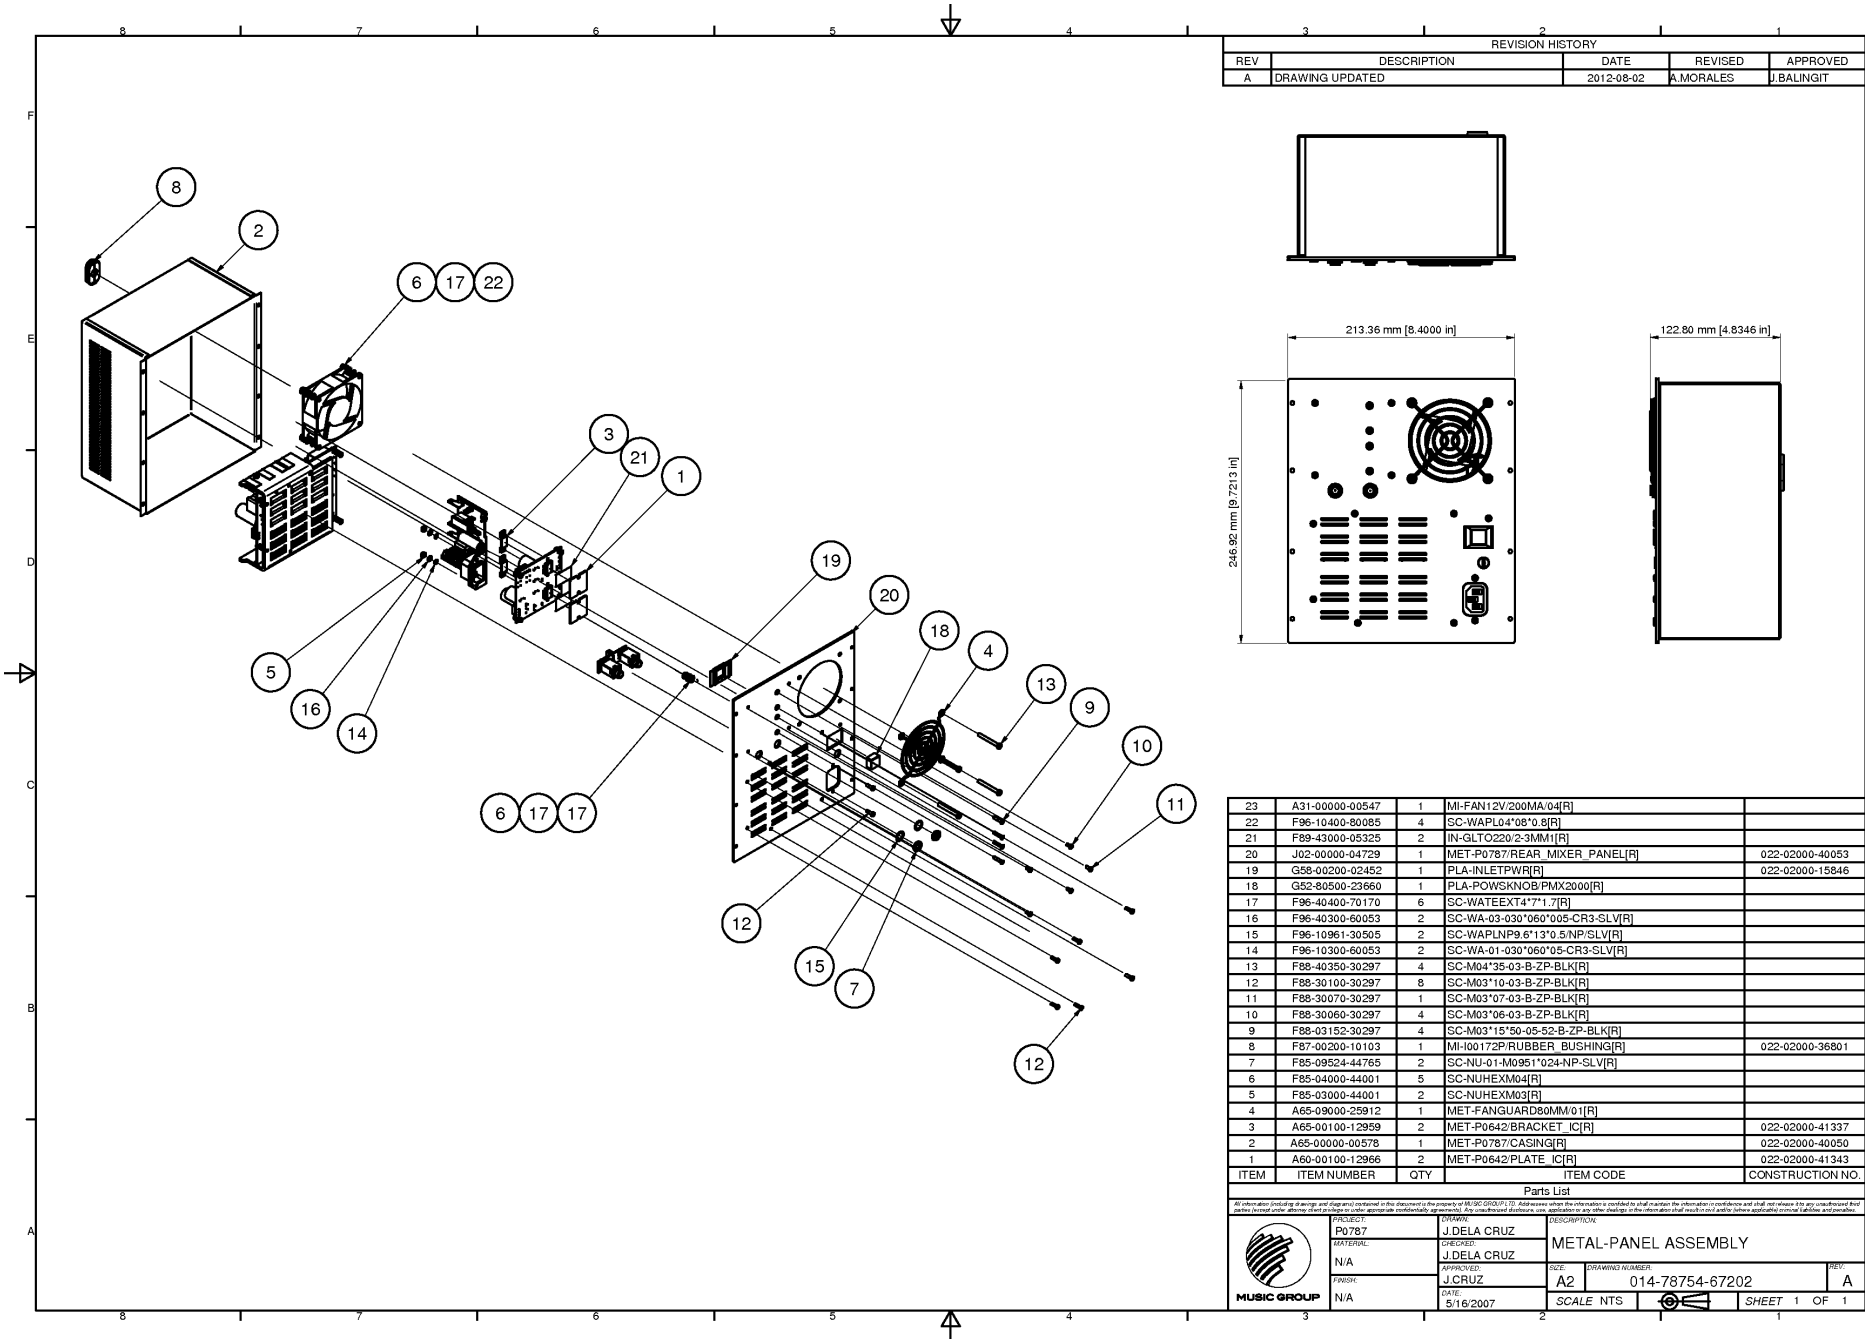



REVISION HISTORY				
REV	DESCRIPTION	DATE	REVISED	APPROVED
A	DRAWING UPDATED	2012-08-02	A.MORALES	J.BALINGIT

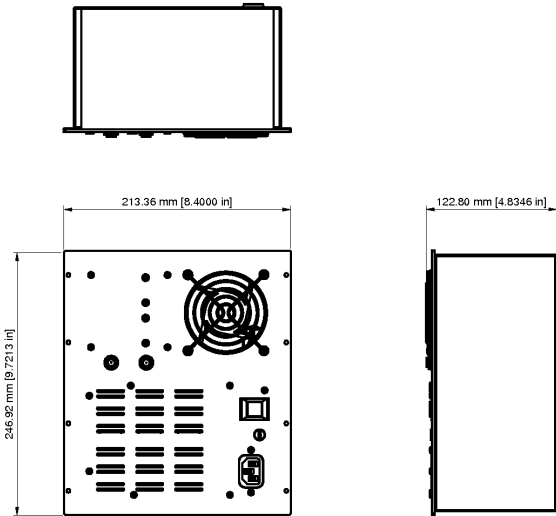



23	A31-00000-00547	1	MI-FAN12V/200MA/04[R]	
22	F96-10400-80085	4	SC-WAPL04*08*0.8[R]	
21	F89-43000-05325	2	IN-GLTO220/2-3MM1[R]	
20	J02-00000-04729	1	MET-P0787/REAR MIXER PANEL[R]	022-02000-40053
19	G58-00200-02452	1	PLA-INLETPWR[R]	022-02000-15846
18	G52-80500-23660	1	PLA-POWSKNOB/PMX2000[R]	
17	F96-40400-70170	6	SC-WATEEXT4*7*1.7[R]	
16	F96-40300-60053	2	SC-WA-03-030*060*005-CR3-SLV[R]	
15	F96-10961-30505	2	SC-WAPLNP9.6*13*0.5/NP/SLV[R]	
14	F96-10300-60053	2	SC-WA-01-030*060*005-CR3-SLV[R]	
13	F88-40350-30297	4	SC-M04*35-03-B-ZP-BLK[R]	
12	F88-30100-30297	8	SC-M03*10-03-B-ZP-BLK[R]	
11	F88-30070-30297	1	SC-M03*07-03-B-ZP-BLK[R]	
10	F88-30060-30297	4	SC-M03*06-03-B-ZP-BLK[R]	
9	F88-03152-30297	4	SC-M03*15*50-05-52-B-ZP-BLK[R]	
8	F87-00200-10103	1	MI-100172P/RUBBER BUSHING[R]	022-02000-36801
7	F85-09524-44765	2	SC-NU-01-M0951*024-NP-SLV[R]	
6	F85-04000-44001	5	SC-NUHEXM04[R]	
5	F85-03000-44001	2	SC-NUHEXM03[R]	
4	A65-09000-25912	1	MET-FANGUARD80MM/01[R]	
3	A65-00100-12959	2	MET-P0642/BACKET_IC[R]	022-02000-41337
2	A65-00000-00578	1	MET-P0787/CASING[R]	022-02000-40050
1	A60-00100-12966	2	MET-P0642/PLATE_IC[R]	022-02000-41343
ITEM	ITEM NUMBER	QTY	ITEM CODE	CONSTRUCTION NO.


Parts List				
PROJECT:		DRAWN:		DESCRIPTION:
P0787		J.DELA CRUZ		METAL-PANEL ASSEMBLY
CHECKED:		J.DELA CRUZ		
APPROVED:		J.J. CRUZ		
DATE:		5/16/2007		
SCALE:		NTS		
SHEET:		1		OF 1

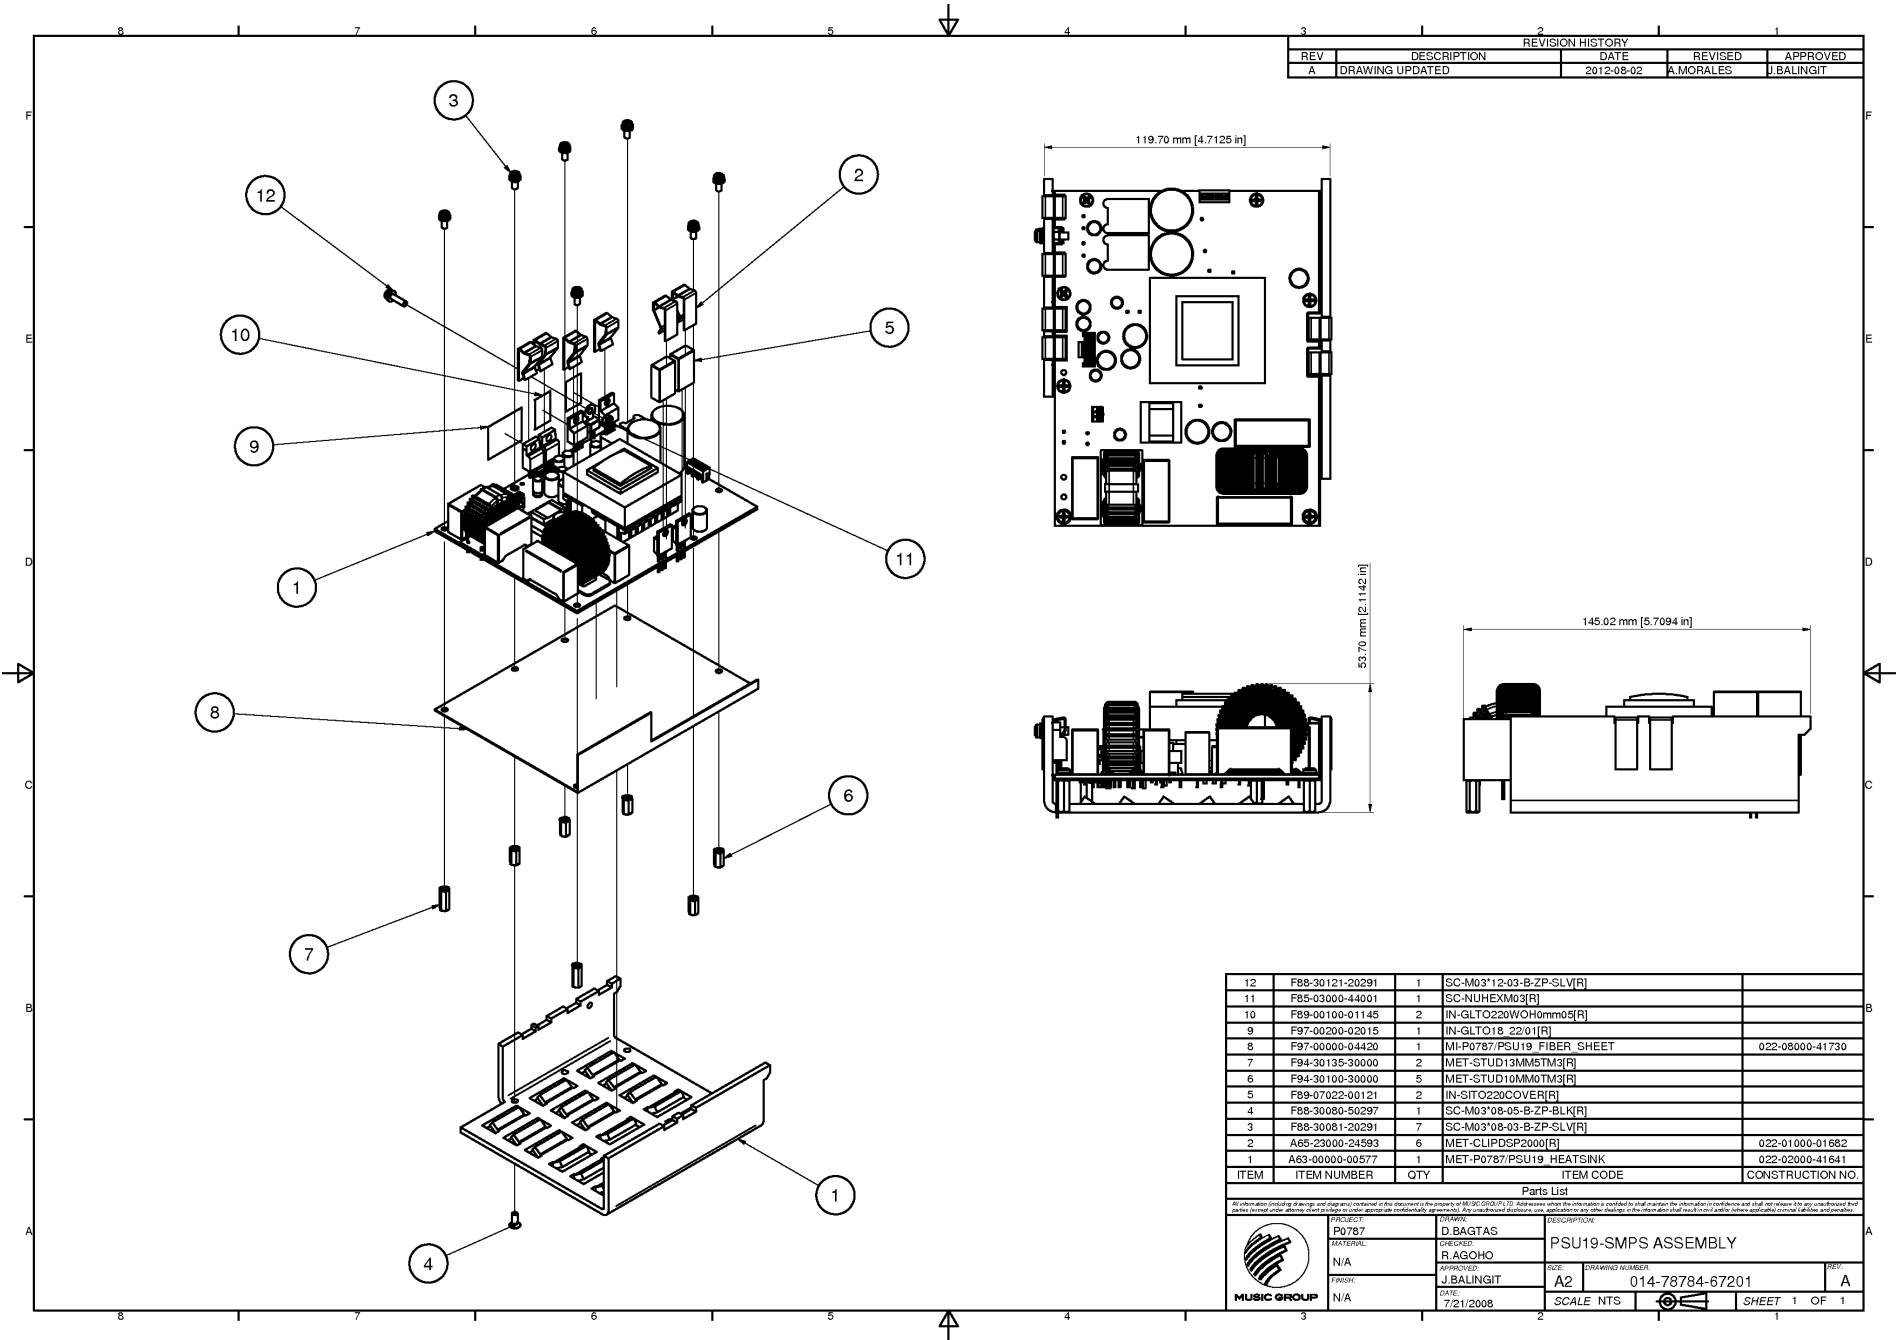

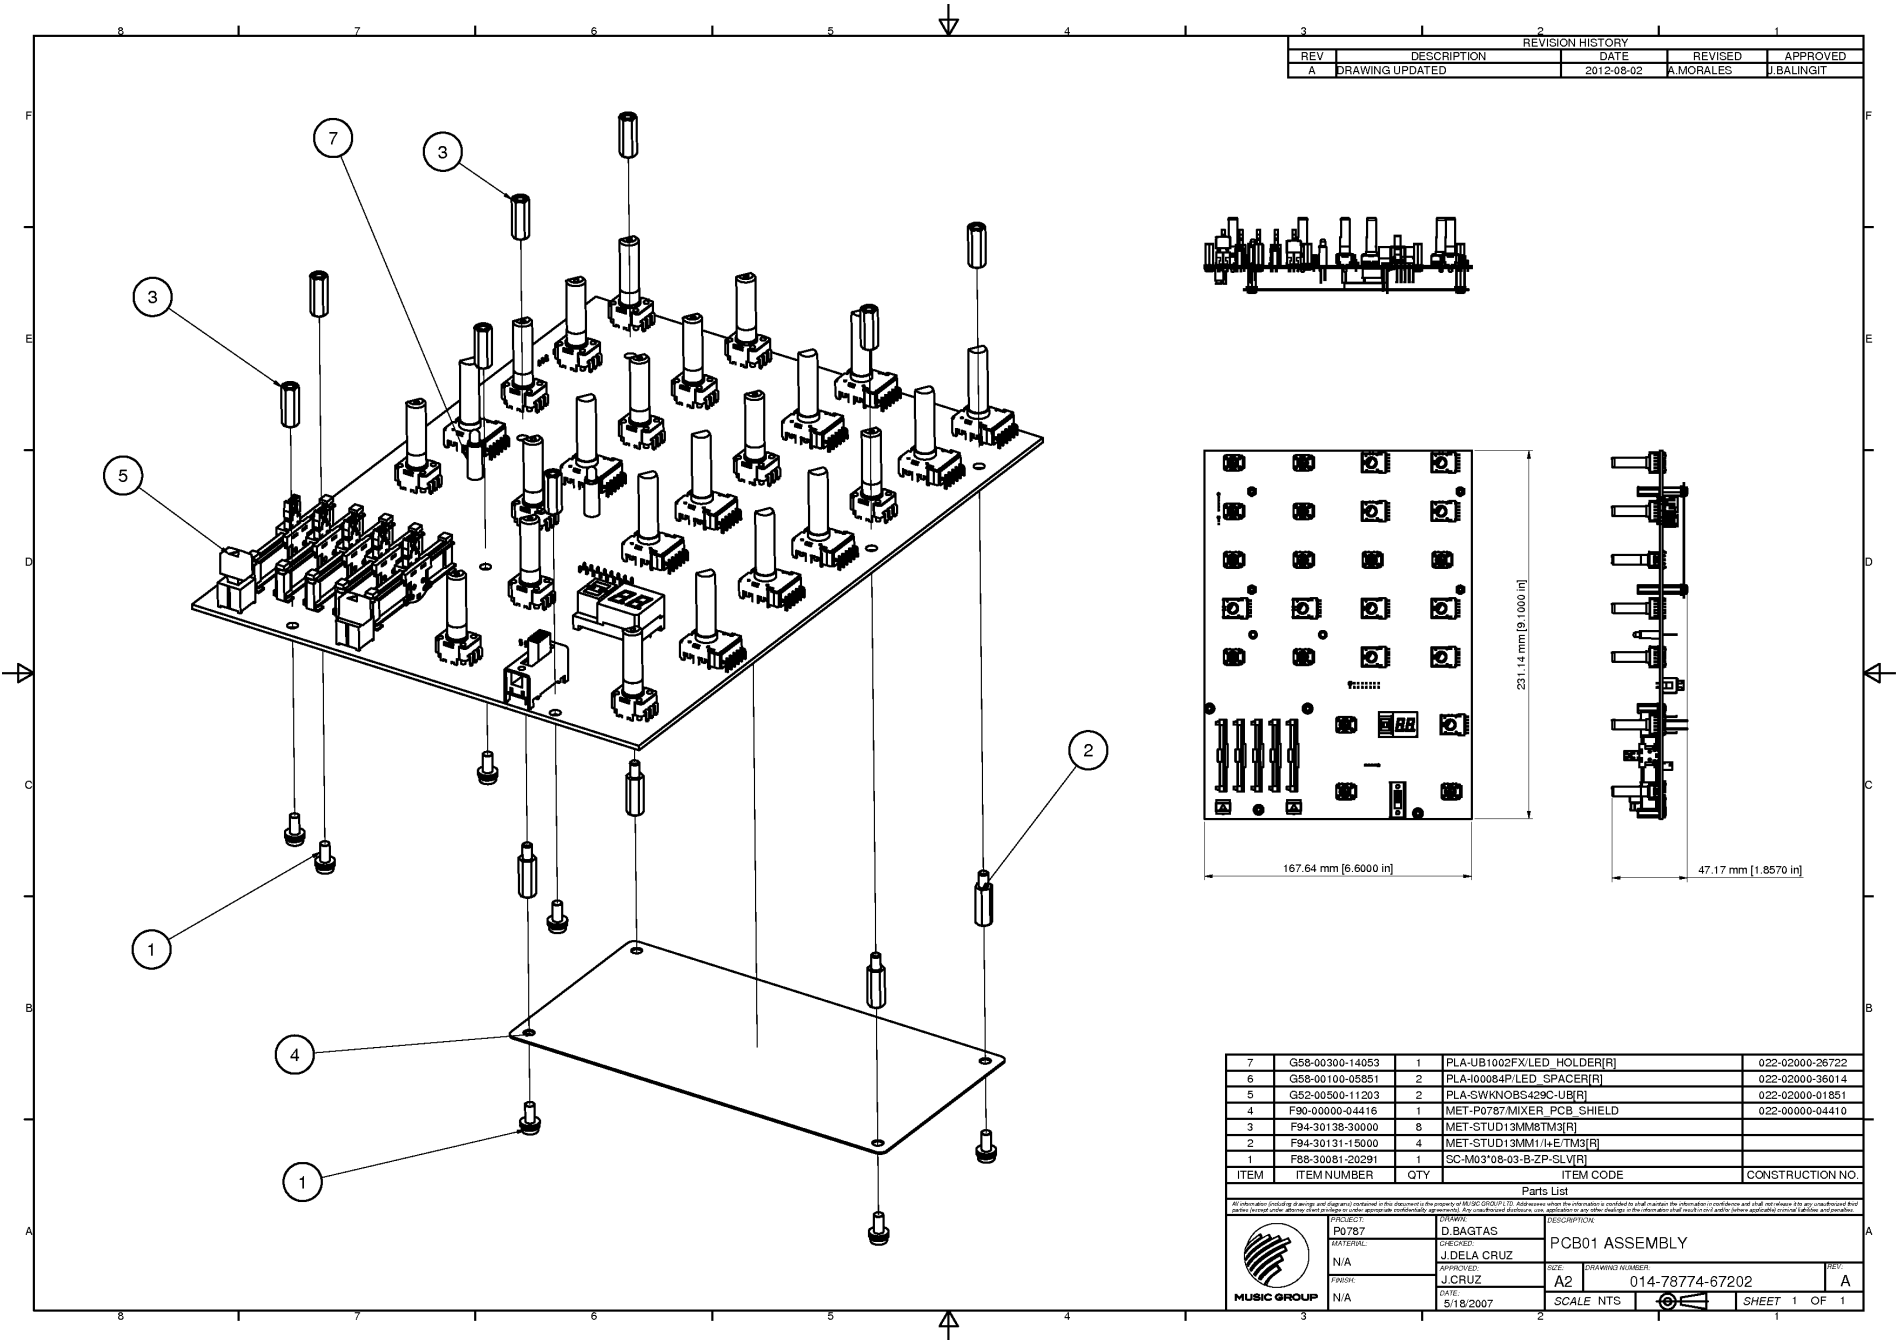


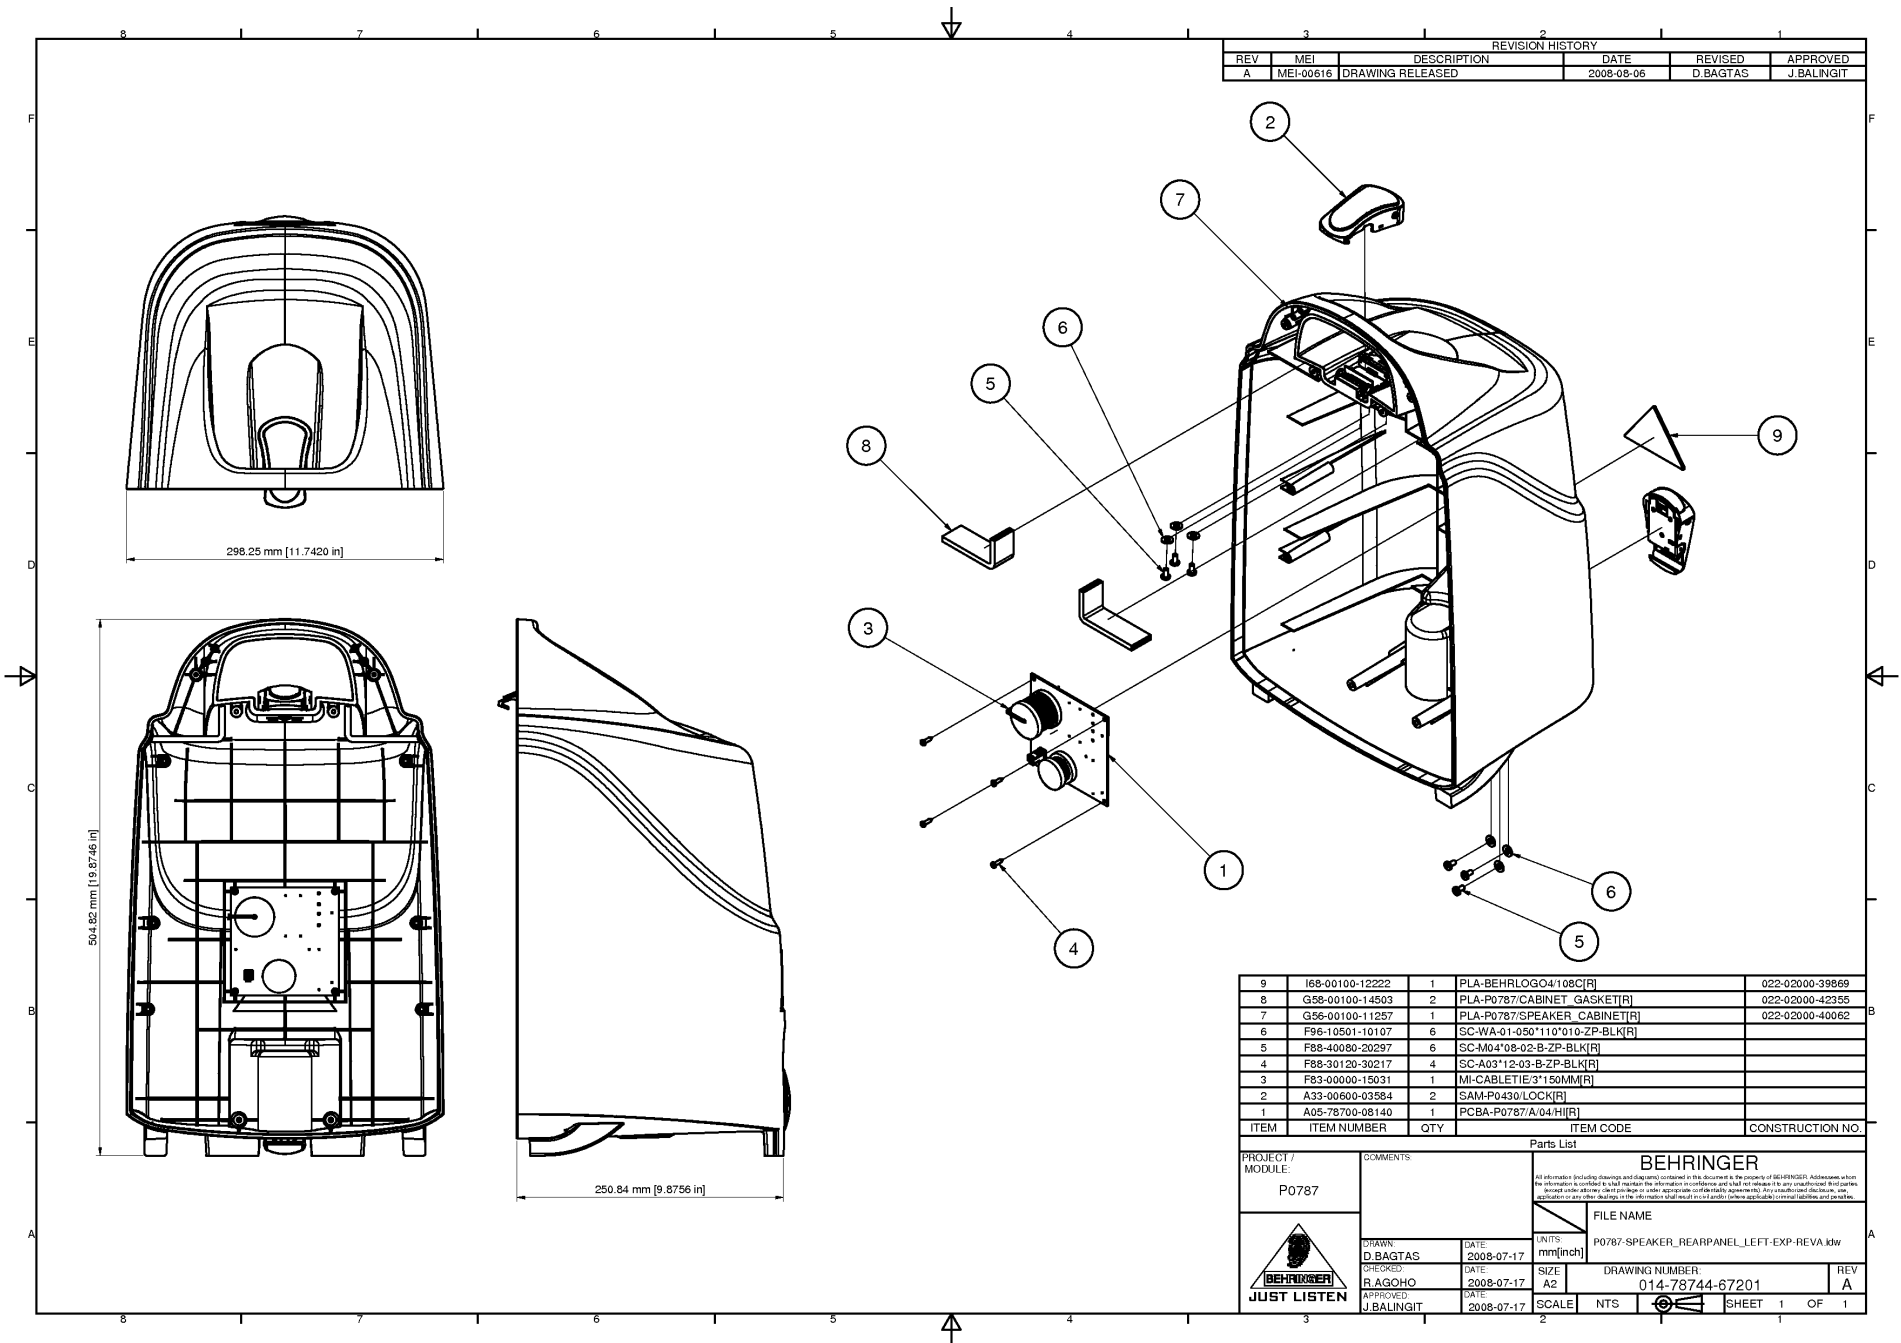

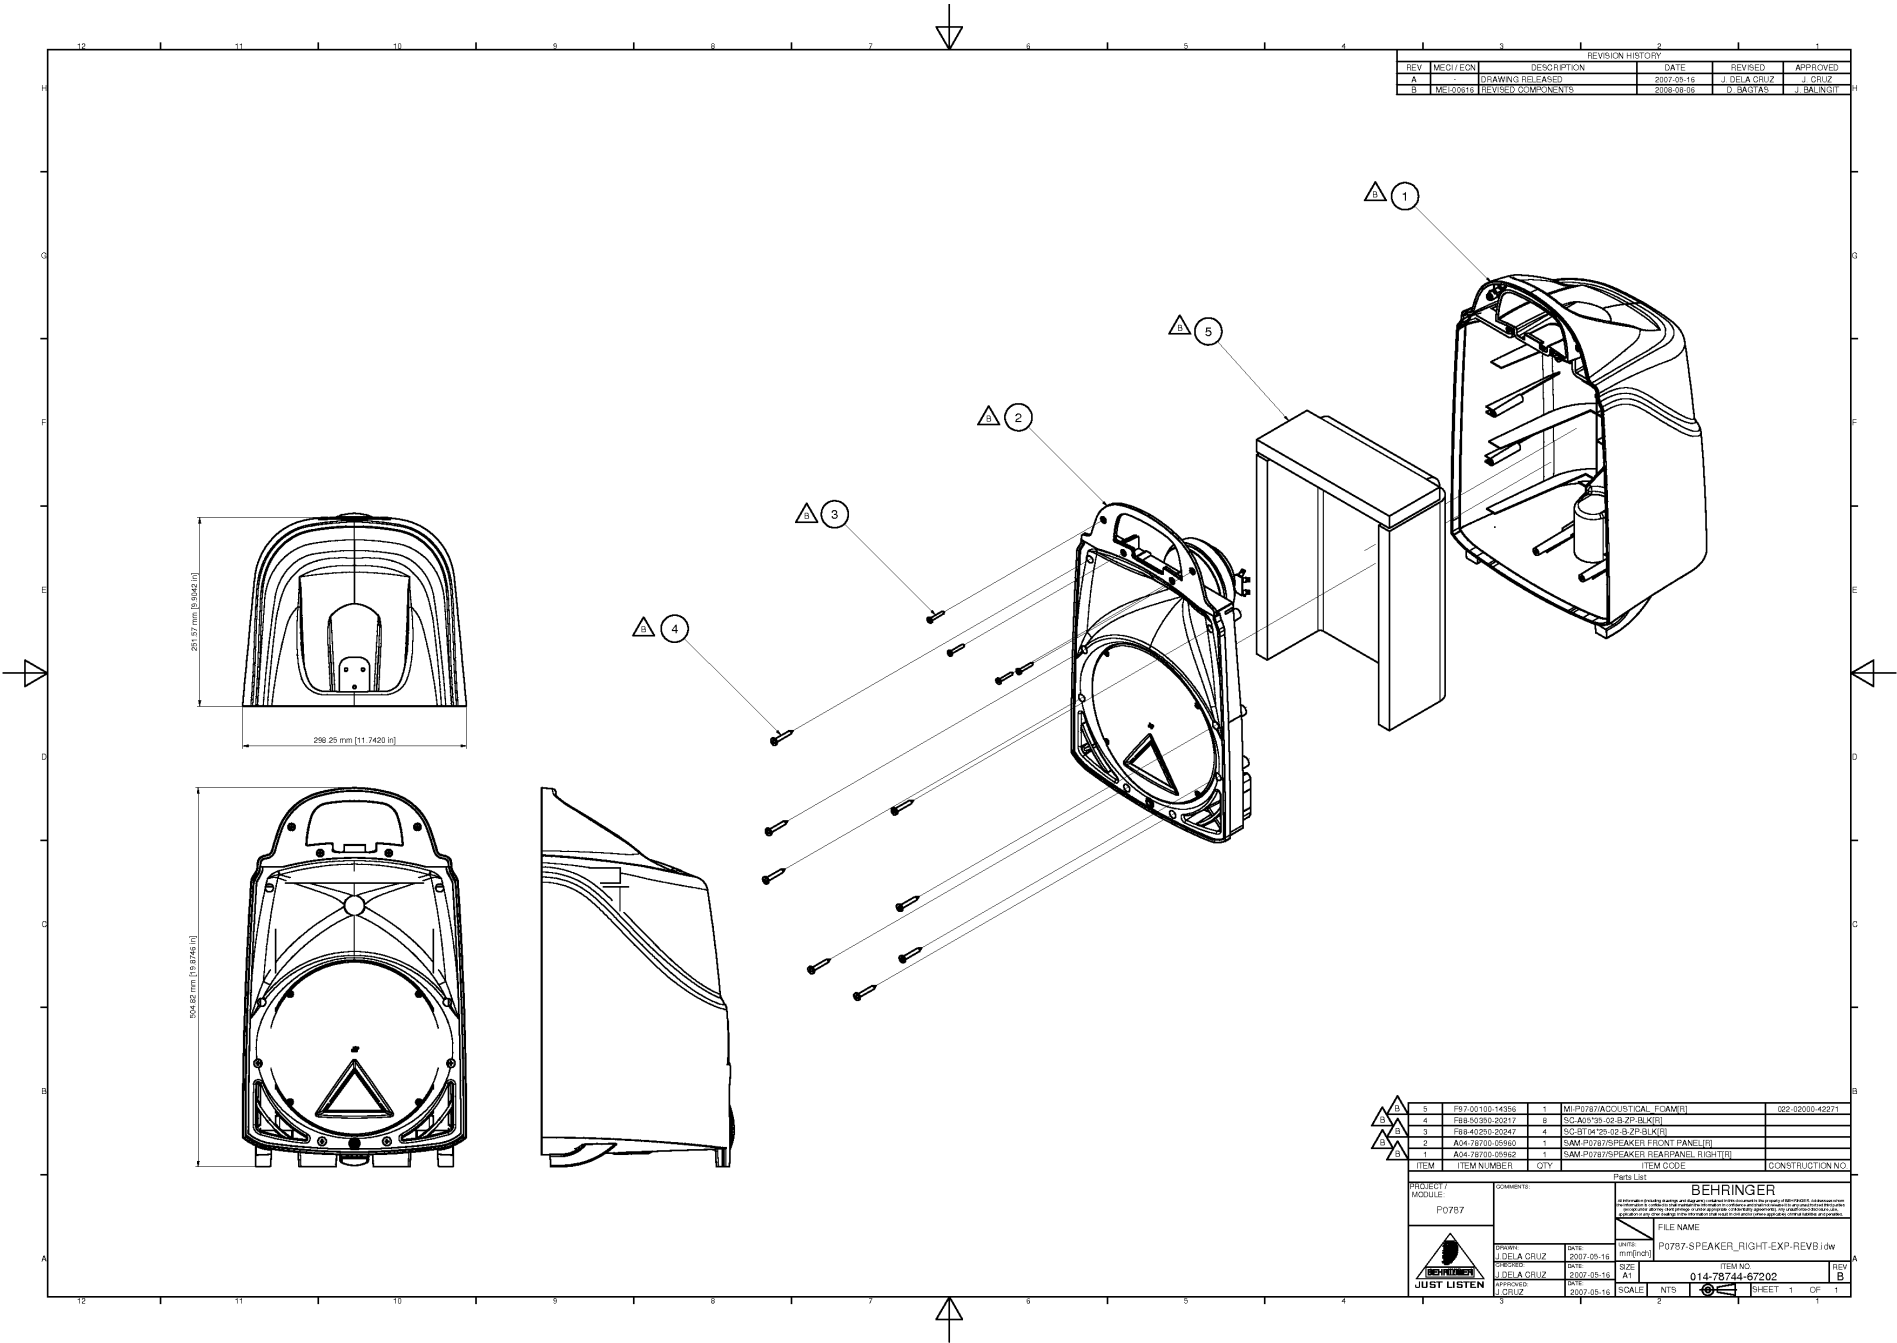

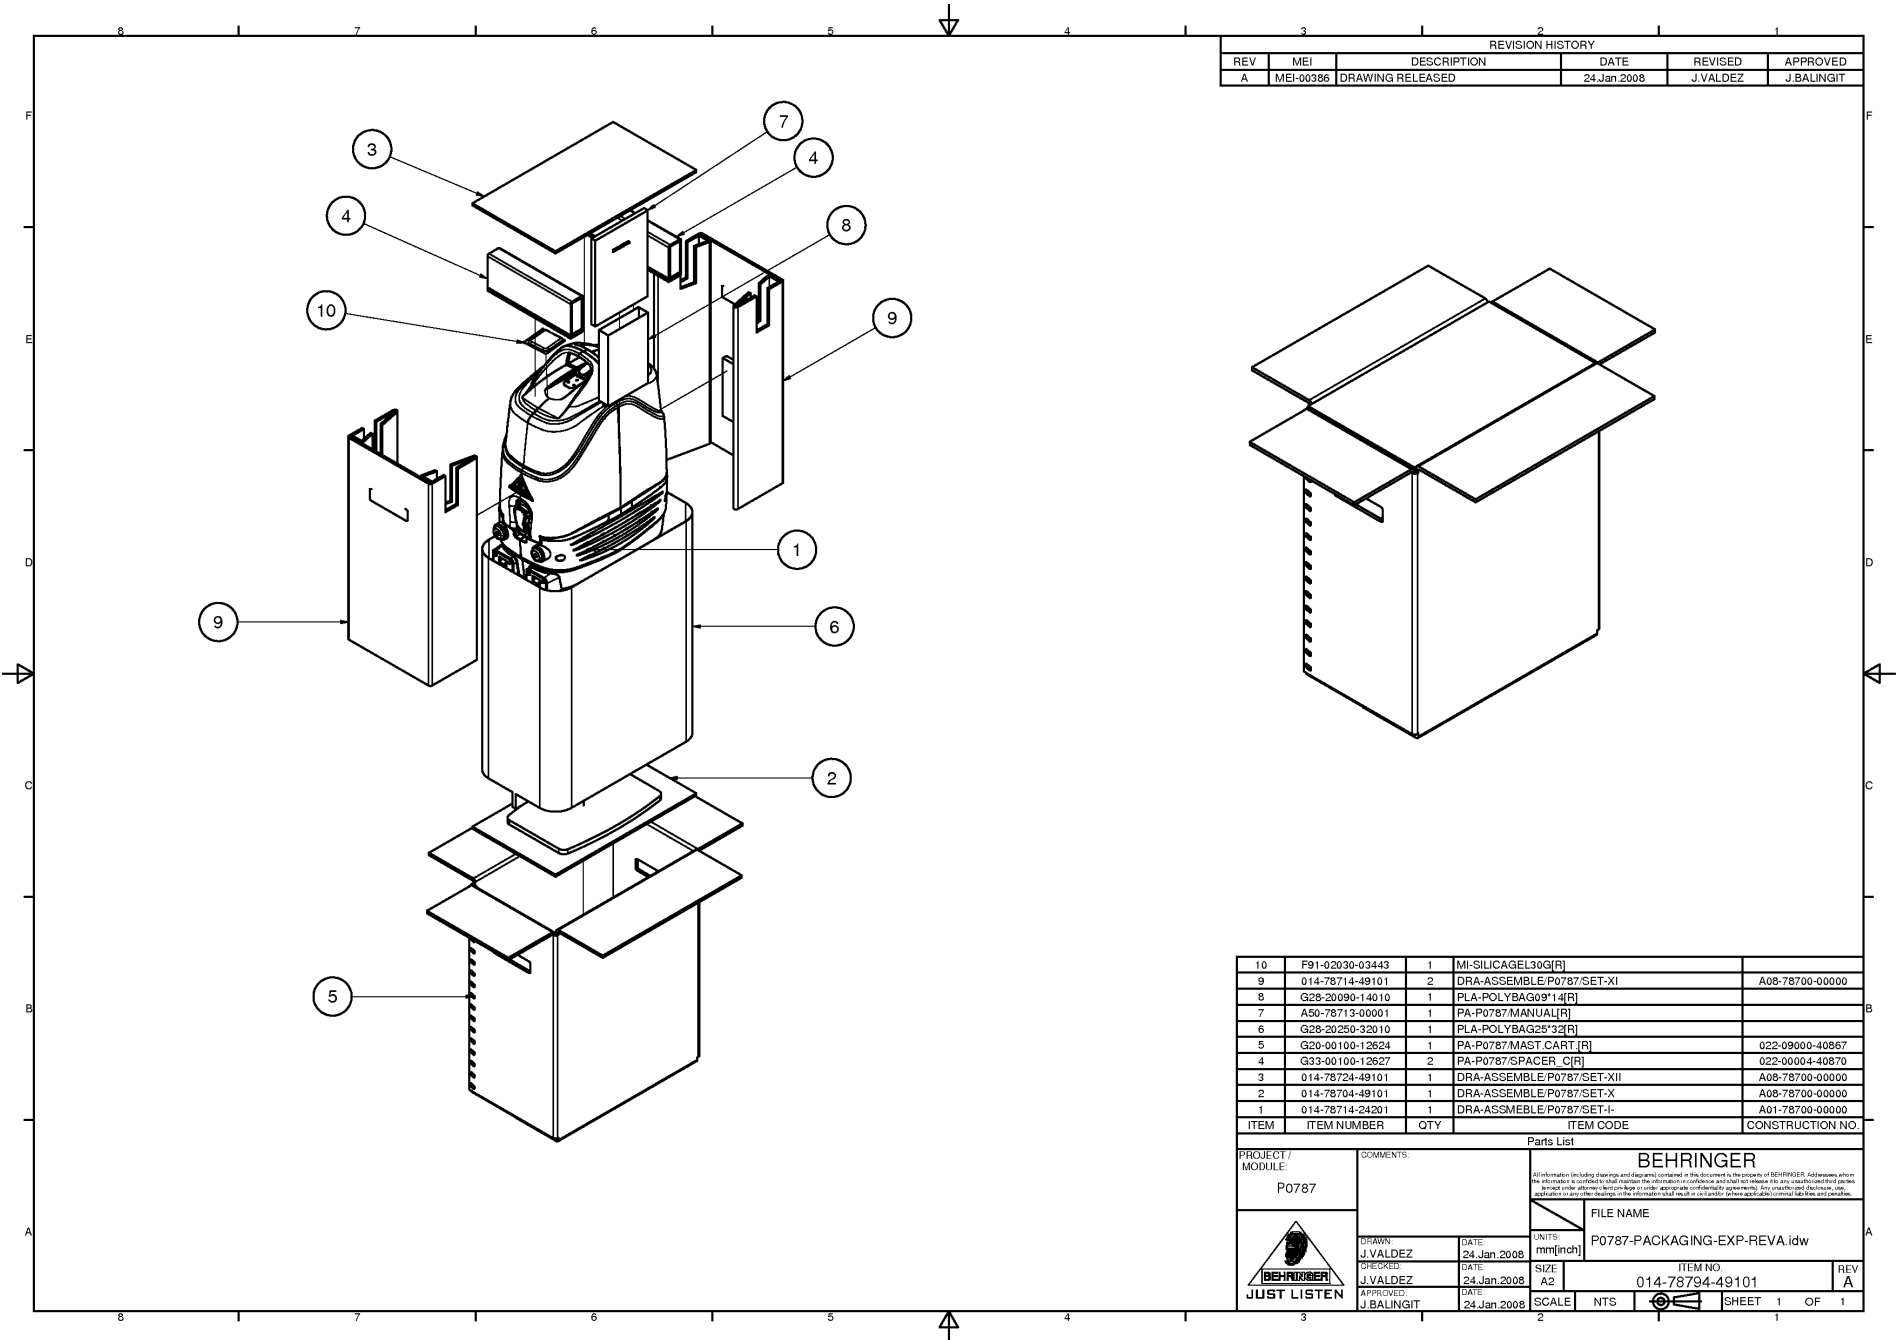

REVISION HISTORY					
REV	MEI	DESCRIPTION	DATE	REVISED	APPROVED
A	MEI-00386	DRAWING RELEASED	24 Jan 2008	J.VALDEZ	J.BALINGIT

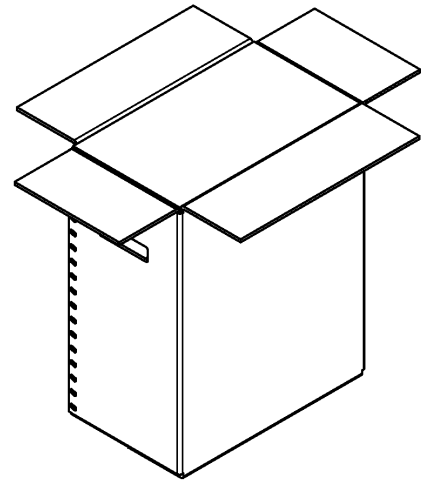

10	F91-02030-03443	1	MI-SILICAGEL30G[R]	
9	014-78714-49101	2	DRA-ASSEMBLE/P0787/SET-XI	A08-78700-00000
8	G28-20090-14010	1	PLA-POLYBAG09*14[R]	
7	A50-78713-00001	1	PA-P0787/MANUAL[R]	
6	G28-20250-32010	1	PLA-POLYBAG25*32[R]	
5	G20-00100-12624	1	PA-P0787/MAST_CART [R]	022-09000-40867
4	G33-00100-12627	2	PA-P0787/SPACER_C[R]	022-00004-40870
3	014-78724-49101	1	DRA-ASSEMBLE/P0787/SET-XII	A08-78700-00000
2	014-78704-49101	1	DRA-ASSEMBLE/P0787/SET-X	A08-78700-00000
1	014-78714-24201	1	DRA-ASSEMBLE/P0787/SET-I-	A01-78700-00000
ITEM	ITEM NUMBER	QTY	ITEM CODE	CONSTRUCTION NO.

PROJECT / MODULE: P0787		COMMENTS:		BEHRINGER All information (including drawings and diagrams) contained in this document is the property of BEHRINGER. Addressing whom the information is confidential to shall require the information to be confidential and shall not be released to any unauthorized third parties without written approval. Furthermore, it is under appropriate confidentiality agreements. Any unauthorized disclosure, copy, application or any other change in the information shall result in civil penalties. Where applicable, corrected drawings and revisions.	
DRAWN: J.VALDEZ CHECKED: J.VALDEZ APPROVED: J.BALINGIT		DATE: 24 Jan 2008 DATE: 24 Jan 2008 DATE: 24 Jan 2008		UNITS: mm[inch] SIZE: A2 SCALE: NTS	
FILE NAME: P0787-PACKAGING-EXP-REVA.idw		ITEM NO: 014-78794-49101		REV A	
SHEET 1		OF 1			



We Hear You