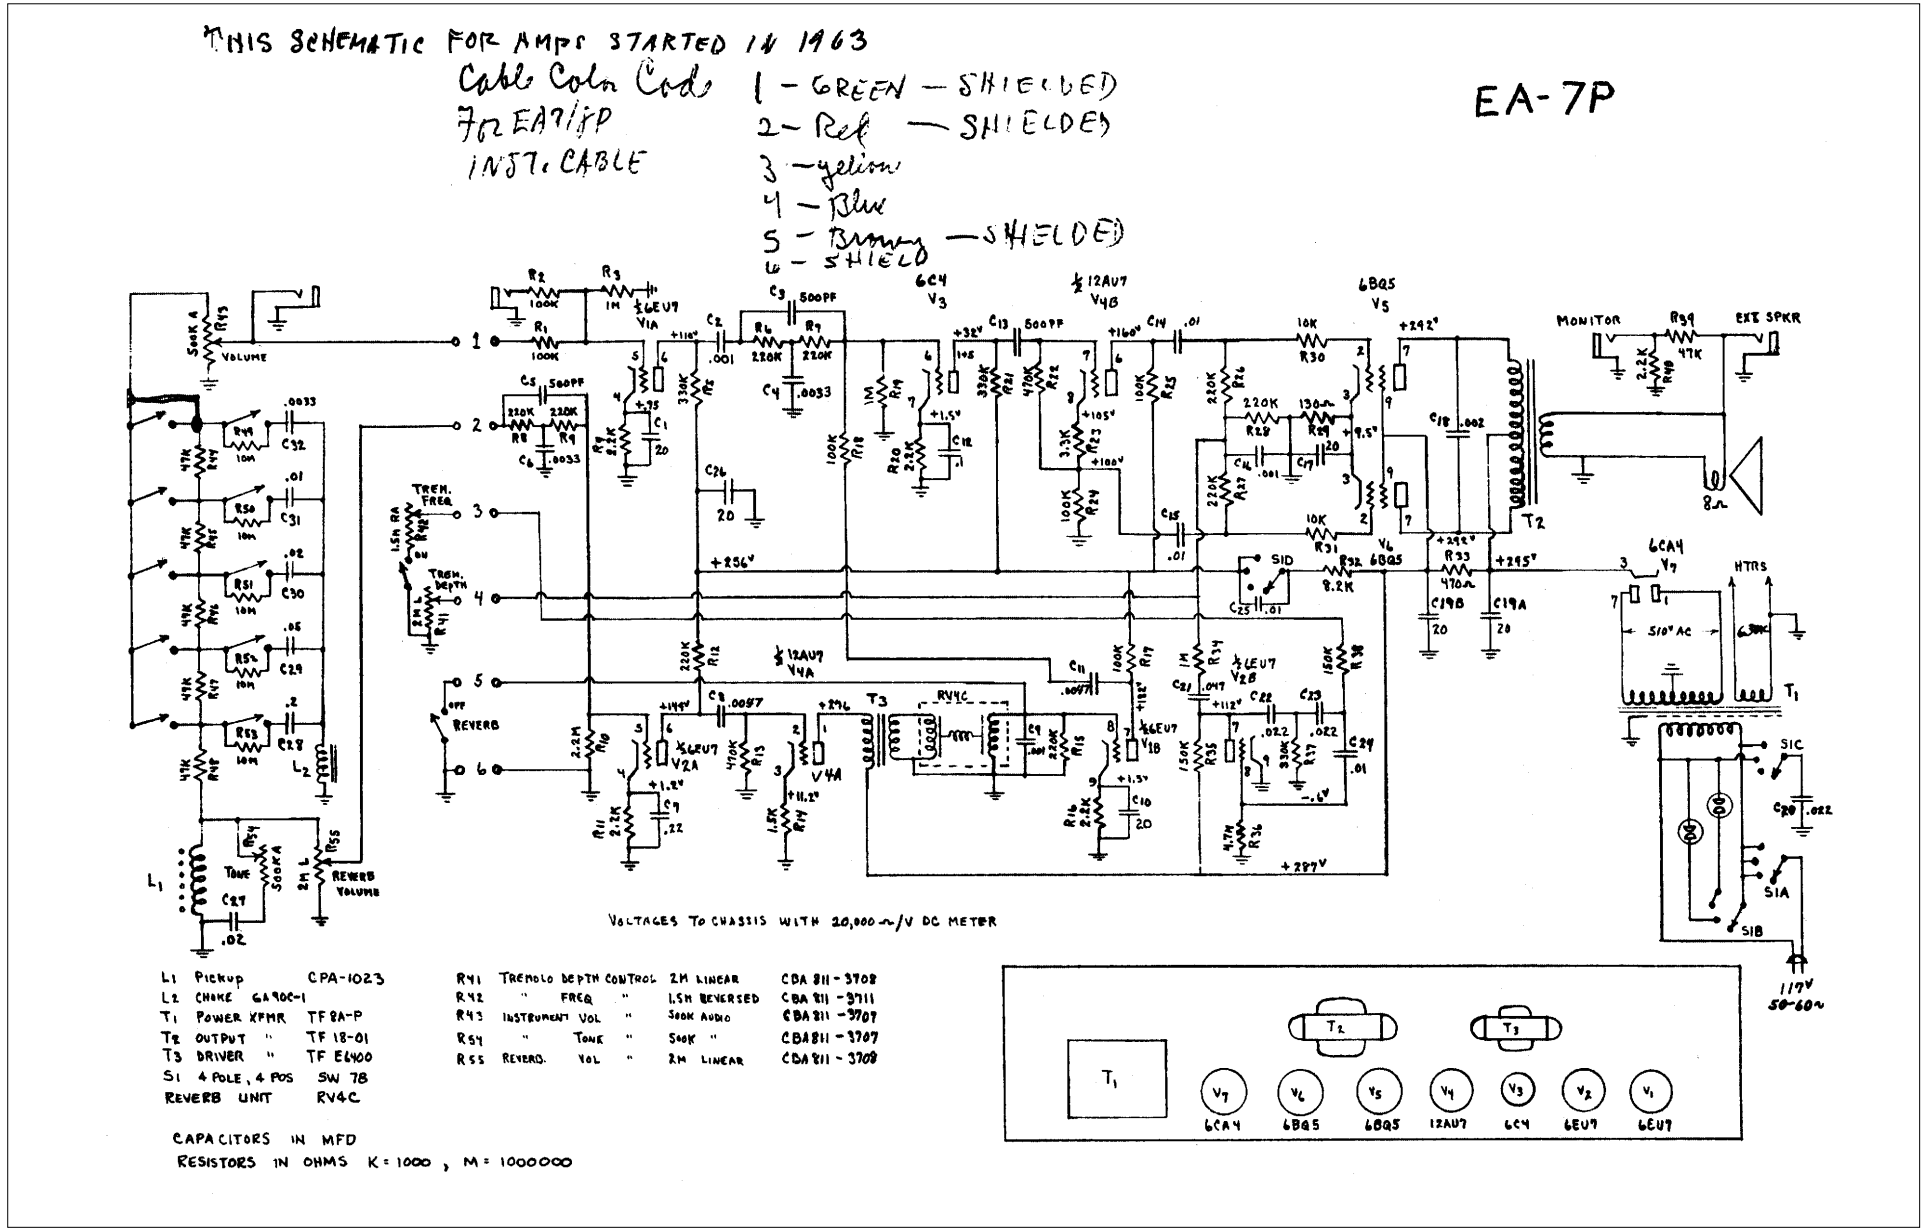

THIS SCHEMATIC FOR AMPS STARTED IN 1963
Cable Color Code
FOR EA7/EP
INST. CABLE
1 - GREEN - SHIELDED
2 - Red - SHIELDED
3 - yellow
4 - Blue
5 - Brown - SHIELDED
6 - SHIELD
EA-7P
VOLUME
TONE
REVERB VOLUME
TREM. FREQ
TREM. DEPTH
REVERB
SID
MONITOR
EXT SPKR
8Ω
HTRS
SIC
SIA
SIB
117V 50-60~
6CA4 V7
6BQ5 V6
6BQ5 V5
6CA4 V4
12AU7 V3
6EU7 V2
6EU7 V1
T1
T2
T3
+256V
+297V
VOLTAGES TO CHASSIS WITH 20,000Ω/V DC METER
L1 Pickup CPA-1023
L2 CHOKE GA90C-1
T1 POWER XFMR TF8A-P
T2 OUTPUT " TF 18-01
T3 DRIVER " TF E6400
S1 4 POLE, 4 POS SW 78
REVERB UNIT RV4C
R41 TREMOLO DEPTH CONTROL 2M LINEAR CBA 811-3708
R42 " FREQ " 1.5M REVERSED CBA 811-3711
R43 INSTRUMENT VOL " 500K AUDIO CBA 811-3707
R54 " TONE " 500K " CBA 811-3707
R55 REVERB VOL " 2M LINEAR CBA 811-3709
CAPACITORS IN MFD
RESISTORS IN OHMS K=1000, M=1000000