

FESTIVAL 40

Controller / Tuner
3-Disc CD Changer
Power Amplifiers

PRELIMINARY Service – Technical Manual

Technical Specifications

Controller / Tuner

FM Tuner

Usable Sensitivity, Stereo, A-weighted, IHF	12.8 dBf (1.2 μ V/75 Ω)
50 dB Quieting Sensitivity, Stereo, A-weighted, IHF	41.2 dBf (32 μ V/75 Ω)
Signal/Noise Ratio, 65 dBf, Mono/Stereo, A-weighted, IHF	70/65 dB
Capture Ratio	1.5 dB
Adjacent Channel Selectivity, $\pm$ 300 kHz	65 dB
IF Rejection	80 dB
Total Harmonic Distortion, 1 kHz, Stereo, 75 kHz mod., 65 dBf	0.3%

AM Tuner

Sensitivity	500 μ V/m
Alternative Channel Selectivity, $\pm$ 9 kHz	25 dB
Image Rejection	35 dB
IF Rejection	52 dB

Controller

Input Sensitivity/Impedance	250 mV/ 100 k Ω
Tone Control Range, Bass 100 Hz/Treble 10 kHz	$\pm$ 10 dB
Dimensions (W x D x H)*	280 x 370 x 140 mm
Weight	3 kg

3-Disc CD Changer


Digital-to-Analog Converter	3D Bitstream (MASH)
Frequency Response ($\pm$ 1dB)	20 – 20 kHz
Total Harmonic Distortion	0.08%
Dynamic Range	90 dB
Signal/Noise Ratio	95 dB
Channel Separation	90 dB
Dimensions (W x D x H)*	280 x 360 x 140 mm
Weight	2.8 kg

Power Amplifiers


Power Output, Stereo, 8 Ω , 20 Hz – 20 kHz, <0.5% THD	2 x 40 Watts
Stereo, 4 Ω , DIN, 1 kHz, 1% THD	2 x 68 Watts
Surround, 8 Ω , 20 Hz – 20 kHz, <0.5% THD	5 x 30 Watts
Power Bandwidth, 8 Ω	20 Hz – 60 kHz
High Current Capability (HCC), Stereo	2 x $\pm$ 30 A
Frequency Response, 1 W $\pm$ 0/-3 dB	5 Hz – 150 kHz
Rise Time	1.0 μ sec
Slew Rate	80 V/ μ sec
Signal/Noise Ratio, ref. rated power, A-weighted	100 dB
Dimensions (W x D x H)*	280 x 360 x 140 mm
Weight	7 kg

* Depth measurements include buttons and terminals. Height measurements include chassis feet.


BLOCK DIAGRAM
POWER AMP

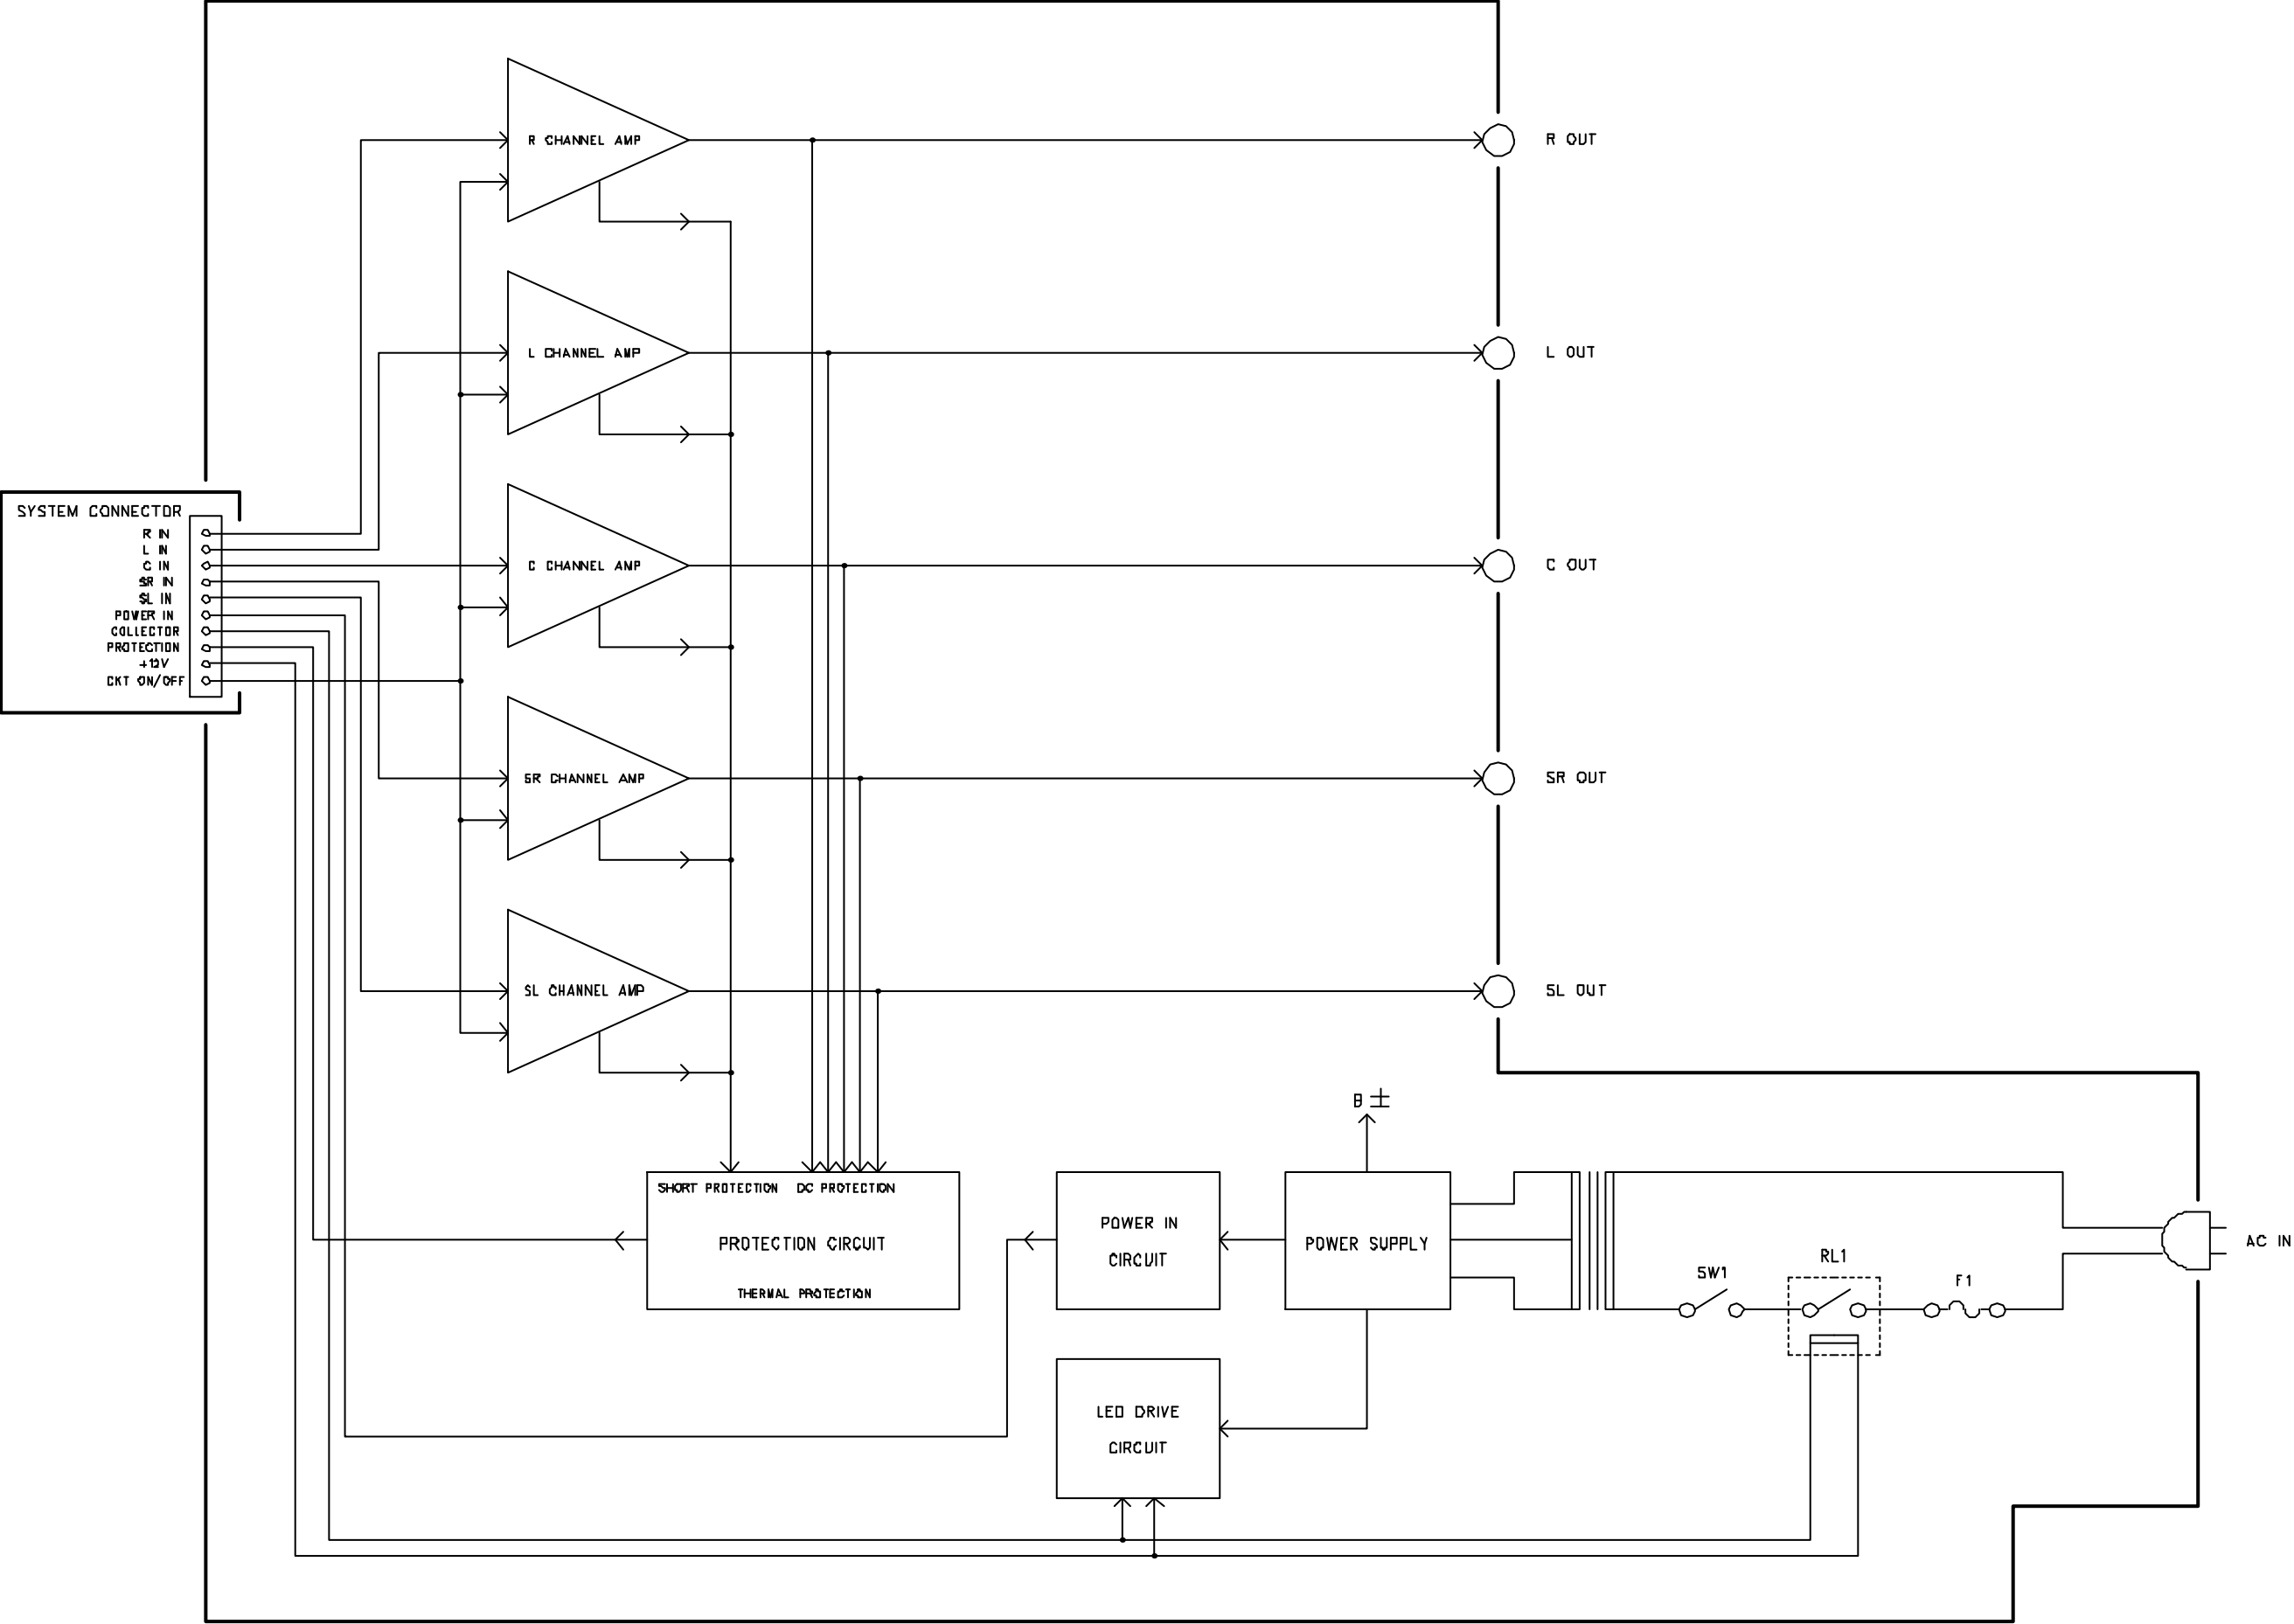

BLOCK DIAGRAM CDP

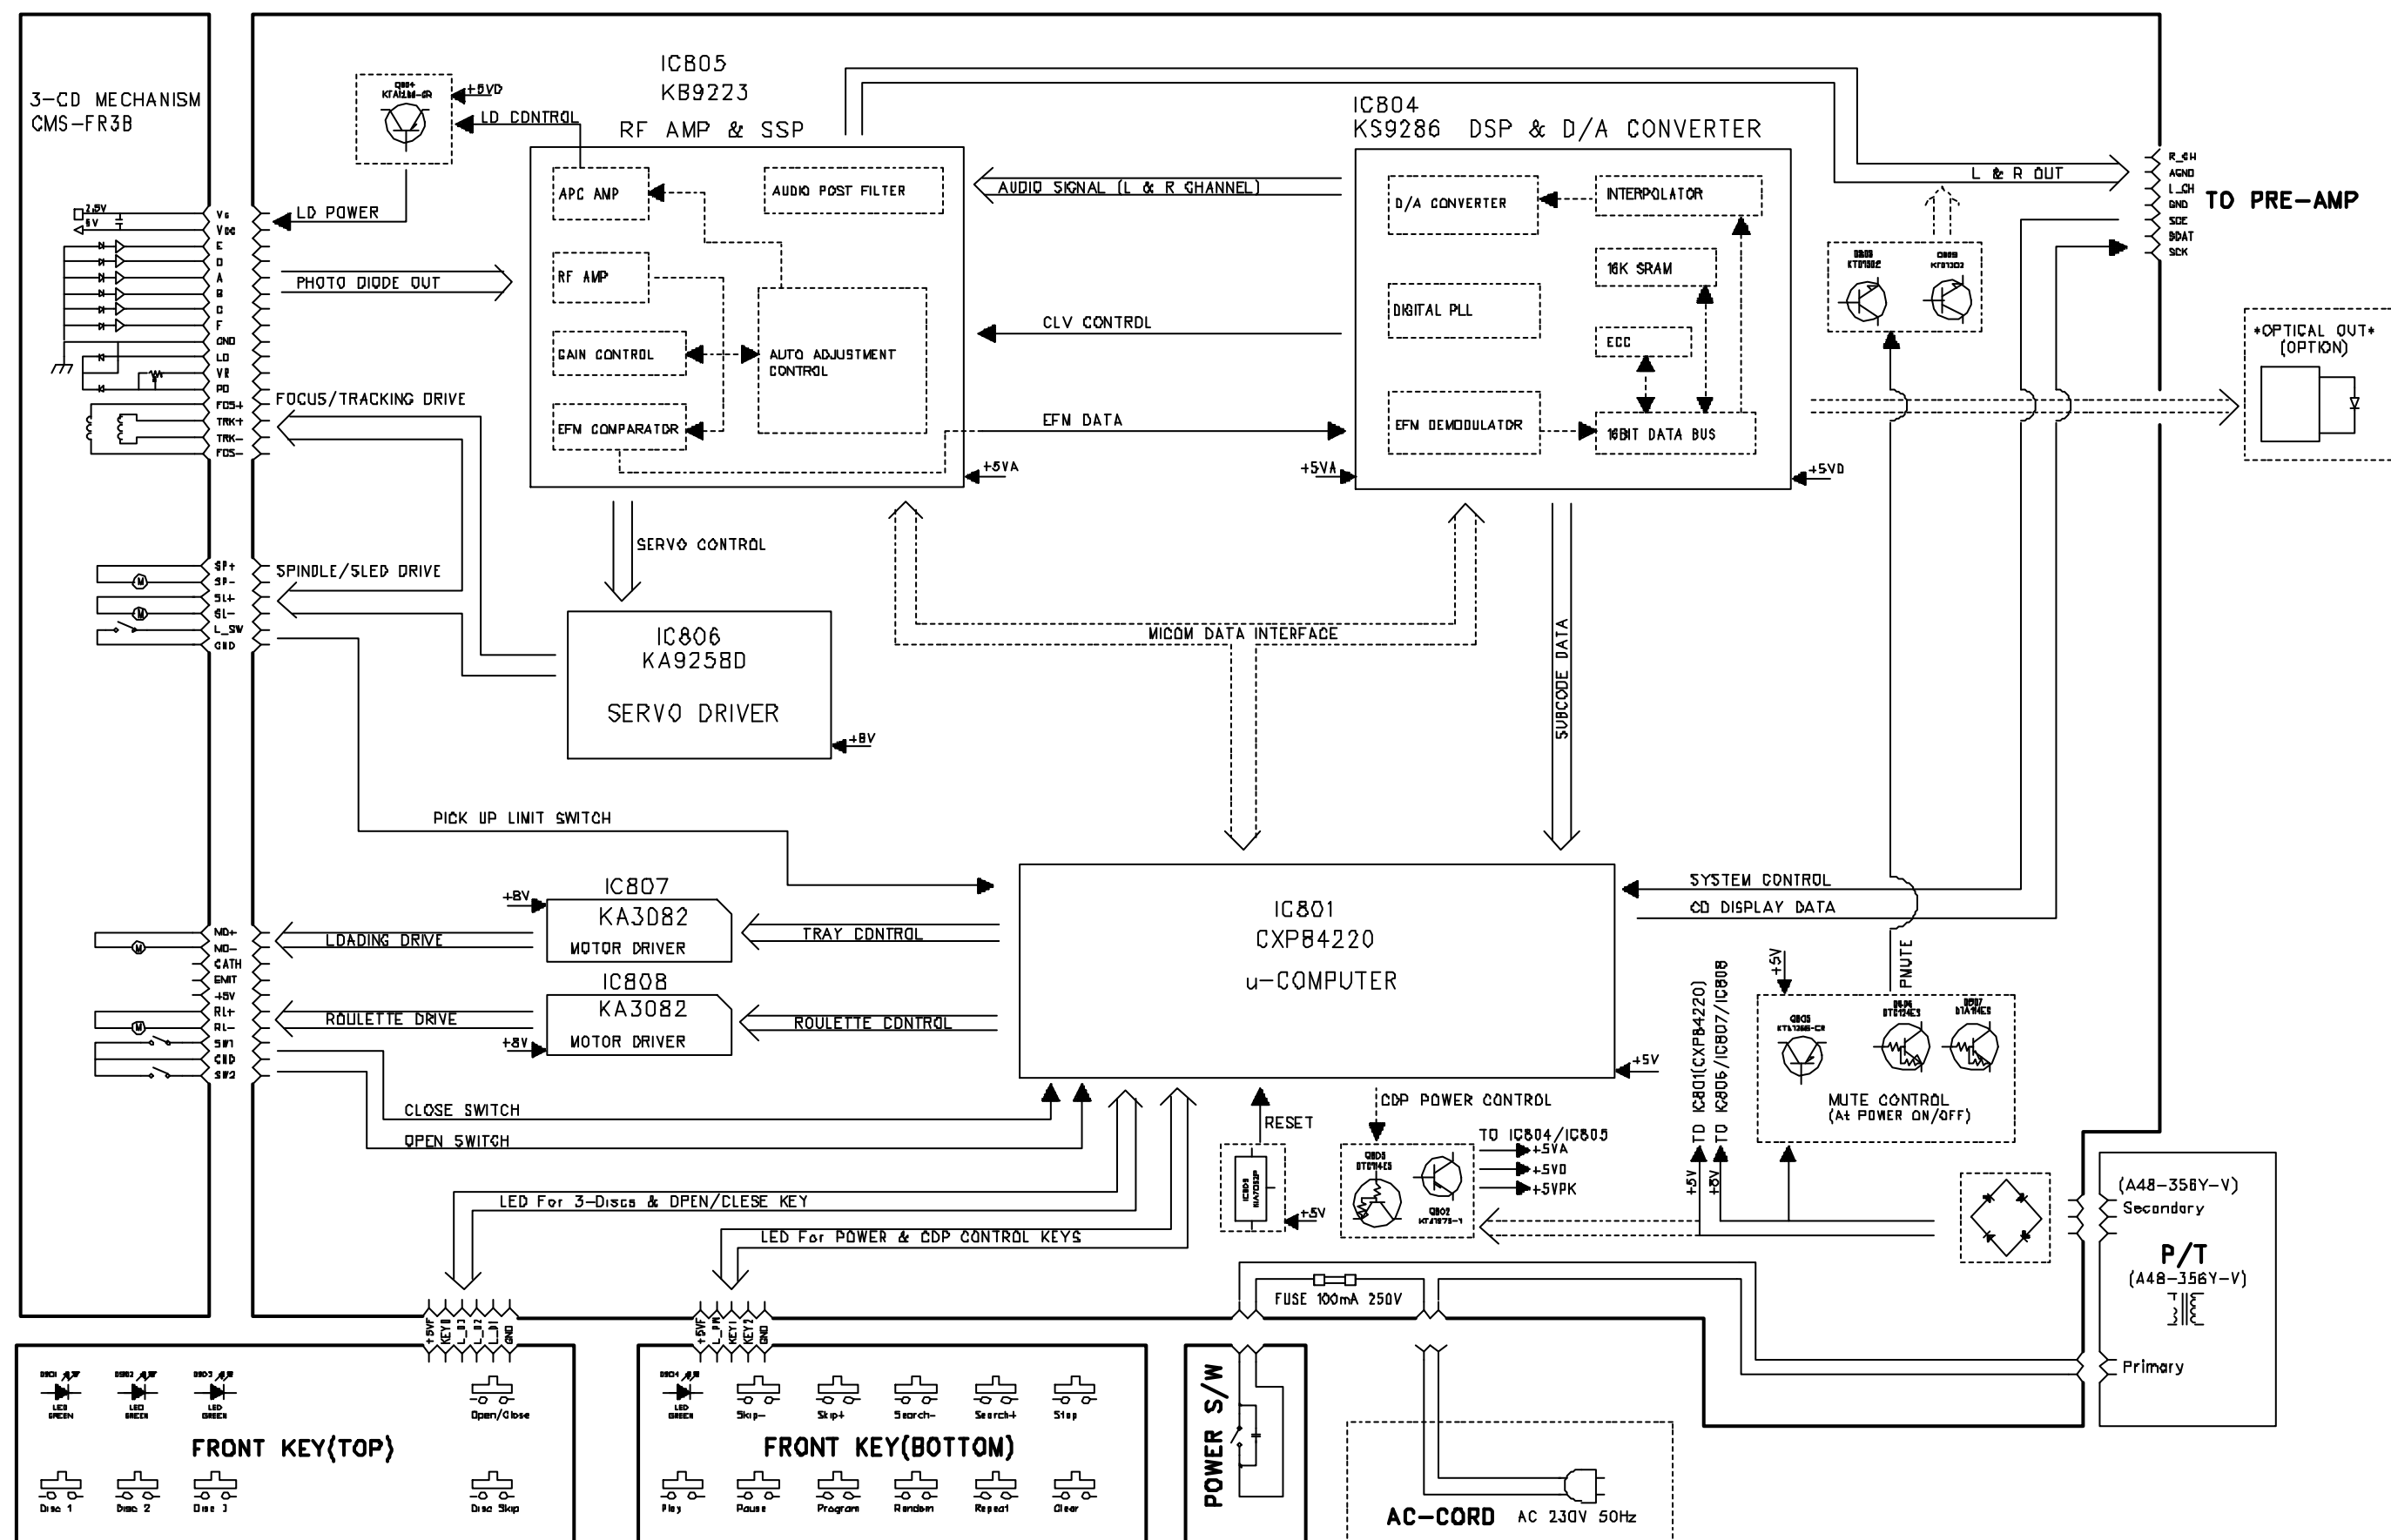

**BLOCK DIAGRAM
PRE/TUNER/FRONT**

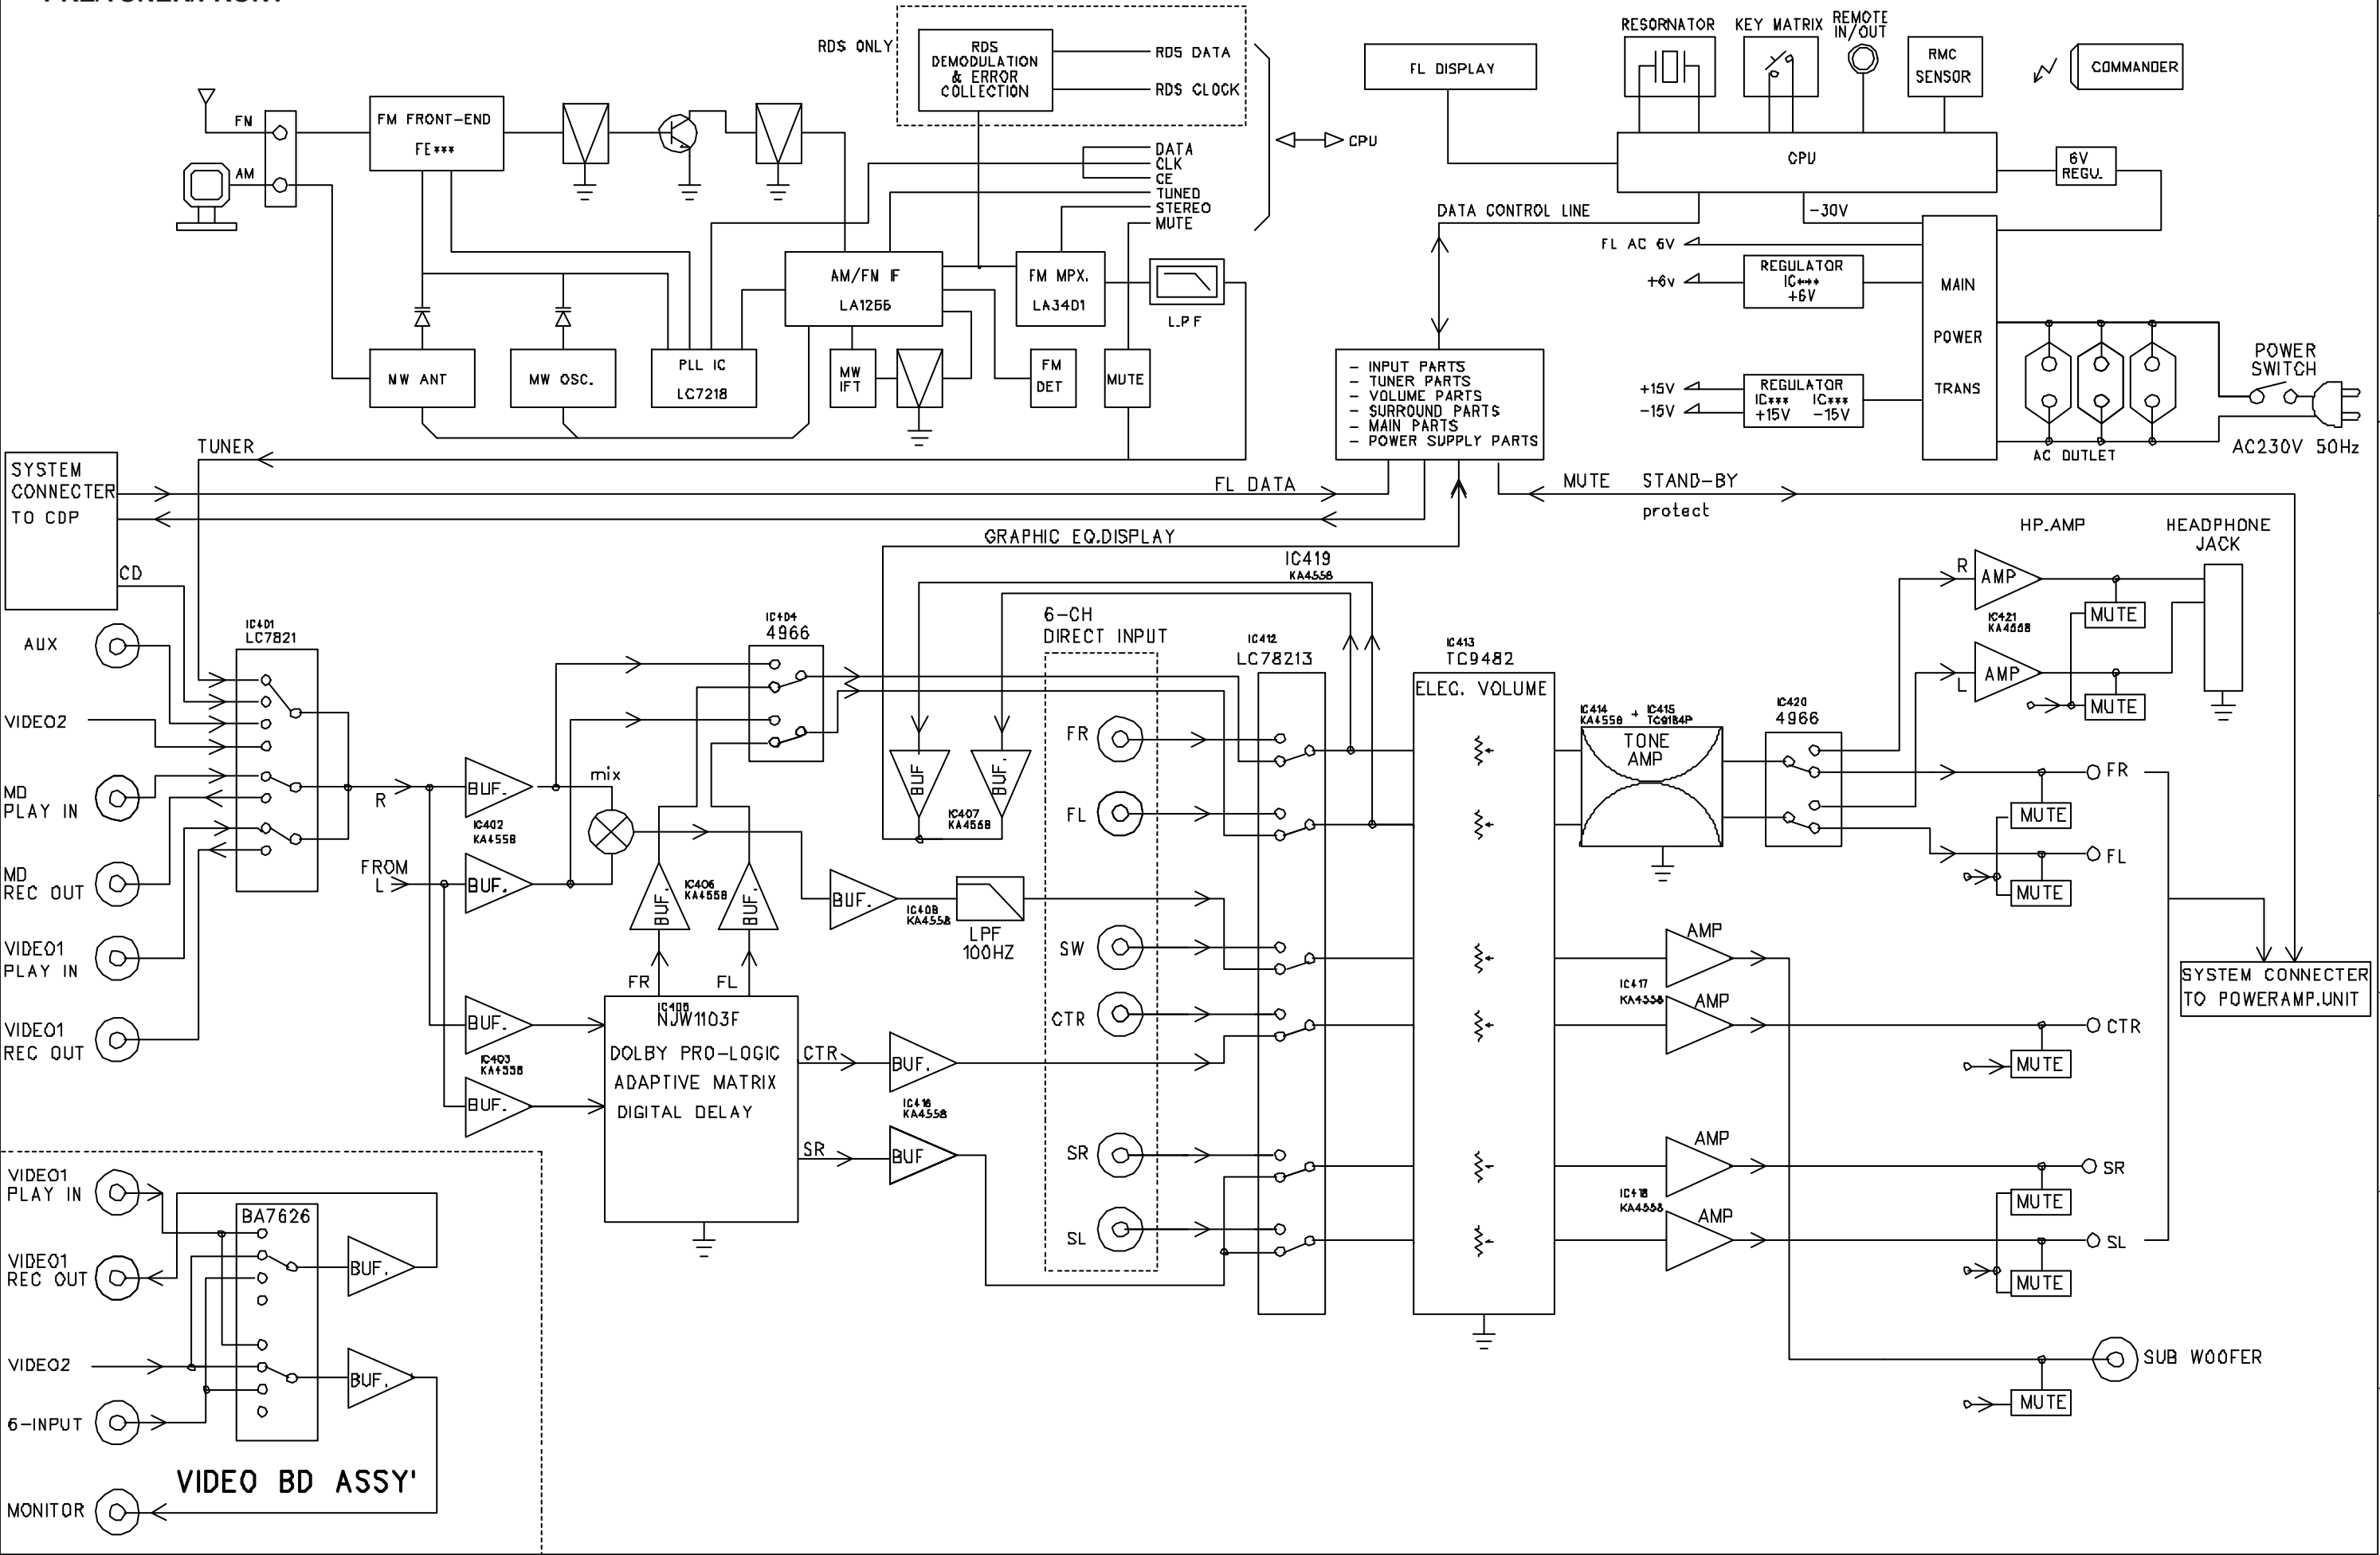

ELECTRICAL PART LIST

Ref. No.	Part No.	Description	
	PRE-AMP BLOCK		
	ASS'Y- MECHANISM		
	MISCELLANEOUS		
	AJAF-16520-014	ASS'Y-FOOT	F40-POWER (ABS+RUBBER2
	ANTL-00060-E50	ANTENNA-LOOP	AAN-007 19.5uH 7T 125x93
	ANTT-00090-075	ANTENNA-T TYPE	75ohm AFN009 3480 W/SOCK
	A2RG-J1000-01E	REMOCON	TRM-F40
	BAMN-00020-150	BATTERY MANGANESE	R06(AAM) 1.5V 14.5x50.
	BTEM-00030-500	FILTER-EMI	ZCAT1325-0530A-M-K
F1	FGFB-S1002-332	FUSE GLASS	1A 250V 5x20 V/S
F2	FGFB-S1002-332	FUSE GLASS	1A 250V 5x20 V/S
F3	FGFB-S1002-332	FUSE GLASS	1A 250V 5x20 V/S
F4	FGFB-S3152-139	FUSE GLASS	3.15A 250V 5.2x20 U/V/B
F5	FGFB-S5001-137	FUSE GLASS	500mA 250V FST034.3114
	KDAC-0562F-AA0	CORD-AC	KKP419C,KLCE-2F CORE&TUB
	KNCH-00090-FS0	CONNECTOR HOUSING	CFG1315-0101 1.5mm 15P
	KNCH-00090-7S0	CONNECTOR HOUSING	CFG1307-0101 1.5mm 7P
	LLA3-18121-E10	CARD CABLE	KF2B 18/120 P7 S9 B9
	LLA3-18181-E10	CARD CABLE	KF2B 18/180 P7 S4 B3
	LLA3-21201-E10	CARD CABLE	1.25x21Px200xCx(0.1x0.8)
	LLA3-21251-E10	CARD CABLE	1.25x21Px250xCx(0.1x0.8)
	MAAF-03420-012	WINDOW-FLT	F40-PRE AMP ACRYL SMOKE
	MAAF-16360-014	LENS-POWER	F40-POWER PMMA 60N
	MAAF-16380-014	FILTER-WINDOW	F40-PRE AMP PVC WINE T0.
	MJAF-06290-011	PANEL-FRONT	F40-PRE AMP HI-PS BLACK
	MJAF-08370-013	KNOB-SELECT	F40-PRE AMP ABS-720
	MJAF-08390-013	KNOB-FUNCTION(A)	F40-PRE AMP ABS-720
	MJAF-08400-013	KNOB-FUNCTION(B)	F40-PRE AMP ABS-720
	MJAF-16060-014	KNOB-SPEAKER	F40-POWER ABS-720
	MJAF-16370-014	KNOB-VOLUME	F40-PRE AMP ABS-720
	MJAF-16410-014	FOOT	F40-PRE AMP ABS-720
	MJAG-00280-003	CORD-BUSH	NIFCO
	MJAG-04540-004	CABLE-TIE-L80	*
	MMAC-16400-004	SCREW-T/P-TOOTH	3X10 BLACK
	MMTC-12180-004	SCREW-BH/W	
	MPAC-04900-012	CHASSIS-BACK	F40-PRE AMP SECC T0.8
	MPAC-04920-012	CHASSIS-TOP	F40-PRE AMP VCM T0.8
	MPAC-06160-001	CHASSIS-BOTTOM	US COATING T1.0
	MRAG-13200-004	CUSHION-A	(FELT 220*9*T0.5)
	MRAG-13220-004	CUSHION-FOOT	(RUBBER 25*19.5*T2)
	MWAW-00970-003	PALLETS	W940*D1150*H141
	PTAG-03650-YJV	TRANSFORMER-POWER	A57-365Y-V
	UF50-9E740-500	WIRE-ASS'Y	UL2468#26 WHT-400 15P
	U348-6A515-480	WIRE-ASS'Y	UL1617#22 BLU-150 3P
	U348-6A540-480	WIRE-ASS'Y	UL1617#22 BLU-400 3P
	U750-0E740-500	WIRE-ASS'Y	UL2468#26 BLK-400 7P
	XSTB-30060-ZY4	SCREW-TAPPING	BHT2T 3x6 FE-ZY
	XSTB-30080-ZB4	SCREW-TAPPING	BHT2T 3x8 FE-ZB
	XSTB-30080-ZY4	SCREW-TAPPING	BHT2T 3x8 FE-ZY
	XSTB-30100-ZB4	SCREW-TAPPING	BHT2T 3x10 FE-ZB
	XSTB-30100-ZY4	SCREW-TAPPING	BHT2T 3x10 FE-ZY
	XSTW-30080-ZY4	SCREW-TAPPING	PH/WT2T 3x8 FE-ZY
	YGAP-14810-014	BOX GIFT	F40-PRE AMP (DW-2 357*42
	YGAP-14820-014	SLEEVE PACKING	F40-POWER (SW-1)
	YGAP-14840-004	BOX-ACCESSORIES	(175*35*30)
	YSAP-12120-002	CUSHION L	(EPS)
	YSAP-12130-002	CUSHION R	(EPS)
	YVAP-01862-014	POLY-BAG-I(G)	TCS-1010
	YVAP-13321-014	TOLON-SHEET	FJ-656 600x1200 0.5
	7JJG-00212-001	PACKING WRAP	500mm*1400m
C300	CEET-J470M-DI0	CAPACITOR E/ALUMINUM	47uF M 50V 6.3x11

Ref. No.	Part No.	Description	
	CAPACITORS		
C301	CEET-J100M-DC0	CAPACITOR E/ALUMINUM	10uF M 50V 6.3x5
C302	CCAT-J473Z-AAF	CAPACITOR CERAMIC	0.047uF Z 50V F T
C303	CCAT-J473Z-AAF	CAPACITOR CERAMIC	0.047uF Z 50V F T
C304	CEET-C470M-CC1	CAPACITOR E/ALUMINUM	47uF M 6.3V 5x5
C306	CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T
C307	CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T
C308	CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T
C312	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C313	CEET-C470M-CC1	CAPACITOR E/ALUMINUM	47uF M 6.3V 5x5
C314	CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T
C315	CCTT-J330J-0DC	CAPACITOR CERAMIC	33PF J 50V CH T
C316	CEET-C470M-CC1	CAPACITOR E/ALUMINUM	47uF M 6.3V 5x5
C317	CCTT-J180J-0BC	CAPACITOR CERAMIC	18PF J 50V CH T
C318	CCTT-J330J-0DC	CAPACITOR CERAMIC	33PF J 50V CH T
C319	CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T
C320	CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T
C321	CCAT-F103Z-AAF	CAPACITOR CERAMIC	0.01uF Z 25V F T
C380	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C381	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C382	CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T
C383	CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T
C384	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C385	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C386	CCTT-J221J-0JC	CAPACITOR CERAMIC	220PF J 50V CH T
C387	CCTT-J221J-0JC	CAPACITOR CERAMIC	220PF J 50V CH T
C388	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C389	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C583	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C584	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C585	CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T
C586	CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T
C587	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C588	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C589	CCTT-J221J-0JC	CAPACITOR CERAMIC	220PF J 50V CH T
C590	CCTT-J221J-0JC	CAPACITOR CERAMIC	220PF J 50V CH T
C591	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C592	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C595	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF Z 50V F T
C596	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF Z 50V F T
C597	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF Z 50V F T
C601	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C602	CCCT-J223Z-OFF	CAPACITOR CERAMIC	0.022uF Z 50V F T
C604	CCAT-F223Z-AAF	CAPACITOR CERAMIC	0.022uF Z 25V F T
C605	CEET-E470M-DC0	CAPACITOR E/ALUMINUM	47uF M 16V 6.3x5
C606	CCAT-F223Z-AAF	CAPACITOR CERAMIC	0.022uF Z 25V F T
C607	CCAT-F223Z-AAF	CAPACITOR CERAMIC	0.022uF Z 25V F T
C608	CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T
C609	CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T
C610	CCTT-J221J-0JC	CAPACITOR CERAMIC	220PF J 50V CH T
C611	CCCT-J473Z-0JF	CAPACITOR CERAMIC	0.047uF Z 50V F T
C613	CCTT-J100D-0BC	CAPACITOR CERAMIC	10PF D 50V CH T
C614	CCTT-J221J-0JC	CAPACITOR CERAMIC	220PF J 50V CH T
C615	CEET-G100M-CI0	CAPACITOR E/ALUMINUM	10uF M 35V 5x11
C616	CCCT-J223Z-OFF	CAPACITOR CERAMIC	0.022uF Z 50V F T
C617	CCAT-F223Z-AAF	CAPACITOR CERAMIC	0.022uF Z 25V F T
C618	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C619	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C620	CCCT-J223Z-OFF	CAPACITOR CERAMIC	0.022uF Z 50V F T
C621	CFMT-N223J-EK0	CAPACITOR F/POLYESTR	0.022uF J 100V 7.4x13
C622	CEET-J3R3M-CI0	CAPACITOR E/ALUMINUM	3.3uF M 50V 5x11

Ref. No.	Part No.	Description	
	CAPACITORS		
C623	CFMT-N332J-DJ0	CAPACITOR F/POLYESTR	0.0033uF J 100V 5.8x12
C624	CFMT-N393J-FK0	CAPACITOR F/POLYESTR	0.039uF J 100V 8.5x13.
C625	CCAT-F103Z-AAF	CAPACITOR CERAMIC	0.01uF Z 25V F T
C626	CEET-JR47M-CI0	CAPACITOR E/ALUMINUM	0.47uF M 50V 5x11
C627	CCCT-J223Z-OFF	CAPACITOR CERAMIC	0.022uF Z 50V F T
C628	CCCT-J223Z-OFF	CAPACITOR CERAMIC	0.022uF Z 50V F T
C629	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C630	CCCT-J473Z-OJF	CAPACITOR CERAMIC	0.047uF Z 50V F T
C631	CCTT-J331J-0FZ	CAPACITOR CERAMIC	330PF J 50V SL T
C632	CCTT-J181J-0DZ	CAPACITOR CERAMIC	180PF J 50V SL T
C633	CCTT-J910J-0FC	CAPACITOR CERAMIC	91PF J 50V CH T
C634	CCCT-J223Z-OFF	CAPACITOR CERAMIC	0.022uF Z 50V F T
C635	CCCT-J103Z-0DF	CAPACITOR CERAMIC	0.01uF Z 50V F T
C636	CCCT-J223Z-OFF	CAPACITOR CERAMIC	0.022uF Z 50V F T
C637	CCTT-J300J-0CC	CAPACITOR CERAMIC	30PF J 50V CH T
C638	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C639	CCTT-J300J-0CC	CAPACITOR CERAMIC	30PF J 50V CH T
C640	CEET-JR47M-CI0	CAPACITOR E/ALUMINUM	0.47uF M 50V 5x11
C641	CCCT-J103Z-0DF	CAPACITOR CERAMIC	0.01uF Z 50V F T
C642	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C643	CCCT-J223Z-OFF	CAPACITOR CERAMIC	0.022uF Z 50V F T
C644	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C645	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C646	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C647	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C649	CEET-G100M-CI0	CAPACITOR E/ALUMINUM	10uF M 35V 5x11
C650	CEET-J2R2M-CI0	CAPACITOR E/ALUMINUM	2.2uF M 50V 5x11
C651	CEET-J2R2M-CI0	CAPACITOR E/ALUMINUM	2.2uF M 50V 5x11
C652	CCAT-J100J-AAC	CAPACITOR CERAMIC	10PF J 50V C T
C653	CCAT-J100J-AAC	CAPACITOR CERAMIC	10PF J 50V C T
C654	CCAT-J221K-AAB	CAPACITOR CERAMIC	220PF K 50V B T
C655	CCAT-J221K-AAB	CAPACITOR CERAMIC	220PF K 50V B T
C656	CEET-G100M-CI0	CAPACITOR E/ALUMINUM	10uF M 35V 5x11
C657	CCCT-J681K-0BB	CAPACITOR CERAMIC	680PF K 50V B T
C658	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C659	CEET-G100M-CI0	CAPACITOR E/ALUMINUM	10uF M 35V 5x11
C660	CCAT-J473Z-AAF	CAPACITOR CERAMIC	0.047uF Z 50V F T
C661	CEET-E101M-DI0	CAPACITOR E/ALUMINUM	100uF M 16V 6.3x11
C662	CEET-J1R0M-CI0	CAPACITOR E/ALUMINUM	1.0uF M 50V 5x11
C663	CEET-JR22M-CI0	CAPACITOR E/ALUMINUM	0.22uF M 50V 5x11
C664	CEET-J1R0M-CI0	CAPACITOR E/ALUMINUM	1.0uF M 50V 5x11
C665	CCCT-J223Z-OFF	CAPACITOR CERAMIC	0.022uF Z 50V F T
C666	CCAT-J271K-AAB	CAPACITOR CERAMIC	270PF K 50V B T
C667	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C668	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF Z 50V F T
C669	CCAT-F223Z-AAF	CAPACITOR CERAMIC	0.022uF Z 25V F T
C670	CCAT-F223Z-AAF	CAPACITOR CERAMIC	0.022uF Z 25V F T
C671	CEET-G100M-CC0	CAPACITOR E/ALUMINUM	10uF M 35V 5x5
C673	CCTT-J100D-0BC	CAPACITOR CERAMIC	10PF D 50V CH T
C674	CCTT-J100D-0BC	CAPACITOR CERAMIC	10PF D 50V CH T
C675	CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T
C676	CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T
C677	CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T
C701	CEET-F330M-CI0	CAPACITOR E/ALUMINUM	33uF M 25V 5x11
C702	CEET-D471M-FI1	CAPACITOR E/ALUMINUM	470uF M 10V 8x11.5 U
C703	CEET-F330M-CI0	CAPACITOR E/ALUMINUM	33uF M 25V 5x11
C704	CEET-D471M-FI1	CAPACITOR E/ALUMINUM	470uF M 10V 8x11.5 U
C705	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF Z 50V F T
C706	CEET-D471M-FI1	CAPACITOR E/ALUMINUM	470uF M 10V 8x11.5 U
C708	CCCT-J222K-0DB	CAPACITOR CERAMIC	2200PF K 50V B T

Ref. No.	Part No.	Description	
CAPACITORS			
C709	CCCT-J222K-0DB	CAPACITOR CERAMIC	2200PF K 50V B T
C713	CEET-F330M-CI0	CAPACITOR E/ALUMINUM	33uF M 25V 5x11
C714	CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T
C715	CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T
C716	CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T
C717	CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T
C744	CACS-S102K-181	CAPACITOR AC	DE7090 B102KVA1 250V BS4
C746	CEET-C221M-DE0	CAPACITOR E/ALUMINUM	220uF M 6.3V 6.3x7
C747	CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T
C748	CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T
C749	CEET-J4R7M-BC0	CAPACITOR E/ALUMINUM	4.7uF M 50V 4x5
C750	CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T
C751	CCCT-J332K-0DB	CAPACITOR CERAMIC	3300PF K 50V B T
C754	CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T
C755	CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T
C757	CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T
C758	CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T
C759	CCCT-J102K-0BB	CAPACITOR CERAMIC	1000PF K 50V B T
C760	CCCT-J102K-0BB	CAPACITOR CERAMIC	1000PF K 50V B T
C761	CCCT-J102K-0BB	CAPACITOR CERAMIC	1000PF K 50V B T
C762	CCTT-J561J-0HZ	CAPACITOR CERAMIC	560PF J 50V SL T
C763	CCTT-J561J-0HZ	CAPACITOR CERAMIC	560PF J 50V SL T
C764	CCAT-F223Z-AAF	CAPACITOR CERAMIC	0.022uF Z 25V F T
C765	CEET-J3R3M-CI0	CAPACITOR E/ALUMINUM	3.3uF M 50V 5x11
	CEGS-B473J-QJ0	CAPACITOR E/DO LAYER	0.047 J 5.5V SCDA5R5473H
DIODES			
VD601	DDSV-00120-S10	DIODE-VVC	SVC321SPA-C2 AM8V DO40S
VD602	DDSV-00120-S10	DIODE-VVC	SVC321SPA-C2 AM8V DO40S
D302	DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40
D309	DDTR-00040-T10	DIODE-RECTIFIER	1N4004S(400V 1A 0.6mm)
D602	DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40
D603	DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40
D604	DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40
D606	DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40
D607	DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40
ZD601	DDTZ-G051B-SOS	DIODE ZENER	MTZJ5.1B 4.94-5.20 DO34
ZD602	DDTZ-G051B-SOS	DIODE ZENER	MTZJ5.1B 4.94-5.20 DO34
ZD605	DDTZ-G075B-SO0	DIODE ZENER	MTZ7.5B 7.07-7.45 D040
DP1	DPFL-00720-00A	DISPLAY-FLUORSCENT	HNA-16LM12
LD300	DPLT-00860-GG5	DOT-LED	LTL-307G GRN R5
INTEGRATED CIRCUITS			
IC300	ICMP-03700-S40	MICOM	CXP82224-146Q
IC302	ICLN-03800-TQ0	IC EQ	MSGEQ7 DIP8
IC303	ICHY-00371-U80	IC REMOTE RECEIVER	HI-M602H
IC323	ICRG-00570-SD0	IC SYSTEM RESET	KIA7021P/F 2.1V TO-92
IC417	ICOP-03120-SG0	IC DUAL OP AMP	NJM4580D
IC418	ICOP-03120-SG0	IC DUAL OP AMP	NJM4580D
IC601	ICLN-03620-S10	IC AM/FM IF	LA1266 DIP24
IC602	ICLN-03680-S10	IC PLL	LC7218JM SOP-24
IC603	ICLN-03610-S10	IC PLL FM MPX	LA3401 DIP22
IC604	ICLN-03630-SR0	IC RDS DEMODULATOR	TDA7479D SOP16
IC605	ICRG-00500-SD0	IC REGULATOR	KIA78S12P
IC701	ICCM-20630-SO0	IC VIDEO SWITCHER	BA7626 DIP16
COILS			
L602	KIFK-00080-E20	COIL-FM CHOKE	AFK016 A187LY-K5006 20.8
L603	KI0T-4101K-003	COIL-INDUCTOR	100uH K LA 40 T L 02
T601	KIAT-00530-E20	COIL-AM ANT	AAT053 MW 7mm - CAN

Ref. No.	Part No.	Description	
COILS			
T602	KIAO-00460-E20	COIL-AM OSC	AAO046 MW 7mm - CAN
T603	KIAA-00260-E20	COIL-AM IFT	AAA-026 7MC-K502713N4-KR
T604	IFFA-00110-E20	IFT-FM	AFA011 7mm-CAN
T605	IFFD-00100-E20	IFT-FM DET	AFD010 7mm-CAN
T606	KIML-A0010-E20	COIL-FM MPX FILTER	AMA001 19KHz 10mm-CAN
T607	KIML-A0010-E20	COIL-FM MPX FILTER	AMA001 19KHz 10mm-CAN
RESISTORS			
R273	RCFT-E332J-000	RESISTOR-CARBON FILM	3.3Kohm 1/5W 5% T
R301	RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T
R302	RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T
R303	RCFT-E333J-000	RESISTOR-CARBON FILM	33Kohm 1/5W 5% T
R304	RCFT-E105J-000	RESISTOR-CARBON FILM	1Mohm 1/5W 5% T
R309	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R310	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R312	RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T
R313	RCFT-E204J-000	RESISTOR-CARBON FILM	200Kohm 1/5W 5% T
R314	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R315	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R316	RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T
R318	RCFT-E122J-000	RESISTOR-CARBON FILM	1.2Kohm 1/5W 5% T
R319	RCFT-E152J-000	RESISTOR-CARBON FILM	1.5Kohm 1/5W 5% T
R320	RCFT-E122J-000	RESISTOR-CARBON FILM	1.2Kohm 1/5W 5% T
R321	RCFT-E152J-000	RESISTOR-CARBON FILM	1.5Kohm 1/5W 5% T
R322	RCFT-E222J-000	RESISTOR-CARBON FILM	2.2Kohm 1/5W 5% T
R323	RCFT-E222J-000	RESISTOR-CARBON FILM	2.2Kohm 1/5W 5% T
R324	RCFT-E332J-000	RESISTOR-CARBON FILM	3.3Kohm 1/5W 5% T
R325	RCFT-E332J-000	RESISTOR-CARBON FILM	3.3Kohm 1/5W 5% T
R326	RCFT-E472J-000	RESISTOR-CARBON FILM	4.7Kohm 1/5W 5% T
R327	RCFT-E472J-000	RESISTOR-CARBON FILM	4.7Kohm 1/5W 5% T
R328	RCFT-E822J-000	RESISTOR-CARBON FILM	8.2Kohm 1/5W 5% T
R329	RCFT-E822J-000	RESISTOR-CARBON FILM	8.2Kohm 1/5W 5% T
R330	RCFT-E153J-000	RESISTOR-CARBON FILM	15Kohm 1/5W 5% T
R332	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R333	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R334	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R335	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R336	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R338	RCFT-E105J-000	RESISTOR-CARBON FILM	1Mohm 1/5W 5% T
R369	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R370	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R371	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R372	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R373	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R376	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R385	RCFT-E473J-000	RESISTOR-CARBON FILM	47Kohm 1/5W 5% T
R387	RCFT-E473J-000	RESISTOR-CARBON FILM	47Kohm 1/5W 5% T
R388	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R389	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R390	RCFT-E153J-000	RESISTOR-CARBON FILM	15Kohm 1/5W 5% T
R391	RCFT-E225J-000	RESISTOR-CARBON FILM	2.2Mohm 1/5W 5% T
R395	RCFT-E222J-000	RESISTOR-CARBON FILM	2.2Kohm 1/5W 5% T
R396	RCFT-E153J-000	RESISTOR-CARBON FILM	15Kohm 1/5W 5% T
R397	RCFT-E225J-000	RESISTOR-CARBON FILM	2.2Mohm 1/5W 5% T
R398	RCFT-E222J-000	RESISTOR-CARBON FILM	2.2Kohm 1/5W 5% T
R399	RCFT-E222J-000	RESISTOR-CARBON FILM	2.2Kohm 1/5W 5% T
R524	RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T
R529	RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T
R530	RCFT-E751J-000	RESISTOR-CARBON FILM	750ohm 1/5W 5% T
R531	RCFT-E751J-000	RESISTOR-CARBON FILM	750ohm 1/5W 5% T

Ref. No.	Part No.	Description	
	RESISTORS		
R532	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R533	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R534	RCFT-E221J-000	RESISTOR-CARBON FILM	220ohm 1/5W 5% T
R535	RCFT-E221J-000	RESISTOR-CARBON FILM	220ohm 1/5W 5% T
R536	RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T
R537	RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T
R538	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R539	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R551	RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T
R552	RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T
R553	RCFT-E751J-000	RESISTOR-CARBON FILM	750ohm 1/5W 5% T
R554	RCFT-E751J-000	RESISTOR-CARBON FILM	750ohm 1/5W 5% T
R555	RCFT-E221J-000	RESISTOR-CARBON FILM	220ohm 1/5W 5% T
R556	RCFT-E221J-000	RESISTOR-CARBON FILM	220ohm 1/5W 5% T
R557	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R558	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R559	RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T
R560	RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T
R561	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R562	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R604	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R605	RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T
R606	RCFT-E152J-000	RESISTOR-CARBON FILM	1.5Kohm 1/5W 5% T
R607	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R608	RCFT-E331J-000	RESISTOR-CARBON FILM	330ohm 1/5W 5% T
R609	RCFT-E331J-000	RESISTOR-CARBON FILM	330ohm 1/5W 5% T
R610	RCFT-E7R5J-000	RESISTOR-CARBON FILM	7.5ohm 1/5W 5% T
R611	RCFT-E271J-000	RESISTOR-CARBON FILM	270ohm 1/5W 5% T
R613	RCFT-E221J-000	RESISTOR-CARBON FILM	220ohm 1/5W 5% T
R614	RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T
R618	RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T
R621	RCFT-E222J-000	RESISTOR-CARBON FILM	2.2Kohm 1/5W 5% T
R622	RCFT-E683J-000	RESISTOR-CARBON FILM	68Kohm 1/5W 5% T
R623	RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T
R624	RCFT-E473J-000	RESISTOR-CARBON FILM	47Kohm 1/5W 5% T
R626	RCFT-E472J-000	RESISTOR-CARBON FILM	4.7Kohm 1/5W 5% T
R627	RCFT-E220J-000	RESISTOR-CARBON FILM	22ohm 1/5W 5% T
R628	RCFT-E472J-000	RESISTOR-CARBON FILM	4.7Kohm 1/5W 5% T
R629	RCFT-E472J-000	RESISTOR-CARBON FILM	4.7Kohm 1/5W 5% T
R630	RCFT-E682J-000	RESISTOR-CARBON FILM	6.8Kohm 1/5W 5% T
R631	RCFT-E222J-000	RESISTOR-CARBON FILM	2.2Kohm 1/5W 5% T
R632	RCFT-E152J-000	RESISTOR-CARBON FILM	1.5Kohm 1/5W 5% T
R633	RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T
R634	RCFT-E473J-000	RESISTOR-CARBON FILM	47Kohm 1/5W 5% T
R635	RCFT-E823J-000	RESISTOR-CARBON FILM	82Kohm 1/5W 5% T
R636	RCFT-E220J-000	RESISTOR-CARBON FILM	22ohm 1/5W 5% T
R637	RCFT-E151J-000	RESISTOR-CARBON FILM	150ohm 1/5W 5% T
R638	RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T
R639	RCFT-E225J-000	RESISTOR-CARBON FILM	2.2Mohm 1/5W 5% T
R640	RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T
R641	RCFT-E473J-000	RESISTOR-CARBON FILM	47Kohm 1/5W 5% T
R642	RCFT-E332J-000	RESISTOR-CARBON FILM	3.3Kohm 1/5W 5% T
R643	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R645	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R646	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R647	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R648	RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T
R649	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R650	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R651	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T

Ref. No.	Part No.	Description	
	RESISTORS		
R659	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R660	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R661	RCFT-E152J-000	RESISTOR-CARBON FILM	1.5Kohm 1/5W 5% T
R662	RCFT-E152J-000	RESISTOR-CARBON FILM	1.5Kohm 1/5W 5% T
R663	RCFT-E272J-000	RESISTOR-CARBON FILM	2.7Kohm 1/5W 5% T
R664	RCFT-E272J-000	RESISTOR-CARBON FILM	2.7Kohm 1/5W 5% T
R665	RCFT-E622J-000	RESISTOR-CARBON FILM	6.2Kohm 1/5W 5% T
R666	RCFT-E622J-000	RESISTOR-CARBON FILM	6.2Kohm 1/5W 5% T
R667	RCFT-E274J-000	RESISTOR-CARBON FILM	270Kohm 1/5W 5% T
R668	RCFT-E274J-000	RESISTOR-CARBON FILM	270Kohm 1/5W 5% T
R669	RCFT-E224J-000	RESISTOR-CARBON FILM	220Kohm 1/5W 5% T
R670	RCFT-E224J-000	RESISTOR-CARBON FILM	220Kohm 1/5W 5% T
R671	RCFT-E473J-000	RESISTOR-CARBON FILM	47Kohm 1/5W 5% T
R672	RCFT-E221J-000	RESISTOR-CARBON FILM	220ohm 1/5W 5% T
R673	RCFT-E221J-000	RESISTOR-CARBON FILM	220ohm 1/5W 5% T
R674	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R675	RCFT-E473J-000	RESISTOR-CARBON FILM	47Kohm 1/5W 5% T
R676	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R677	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R678	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R679	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R680	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R681	RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T
R683	RCFT-E182J-000	RESISTOR-CARBON FILM	1.8Kohm 1/5W 5% T
R684	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R701	RCFT-E750J-000	RESISTOR-CARBON FILM	75ohm 1/5W 5% T
R702	RCFT-E750J-000	RESISTOR-CARBON FILM	75ohm 1/5W 5% T
R703	RCFT-E750J-000	RESISTOR-CARBON FILM	75ohm 1/5W 5% T
R704	RCFT-E750J-000	RESISTOR-CARBON FILM	75ohm 1/5W 5% T
R705	RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T
R706	RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T
R707	RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T
R708	RCFT-E3R3J-000	RESISTOR-CARBON FILM	3.3ohm 1/5W 5% T
R709	RCFT-E152J-000	RESISTOR-CARBON FILM	1.5Kohm 1/5W 5% T
R710	RCFT-E152J-000	RESISTOR-CARBON FILM	1.5Kohm 1/5W 5% T
R711	RCFT-E750J-000	RESISTOR-CARBON FILM	75ohm 1/5W 5% T
R712	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R713	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R717	RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T
R718	RCFT-E225J-000	RESISTOR-CARBON FILM	2.2Mohm 1/5W 5% T
R721	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R723	RCFT-E222J-000	RESISTOR-CARBON FILM	2.2Kohm 1/5W 5% T
R724	RCFT-E153J-000	RESISTOR-CARBON FILM	15Kohm 1/5W 5% T
R726	RCFT-E151J-000	RESISTOR-CARBON FILM	150ohm 1/5W 5% T
	TRANSISTORS		
Q301	TRTC-01700-SD0	TRANSISTOR N-H FREQ	KRC107M W/RESIST TO92M
Q409	TRTA-00940-SD0	TRANSISTOR P-H FREQ	KRA107M W/RESIST TO92M
Q410	TRTC-01700-SD0	TRANSISTOR N-H FREQ	KRC107M W/RESIST TO92M
Q411	TRTD-00200-SD0	TRANSISTOR N-L FREQ	KTD-1302 TO92
Q412	TRTA-00940-SD0	TRANSISTOR P-H FREQ	KRA107M W/RESIST TO92M
Q413	TRTC-01700-SD0	TRANSISTOR N-H FREQ	KRC107M W/RESIST TO92M
Q414	TRTD-00200-SD0	TRANSISTOR N-L FREQ	KTD-1302 TO92
Q415	TRTD-00200-SD0	TRANSISTOR N-L FREQ	KTD-1302 TO92
Q601	TRTC-0010Y-SD0	TRANSISTOR N-H FREQ	KTC3194-Y TO92
Q603	TRTC-0015G-SD0	TRANSISTOR N-H FREQ	KTC3200-GR TO92
Q605	TRTA-00940-SD0	TRANSISTOR P-H FREQ	KRA107M W/RESIST TO92M
Q606	TRTA-00940-SD0	TRANSISTOR P-H FREQ	KRA107M W/RESIST TO92M
Q607	TRTA-00940-SD0	TRANSISTOR P-H FREQ	KRA107M W/RESIST TO92M
Q608	TRTA-00940-SD0	TRANSISTOR P-H FREQ	KRA107M W/RESIST TO92M

Ref. No.	Part No.	Description	
TRANSISTORS			
Q609	TRTD-00200-SD0	TRANSISTOR N-L FREQ	KTD-1302 TO92
Q610	TRTD-00200-SD0	TRANSISTOR N-L FREQ	KTD-1302 TO92
Q611	TRTC-0015G-SD0	TRANSISTOR N-H FREQ	KTC3200-GR TO92
Q612	TRTC-0015G-SD0	TRANSISTOR N-H FREQ	KTC3200-GR TO92
Q618	TRTA-00940-SD0	TRANSISTOR P-H FREQ	KRA107M W/RESIST TO92M
Q701	TRTA-0008Y-SD0	TRANSISTOR P-H FREQ	KTA1266-Y TO92
Q702	TRTA-0008Y-SD0	TRANSISTOR P-H FREQ	KTA1266-Y TO92
CONTROLS			
CT601	VCTC-00022-200	TRIMMER	CVCN06C200
VR601	VFEB-A022C-103	RESISTOR-SEMI FIXED	RH063MC14R 10Kohm
VR603	VFEB-A022C-224	RESISTOR-SEMI FIXED	RH063MCJ5R 220Kohm
VR602	VFEB-A022C-473	RESISTOR-SEMI FIXED	RH063MCS4R 47Kohm
MISCELLANEOUS			
CF601	BTBP-00140-BPM	FILTER-MICA PRINT	GFMB3-T
CF602	BTCE-00040-107	FILTER-CERAMIC	SFE10.7MS2-A-TF21
CF604	BTCE-00450-045	FILTER-CERAMIC	AHCFM2-450AL
CF606	BTCE-00152-107	FILTER-CERAMIC	SFE10.7MJA10H-A-TF21
DP1	DPFL-00720-00A	DISPLAY-FLUORSCENT	HNA-16LM12
J315	KNCW-00140-9TM	CONNECTOR-WAFER	5267-09A 2.5mm MILK
J325	KNCW-00240-4T9	CONNECTOR-WAFER	53014-04 2.0mm WHT
TP1	KNCW-00240-4T9	CONNECTOR-WAFER	53014-04 2.0mm WHT
	KNCW-00240-2T9	CONNECTOR-WAFER	53014-02 2.0mm WHT
CN5	KNCW-00380-FS0	CONNECTOR WAFER	CFG1115-0101 1.5mm 15P
CN5	KNCW-00380-7S0	CONNECTOR WAFER	CFG1107-0101 1.5mm 7P
CN413	KNCW-06531-18T	CONNECTOR-WAFER	00-6216-018-110-808A 18P
CN414	KNCW-06531-18T	CONNECTOR-WAFER	00-6216-018-110-808A 18P
CW19	KNCW-00990-2T9	CONNECTOR-WAFER	JE202A-1T-02
J302	KNCW-06531-21T	CONNECTOR-WAFER	00-6216-021-110-808A 21P
J321	KNCW-00990-2T9	CONNECTOR-WAFER	JE202A-1T-02
J322	KNCW-00990-2T9	CONNECTOR-WAFER	JE202A-1T-02
J323	KNCW-00990-2T9	CONNECTOR-WAFER	JE202A-1T-02
J326	KNCW-06531-21T	CONNECTOR-WAFER	00-6216-021-110-808A 21P
TP601	KNCW-01490-2T9	CONNECTOR-WAFER	JE115-AT-02P
TP602	KNCW-01490-2T9	CONNECTOR-WAFER	JE115-AT-02P
TP603	KNCW-01490-2T9	CONNECTOR-WAFER	JE115-AT-02P
	KNCW-01510-ES9	CONNECTOR-WAFER	35237-1410 2M/M 14P
X301	KTRE-00220-080	RESONATOR	CST8.00MTW-TF01
X302	KTAL-00360-327	CRYSTAL	QW-6 32.768kHz
X601	KTAL-00041-072	CRYSTAL	HC-49/U 7.200000MHz
X602	KTAL-00321-433	CRYSTAL	HC-49/U 4.332MHz
CF605	KTRE-00300-288	RESONATOR	ZTB456F11
FC301	MPAC-11620-004	FUSE CLIP	5.2Pi TAPPING TYPE
FC302	MPAC-11620-004	FUSE CLIP	5.2Pi TAPPING TYPE
	MRAG-13180-004	CUSHION-A	(EVA 45*10*T2)
	MRAG-13190-004	CUSHION-A	(EVA 8*8*T7)
PCB1	PCSF-05130-11B	PCB-SINGLE	A1F-513 330x247x1.
JK701	SKRC-00770-060	SOCKET-RCA	JC0300121N
JK702	SKPH-00252-66W	SOCKET-PHONE	HTJ064-05A(G) W/NUT WASH
JK703	SKRC-00251-041	PIN JACK BOARD	JC0401005N
SW301	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA
SW302	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA
SW303	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA
SW304	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA
SW305	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA
SW306	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA
SW307	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA
SW308	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA
SW309	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA

Ref. No.	Part No.	Description	
MISCELLANEOUS			
SW310	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA
SW311	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA
SW312	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA
SW313	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA
SW314	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA
SW315	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA
SW316	VRAE-E052B-220	VR-ROTARY	EC16B22040A
SW701	SWPU-00591-059	SWITCH-PUSH	SDDL13300
	TEAT-00160-02S	TERMINAL ANTENNA	SC0210392N
FE601	TUFF-00310-00K	FRONT-END	FTE4-400TA
J328	U208-1M710-250	WIRE-ASS'Y	UL1007#26 BRN-100 2P
J306	U908-8M725-250	WIRE-ASS'Y	UL1007#26 GRY-250 9P
J308	U808-7M725-250	WIRE-ASS'Y	UL1007#26 VIT-250 8P
J315	U910-8M715-200	WIRE-ASS'Y	UL1007#26 GRY-150 9P
J327	U708-6M715-250	WIRE-ASS'Y	UL1007#26 BLU-150 7P
ASS'Y-MAIN BOARD			
CAPACITORS			
C5	CFMT-N102J-CJ0	CAPACITOR F/POLYESTR	0.001uF J 100V 5.3x12.
C8	CFMT-N222J-CJ0	CAPACITOR F/POLYESTR	0.0022uF J 100V 5.5x12
C10	CFMT-N222J-CJ0	CAPACITOR F/POLYESTR	0.0022uF J 100V 5.5x12
C11	CFMT-N222J-CJ0	CAPACITOR F/POLYESTR	0.0022uF J 100V 5.5x12
C61	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C65	CCAT-J473Z-AAF	CAPACITOR CERAMIC	0.047uF Z 50V F T
C71	CCAT-J473Z-AAF	CAPACITOR CERAMIC	0.047uF Z 50V F T
C390	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C391	CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF M 50V 5x11
C392	CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF M 50V 5x11
C393	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C394	CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF M 50V 5x11
C395	CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF M 50V 5x11
C396	CEET-E471M-FI1	CAPACITOR E/ALUMINUM	470uF M 16V 8x11.5 U
C397	CEET-E471M-FI1	CAPACITOR E/ALUMINUM	470uF M 16V 8x11.5 U
C398	CFMT-N103J-DE0	CAPACITOR F/POLYESTR	0.01uF J 100V 6x7
C399	CFMT-N103J-DE0	CAPACITOR F/POLYESTR	0.01uF J 100V 6x7
C400	CEET-J1R0M-CI0	CAPACITOR E/ALUMINUM	1.0uF M 50V 5x11
C401	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C402	CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF M 50V 5x11
C403	CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF J 100V 12.1x14
C404	CFMT-N123J-EK0	CAPACITOR F/POLYESTR	0.012uF J 100V 7.0x13
C405	CFMT-N473J-GK0	CAPACITOR F/POLYESTR	0.047uF J 100V 8.9x13.
C406	CFMT-N473J-GK0	CAPACITOR F/POLYESTR	0.047uF J 100V 8.9x13.
C407	CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF J 100V 12.1x14
C408	CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF J 100V 12.1x14
C409	CFMT-N123J-EK0	CAPACITOR F/POLYESTR	0.012uF J 100V 7.0x13
C410	CFMT-L224J-EF0	CAPACITOR F/POLYESTR	0.22uF J 63V 7.5x8.5 TL
C411	CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF J 100V 12.1x14
C412	CFMT-L224J-EF0	CAPACITOR F/POLYESTR	0.22uF J 63V 7.5x8.5 TL
C413	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C414	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C415	CFMT-L224J-EF0	CAPACITOR F/POLYESTR	0.22uF J 63V 7.5x8.5 TL
C416	CFMT-L224J-EF0	CAPACITOR F/POLYESTR	0.22uF J 63V 7.5x8.5 TL
C417	CFMT-N473J-GK0	CAPACITOR F/POLYESTR	0.047uF J 100V 8.9x13.
C418	CFMT-N562J-DJ0	CAPACITOR F/POLYESTR	0.0056uF J 100V 5.8x12
C419	CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF J 100V 12.1x14
C420	CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF J 100V 12.1x14
C421	CFMT-L684J-FI0	CAPACITOR F/POLYESTR	0.68uF J 63V 8x11.5 TL
C422	CFST-O821J-CJ0	CAPACITOR F/STYROL	820PF J 125V 5.5x12
C423	CCAT-J471K-AAB	CAPACITOR CERAMIC	470PF K 50V B T
C424	CFMT-N122J-CJ0	CAPACITOR F/POLYESTR	0.0012uF J 100V 5.4x12

Ref. No.	Part No.	Description	
	CAPACITORS		
C425	CFMT-N103J-DE0	CAPACITOR F/POLYESTR	0.01uF J 100V 6x7
C426	CFMT-N683J-HK0	CAPACITOR F/POLYESTR	0.068uF J 100V 9.9x14
C427	CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF J 100V 12.1x14
C428	CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF J 100V 12.1x14
C429	CFMT-N683J-HK0	CAPACITOR F/POLYESTR	0.068uF J 100V 9.9x14
C430	CFMT-N103J-DE0	CAPACITOR F/POLYESTR	0.01uF J 100V 6x7
C431	CFMT-L105J-EHN	CAPACITOR F/POLYESTR	EB 1uF J 50V 7.2x10 T
C432	CEET-F220M-CI0	CAPACITOR E/ALUMINUM	22uF M 25V 5x11
C433	CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF M 50V 5x11
C434	CEET-F220M-CI0	CAPACITOR E/ALUMINUM	22uF M 25V 5x11
C435	CEET-JR68M-CI0	CAPACITOR E/ALUMINUM	0.68uF M 50V 5x11
C436	CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF J 100V 12.1x14
C437	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C438	CEET-E221M-FI0	CAPACITOR E/ALUMINUM	220uF M 16V 8x11.5
C439	CEET-F220M-CI0	CAPACITOR E/ALUMINUM	22uF M 25V 5x11
C440	CFMT-N562J-DJ0	CAPACITOR F/POLYESTR	0.0056uF J 100V 5.8x12
C441	CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF M 50V 5x11
C442	CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF M 50V 5x11
C443	CCCT-J681K-0BB	CAPACITOR CERAMIC	680PF K 50V B T
C444	CCCT-J681K-0BB	CAPACITOR CERAMIC	680PF K 50V B T
C445	CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF J 100V 12.1x14
C446	CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF J 100V 12.1x14
C447	CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF J 100V 12.1x14
C448	CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF J 100V 12.1x14
C449	CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF J 100V 12.1x14
C450	CFMT-N152J-CJ0	CAPACITOR F/POLYESTR	0.0015uF J 100V 5.4x12
C451	CFMT-N152J-CJ0	CAPACITOR F/POLYESTR	0.0015uF J 100V 5.4x12
C452	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C453	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C455	CCTT-J470J-0BZ	CAPACITOR CERAMIC	47PF J 50V SL T
C456	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C457	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C458	CCTT-J470J-0BZ	CAPACITOR CERAMIC	47PF J 50V SL T
C459	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C460	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C461	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C462	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C463	CEET-E101M-DI0	CAPACITOR E/ALUMINUM	100uF M 16V 6.3x11
C464	CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF M 50V 5x11
C465	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C466	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C467	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C468	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C469	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C470	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C471	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C472	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C473	CEET-J3R3M-CI0	CAPACITOR E/ALUMINUM	3.3uF M 50V 5x11
C475	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C476	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C477	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C478	CFMT-N563J-GK0	CAPACITOR F/POLYESTR	0.056uF J 100V 9.5x14
C479	CFMT-N563J-GK0	CAPACITOR F/POLYESTR	0.056uF J 100V 9.5x14
C480	CFMT-J362J-CEN	CAPACITOR F/POLYESTR	TS 0.0036uF J 50V 5.5x7
C481	CFMT-J362J-CEN	CAPACITOR F/POLYESTR	TS 0.0036uF J 50V 5.5x7
C484	CFMT-N822J-DJ0	CAPACITOR F/POLYESTR	0.0082uF J 100V 6.5x12
C485	CFMT-N822J-DJ0	CAPACITOR F/POLYESTR	0.0082uF J 100V 6.5x12
C486	CFMT-N154J-HH0	CAPACITOR F/POLYESTR	0.15uF J 100V 10.3x9.8
C487	CFMT-N154J-HH0	CAPACITOR F/POLYESTR	0.15uF J 100V 10.3x9.8
C488	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11

Ref. No.	Part No.	Description	
	CAPACITORS		
C489	CEET-J2R2M-CI0	CAPACITOR E/ALUMINUM	2.2uF M 50V 5x11
C490	CEET-J2R2M-CI0	CAPACITOR E/ALUMINUM	2.2uF M 50V 5x11
C491	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C492	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C493	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C494	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C495	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C496	CCTT-J470J-0BZ	CAPACITOR CERAMIC	47PF J 50V SL T
C497	CCTT-J470J-0BZ	CAPACITOR CERAMIC	47PF J 50V SL T
C499	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C500	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C501	CEET-J1R0M-CI0	CAPACITOR E/ALUMINUM	1.0uF M 50V 5x11
C502	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C503	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C506	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C507	CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T
C508	CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T
C509	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C510	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C511	CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T
C512	CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T
C513	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C514	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C515	CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T
C516	CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T
C517	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C518	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C519	CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T
C520	CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T
C521	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C522	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C523	CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T
C524	CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T
C525	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C526	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C527	CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T
C528	CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T
C529	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C530	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C531	CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T
C532	CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T
C533	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C534	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C535	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C536	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C537	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C538	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C539	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C541	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C542	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C543	CFMT-N154J-HH0	CAPACITOR F/POLYESTR	0.15uF J 100V 10.3x9.8
C544	CFMT-N333J-FK0	CAPACITOR F/POLYESTR	0.033uF J 100V 8.1x13
C546	CCAT-J473Z-AAF	CAPACITOR CERAMIC	0.047uF Z 50V F T
C549	CCAT-J473Z-AAF	CAPACITOR CERAMIC	0.047uF Z 50V F T
C550	CCAT-J473Z-AAF	CAPACITOR CERAMIC	0.047uF Z 50V F T
C551	CEET-J1R0M-CI0	CAPACITOR E/ALUMINUM	1.0uF M 50V 5x11
C552	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C553	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C555	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C574	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11

Ref. No.	Part No.	Description	
	CAPACITORS		
C575	CEET-J1R0M-CI0	CAPACITOR E/ALUMINUM	1.0uF M 50V 5x11
C576	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C577	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C578	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C579	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C580	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C581	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C582	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C597	CFMT-N102J-CJ0	CAPACITOR F/POLYESTR	0.001uF J 100V 5.3x12.
C680	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C681	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C682	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C683	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C686	CFMT-N102J-CJ0	CAPACITOR F/POLYESTR	0.001uF J 100V 5.3x12.
C688	CFMT-N102J-CJ0	CAPACITOR F/POLYESTR	0.001uF J 100V 5.3x12.
C689	CCTT-J470J-0BZ	CAPACITOR CERAMIC	47PF J 50V SL T
C690	CCTT-J470J-0BZ	CAPACITOR CERAMIC	47PF J 50V SL T
C722	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF Z 50V F T
C723	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF Z 50V F T
C724	CEET-J1R0M-CI0	CAPACITOR E/ALUMINUM	1.0uF M 50V 5x11
C725	CEET-J1R0M-CI0	CAPACITOR E/ALUMINUM	1.0uF M 50V 5x11
C726	CEEC-G332M-MT1	CAPACITOR E/ALUMINUM	3300uF M 35V 18x40
C727	CEEM-G222M-LR1	CAPACITOR E/ALUMINUM	2200uF M 35V 16x31.5 U
C728	CFMT-N473J-GK0	CAPACITOR F/POLYESTR	0.047uF J 100V 8.9x13.
C729	CFMT-N473J-GK0	CAPACITOR F/POLYESTR	0.047uF J 100V 8.9x13.
C730	CFMT-N473J-GK0	CAPACITOR F/POLYESTR	0.047uF J 100V 8.9x13.
C731	CFMT-N473J-GK0	CAPACITOR F/POLYESTR	0.047uF J 100V 8.9x13.
C732	CFMT-N473J-GK0	CAPACITOR F/POLYESTR	0.047uF J 100V 8.9x13.
C733	CFMT-L224J-EF0	CAPACITOR F/POLYESTR	0.22uF J 63V 7.5x8.5 TL
C735	CEET-J1R0M-CI0	CAPACITOR E/ALUMINUM	1.0uF M 50V 5x11
C736	CEET-E222M-KL0	CAPACITOR E/ALUMINUM	2200uF M 16V 12.5x16
C737	CFMT-N473J-GK0	CAPACITOR F/POLYESTR	0.047uF J 100V 8.9x13.
C738	CFMT-N473J-GK0	CAPACITOR F/POLYESTR	0.047uF J 100V 8.9x13.
C739	CFMT-N473J-GK0	CAPACITOR F/POLYESTR	0.047uF J 100V 8.9x13.
C740	CCCT-J103Z-0DF	CAPACITOR CERAMIC	0.01uF Z 50V F T
C741	CEET-J101M-FI0	CAPACITOR E/ALUMINUM	100uF M 50V 8x11.5
C751	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C752	CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T
C753	CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T
C754	CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T
C755	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C756	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C757	CEET-J470M-DI0	CAPACITOR E/ALUMINUM	47uF M 50V 6.3x11
C758	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C759	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C760	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C761	CEET-L331M-DI1	CAPACITOR E/ALUMINUM	330uF M 63V 10x20 SHL
C762	CFMT-N102J-CJ0	CAPACITOR F/POLYESTR	0.001uF J 100V 5.3x12.
C763	CFMT-N102J-CJ0	CAPACITOR F/POLYESTR	0.001uF J 100V 5.3x12.
C764	CEET-E101M-DI0	CAPACITOR E/ALUMINUM	100uF M 16V 6.3x11
C765	CEET-E101M-DI0	CAPACITOR E/ALUMINUM	100uF M 16V 6.3x11
C766	CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF M 50V 5x11
C767	CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF M 50V 5x11
C769	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF Z 50V F T
C770	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF Z 50V F T
C771	CCAT-J473Z-AAF	CAPACITOR CERAMIC	0.047uF Z 50V F T
C772	CCAT-J473Z-AAF	CAPACITOR CERAMIC	0.047uF Z 50V F T
C773	CCTT-J470J-0BZ	CAPACITOR CERAMIC	47PF J 50V SL T
C774	CCTT-J470J-0BZ	CAPACITOR CERAMIC	47PF J 50V SL T
C775	CCTT-J221J-0DZ	CAPACITOR CERAMIC	220PF J 50V SL T

Ref. No.	Part No.	Description	
CAPACITORS			
C776	CCTT-J221J-0DZ	CAPACITOR CERAMIC	220PF J 50V SL T
C777	CCAT-J473Z-AAF	CAPACITOR CERAMIC	0.047uF Z 50V F T
C778	CCAT-J473Z-AAF	CAPACITOR CERAMIC	0.047uF Z 50V F T
C779	CCAT-J473Z-AAF	CAPACITOR CERAMIC	0.047uF Z 50V F T
C780	CCAT-J473Z-AAF	CAPACITOR CERAMIC	0.047uF Z 50V F T
C781	CCAT-J473Z-AAF	CAPACITOR CERAMIC	0.047uF Z 50V F T
C782	CCAT-J473Z-AAF	CAPACITOR CERAMIC	0.047uF Z 50V F T
C783	CCAT-J473Z-AAF	CAPACITOR CERAMIC	0.047uF Z 50V F T
C784	CCAT-J473Z-AAF	CAPACITOR CERAMIC	0.047uF Z 50V F T
C785	CCAT-J473Z-AAF	CAPACITOR CERAMIC	0.047uF Z 50V F T
C786	CFMT-N152J-CJ0	CAPACITOR F/POLYESTR	0.0015uF J 100V 5.4x12
C787	CFMT-N392J-DJ0	CAPACITOR F/POLYESTR	0.0039uF J 100V 5.8x12
C788	CFMT-N392J-DJ0	CAPACITOR F/POLYESTR	0.0039uF J 100V 5.8x12
C789	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF Z 50V F T
C790	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF Z 50V F T
C791	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF Z 50V F T
C792	CEET-J2R2M-CI0	CAPACITOR E/ALUMINUM	2.2uF M 50V 5x11
C793	CFMT-N222J-CJ0	CAPACITOR F/POLYESTR	0.0022uF J 100V 5.5x12
C794	CCTT-J470J-0BZ	CAPACITOR CERAMIC	47PF J 50V SL T
C795	CFMT-N222J-CJ0	CAPACITOR F/POLYESTR	0.0022uF J 100V 5.5x12
C796	CEET-J470M-DI0	CAPACITOR E/ALUMINUM	47uF M 50V 6.3x11
C797	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C800	CCTT-J470J-0BZ	CAPACITOR CERAMIC	47PF J 50V SL T
C801	CCTT-J470J-0BZ	CAPACITOR CERAMIC	47PF J 50V SL T
DIODES			
D1	DDTR-00040-T10	DIODE-RECTIFIER	1N4004S(400V 1A 0.6mm)
D401	DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40
D402	DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40
D403	DDTZ-G056B-SOS	DIODE ZENER	MTZJ5.6B 5.45-5.73 DO34
D404	DDTZ-G100B-SO0	DIODE ZENER	MTZ10B 9.41-9.90 DO40
D405	DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40
D406	DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40
D407	DDTR-00040-T10	DIODE-RECTIFIER	1N4004S(400V 1A 0.6mm)
D408	DDTR-00040-T10	DIODE-RECTIFIER	1N4004S(400V 1A 0.6mm)
D409	DDTR-00040-T10	DIODE-RECTIFIER	1N4004S(400V 1A 0.6mm)
D410	DDTR-00040-T10	DIODE-RECTIFIER	1N4004S(400V 1A 0.6mm)
D411	DDTZ-G043B-SO0	DIODE ZENER	MTZ4.3B 4.17-4.43 DO40
D412	DDTR-00040-T10	DIODE-RECTIFIER	1N4004S(400V 1A 0.6mm)
D413	DDTR-00040-T10	DIODE-RECTIFIER	1N4004S(400V 1A 0.6mm)
D414	DDTR-00040-T10	DIODE-RECTIFIER	1N4004S(400V 1A 0.6mm)
D415	DDTR-00040-T10	DIODE-RECTIFIER	1N4004S(400V 1A 0.6mm)
D416	DDTR-00040-T10	DIODE-RECTIFIER	1N4004S(400V 1A 0.6mm)
D418	DDTR-00040-T10	DIODE-RECTIFIER	1N4004S(400V 1A 0.6mm)
D419	DDTR-00040-T10	DIODE-RECTIFIER	1N4004S(400V 1A 0.6mm)
D420	DDTZ-G062B-SOS	DIODE ZENER	MTZJ6.2B 5.96-6.27 DO34
D421	DDTZ-G062B-SOS	DIODE ZENER	MTZJ6.2B 5.96-6.27 DO34
D422	DDTR-00040-T10	DIODE-RECTIFIER	1N4004S(400V 1A 0.6mm)
D423	DDTR-00040-T10	DIODE-RECTIFIER	1N4004S(400V 1A 0.6mm)
D424	DDTZ-G300D-SO0	DIODE ZENER	MTZ30D 29.02-30.51 DO40
INTEGRATED CIRCUITS			
IC401	ICDG-00260-S10	IC FUNCTION SELECTOR	LC7821 DIP30S
IC402	ICOP-03120-SG0	IC DUAL OP AMP	NJM4580D
IC403	ICOP-00131-SE0	IC DUAL OP AMP	KA4558C DIP8
IC404	ICLN-03690-S10	IC BYPOLAR SWITCH	LC4966 DIP14
IC405	ICLN-03310-SG0	IC DOLBY	NJW-1103F QFP80
IC406	ICOP-03120-SG0	IC DUAL OP AMP	NJM4580D
IC407	ICOP-00131-SE0	IC DUAL OP AMP	KA4558C DIP8
IC408	ICOP-00131-SE0	IC DUAL OP AMP	KA4558C DIP8

Ref. No.	Part No.	Description	
INTEGRATED CIRCUITS			
IC412	ICLN-03590-S10	IC ANALOG FUNCTION	LC78213 DIP30
IC413	ICLN-03870-SD0	IC	TC9482N
IC414	ICOP-03120-SG0	IC DUAL OP AMP	NJM4580D
IC415	ICDG-02410-S30	IC HIGH TONE CONTROL	TC9184AP DIP16
IC416	ICOP-00131-SE0	IC DUAL OP AMP	KA4558C DIP8
IC420	ICLN-03690-S10	IC BYPOLAR SWITCH	LC4966 DIP14
IC421	ICOP-03120-SG0	IC DUAL OP AMP	NJM4580D
IC423	ICRG-00061-SE0	IC REGULATOR	KA7815 15V 3mm TO-22
IC424	ICRG-00251-SE0	IC REGULATOR	KA7915 15V 3mm TO-22
IC425	ICRG-00043-SE0	IC REGULATOR	KA7805 5V 3mm TO-22
RESISTORS			
R1	RMOE-H391J-020	RESISTOR-METAL OXIDE	1W ERG-1SJ391E 390ohm T
R376	RCFT-E393J-000	RESISTOR-CARBON FILM	39Kohm 1/5W 5% T
R377	RCFT-E222J-000	RESISTOR-CARBON FILM	2.2Kohm 1/5W 5% T
R378	RCFT-E222J-000	RESISTOR-CARBON FILM	2.2Kohm 1/5W 5% T
R379	RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T
R382	RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T
R383	RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T
R384	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R385	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R386	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R387	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R388	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R389	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R390	RCFT-E393J-000	RESISTOR-CARBON FILM	39Kohm 1/5W 5% T
R391	RCFT-E225J-000	RESISTOR-CARBON FILM	2.2Mohm 1/5W 5% T
R392	RCFT-E222J-000	RESISTOR-CARBON FILM	2.2Kohm 1/5W 5% T
R401	RCFT-E334J-000	RESISTOR-CARBON FILM	330Kohm 1/5W 5% T
R402	RCFT-E243J-000	RESISTOR-CARBON FILM	24Kohm 1/5W 5% T
R403	RCFT-E243J-000	RESISTOR-CARBON FILM	24Kohm 1/5W 5% T
R404	RCFT-E513J-000	RESISTOR-CARBON FILM	51Kohm 1/5W 5% T
R405	RCFT-E513J-000	RESISTOR-CARBON FILM	51Kohm 1/5W 5% T
R406	RCFT-E512J-000	RESISTOR-CARBON FILM	5.1Kohm 1/5W 5% T
R407	RCFT-E512J-000	RESISTOR-CARBON FILM	5.1Kohm 1/5W 5% T
R408	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R409	RCFT-E105J-000	RESISTOR-CARBON FILM	1Mohm 1/5W 5% T
R410	RCFT-E225J-000	RESISTOR-CARBON FILM	2.2Mohm 1/5W 5% T
R411	RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T
R412	RCFT-E224J-000	RESISTOR-CARBON FILM	220Kohm 1/5W 5% T
R413	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R414	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R415	RCFT-E473J-000	RESISTOR-CARBON FILM	47Kohm 1/5W 5% T
R416	RCFT-E153J-000	RESISTOR-CARBON FILM	15Kohm 1/5W 5% T
R417	RCFT-E752J-000	RESISTOR-CARBON FILM	7.5Kohm 1/5W 5% T
R418	RCFT-E473J-000	RESISTOR-CARBON FILM	47Kohm 1/5W 5% T
R419	RCFT-E752J-000	RESISTOR-CARBON FILM	7.5Kohm 1/5W 5% T
R420	RCFT-E153J-000	RESISTOR-CARBON FILM	15Kohm 1/5W 5% T
R421	RCFT-E203J-000	RESISTOR-CARBON FILM	20Kohm 1/5W 5% T
R422	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R423	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R424	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R425	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R426	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R427	RCFT-E152J-000	RESISTOR-CARBON FILM	1.5Kohm 1/5W 5% T
R428	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R430	RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T
R431	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R432	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R433	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T

Ref. No.	Part No.	Description	
	RESISTORS		
R434	RCFT-E152J-000	RESISTOR-CARBON FILM	1.5Kohm 1/5W 5% T
R435	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R437	RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T
R439	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R440	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R441	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R442	RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T
R443	RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T
R444	RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T
R445	RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T
R446	RCFT-E152J-000	RESISTOR-CARBON FILM	1.5Kohm 1/5W 5% T
R447	RCFT-E152J-000	RESISTOR-CARBON FILM	1.5Kohm 1/5W 5% T
R448	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R449	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R450	RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T
R451	RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T
R452	RCFT-E152J-000	RESISTOR-CARBON FILM	1.5Kohm 1/5W 5% T
R453	RCFT-E152J-000	RESISTOR-CARBON FILM	1.5Kohm 1/5W 5% T
R462	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R463	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R464	RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T
R465	RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T
R466	RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T
R467	RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T
R468	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R469	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R472	RCFT-E221J-000	RESISTOR-CARBON FILM	220ohm 1/5W 5% T
R473	RCFT-E221J-000	RESISTOR-CARBON FILM	220ohm 1/5W 5% T
R475	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R476	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R477	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R478	RCFT-E221J-000	RESISTOR-CARBON FILM	220ohm 1/5W 5% T
R479	RCFT-E221J-000	RESISTOR-CARBON FILM	220ohm 1/5W 5% T
R480	RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T
R486	RCFT-E221J-000	RESISTOR-CARBON FILM	220ohm 1/5W 5% T
R487	RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T
R488	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R489	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R490	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R491	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R492	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R493	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R494	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R495	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R496	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R497	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R498	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R499	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R500	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R501	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R502	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R503	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R504	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R505	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R506	RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T
R507	RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T
R508	RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T
R509	RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T
R510	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R511	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T

Ref. No.	Part No.	Description
	RESISTORS	
R512	RCFT-E221J-000	RESISTOR-CARBON FILM 220ohm 1/5W 5% T
R513	RCFT-E221J-000	RESISTOR-CARBON FILM 220ohm 1/5W 5% T
R514	RCFT-E102J-000	RESISTOR-CARBON FILM 1Kohm 1/5W 5% T
R515	RCFT-E221J-000	RESISTOR-CARBON FILM 220ohm 1/5W 5% T
R516	RCFT-E221J-000	RESISTOR-CARBON FILM 220ohm 1/5W 5% T
R517	RCFT-E221J-000	RESISTOR-CARBON FILM 220ohm 1/5W 5% T
R518	RCFT-E152J-000	RESISTOR-CARBON FILM 1.5Kohm 1/5W 5% T
R519	RCFT-E152J-000	RESISTOR-CARBON FILM 1.5Kohm 1/5W 5% T
R520	RCFT-E243J-000	RESISTOR-CARBON FILM 24Kohm 1/5W 5% T
R521	RCFT-E224J-000	RESISTOR-CARBON FILM 220Kohm 1/5W 5% T
R522	RCFT-E243J-000	RESISTOR-CARBON FILM 24Kohm 1/5W 5% T
R523	RCFT-E224J-000	RESISTOR-CARBON FILM 220Kohm 1/5W 5% T
R525	RCFT-F101J-010	RESISTOR-CARBON FILM 100ohm 1/4W 5% T
R526	RCFT-G221J-190	RESISTOR-CARBON FILM 220ohm 1/2W 5% 2.3x6.5
R527	RCFT-F102J-010	RESISTOR-CARBON FILM 1Kohm 1/4W 5% T
R528	RCFT-E102J-000	RESISTOR-CARBON FILM 1Kohm 1/5W 5% T
R540	RCFT-E102J-000	RESISTOR-CARBON FILM 1Kohm 1/5W 5% T
R541	RCFT-E102J-000	RESISTOR-CARBON FILM 1Kohm 1/5W 5% T
R542	RCFT-E102J-000	RESISTOR-CARBON FILM 1Kohm 1/5W 5% T
R549	RCFT-E152J-000	RESISTOR-CARBON FILM 1.5Kohm 1/5W 5% T
R550	RCFT-E152J-000	RESISTOR-CARBON FILM 1.5Kohm 1/5W 5% T
R562	RCFT-E363J-000	RESISTOR-CARBON FILM 36Kohm 1/5W 5% T
R563	RCFT-E153J-000	RESISTOR-CARBON FILM 15Kohm 1/5W 5% T
R564	RCFT-E103J-000	RESISTOR-CARBON FILM 10Kohm 1/5W 5% T
R565	RCFT-E471J-000	RESISTOR-CARBON FILM 470ohm 1/5W 5% T
R566	RCFT-E470J-000	RESISTOR-CARBON FILM 47ohm 1/5W 5% T
R567	RCFT-E243J-000	RESISTOR-CARBON FILM 24Kohm 1/5W 5% T
R568	RCFT-E470J-000	RESISTOR-CARBON FILM 47ohm 1/5W 5% T
R569	RCFT-F471J-010	RESISTOR-CARBON FILM 470ohm 1/4W 5% T
R570	RCFT-E152J-000	RESISTOR-CARBON FILM 1.5Kohm 1/5W 5% T
R571	RCFT-E152J-000	RESISTOR-CARBON FILM 1.5Kohm 1/5W 5% T
R572	RCFT-E473J-000	RESISTOR-CARBON FILM 47Kohm 1/5W 5% T
R573	RCFT-E473J-000	RESISTOR-CARBON FILM 47Kohm 1/5W 5% T
R574	RCFT-E624J-000	RESISTOR-CARBON FILM 620Kohm 1/5W 5% T
R575	RCFT-E624J-000	RESISTOR-CARBON FILM 620Kohm 1/5W 5% T
R578	RCFT-E183J-000	RESISTOR-CARBON FILM 18Kohm 1/5W 5% T
R579	RCFT-E183J-000	RESISTOR-CARBON FILM 18Kohm 1/5W 5% T
R580	RCFT-E221J-000	RESISTOR-CARBON FILM 220ohm 1/5W 5% T
R581	RCFT-E221J-000	RESISTOR-CARBON FILM 220ohm 1/5W 5% T
R584	RCFT-E132J-000	RESISTOR-CARBON FILM 1.3Kohm 1/5W 5% T
R585	RCFT-E132J-000	RESISTOR-CARBON FILM 1.3Kohm 1/5W 5% T
R588	RCFT-E223J-000	RESISTOR-CARBON FILM 22Kohm 1/5W 5% T
R589	RCFT-E223J-000	RESISTOR-CARBON FILM 22Kohm 1/5W 5% T
R590	RCFT-E362J-000	RESISTOR-CARBON FILM 3.6Kohm 1/5W 5% T
R591	RCFT-E362J-000	RESISTOR-CARBON FILM 3.6Kohm 1/5W 5% T
R592	RCFT-E100J-000	RESISTOR-CARBON FILM 10ohm 1/5W 5% T
R593	RCFT-E100J-000	RESISTOR-CARBON FILM 10ohm 1/5W 5% T
R594	RCFT-E102J-000	RESISTOR-CARBON FILM 1Kohm 1/5W 5% T
R595	RCFT-E102J-000	RESISTOR-CARBON FILM 1Kohm 1/5W 5% T
R596	RCFT-E102J-000	RESISTOR-CARBON FILM 1Kohm 1/5W 5% T
R597	RCFT-E102J-000	RESISTOR-CARBON FILM 1Kohm 1/5W 5% T
R598	RCFT-E102J-000	RESISTOR-CARBON FILM 1Kohm 1/5W 5% T
R680	RCFT-E153J-000	RESISTOR-CARBON FILM 15Kohm 1/5W 5% T
R681	RCFT-E243J-000	RESISTOR-CARBON FILM 24Kohm 1/5W 5% T
R683	RCFT-E101J-000	RESISTOR-CARBON FILM 100ohm 1/5W 5% T
R684	RCFT-E243J-000	RESISTOR-CARBON FILM 24Kohm 1/5W 5% T
R685	RCFT-E224J-000	RESISTOR-CARBON FILM 220Kohm 1/5W 5% T
R687	RCFT-E224J-000	RESISTOR-CARBON FILM 220Kohm 1/5W 5% T
R689	RCFT-E152J-000	RESISTOR-CARBON FILM 1.5Kohm 1/5W 5% T
R690	RCFT-E152J-000	RESISTOR-CARBON FILM 1.5Kohm 1/5W 5% T

Ref. No.	Part No.	Description	
	RESISTORS		
R691	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R692	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R693	RCFT-E242J-000	RESISTOR-CARBON FILM	2.4Kohm 1/5W 5% T
R694	RCFT-E242J-000	RESISTOR-CARBON FILM	2.4Kohm 1/5W 5% T
R695	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R696	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R697	RCFT-G100J-190	RESISTOR-CARBON FILM	10ohm 1/2W 5% 2.3x6.5
R698	RCFT-G100J-190	RESISTOR-CARBON FILM	10ohm 1/2W 5% 2.3x6.5
R699	RCFT-G470J-190	RESISTOR-CARBON FILM	47ohm 1/2W 5% 2.3x6.5
R717	RMOT-H150J-1L0	RESISTOR-METAL OXIDE	15ohm 1W 5% 3x9 RSS1YV
R718	RMOT-H150J-1L0	RESISTOR-METAL OXIDE	15ohm 1W 5% 3x9 RSS1YV
R719	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R720	RCFT-E472J-000	RESISTOR-CARBON FILM	4.7Kohm 1/5W 5% T
R721	RCFT-E472J-000	RESISTOR-CARBON FILM	4.7Kohm 1/5W 5% T
R722	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R723	RCFT-E222J-000	RESISTOR-CARBON FILM	2.2Kohm 1/5W 5% T
R724	RCFT-E222J-000	RESISTOR-CARBON FILM	2.2Kohm 1/5W 5% T
R725	RMOH-H330J-100	RESISTOR-METAL OXIDE	PR01 1W 33ohm 5% R-SHAPE
R726	RCFT-F4R7J-010	RESISTOR-CARBON FILM	4.7ohm 1/4W 5% T
R728	RCFT-E1R0J-000	RESISTOR-CARBON FILM	1ohm 1/5W 5% T
R729	RCFT-E1R0J-000	RESISTOR-CARBON FILM	1ohm 1/5W 5% T
R750	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R751	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R752	RCFT-G470J-190	RESISTOR-CARBON FILM	47ohm 1/2W 5% 2.3x6.5
R753	RCFT-E222J-000	RESISTOR-CARBON FILM	2.2Kohm 1/5W 5% T
R754	RCFT-E222J-000	RESISTOR-CARBON FILM	2.2Kohm 1/5W 5% T
R755	RCFT-E472J-000	RESISTOR-CARBON FILM	4.7Kohm 1/5W 5% T
R756	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R757	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R758	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R761	RCFT-E225J-000	RESISTOR-CARBON FILM	2.2Mohm 1/5W 5% T
R762	RCFT-F470J-010	RESISTOR-CARBON FILM	47ohm 1/4W 5% T
R763	RCFT-E472J-000	RESISTOR-CARBON FILM	4.7Kohm 1/5W 5% T
R765	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R766	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R767	RCFT-E152J-000	RESISTOR-CARBON FILM	1.5Kohm 1/5W 5% T
R768	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R769	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
R770	RCFT-E122J-000	RESISTOR-CARBON FILM	1.2Kohm 1/5W 5% T
R777	RCFT-F100J-010	RESISTOR-CARBON FILM	10ohm 1/4W 5% T
R778	RCFT-E752J-000	RESISTOR-CARBON FILM	7.5Kohm 1/5W 5% T
R779	RCFT-E752J-000	RESISTOR-CARBON FILM	7.5Kohm 1/5W 5% T
R780	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R781	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R782	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R783	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R785	RCFT-E473J-000	RESISTOR-CARBON FILM	47Kohm 1/5W 5% T
R786	RCFT-E473J-000	RESISTOR-CARBON FILM	47Kohm 1/5W 5% T
R787	RCFT-F470J-010	RESISTOR-CARBON FILM	47ohm 1/4W 5% T
R796	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T
	TRANSISTORS		
Q401	TRTC-01700-SD0	TRANSISTOR N-H FREQ	KRC107M W/RESIST TO92M
Q402	TRTA-00940-SD0	TRANSISTOR P-H FREQ	KRA107M W/RESIST TO92M
Q403	TRTC-01700-SD0	TRANSISTOR N-H FREQ	KRC107M W/RESIST TO92M
Q404	TRTC-0016G-SD0	TRANSISTOR N-H FREQ	KTC3198-GR TO92
Q405	TRTC-0016G-SD0	TRANSISTOR N-H FREQ	KTC3198-GR TO92
Q406	TRTD-00200-SD0	TRANSISTOR N-L FREQ	KTD-1302 TO92
Q407	TRTA-00940-SD0	TRANSISTOR P-H FREQ	KRA107M W/RESIST TO92M
Q408	TRTC-01700-SD0	TRANSISTOR N-H FREQ	KRC107M W/RESIST TO92M

Ref. No.	Part No.	Description	
TRANSISTORS			
Q416	TRTA-00940-SD0	TRANSISTOR P-H FREQ	KRA107M W/RESIST TO92M
Q417	TRTC-01700-SD0	TRANSISTOR N-H FREQ	KRC107M W/RESIST TO92M
Q418	TRTC-01700-SD0	TRANSISTOR N-H FREQ	KRC107M W/RESIST TO92M
Q419	TRTA-00940-SD0	TRANSISTOR P-H FREQ	KRA107M W/RESIST TO92M
Q420	TRTC-01700-SD0	TRANSISTOR N-H FREQ	KRC107M W/RESIST TO92M
Q421	TRTC-01700-SD0	TRANSISTOR N-H FREQ	KRC107M W/RESIST TO92M
Q422	TRTA-00940-SD0	TRANSISTOR P-H FREQ	KRA107M W/RESIST TO92M
Q423	TRTD-00200-SD0	TRANSISTOR N-L FREQ	KTD-1302 TO92
Q424	TRTD-00200-SD0	TRANSISTOR N-L FREQ	KTD-1302 TO92
Q425	TRTD-00200-SD0	TRANSISTOR N-L FREQ	KTD-1302 TO92
Q426	TRTD-00200-SD0	TRANSISTOR N-L FREQ	KTD-1302 TO92
Q427	TRTC-0039Y-SD0	TRANSISTOR N-H FREQ	KTC3205-Y TO92L
Q428	TRTA-00940-SD0	TRANSISTOR P-H FREQ	KRA107M W/RESIST TO92M
Q429	TRTC-01700-SD0	TRANSISTOR N-H FREQ	KRC107M W/RESIST TO92M
Q430	TRTC-0039Y-SD0	TRANSISTOR N-H FREQ	KTC3205-Y TO92L
Q431	TRTA-0012Y-SD0	TRANSISTOR P-H FREQ	KTA1273-Y TO92L
Q432	TRTA-00940-SD0	TRANSISTOR P-H FREQ	KRA107M W/RESIST TO92M
Q433	TRTA-0012Y-SD0	TRANSISTOR P-H FREQ	KTA1273-Y TO92L
Q434	TRTA-00940-SD0	TRANSISTOR P-H FREQ	KRA107M W/RESIST TO92M
MISCELLANEOUS			
CN1	KNCW-00760-LT0	CONNECTOR-WAFER	8370-211 1.25mm TOP 21P
CN2	KNCW-01520-ES9	CONNECTOR-WAFER	35336-1410 20MM 14P
CN8	KNCW-00240-8T9	CONNECTOR-WAFER	53014-08 2.0mm WHT
CW1	KNCW-00990-2T9	CONNECTOR-WAFER	JE202A-1T-02
J4	KNCW-00760-IT0	CONNECTOR-WAFER	8370-181 1.25mm TOP 18P
J5	KNCW-00760-IT0	CONNECTOR-WAFER	8370-181 1.25mm TOP 18P
J6	KNCW-00140-9TM	CONNECTOR-WAFER	5267-09A 2.5mm MILK
J6	KNCW-00760-LT0	CONNECTOR-WAFER	8370-211 1.25mm TOP 21P
J7	KNCW-00240-9T9	CONNECTOR-WAFER	53014-09 2.0mm WHT
J8	KNCW-00240-7T9	CONNECTOR-WAFER	53014-07 2.0mm WHT
X401	KTRE-00091-040	RESONATOR	CST4.00MGW-TF01 T05
	MEAC-08215-004	RADIATOR-TR	
	MPAC-03810-004	TERMINAL-GND	ET-HD T0.3
FC7	MPAC-11620-004	FUSE CLIP	5.2Pi TAPPING TYPE
FC8	MPAC-11620-004	FUSE CLIP	5.2Pi TAPPING TYPE
FC9	MPAC-11620-004	FUSE CLIP	5.2Pi TAPPING TYPE
FC10	MPAC-11620-004	FUSE CLIP	5.2Pi TAPPING TYPE
FC11	MPAC-11620-004	FUSE CLIP	5.2Pi TAPPING TYPE
FC12	MPAC-11620-004	FUSE CLIP	5.2Pi TAPPING TYPE
FC13	MPAC-11620-004	FUSE CLIP	5.2Pi TAPPING TYPE
FC14	MPAC-11620-004	FUSE CLIP	5.2Pi TAPPING TYPE
	MPAC-16700-004	PLATE-SHIELD	SPTE T0.3
PCB1	PCSF-05170-11B	PCB-SINGLE	A1F-517 247x247x1.
	SKAO-00210-C50	AC OUTLET	S2-763T-214SJ
JK1	SKRC-00420-061	SOCKET-RCA	JK0600460N
JK2	SKRC-00300-040	SOCKET-RCA	JK0400910N 4P
JK40	SKRC-00650-01P	SOCKET-RCA	JC010126AG
JK403	SKRC-00411-061	SOCKET-RCA	JK0600469N
J9	U408-20835-250	WIRE-ASS'Y	UL1533#28 RED-350 4P
J10	U408-20827-250	WIRE-ASS'Y	UL1533#28 RED-270 4P
POWER AMP BLOCK			
ASS'Y-MECHANISM			
MISCELLANEOUS			
	AJAF-16520-014	ASS'Y-FOOT	F40-POWER (ABS+RUBBER2
F1	FGFB-S2502-837	FUSE GLASS	2.5A 250V 5x20 V/S/B T
AC-CORD1	KDAC-0562F-AA0	CORD-AC	KKP419C,KLCE-2F CORE&TUB
	MAAF-16360-014	LENS-POWER	F40-POWER PMMA 60N
	MEAC-04930-002	RADIATOR-MAIN	A6063 T-5

Ref. No.	Part No.	Description	
	MISCELLANEOUS		
	MJAF-06310-011	PANEL-FRONT	F40-POWER HI-PS BLACK
	MJAF-16060-014	KNOB-SPEAKER	F40-POWER ABS-720
	MJAG-00280-003	CORD-BUSH	NIFCO
	MJAG-04540-004	CABLE-TIE-L80	*
	MMAC-15650-004	SCREW-RADIATOR	
	MPAC-04800-013	CHASSIS-BACK	F40-POWER SECC T0.8
	MPAC-04830-003	CHASSIS-SIDE	SECC T1.0
	MPAC-04910-012	CHASSIS-TOP	F40-POWER VCM T0.8
	MPAC-06190-001	CHASSIS-BOTTOM	US COATING T1.0
	MPAC-06710-004	CLAMP-WIRE-L52	*
	MPAC-16220-004	BRACKET-RADIATOR(S)	US COATING T1.0
	MPAC-16340-004	BRACKET-RADIATOR(F)	SECC T1.0
	MPAC-16350-004	BRACKET-RADIATOR(R)	SECC T1.0
P/T	PTAN-03700-YJV	TRANSFORMER-POWER	A86-370Y-V 230V 50Hz
POSSTOR1	VSPO-00010-100	POSISTOR	P42T8D100BW23
	XSTB-30080-ZB4	SCREW-TAPPING	BHT2T 3x8 FE-ZB
	XSTB-30080-ZY4	SCREW-TAPPING	BHT2T 3x8 FE-ZY
	XSTB-30100-ZB4	SCREW-TAPPING	BHT2T 3x10 FE-ZB
	XSTB-30100-ZY4	SCREW-TAPPING	BHT2T 3x10 FE-ZY
	XSTB-40080-ZY4	SCREW-TAPPING	BHT2T 4x8 FE-ZY
	XSTF-30080-ZY4	SCREW-TAPPING	FHT2T 3x8 FE-ZY
	XSTS-30080-ZY4	SCREW-TAPPING	PHWT2T 3x8 FE-ZY
	YGAP-14820-014	SLEEVE PACKING	F40-POWER (SW-1)
	YSAP-12120-002	CUSHION L	(EPS)
	YSAP-12130-002	CUSHION R	(EPS)
	YVAP-13321-ZZ4	TOLON-SHEET	600x1200 0.5t
	ASS'Y-MAIN PCB		
	CAPACITORS		
C1	CFMT-N473J-GK0	CAPACITOR F/POLYESTR	0.047uF J 100V 8.9x13.
C2	CFMT-N473J-GK0	CAPACITOR F/POLYESTR	0.047uF J 100V 8.9x13.
C3	CFMT-N473J-GK0	CAPACITOR F/POLYESTR	0.047uF J 100V 8.9x13.
C4	CFMT-N473J-GK0	CAPACITOR F/POLYESTR	0.047uF J 100V 8.9x13.
C5	CFMT-N473J-GK0	CAPACITOR F/POLYESTR	0.047uF J 100V 8.9x13.
C6	CFMT-S104K-GI0	CAPACITOR F/POLYESTR	0.1uF K 250V 9.5x11 TL
C7	CFMT-S104K-GI0	CAPACITOR F/POLYESTR	0.1uF K 250V 9.5x11 TL
C8	CFMT-S104K-GI0	CAPACITOR F/POLYESTR	0.1uF K 250V 9.5x11 TL
C9	CEEZ-J822M-RT1	CAPACITOR E/ALUMINUM	8200uF M 50V 30x40 SMH
C10	CEEZ-J822M-RT1	CAPACITOR E/ALUMINUM	8200uF M 50V 30x40 SMH
C11	CFMT-S104K-GI0	CAPACITOR F/POLYESTR	0.1uF K 250V 9.5x11 TL
C12	CFMT-S104K-GI0	CAPACITOR F/POLYESTR	0.1uF K 250V 9.5x11 TL
C13	CACS-S472M-180	CAPACITOR AC	DE7150 F472MVA1 250V BS4
C14	CEET-C471M-FI1	CAPACITOR E/ALUMINUM	470uF M 6.3V 8x11.5 U
C15	CEET-J1R0M-CI0	CAPACITOR E/ALUMINUM	1.0uF M 50V 5x11
C16	CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF M 50V 5x11
C17	CEET-J330M-DI0	CAPACITOR E/ALUMINUM	33uF M 50V 6.3x11
C18	CACS-S472M-180	CAPACITOR AC	DE7150 F472MVA1 250V BS4
C19	CEET-J220M-CI0	CAPACITOR E/ALUMINUM	22uF M 50V 5x11
C21	CCCT-J222K-0DB	CAPACITOR CERAMIC	2200PF K 50V B T
C22	CCCT-J222K-0DB	CAPACITOR CERAMIC	2200PF K 50V B T
C23	CCCT-J222K-0DB	CAPACITOR CERAMIC	2200PF K 50V B T
C24	CCCT-J222K-0DB	CAPACITOR CERAMIC	2200PF K 50V B T
C25	CCCT-J222K-0DB	CAPACITOR CERAMIC	2200PF K 50V B T
C26	CCCT-J222K-0DB	CAPACITOR CERAMIC	2200PF K 50V B T
C27	CCCT-J222K-0DB	CAPACITOR CERAMIC	2200PF K 50V B T
C28	CCCT-J222K-0DB	CAPACITOR CERAMIC	2200PF K 50V B T
C29	CCCT-J222K-0DB	CAPACITOR CERAMIC	2200PF K 50V B T
C30	CCCT-J222K-0DB	CAPACITOR CERAMIC	2200PF K 50V B T
C101	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C102	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11

Ref. No.	Part No.	Description	
	CAPACITORS		
C103	CCTT-J680J-0FC	CAPACITOR CERAMIC	68PF J 50V CH T
C104	CCTT-J680J-0FC	CAPACITOR CERAMIC	68PF J 50V CH T
C105	CCAT-J681K-AAB	CAPACITOR CERAMIC	680PF K 50V B T
C106	CCAT-J681K-AAB	CAPACITOR CERAMIC	680PF K 50V B T
C107	CEET-F330M-CI0	CAPACITOR E/ALUMINUM	33uF M 25V 5x11
C108	CEET-F330M-CI0	CAPACITOR E/ALUMINUM	33uF M 25V 5x11
C109	CEET-F220M-CI0	CAPACITOR E/ALUMINUM	22uF M 25V 5x11
C110	CEET-F220M-CI0	CAPACITOR E/ALUMINUM	22uF M 25V 5x11
C111	CEET-C471M-FI1	CAPACITOR E/ALUMINUM	470uF M 6.3V 8x11.5 U
C112	CEET-C471M-FI1	CAPACITOR E/ALUMINUM	470uF M 6.3V 8x11.5 U
C113	CCAT-J8R2K-AAZ	CAPACITOR CERAMIC	8.2PF K 50V SL T
C114	CCAT-J8R2K-AAZ	CAPACITOR CERAMIC	8.2PF K 50V SL T
C115	CEET-J331M-HL1	CAPACITOR E/ALUMINUM	330uF M 50V 10x16 SHL
C116	CEET-J331M-HL1	CAPACITOR E/ALUMINUM	330uF M 50V 10x16 SHL
C117	CEET-J331M-HL1	CAPACITOR E/ALUMINUM	330uF M 50V 10x16 SHL
C118	CEET-J331M-HL1	CAPACITOR E/ALUMINUM	330uF M 50V 10x16 SHL
C119	CCTT-J330J-0BZ	CAPACITOR CERAMIC	33PF J 50V SL T
C120	CCTT-J330J-0BZ	CAPACITOR CERAMIC	33PF J 50V SL T
C121	CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF M 50V 5x11
C122	CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF M 50V 5x11
C123	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C124	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C125	CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF M 50V 5x11
C126	CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF M 50V 5x11
C127	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C128	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C129	CCTT-J680J-0FC	CAPACITOR CERAMIC	68PF J 50V CH T
C130	CCTT-J680J-0FC	CAPACITOR CERAMIC	68PF J 50V CH T
C131	CCAT-J681K-AAB	CAPACITOR CERAMIC	680PF K 50V B T
C132	CCAT-J681K-AAB	CAPACITOR CERAMIC	680PF K 50V B T
C133	CEET-F330M-CI0	CAPACITOR E/ALUMINUM	33uF M 25V 5x11
C134	CEET-F330M-CI0	CAPACITOR E/ALUMINUM	33uF M 25V 5x11
C135	CEET-F220M-CI0	CAPACITOR E/ALUMINUM	22uF M 25V 5x11
C136	CEET-F220M-CI0	CAPACITOR E/ALUMINUM	22uF M 25V 5x11
C137	CEET-C471M-FI1	CAPACITOR E/ALUMINUM	470uF M 6.3V 8x11.5 U
C138	CEET-C471M-FI1	CAPACITOR E/ALUMINUM	470uF M 6.3V 8x11.5 U
C139	CCAT-J8R2K-AAZ	CAPACITOR CERAMIC	8.2PF K 50V SL T
C140	CCAT-J8R2K-AAZ	CAPACITOR CERAMIC	8.2PF K 50V SL T
C141	CEET-J331M-HL1	CAPACITOR E/ALUMINUM	330uF M 50V 10x16 SHL
C142	CEET-J331M-HL1	CAPACITOR E/ALUMINUM	330uF M 50V 10x16 SHL
C143	CEET-J331M-HL1	CAPACITOR E/ALUMINUM	330uF M 50V 10x16 SHL
C144	CEET-J331M-HL1	CAPACITOR E/ALUMINUM	330uF M 50V 10x16 SHL
C145	CCTT-J330J-0BZ	CAPACITOR CERAMIC	33PF J 50V SL T
C146	CCTT-J330J-0BZ	CAPACITOR CERAMIC	33PF J 50V SL T
C147	CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF M 50V 5x11
C148	CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF M 50V 5x11
C149	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C150	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C151	CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF M 50V 5x11
C152	CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF M 50V 5x11
C153	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11
C154	CCTT-J680J-0FC	CAPACITOR CERAMIC	68PF J 50V CH T
C155	CCAT-J681K-AAB	CAPACITOR CERAMIC	680PF K 50V B T
C156	CEET-F330M-CI0	CAPACITOR E/ALUMINUM	33uF M 25V 5x11
C157	CEET-F220M-CI0	CAPACITOR E/ALUMINUM	22uF M 25V 5x11
C158	CEET-C471M-FI1	CAPACITOR E/ALUMINUM	470uF M 6.3V 8x11.5 U
C159	CCAT-J8R2K-AAZ	CAPACITOR CERAMIC	8.2PF K 50V SL T
C160	CEET-J331M-HL1	CAPACITOR E/ALUMINUM	330uF M 50V 10x16 SHL
C161	CEET-J331M-HL1	CAPACITOR E/ALUMINUM	330uF M 50V 10x16 SHL
C162	CCTT-J330J-0BZ	CAPACITOR CERAMIC	33PF J 50V SL T

Ref. No.	Part No.	Description	
CAPACITORS			
C163	CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF M 50V 5x11
C164	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11
C165	CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF M 50V 5x11
C168	CCCT-J223Z-OFF	CAPACITOR CERAMIC	0.022uF Z 50V F T
DIODES			
D1	DDMR-00230-T10	DIODE-RECTIFIER	GP60-04F(400V 6A)
D2	DDMR-00230-T10	DIODE-RECTIFIER	GP60-04F(400V 6A)
D3	DDMR-00230-T10	DIODE-RECTIFIER	GP60-04F(400V 6A)
D4	DDMR-00230-T10	DIODE-RECTIFIER	GP60-04F(400V 6A)
D5	DDTZ-G200C-SO0	DIODE ZENER	MTZ20C 19.23-20.22 DO40
D6	DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40
D7	DDTZ-G091B-SO0	DIODE ZENER	MTZ9.1B 9.01 DO40
D8	DDTZ-G051B-SOS	DIODE ZENER	MTZJ5.1B 4.94-5.20 DO34
D9	DDTZ-G150C-SO0	DIODE ZENER	MTZ15C 14.35-15.09 DO40
D10	DDTZ-G150C-SO0	DIODE ZENER	MTZ15C 14.35-15.09 DO40
D11	DDTR-00040-T10	DIODE-RECTIFIER	1N4004S(400V 1A 0.6mm)
D12	DDTR-00040-T10	DIODE-RECTIFIER	1N4004S(400V 1A 0.6mm)
D13	DDTZ-G180C-SO0	DIODE ZENER	MTZ18C 17.42-18.33 DO40
D14	DDTR-00040-T10	DIODE-RECTIFIER	1N4004S(400V 1A 0.6mm)
D101	DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40
D102	DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40
D103	DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40
D104	DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40
D105	DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40
D106	DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40
D107	DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40
D108	DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40
D109	DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40
D110	DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40
LED1	DPLT-00860-GG5	DOT-LED	LTL-307G GRN R5
INTEGRATED CIRCUITS			
U1	ICRG-00061-SE0	IC REGULATOR	KA7815 15V 3mm TO-22
COILS			
L1	KIBK-00190-E40	COIL-AUDIO CHOCK	0.7uH COIL-CHOCK
L2	KIBK-00190-E40	COIL-AUDIO CHOCK	0.7uH COIL-CHOCK
L3	KIBK-00190-E40	COIL-AUDIO CHOCK	0.7uH COIL-CHOCK
L4	KIBK-00190-E40	COIL-AUDIO CHOCK	0.7uH COIL-CHOCK
L5	KIBK-00190-E40	COIL-AUDIO CHOCK	0.7uH COIL-CHOCK
TRANSISTORS			
Q119	TRSC-01680-SB0	TRANSISTOR N-H FREQ	2SC4137 TO-126FP
Q120	TRSC-01680-SB0	TRANSISTOR N-H FREQ	2SC4137 TO-126FP
Q125	TRSC-01860-SD0	TRANSISTOR N-H FREQ	KTC5197 TO-3P(N)
Q126	TRSC-01860-SD0	TRANSISTOR N-H FREQ	KTC5197 TO-3P(N)
Q127	TRSA-01720-SD0	TRANSISTOR P-H FREQ	KTA1940 TO-3P(N)
Q128	TRSA-01720-SD0	TRANSISTOR P-H FREQ	KTA1940 TO-3P(N)
Q149	TRSC-01680-SB0	TRANSISTOR N-H FREQ	2SC4137 TO-126FP
Q150	TRSC-01680-SB0	TRANSISTOR N-H FREQ	2SC4137 TO-126FP
Q155	TRSC-01860-SD0	TRANSISTOR N-H FREQ	KTC5197 TO-3P(N)
Q156	TRSC-01860-SD0	TRANSISTOR N-H FREQ	KTC5197 TO-3P(N)
Q157	TRSA-01720-SD0	TRANSISTOR P-H FREQ	KTA1940 TO-3P(N)
Q158	TRSA-01720-SD0	TRANSISTOR P-H FREQ	KTA1940 TO-3P(N)
Q170	TRSC-01680-SB0	TRANSISTOR N-H FREQ	2SC4137 TO-126FP
Q173	TRSC-01860-SD0	TRANSISTOR N-H FREQ	KTC5197 TO-3P(N)
Q174	TRSA-01720-SD0	TRANSISTOR P-H FREQ	KTA1940 TO-3P(N)

Ref. No.	Part No.	Description	
	RESISTORS		
R1	RCFT-E220J-000	RESISTOR-CARBON FILM	22ohm 1/5W 5% T
R2	RCFT-E220J-000	RESISTOR-CARBON FILM	22ohm 1/5W 5% T
R3	RCFT-E220J-000	RESISTOR-CARBON FILM	22ohm 1/5W 5% T
R4	RCFT-E220J-000	RESISTOR-CARBON FILM	22ohm 1/5W 5% T
R5	RCFT-E220J-000	RESISTOR-CARBON FILM	22ohm 1/5W 5% T
R6	RCFT-E220J-000	RESISTOR-CARBON FILM	22ohm 1/5W 5% T
R7	RCFT-E220J-000	RESISTOR-CARBON FILM	22ohm 1/5W 5% T
R8	RCFT-E220J-000	RESISTOR-CARBON FILM	22ohm 1/5W 5% T
R9	RCFT-E220J-000	RESISTOR-CARBON FILM	22ohm 1/5W 5% T
R10	RCFT-E220J-000	RESISTOR-CARBON FILM	22ohm 1/5W 5% T
R16	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R17	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R18	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R19	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R20	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R21	RCFT-E152J-000	RESISTOR-CARBON FILM	1.5Kohm 1/5W 5% T
R22	RCFT-E391J-000	RESISTOR-CARBON FILM	390ohm 1/5W 5% T
R23	RCFT-E683J-000	RESISTOR-CARBON FILM	68Kohm 1/5W 5% T
R24	RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T
R25	RCFT-E332J-000	RESISTOR-CARBON FILM	3.3Kohm 1/5W 5% T
R26	RCFT-E751J-000	RESISTOR-CARBON FILM	750ohm 1/5W 5% T
R27	RCFT-E153J-000	RESISTOR-CARBON FILM	15Kohm 1/5W 5% T
R28	RCFT-E391J-000	RESISTOR-CARBON FILM	390ohm 1/5W 5% T
R29	RCFT-E473J-000	RESISTOR-CARBON FILM	47Kohm 1/5W 5% T
R30	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R31	RCFT-E333J-000	RESISTOR-CARBON FILM	33Kohm 1/5W 5% T
R32	RCFT-E473J-000	RESISTOR-CARBON FILM	47Kohm 1/5W 5% T
R33	RCFT-E473J-000	RESISTOR-CARBON FILM	47Kohm 1/5W 5% T
R34	RCFT-E333J-000	RESISTOR-CARBON FILM	33Kohm 1/5W 5% T
R35	RCFT-E153J-000	RESISTOR-CARBON FILM	15Kohm 1/5W 5% T
R36	RCFT-E153J-000	RESISTOR-CARBON FILM	15Kohm 1/5W 5% T
R37	RCFT-E751J-000	RESISTOR-CARBON FILM	750ohm 1/5W 5% T
R39	RCFT-E753J-000	RESISTOR-CARBON FILM	75Kohm 1/5W 5% T
R101	RCFT-E331J-000	RESISTOR-CARBON FILM	330ohm 1/5W 5% T
R102	RCFT-E331J-000	RESISTOR-CARBON FILM	330ohm 1/5W 5% T
R103	RCFT-E333J-000	RESISTOR-CARBON FILM	33Kohm 1/5W 5% T
R104	RCFT-E333J-000	RESISTOR-CARBON FILM	33Kohm 1/5W 5% T
R105	RCFT-E150J-000	RESISTOR-CARBON FILM	15ohm 1/5W 5% T
R106	RCFT-E150J-000	RESISTOR-CARBON FILM	15ohm 1/5W 5% T
R107	RCFT-E751J-000	RESISTOR-CARBON FILM	750ohm 1/5W 5% T
R108	RCFT-E751J-000	RESISTOR-CARBON FILM	750ohm 1/5W 5% T
R109	RCFT-E150J-000	RESISTOR-CARBON FILM	15ohm 1/5W 5% T
R110	RCFT-E150J-000	RESISTOR-CARBON FILM	15ohm 1/5W 5% T
R111	RCFT-E751J-000	RESISTOR-CARBON FILM	750ohm 1/5W 5% T
R112	RCFT-E751J-000	RESISTOR-CARBON FILM	750ohm 1/5W 5% T
R113	RCFT-E680J-000	RESISTOR-CARBON FILM	68ohm 1/5W 5% T
R114	RCFT-E680J-000	RESISTOR-CARBON FILM	68ohm 1/5W 5% T
R115	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R116	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R117	RCFT-E333J-000	RESISTOR-CARBON FILM	33Kohm 1/5W 5% T
R118	RCFT-E333J-000	RESISTOR-CARBON FILM	33Kohm 1/5W 5% T
R119	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R120	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R121	RCFT-E151J-000	RESISTOR-CARBON FILM	150ohm 1/5W 5% T
R122	RCFT-E151J-000	RESISTOR-CARBON FILM	150ohm 1/5W 5% T
R123	RCFT-E182J-000	RESISTOR-CARBON FILM	1.8Kohm 1/5W 5% T
R124	RCFT-E182J-000	RESISTOR-CARBON FILM	1.8Kohm 1/5W 5% T
R125	RCFT-E333J-000	RESISTOR-CARBON FILM	33Kohm 1/5W 5% T
R126	RCFT-E333J-000	RESISTOR-CARBON FILM	33Kohm 1/5W 5% T
R127	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T

Ref. No.	Part No.	Description	
	RESISTORS		
R128	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R129	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R130	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R131	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R132	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R133	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R134	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R135	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R136	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R137	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R138	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R139	RCFT-E432J-000	RESISTOR-CARBON FILM	4.3Kohm 1/5W 5% T
R140	RCFT-E432J-000	RESISTOR-CARBON FILM	4.3Kohm 1/5W 5% T
R141	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R142	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R143	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R144	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R145	RCFT-E122J-000	RESISTOR-CARBON FILM	1.2Kohm 1/5W 5% T
R146	RCFT-E122J-000	RESISTOR-CARBON FILM	1.2Kohm 1/5W 5% T
R147	RCFT-E821J-000	RESISTOR-CARBON FILM	820ohm 1/5W 5% T
R148	RCFT-E821J-000	RESISTOR-CARBON FILM	820ohm 1/5W 5% T
R149	RCFT-E821J-000	RESISTOR-CARBON FILM	820ohm 1/5W 5% T
R150	RCFT-E821J-000	RESISTOR-CARBON FILM	820ohm 1/5W 5% T
R151	RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T
R152	RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T
R153	RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T
R154	RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T
R159	RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T
R160	RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T
R166	RCFT-E432J-000	RESISTOR-CARBON FILM	4.3Kohm 1/5W 5% T
R171	RCFT-E182J-000	RESISTOR-CARBON FILM	1.8Kohm 1/5W 5% T
R172	RCFT-E182J-000	RESISTOR-CARBON FILM	1.8Kohm 1/5W 5% T
R173	RCFT-E202J-000	RESISTOR-CARBON FILM	2Kohm 1/5W 5% T
R174	RCFT-E202J-000	RESISTOR-CARBON FILM	2Kohm 1/5W 5% T
R175	RCFT-E911J-000	RESISTOR-CARBON FILM	910ohm 1/5W 5% T
R176	RCFT-E911J-000	RESISTOR-CARBON FILM	910ohm 1/5W 5% T
R177	RCFT-E682J-000	RESISTOR-CARBON FILM	6.8Kohm 1/5W 5% T
R178	RCFT-E682J-000	RESISTOR-CARBON FILM	6.8Kohm 1/5W 5% T
R181	RCFT-E331J-000	RESISTOR-CARBON FILM	330ohm 1/5W 5% T
R182	RCFT-E331J-000	RESISTOR-CARBON FILM	330ohm 1/5W 5% T
R183	RCFT-E333J-000	RESISTOR-CARBON FILM	33Kohm 1/5W 5% T
R184	RCFT-E333J-000	RESISTOR-CARBON FILM	33Kohm 1/5W 5% T
R185	RCFT-E150J-000	RESISTOR-CARBON FILM	15ohm 1/5W 5% T
R186	RCFT-E150J-000	RESISTOR-CARBON FILM	15ohm 1/5W 5% T
R187	RCFT-E751J-000	RESISTOR-CARBON FILM	750ohm 1/5W 5% T
R188	RCFT-E751J-000	RESISTOR-CARBON FILM	750ohm 1/5W 5% T
R189	RCFT-E150J-000	RESISTOR-CARBON FILM	15ohm 1/5W 5% T
R190	RCFT-E150J-000	RESISTOR-CARBON FILM	15ohm 1/5W 5% T
R191	RCFT-E751J-000	RESISTOR-CARBON FILM	750ohm 1/5W 5% T
R192	RCFT-E751J-000	RESISTOR-CARBON FILM	750ohm 1/5W 5% T
R193	RCFT-E680J-000	RESISTOR-CARBON FILM	68ohm 1/5W 5% T
R194	RCFT-E680J-000	RESISTOR-CARBON FILM	68ohm 1/5W 5% T
R195	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R196	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R197	RCFT-E333J-000	RESISTOR-CARBON FILM	33Kohm 1/5W 5% T
R198	RCFT-E333J-000	RESISTOR-CARBON FILM	33Kohm 1/5W 5% T
R199	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R200	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R201	RCFT-E151J-000	RESISTOR-CARBON FILM	150ohm 1/5W 5% T
R202	RCFT-E151J-000	RESISTOR-CARBON FILM	150ohm 1/5W 5% T

Ref. No.	Part No.	Description	
	RESISTORS		
R203	RCFT-E182J-000	RESISTOR-CARBON FILM	1.8Kohm 1/5W 5% T
R204	RCFT-E182J-000	RESISTOR-CARBON FILM	1.8Kohm 1/5W 5% T
R205	RCFT-E333J-000	RESISTOR-CARBON FILM	33Kohm 1/5W 5% T
R206	RCFT-E333J-000	RESISTOR-CARBON FILM	33Kohm 1/5W 5% T
R207	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R208	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R209	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R210	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R211	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R212	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R213	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R214	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R215	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R216	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R217	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R218	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R219	RCFT-E432J-000	RESISTOR-CARBON FILM	4.3Kohm 1/5W 5% T
R221	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R222	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R223	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R224	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R225	RCFT-E122J-000	RESISTOR-CARBON FILM	1.2Kohm 1/5W 5% T
R226	RCFT-E122J-000	RESISTOR-CARBON FILM	1.2Kohm 1/5W 5% T
R227	RCFT-E821J-000	RESISTOR-CARBON FILM	820ohm 1/5W 5% T
R228	RCFT-E821J-000	RESISTOR-CARBON FILM	820ohm 1/5W 5% T
R229	RCFT-E821J-000	RESISTOR-CARBON FILM	820ohm 1/5W 5% T
R230	RCFT-E821J-000	RESISTOR-CARBON FILM	820ohm 1/5W 5% T
R231	RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T
R232	RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T
R233	RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T
R234	RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T
R239	RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T
R240	RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T
R251	RCFT-E182J-000	RESISTOR-CARBON FILM	1.8Kohm 1/5W 5% T
R252	RCFT-E182J-000	RESISTOR-CARBON FILM	1.8Kohm 1/5W 5% T
R253	RCFT-E202J-000	RESISTOR-CARBON FILM	2Kohm 1/5W 5% T
R254	RCFT-E202J-000	RESISTOR-CARBON FILM	2Kohm 1/5W 5% T
R255	RCFT-E911J-000	RESISTOR-CARBON FILM	910ohm 1/5W 5% T
R256	RCFT-E911J-000	RESISTOR-CARBON FILM	910ohm 1/5W 5% T
R257	RCFT-E682J-000	RESISTOR-CARBON FILM	6.8Kohm 1/5W 5% T
R258	RCFT-E682J-000	RESISTOR-CARBON FILM	6.8Kohm 1/5W 5% T
R261	RCFT-E331J-000	RESISTOR-CARBON FILM	330ohm 1/5W 5% T
R262	RCFT-E333J-000	RESISTOR-CARBON FILM	33Kohm 1/5W 5% T
R263	RCFT-E150J-000	RESISTOR-CARBON FILM	15ohm 1/5W 5% T
R264	RCFT-E751J-000	RESISTOR-CARBON FILM	750ohm 1/5W 5% T
R265	RCFT-E150J-000	RESISTOR-CARBON FILM	15ohm 1/5W 5% T
R266	RCFT-E751J-000	RESISTOR-CARBON FILM	750ohm 1/5W 5% T
R267	RCFT-E680J-000	RESISTOR-CARBON FILM	68ohm 1/5W 5% T
R268	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T
R269	RCFT-E333J-000	RESISTOR-CARBON FILM	33Kohm 1/5W 5% T
R270	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T
R271	RCFT-E151J-000	RESISTOR-CARBON FILM	150ohm 1/5W 5% T
R272	RCFT-E182J-000	RESISTOR-CARBON FILM	1.8Kohm 1/5W 5% T
R273	RCFT-E333J-000	RESISTOR-CARBON FILM	33Kohm 1/5W 5% T
R274	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R275	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R276	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R277	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R278	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T
R279	RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T

Ref. No.	Part No.	Description	
RESISTORS			
R280	RCFT-E432J-000	RESISTOR-CARBON FILM	4.3Kohm 1/5W 5% T
R281	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R282	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R283	RCFT-E122J-000	RESISTOR-CARBON FILM	1.2Kohm 1/5W 5% T
R284	RCFT-E821J-000	RESISTOR-CARBON FILM	820ohm 1/5W 5% T
R285	RCFT-E821J-000	RESISTOR-CARBON FILM	820ohm 1/5W 5% T
R286	RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T
R287	RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T
R290	RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T
R296	RCFT-E182J-000	RESISTOR-CARBON FILM	1.8Kohm 1/5W 5% T
R297	RCFT-E202J-000	RESISTOR-CARBON FILM	2Kohm 1/5W 5% T
R298	RCFT-E911J-000	RESISTOR-CARBON FILM	910ohm 1/5W 5% T
R299	RCFT-E682J-000	RESISTOR-CARBON FILM	6.8Kohm 1/5W 5% T
R301	RCFT-E334J-000	RESISTOR-CARBON FILM	330Kohm 1/5W 5% T
MISCELLANEOUS			
CN1	KNCW-00380-FS0	CONNECTOR WAFER	CFG1115-0101 1.5mm 15P
CN2	KNCW-00140-ATM	CONNECTOR-WAFER	5267-10A 2.5mm MILK
CN3	KNCW-00240-CT9	CONNECTOR-WAFER	53014-12 2.0mm WHT
CN4	KNCW-00140-2TM	CONNECTOR-WAFER	5267-02A 2.5mm MILK
CN5	KNCW-00240-2T9	CONNECTOR-WAFER	53014-02 2.0mm WHT
CN6	KNCW-00990-2T9	CONNECTOR-WAFER	JE202A-1T-02
CN8	KNCW-00980-2S9	CONNECTOR-WAFER	JE202A-2T-2P
CN9	KNCW-00970-3T9	CONNECTOR-WAFER	JE202-1T-3P
CN10	KNCW-00140-9TM	CONNECTOR-WAFER	5267-09A 2.5mm MILK
CN11	KNCW-00990-2T9	CONNECTOR-WAFER	JE202A-1T-02
GND-TER1	MPAC-03810-004	TERMINAL-GND	ET-HD T0.3
FC1	MPAC-11620-004	FUSE CLIP	5.2Pi TAPPING TYPE
FC2	MPAC-11620-004	FUSE CLIP	5.2Pi TAPPING TYPE
PCB1	PCSA-05180-11B	PCB-SINGLE	A1A-518 330x247x1.6t
RL1	ESRY-00290-124	RELAY	DG12D1-O(M)
CDP BLOCK			
ASS'Y-MECHANISM			
MISCELLANEOUS			
AJAF-16520-014	ASS'Y-FOOT	F40-POWER (ABS+RUBBER2T)	
DECD-00200-00F	MECHA CDP	CMS-FR3B (3CD)	
FGFB-S1001-837	FUSE GLASS	100mA 250V 50T 5x20	
KDAC-0562F-AA0	CORD-AC	KKP419C,KLCE-2F CORE&TUBE	
LLA3-16223-E10	CARD CABLE	2896 1.0x16Px223xCx	
MAAF-16360-014	LENS-POWER	F40-POWER PMMA 60N	
MAAF-16400-014	LENS-DIRECT	F40-CDP PMMA 60N	
MJAF-06300-011	PANEL-FRONT	F40-CDP HI-PS BLACK	
MJAF-08380-013	KNOB-OP/CL	F40-CDP ABS-720	
MJAF-08390-013	KNOB-FUNCTION(A)	F40-PRE AMP ABS-720	
MJAF-08400-013	KNOB-FUNCTION(B)	F40-PRE AMP ABS-720	
MJAF-08410-013	KNOB-DIRECT	F40-CDP ABS-720	
MJAF-08420-013	DOOR-CDP	F40-CDP ABS-720	
MJAF-16060-014	KNOB-SPEAKER	F40-POWER ABS-720	
MJAF-16390-004	JOINT-POWER	ABS-720	
MJAF-16410-014	FOOT	F40-PRE AMP ABS-720	
MJAG-00280-003	CORD-BUSH	NIFCO	
MJAG-04540-004	CABLE-TIE-L80	*	
MPAC-04790-013	CHASSIS-BACK	F40-CDP SECC T0.8	
MPAC-04810-003	BRACKET-CDP	SECC T1.0	
MPAC-04820-003	BRACKET-PCB	SECC T1.0	
MPAC-04920-012	CHASSIS-TOP	F40-PRE AMP VCM T0.8	
MPAC-06170-001	CHASSIS-BOTTOM	US COATING T1.0	
MPAC-06710-004	CLAMP-WIRE-L52	*	
MRAG-13210-004	CUSHION-A	(EVA 25*15*T4)	

Ref. No.	Part No.	Description	
	MISCELLANEOUS		
	MRAG-13220-004	CUSHION-FOOT	(RUBBER 25*19.5*T2)
	PTAE-03560-YJV	TRANSFORMER-POWER	A48-356Y-V 230V 50Hz
	UA08-9M727-520	WIRE-ASS'Y	UL1007#26 WHT-270 10P
	U348-2A540-480	WIRE-ASS'Y	UL1617#22 RED-400 3P
	U508-4M742-250	WIRE-ASS'Y	UL1007#26 YEL-420 5P
	U608-5M735-520	WIRE-ASS'Y	UL1007#26 GRN-350 6P
	XSTB-30060-ZB4	SCREW-TAPPING	BHT2T 3x6 FE-ZB
	XSTB-30060-ZY4	SCREW-TAPPING	BHT2T 3x6 FE-ZY
	XSTB-30080-ZB4	SCREW-TAPPING	BHT2T 3x8 FE-ZB
	XSTB-30080-ZY4	SCREW-TAPPING	BHT2T 3x8 FE-ZY 1
	XSTB-30100-ZB4	SCREW-TAPPING	BHT2T 3x10 FE-ZB
	XSTB-30100-ZY4	SCREW-TAPPING	BHT2T 3x10 FE-ZY 2
	XSTB-40080-ZY8	SCREW-TAPPING	BHT3T 4x8 FE-ZY
	XSTW-30080-ZY4	SCREW-TAPPING	PH/WT2T 3x8 FE-ZY
	YGAP-14820-014	SLEEVE PACKING	F40-POWER (SW-1)
	YGAP-15230-004	ANGLE-PROTECTOR	54X50X640 3T
	YSAP-12120-002	CUSHION L	(EPS)
	YSAP-12130-002	CUSHION R	(EPS)
	YVAP-13321-014	TOLON-SHEET	FJ-656 600x1200 0.5t
	ASS'Y-MAIN PCB		
	CAPACITORS		
C801	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11 T
C803	CCCT-J122K-0BB	CAPACITOR CERAMIC	1200PF K 50V B T
C804	CCCT-J122K-0BB	CAPACITOR CERAMIC	1200PF K 50V B T
C805	CFMT-N103J-DE0	CAPACITOR F/POLYESTR	0.01uF J 100V 6x7 T
C807	CFMT-N103J-DE0	CAPACITOR F/POLYESTR	0.01uF J 100V 6x7 T
C809	CACS-S472M-180	CAPACITOR AC	DE7150 F472MVA1 250V BS415
C810	CEEC-F332M-LP1	CAPACITOR E/ALUMINUM	3300uF M 25V 16x25 C
C811	CEEC-F332M-LP1	CAPACITOR E/ALUMINUM	3300uF M 25V 16x25 C
C812	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF Z 50V F T 2
C813	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF Z 50V F T 2
C814	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF Z 50V F T 2
C815	CEET-E222M-KL0	CAPACITOR E/ALUMINUM	2200uF M 16V 12.5x16 T
C816	CEET-F221M-FI1	CAPACITOR E/ALUMINUM	220uF M 25V 8x11.5 T
C817	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF Z 50V F T 2
C818	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF Z 50V F T 2
C819	CEET-D101M-CI0	CAPACITOR E/ALUMINUM	100uF M 10V 5x11 T
C820	CCCT-J223Z-OFF	CAPACITOR CERAMIC	0.022uF Z 50V F T
C821	CFMT-N473J-GK0	CAPACITOR F/POLYESTR	0.047uF J 100V 8.9x13. T
C822	CFMT-N103J-DE0	CAPACITOR F/POLYESTR	0.01uF J 100V 6x7 T
C823	CCTT-J330J-0DC	CAPACITOR CERAMIC	33PF J 50V CH T
C824	CCTT-J330J-0DC	CAPACITOR CERAMIC	33PF J 50V CH T
C825	CCCT-J223Z-OFF	CAPACITOR CERAMIC	0.022uF Z 50V F T
C826	CEET-D221M-DI0	CAPACITOR E/ALUMINUM	220uF M 10V 6.3x11 T
C827	CEET-D101M-CI0	CAPACITOR E/ALUMINUM	100uF M 10V 5x11 T
C831	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11 T
C832	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11 T
C833	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF Z 50V F T 2
C834	CEET-D221M-DI0	CAPACITOR E/ALUMINUM	220uF M 10V 6.3x11 T
C835	CCCT-J103Z-0DF	CAPACITOR CERAMIC	0.01uF Z 50V F T
C836	CFMT-N152J-CJ0	CAPACITOR F/POLYESTR	0.0015uF J 100V 5.4x12 T
C837	CFMT-N103J-DE0	CAPACITOR F/POLYESTR	0.01uF J 100V 6x7 T
C838	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11 T
C839	CEET-D221M-DI0	CAPACITOR E/ALUMINUM	220uF M 10V 6.3x11 T
C840	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF Z 50V F T 2
C841	CEET-D101M-CI0	CAPACITOR E/ALUMINUM	100uF M 10V 5x11 T
C842	CCCT-J223Z-OFF	CAPACITOR CERAMIC	0.022uF Z 50V F T
C843	CEET-D221M-DI0	CAPACITOR E/ALUMINUM	220uF M 10V 6.3x11 T
C844	CFMT-N333J-FK0	CAPACITOR F/POLYESTR	0.033uF J 100V 8.1x13 T

Ref. No.	Part No.	Description			
	CAPACITORS				
C845	CFMT-N103J-DE0	CAPACITOR F/POLYESTR	0.01uF	J 100V 6x7	T
C846	CEET-D101M-CI0	CAPACITOR E/ALUMINUM	100uF	M 10V 5x11	T
C847	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF	Z 50V F T	2
C848	CFMT-N272J-DJ0	CAPACITOR F/POLYESTR	0.0027uF	J 100V 5.7x12	T
C849	CCTT-J391J-0FZ	CAPACITOR CERAMIC	390PF	J 50V SL T	
C850	CCTT-J151J-0DZ	CAPACITOR CERAMIC	150PF	J 50V SL T	
C851	CCTT-J391J-0FZ	CAPACITOR CERAMIC	390PF	J 50V SL T	
C852	CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF	M 25V 5x11	T
C853	CCTT-J151J-0DZ	CAPACITOR CERAMIC	150PF	J 50V SL T	
C854	CFMT-N272J-DJ0	CAPACITOR F/POLYESTR	0.0027uF	J 100V 5.7x12	T
C855	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF	M 50V 5x11	T
C856	CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF	M 50V 5x11	T
C857	CEET-D221M-DI0	CAPACITOR E/ALUMINUM	220uF	M 10V 6.3x11	T
C858	CFMT-N333J-FK0	CAPACITOR F/POLYESTR	0.033uF	J 100V 8.1x13	T
C859	CEET-JR47M-CI0	CAPACITOR E/ALUMINUM	0.47uF	M 50V 5x11	T
C860	CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF	J 100V 12.1x14	T
C861	CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF	J 100V 12.1x14	T
C862	CEET-JR47M-CI0	CAPACITOR E/ALUMINUM	0.47uF	M 50V 5x11	T
C863	CFMT-N103J-DE0	CAPACITOR F/POLYESTR	0.01uF	J 100V 6x7	T
C865	CEET-G100M-CI0	CAPACITOR E/ALUMINUM	10uF	M 35V 5x11	T
C866	CEET-J2R2M-CI0	CAPACITOR E/ALUMINUM	2.2uF	M 50V 5x11	T
C867	CFMT-N103J-DE0	CAPACITOR F/POLYESTR	0.01uF	J 100V 6x7	T
C868	CCTT-J391J-0FZ	CAPACITOR CERAMIC	390PF	J 50V SL T	
C869	CEET-JR10M-CI0	CAPACITOR E/ALUMINUM	0.1uF	M 50V 5x11	T
C870	CFMT-N472J-DJ0	CAPACITOR F/POLYESTR	0.0047uF	J 100V 5.8x12	T
C871	CFMT-N333J-FK0	CAPACITOR F/POLYESTR	0.033uF	J 100V 8.1x13	T
C872	CFMT-N472J-DJ0	CAPACITOR F/POLYESTR	0.0047uF	J 100V 5.8x12	T
C873	CFMT-N103J-DE0	CAPACITOR F/POLYESTR	0.01uF	J 100V 6x7	T
C874	CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF	J 100V 12.1x14	T
C875	CFMT-N222J-CJ0	CAPACITOR F/POLYESTR	0.0022uF	J 100V 5.5x12	T
C876	CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF	J 100V 12.1x14	T
C877	CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF	J 100V 12.1x14	T
C878	CFMT-N333J-FK0	CAPACITOR F/POLYESTR	0.033uF	J 100V 8.1x13	T
C879	CEET-F330M-CI0	CAPACITOR E/ALUMINUM	33uF	M 25V 5x11	T
C880	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF	Z 50V F T	2
C881	CEET-D101M-CI0	CAPACITOR E/ALUMINUM	100uF	M 10V 5x11	T
C882	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF	Z 50V F T	2
C883	CEET-D221M-DI0	CAPACITOR E/ALUMINUM	220uF	M 10V 6.3x11	T
C884	CEET-F330M-CI0	CAPACITOR E/ALUMINUM	33uF	M 25V 5x11	T
C885	CCCT-J102K-0BB	CAPACITOR CERAMIC	1000PF	K 50V B T	
C886	CEET-G100M-CI0	CAPACITOR E/ALUMINUM	10uF	M 35V 5x11	T
C887	CCTT-J6R0D-0BC	CAPACITOR CERAMIC	6PF	D 50V CH T	
C888	CFMT-N472J-DJ0	CAPACITOR F/POLYESTR	0.0047uF	J 100V 5.8x12	T
C889	CFMT-N103J-DE0	CAPACITOR F/POLYESTR	0.01uF	J 100V 6x7	T
C890	CEET-J1R0M-CI0	CAPACITOR E/ALUMINUM	1.0uF	M 50V 5x11	T
C891	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF	Z 50V F T	2
C892	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF	Z 50V F T	2
C893	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF	Z 50V F T	2
C894	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF	Z 50V F T	2
C895	CEET-E101M-DI0	CAPACITOR E/ALUMINUM	100uF	M 16V 6.3x11	T
C896	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF	Z 50V F T	2
C897	CCCT-J102K-0BB	CAPACITOR CERAMIC	1000PF	K 50V B T	
C898	CCCT-J102K-0BB	CAPACITOR CERAMIC	1000PF	K 50V B T	
C899	CCCT-J102K-0BB	CAPACITOR CERAMIC	1000PF	K 50V B T	
C900	CCCT-J102K-0BB	CAPACITOR CERAMIC	1000PF	K 50V B T	
C901	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF	Z 50V F T	2
C902	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF	Z 50V F T	2
C904	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF	Z 50V F T	2
C910	CEET-G100M-CI0	CAPACITOR E/ALUMINUM	10uF	M 35V 5x11	T
C911	CEET-F221M-FI1	CAPACITOR E/ALUMINUM	220uF	M 25V 8x11.5	T


Ref. No.	Part No.	Description		
CAPACITORS				
C912	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF Z 50V F T	2
C913	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF Z 50V F T	2
C914	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF Z 50V F T	2
C915	CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF Z 50V F T	2
C916	CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T	
C917	CCTT-J100D-0BC	CAPACITOR CERAMIC	10PF D 50V CH T	
C918	CCAT-F223Z-AAF	CAPACITOR CERAMIC	0.022uF Z 25V F T	
C919	CCAT-F223Z-AAF	CAPACITOR CERAMIC	0.022uF Z 25V F T	
C920	CCCT-J102K-0BB	CAPACITOR CERAMIC	1000PF K 50V B T	
C921	CCCT-J473Z-0JF	CAPACITOR CERAMIC	0.047uF Z 50V F T	
DIODES				
D801	DDTR-00040-T10	DIODE-RECTIFIER	1N4004S(400V 1A 0.6mm) T	
D802	DDTR-00040-T10	DIODE-RECTIFIER	1N4004S(400V 1A 0.6mm) T	
D803	DDTR-00040-T10	DIODE-RECTIFIER	1N4004S(400V 1A 0.6mm) T	
D804	DDTR-00040-T10	DIODE-RECTIFIER	1N4004S(400V 1A 0.6mm) T	
D805	DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	
D806	DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	
D808	DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	
D901	DPLT-00840-MG3	DOT-LED	LTL-1CHG GRN R3.1	
D902	DPLT-00840-MG3	DOT-LED	LTL-1CHG GRN R3.1	
D903	DPLT-00840-MG3	DOT-LED	LTL-1CHG GRN R3.1	
D904	DPLT-00860-GG5	DOT-LED	LTL-307G GRN R5	
ZD801	DDTZ-G056B-SOS	DIODE ZENER	MTZJ5.6B 5.45-5.73 DO34 T	
ZD802	DDTZ-G030B-SOS	DIODE ZENER	MTZJ3.0B 3.010-3.220 DO34	
ZD803	DDTZ-G075B-SO0	DIODE ZENER	MTZ7.5B 7.07-7.45 D040 T	
INTEGRATED CIRCUITS				
IC801	ICMP-03470-S40	IC U-COMPUTER	CXP84220-107S	
IC802	ICRG-00043-SE0	IC REGULATOR	KA7805 5V 3mm TO-220	
IC803	ICRG-00211-SE0	IC REGULATOR	KA7808 8V 3mm TO-220	
IC804	ICDG-02180-SE0	IC DSP & D/A	KS9286 QFP80	
IC805	ICLN-03470-SE0	IC RF AMP & SSP	KB9223 QFP80	
IC806	ICLN-01590-SE0	IC MOTOR CONTROL CDP	KA-9258D HSOP28	
IC807	ICLN-03780-SE0	IC MOTOR DRIVER	KA3082 SIP10	
IC808	ICLN-03780-SE0	IC MOTOR DRIVER	KA3082 SIP10	
IC809	ICRG-00261-SD0	IC REGULATOR	KIA7032P 3.2V TO-92	
COILS				
L801	KI0T-4100K-003	COIL-INDUCTOR	10uH K LAL02 T	
L802	KI0T-4100K-003	COIL-INDUCTOR	10uH K LAL02 T	
L803	KI0T-4100K-003	COIL-INDUCTOR	10uH K LAL02 T	
RESISTORS				
R801	RCFT-E225J-000	RESISTOR-CARBON FILM	2.2Mohm 1/5W 5% T	
R802	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T	
R804	RCFT-E332J-000	RESISTOR-CARBON FILM	3.3Kohm 1/5W 5% T	
R805	RCFT-E562J-000	RESISTOR-CARBON FILM	5.6Kohm 1/5W 5% T	1
R806	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T	
R807	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T	
R808	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T	
R809	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T	
R810	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T	
R811	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	1
R812	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	1
R813	RCFT-E273J-000	RESISTOR-CARBON FILM	27Kohm 1/5W 5% T	
R814	RCFT-E332J-000	RESISTOR-CARBON FILM	3.3Kohm 1/5W 5% T	
R815	RCFT-E332J-000	RESISTOR-CARBON FILM	3.3Kohm 1/5W 5% T	
R816	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	1
R817	RCFT-E824J-000	RESISTOR-CARBON FILM	820Kohm 1/5W 5% T	

Ref. No.	Part No.	Description	
	RESISTORS		
R818	RCFT-E434J-000	RESISTOR-CARBON FILM	430Kohm 1/5W 5% T
R819	RCFT-E562J-000	RESISTOR-CARBON FILM	5.6Kohm 1/5W 5% T 1
R820	RCFT-E562J-000	RESISTOR-CARBON FILM	5.6Kohm 1/5W 5% T 1
R821	RCFT-E562J-000	RESISTOR-CARBON FILM	5.6Kohm 1/5W 5% T 1
R822	RCFT-E273J-000	RESISTOR-CARBON FILM	27Kohm 1/5W 5% T
R823	RCFT-E562J-000	RESISTOR-CARBON FILM	5.6Kohm 1/5W 5% T 1
R824	RCFT-E562J-000	RESISTOR-CARBON FILM	5.6Kohm 1/5W 5% T 1
R825	RCFT-E562J-000	RESISTOR-CARBON FILM	5.6Kohm 1/5W 5% T 1
R826	RCFT-E273J-000	RESISTOR-CARBON FILM	27Kohm 1/5W 5% T
R827	RCFT-E184J-000	RESISTOR-CARBON FILM	180Kohm 1/5W 5% T
R828	RCFT-E273J-000	RESISTOR-CARBON FILM	27Kohm 1/5W 5% T
R829	RCFT-E273J-000	RESISTOR-CARBON FILM	27Kohm 1/5W 5% T
R830	RCFT-E105J-000	RESISTOR-CARBON FILM	1Mohm 1/5W 5% T
R831	RCFT-E822J-000	RESISTOR-CARBON FILM	8.2Kohm 1/5W 5% T
R832	RCFT-E154J-000	RESISTOR-CARBON FILM	150Kohm 1/5W 5% T
R833	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T 1
R834	RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T
R835	RCFT-E123J-000	RESISTOR-CARBON FILM	12Kohm 1/5W 5% T
R836	RCFT-E683J-000	RESISTOR-CARBON FILM	68Kohm 1/5W 5% T
R837	RCFT-E153J-000	RESISTOR-CARBON FILM	15Kohm 1/5W 5% T
R838	RCFT-E473J-000	RESISTOR-CARBON FILM	47Kohm 1/5W 5% T
R839	RCFT-E683J-000	RESISTOR-CARBON FILM	68Kohm 1/5W 5% T
R840	RCFT-E473J-000	RESISTOR-CARBON FILM	47Kohm 1/5W 5% T
R841	RCFT-E124J-000	RESISTOR-CARBON FILM	120Kohm 1/5W 5% T
R842	RCFT-E124J-000	RESISTOR-CARBON FILM	120Kohm 1/5W 5% T
R843	RCFT-E683J-000	RESISTOR-CARBON FILM	68Kohm 1/5W 5% T
R844	RCFT-E154J-000	RESISTOR-CARBON FILM	150Kohm 1/5W 5% T
R845	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T 1
R846	RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T
R847	RCFT-E154J-000	RESISTOR-CARBON FILM	150Kohm 1/5W 5% T
R848	RCFT-E153J-000	RESISTOR-CARBON FILM	15Kohm 1/5W 5% T
R849	RCFT-E682J-000	RESISTOR-CARBON FILM	6.8Kohm 1/5W 5% T
R850	RCFT-E220J-000	RESISTOR-CARBON FILM	22ohm 1/5W 5% T
R851	RCFT-E153J-000	RESISTOR-CARBON FILM	15Kohm 1/5W 5% T
R852	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R853	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R854	RCFT-E100J-000	RESISTOR-CARBON FILM	10ohm 1/5W 5% T
R855	RCFT-E472J-000	RESISTOR-CARBON FILM	4.7Kohm 1/5W 5% T
R856	RCFT-E472J-000	RESISTOR-CARBON FILM	4.7Kohm 1/5W 5% T
R857	RCFT-E473J-000	RESISTOR-CARBON FILM	47Kohm 1/5W 5% T
R858	RCFT-E100J-000	RESISTOR-CARBON FILM	10ohm 1/5W 5% T
R859	RCFT-E472J-000	RESISTOR-CARBON FILM	4.7Kohm 1/5W 5% T
R860	RCFT-E472J-000	RESISTOR-CARBON FILM	4.7Kohm 1/5W 5% T
R861	RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T
R862	RCFT-E134J-000	RESISTOR-CARBON FILM	130Kohm 1/5W 5% T
R863	RCFT-E683J-000	RESISTOR-CARBON FILM	68Kohm 1/5W 5% T
R864	RCFT-E683J-000	RESISTOR-CARBON FILM	68Kohm 1/5W 5% T
R865	RCFT-E683J-000	RESISTOR-CARBON FILM	68Kohm 1/5W 5% T
R866	RCFT-E683J-000	RESISTOR-CARBON FILM	68Kohm 1/5W 5% T
R867	RCFT-E134J-000	RESISTOR-CARBON FILM	130Kohm 1/5W 5% T
R868	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T 1
R869	RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T
R870	RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T
R871	RCFT-E562J-000	RESISTOR-CARBON FILM	5.6Kohm 1/5W 5% T 1
R872	RCFT-E123J-000	RESISTOR-CARBON FILM	12Kohm 1/5W 5% T
R873	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R874	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T
R875	RCFT-E472J-000	RESISTOR-CARBON FILM	4.7Kohm 1/5W 5% T
R876	RCFT-E472J-000	RESISTOR-CARBON FILM	4.7Kohm 1/5W 5% T
R877	RCFT-G471J-190	RESISTOR-CARBON FILM	470ohm 1/2W 5% 2.3x6.5 T

Ref. No.	Part No.	Description		
RESISTORS				
R878	RCFT-E152J-000	RESISTOR-CARBON FILM	1.5Kohm 1/5W 5% T	
R879	RCFT-E221J-000	RESISTOR-CARBON FILM	220ohm 1/5W 5% T	
R880	RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T	
R881	RCFT-E474J-000	RESISTOR-CARBON FILM	470Kohm 1/5W 5% T	
R882	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	1
R883	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	1
R901	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T	
R902	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T	
R903	RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T	
R904	RCFT-E242J-000	RESISTOR-CARBON FILM	2.4Kohm 1/5W 5% T	
R905	RCFT-E242J-000	RESISTOR-CARBON FILM	2.4Kohm 1/5W 5% T	
R906	RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T	
R907	RCFT-E562J-000	RESISTOR-CARBON FILM	5.6Kohm 1/5W 5% T	1
R908	RCFT-E332J-000	RESISTOR-CARBON FILM	3.3Kohm 1/5W 5% T	
R909	RCFT-E242J-000	RESISTOR-CARBON FILM	2.4Kohm 1/5W 5% T	
R910	RCFT-E242J-000	RESISTOR-CARBON FILM	2.4Kohm 1/5W 5% T	
R911	RCFT-E562J-000	RESISTOR-CARBON FILM	5.6Kohm 1/5W 5% T	1
R912	RCFT-E332J-000	RESISTOR-CARBON FILM	3.3Kohm 1/5W 5% T	
R913	RCFT-E242J-000	RESISTOR-CARBON FILM	2.4Kohm 1/5W 5% T	
R914	RCFT-E242J-000	RESISTOR-CARBON FILM	2.4Kohm 1/5W 5% T	
R915	RCFT-E221J-000	RESISTOR-CARBON FILM	220ohm 1/5W 5% T	
R916	RCFT-E562J-000	RESISTOR-CARBON FILM	5.6Kohm 1/5W 5% T	1
R917	RCFT-E332J-000	RESISTOR-CARBON FILM	3.3Kohm 1/5W 5% T	
R918	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	1
R919	RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T	
R920	RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T	
R921	RCFT-E331J-000	RESISTOR-CARBON FILM	330ohm 1/5W 5% T	
R922	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	1
R923	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	1
R924	RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	1
TRANSISTORS				
Q802	TRTA-0012Y-SD0	TRANSISTOR P-H FREQ	KTA1273-Y TO92L	
Q803	TRTC-0062E-SOS	TRANSISTOR N-H FREQ	DTC114E-S W/RESIST TO92M	
Q804	TRTA-0008G-SD0	TRANSISTOR P-H FREQ	KTA1266-GR TO92	
Q805	TRTA-0008G-SD0	TRANSISTOR P-H FREQ	KTA1266-GR TO92	
Q806	TRTC-0061E-SOS	TRANSISTOR N-H FREQ	DTC124E-S TO92M	
Q807	TRTA-0043E-SOS	TRANSISTOR P-H FREQ	DTA114E-S W/RESIST TO92M	
Q808	TRTD-00200-SD0	TRANSISTOR N-L FREQ	KTD-1302 TO92	
Q809	TRTD-00200-SD0	TRANSISTOR N-L FREQ	KTD-1302 TO92	
Q901	TRTC-0062E-SOS	TRANSISTOR N-H FREQ	DTC114E-S W/RESIST TO92M	
Q902	TRTC-0062E-SOS	TRANSISTOR N-H FREQ	DTC114E-S W/RESIST TO92M	
Q903	TRTC-0062E-SOS	TRANSISTOR N-H FREQ	DTC114E-S W/RESIST TO92M	
Q904	TRTC-0062E-SOS	TRANSISTOR N-H FREQ	DTC114E-S W/RESIST TO92M	
MISCELLANEOUS				
CN801	KNCW-00380-7S0	CONNECTOR WAFER	CFG1107-0101 1.5mm 7P	
CN802	KNCW-00990-2T9	CONNECTOR-WAFER	JE202A-1T-02	
CN803	KNCW-00990-2T9	CONNECTOR-WAFER	JE202A-1T-02	
CN804	KNCW-00990-2T9	CONNECTOR-WAFER	JE202A-1T-02	
CN805	KNCW-00990-2T9	CONNECTOR-WAFER	JE202A-1T-02	
CN806	KNCW-00240-6T9	CONNECTOR-WAFER	53014-06 2.0mm WHT	
CN807	KNCW-00140-3TM	CONNECTOR-WAFER	5267-03A 2.5mm MILK	
CN808	KNCW-00240-5T9	CONNECTOR-WAFER	53014-05 2.0mm WHT	
CN809	KNCW-06271-GT9	CONNECTOR-FFC	6232B-16 16P 1mm	
CN810	KNCW-00240-6T9	CONNECTOR-WAFER	53014-06 2.0mm WHT	
CN811	KNCW-00240-AT9	CONNECTOR-WAFER	53014-10 2.0mm WHT	
CN902	KNCW-00160-5S9	CONNECTOR-WAFER	53015-0510 2mm-WHT	
BF801	KORB-00110-000	EMI BEAD FILTER	ATS3580(MATERIAL:M3L)	
BF802	KORB-00110-000	EMI BEAD FILTER	ATS3580(MATERIAL:M3L)	

Ref. No.	Part No.	Description	
	MISCELLANEOUS		
BF803	KORB-00110-000	EMI BEAD FILTER	ATS3580I(MATERIAL:M3L)
BF804	KORB-00110-000	EMI BEAD FILTER	ATS3580I(MATERIAL:M3L)
BF805	KORB-00110-000	EMI BEAD FILTER	ATS3580I(MATERIAL:M3L)
SW801	SWPU-00591-059	SWITCH-PUSH	SDDL B13300
SW901	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA 1
SW902	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA 1
SW903	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA 1
SW904	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA 1
SW905	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA 1
SW906	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA 1
SW907	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA 1
SW908	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA 1
SW909	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA 1
SW910	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA 1
SW911	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA 1
SW912	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA 1
SW913	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA 1
SW914	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA 1
SW916	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA 1
SW917	SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA 1
X801	KTRE-00220-080	RESONATOR	CST8.00MTW-TF01
X802	KTAL-00074-169	CRYSTAL	HC-49/U 16.9344MHZ
	MEAC-16380-004	RADIATOR-TR(A)	A6063 T-5
	MEAC-16390-004	RADIATOR-TR(B)	A6063 T-5
GT1	MPAC-03810-004	TERMINAL-GND	ET-HD T0.3
CL801	MPAC-11620-004	FUSE CLIP	5.2Pi TAPPING TYPE
CL802	MPAC-11620-004	FUSE CLIP	5.2Pi TAPPING TYPE
PCB801	PCSP-05160-11B	PCB-SINGLE	A1P-516 247x247x1.6t
CN901	U608-5M735-250	WIRE-ASS'Y	UL1007#26 GRN-350 6P
	XSTB-30080-ZY4	SCREW-TAPPING	BHT2T 3x8 FE-ZY


P. C. BOARD
POWER AMP

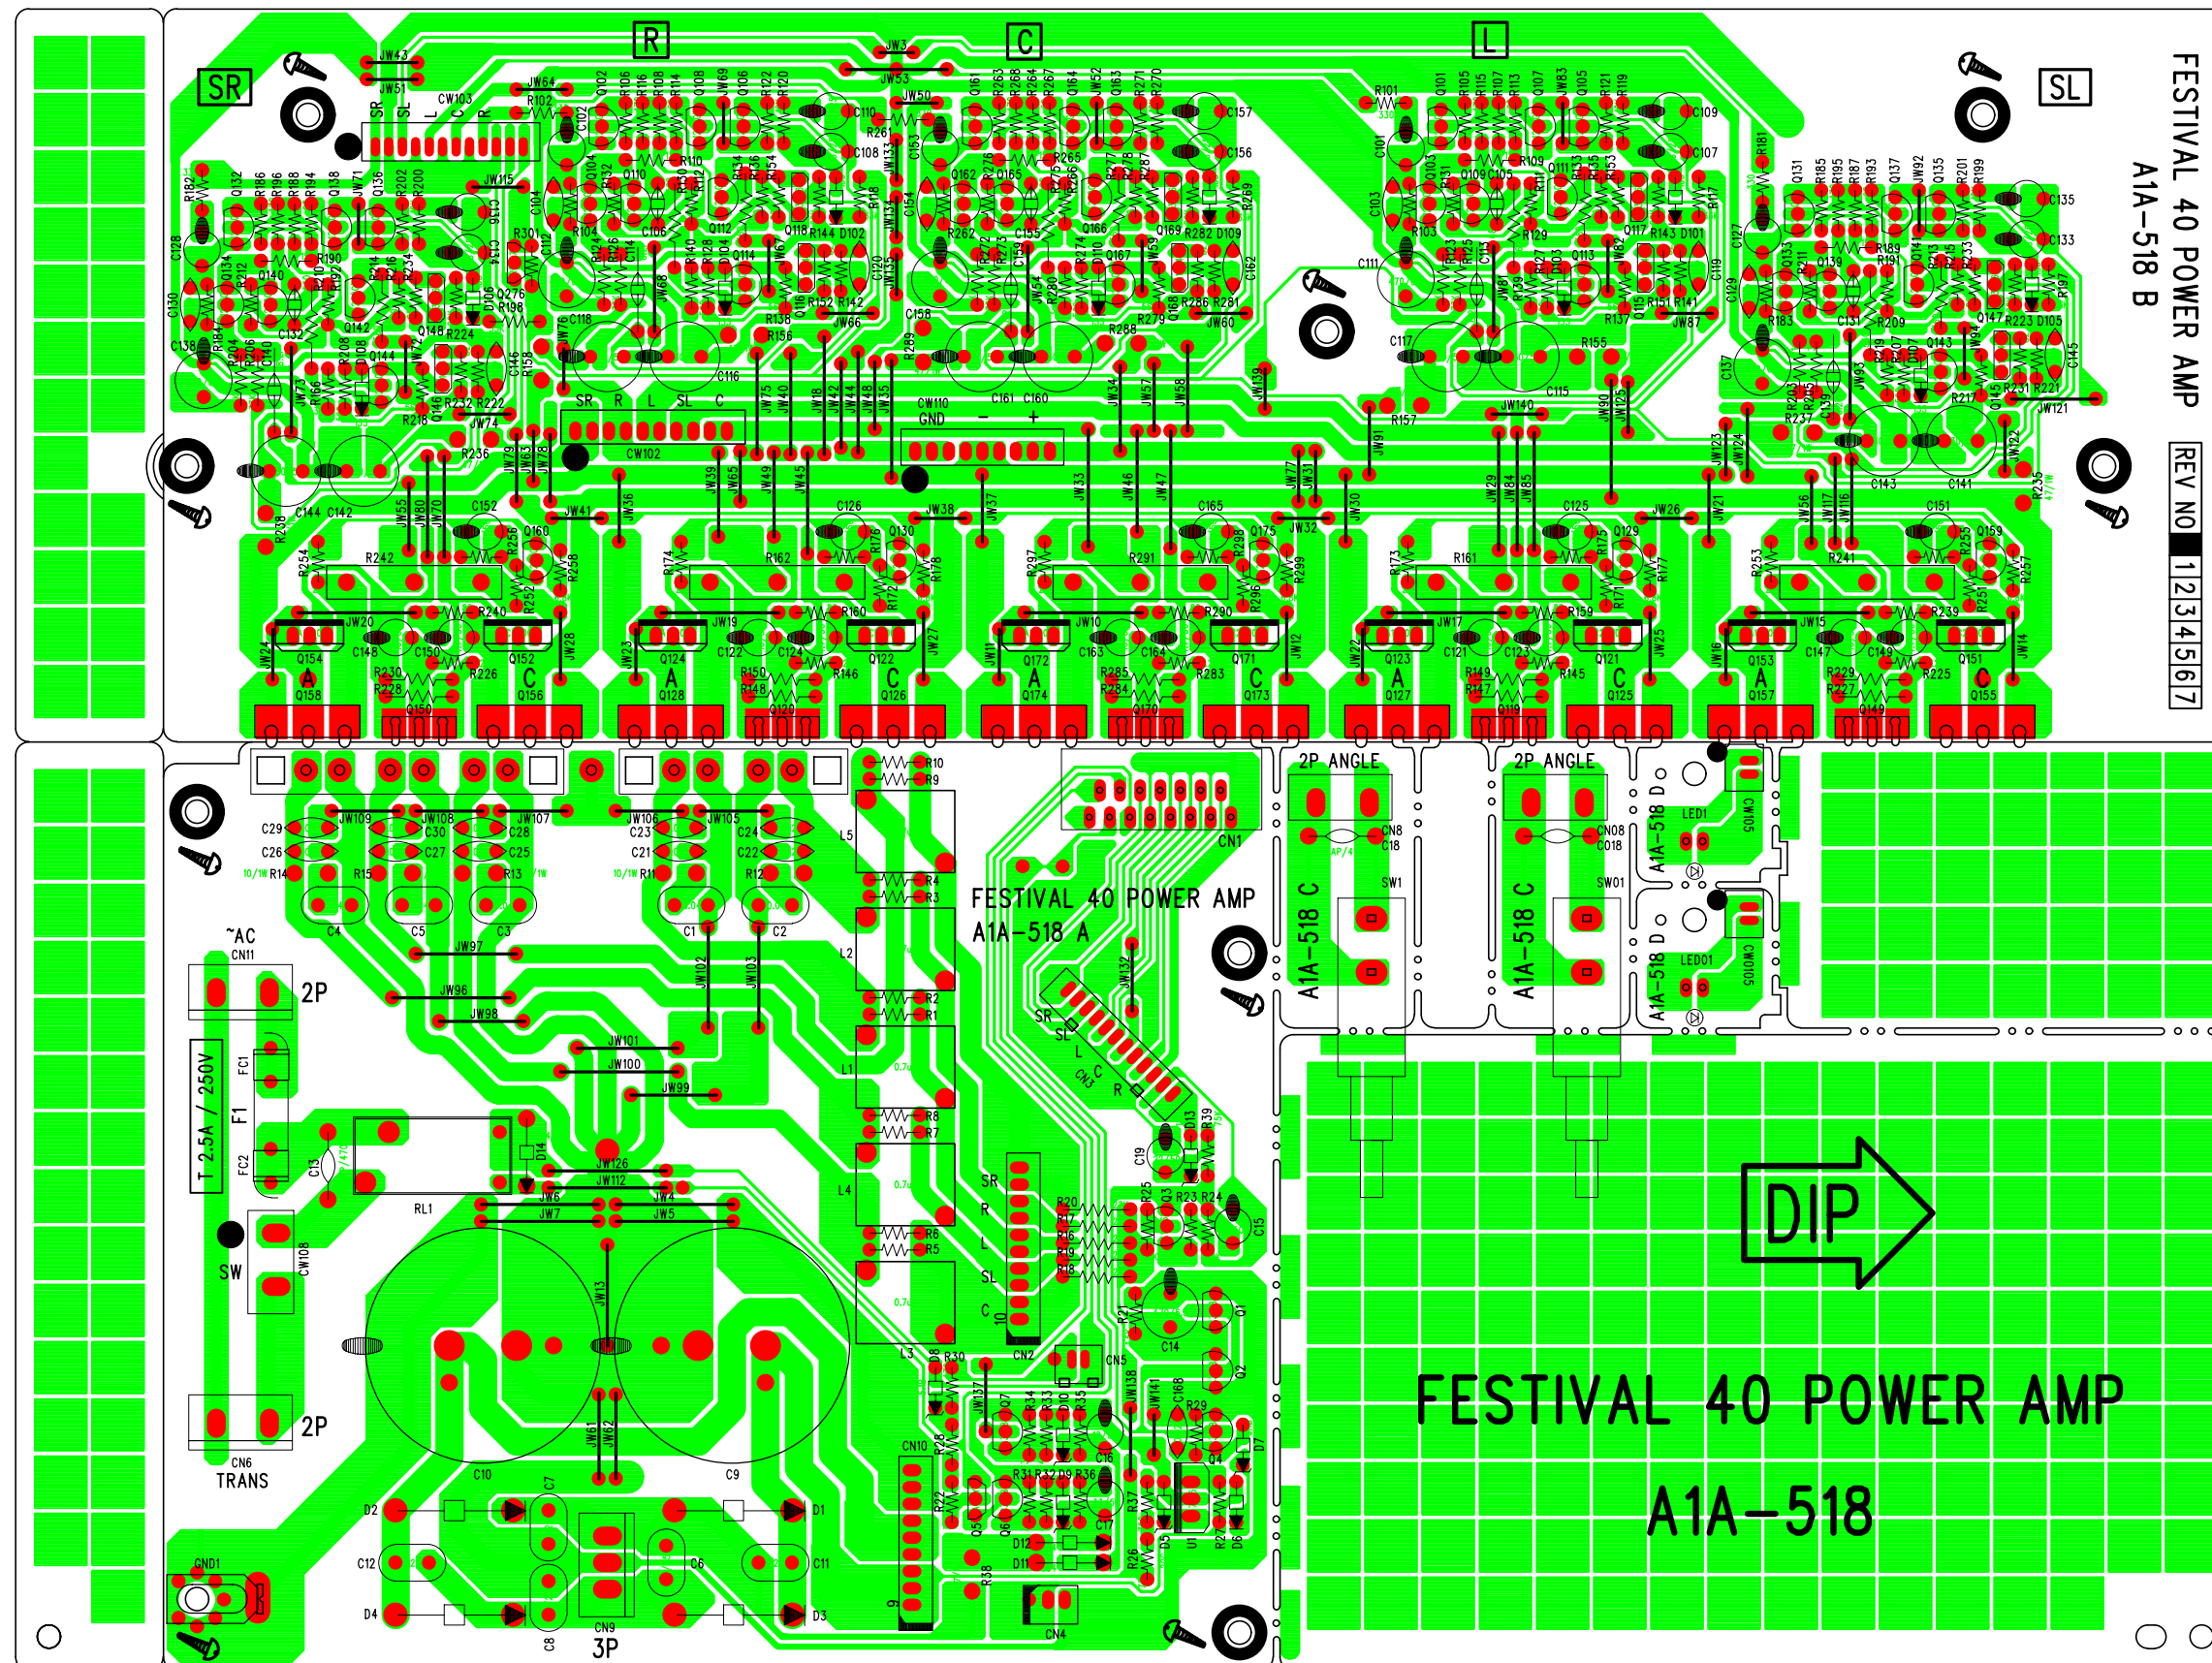


FESTIVAL 40 POWER AMP
A1A-518 B
REV NO 1234567


DIP
FESTIVAL 40 POWER AMP
A1A-518

P.C.BOARD
CDP

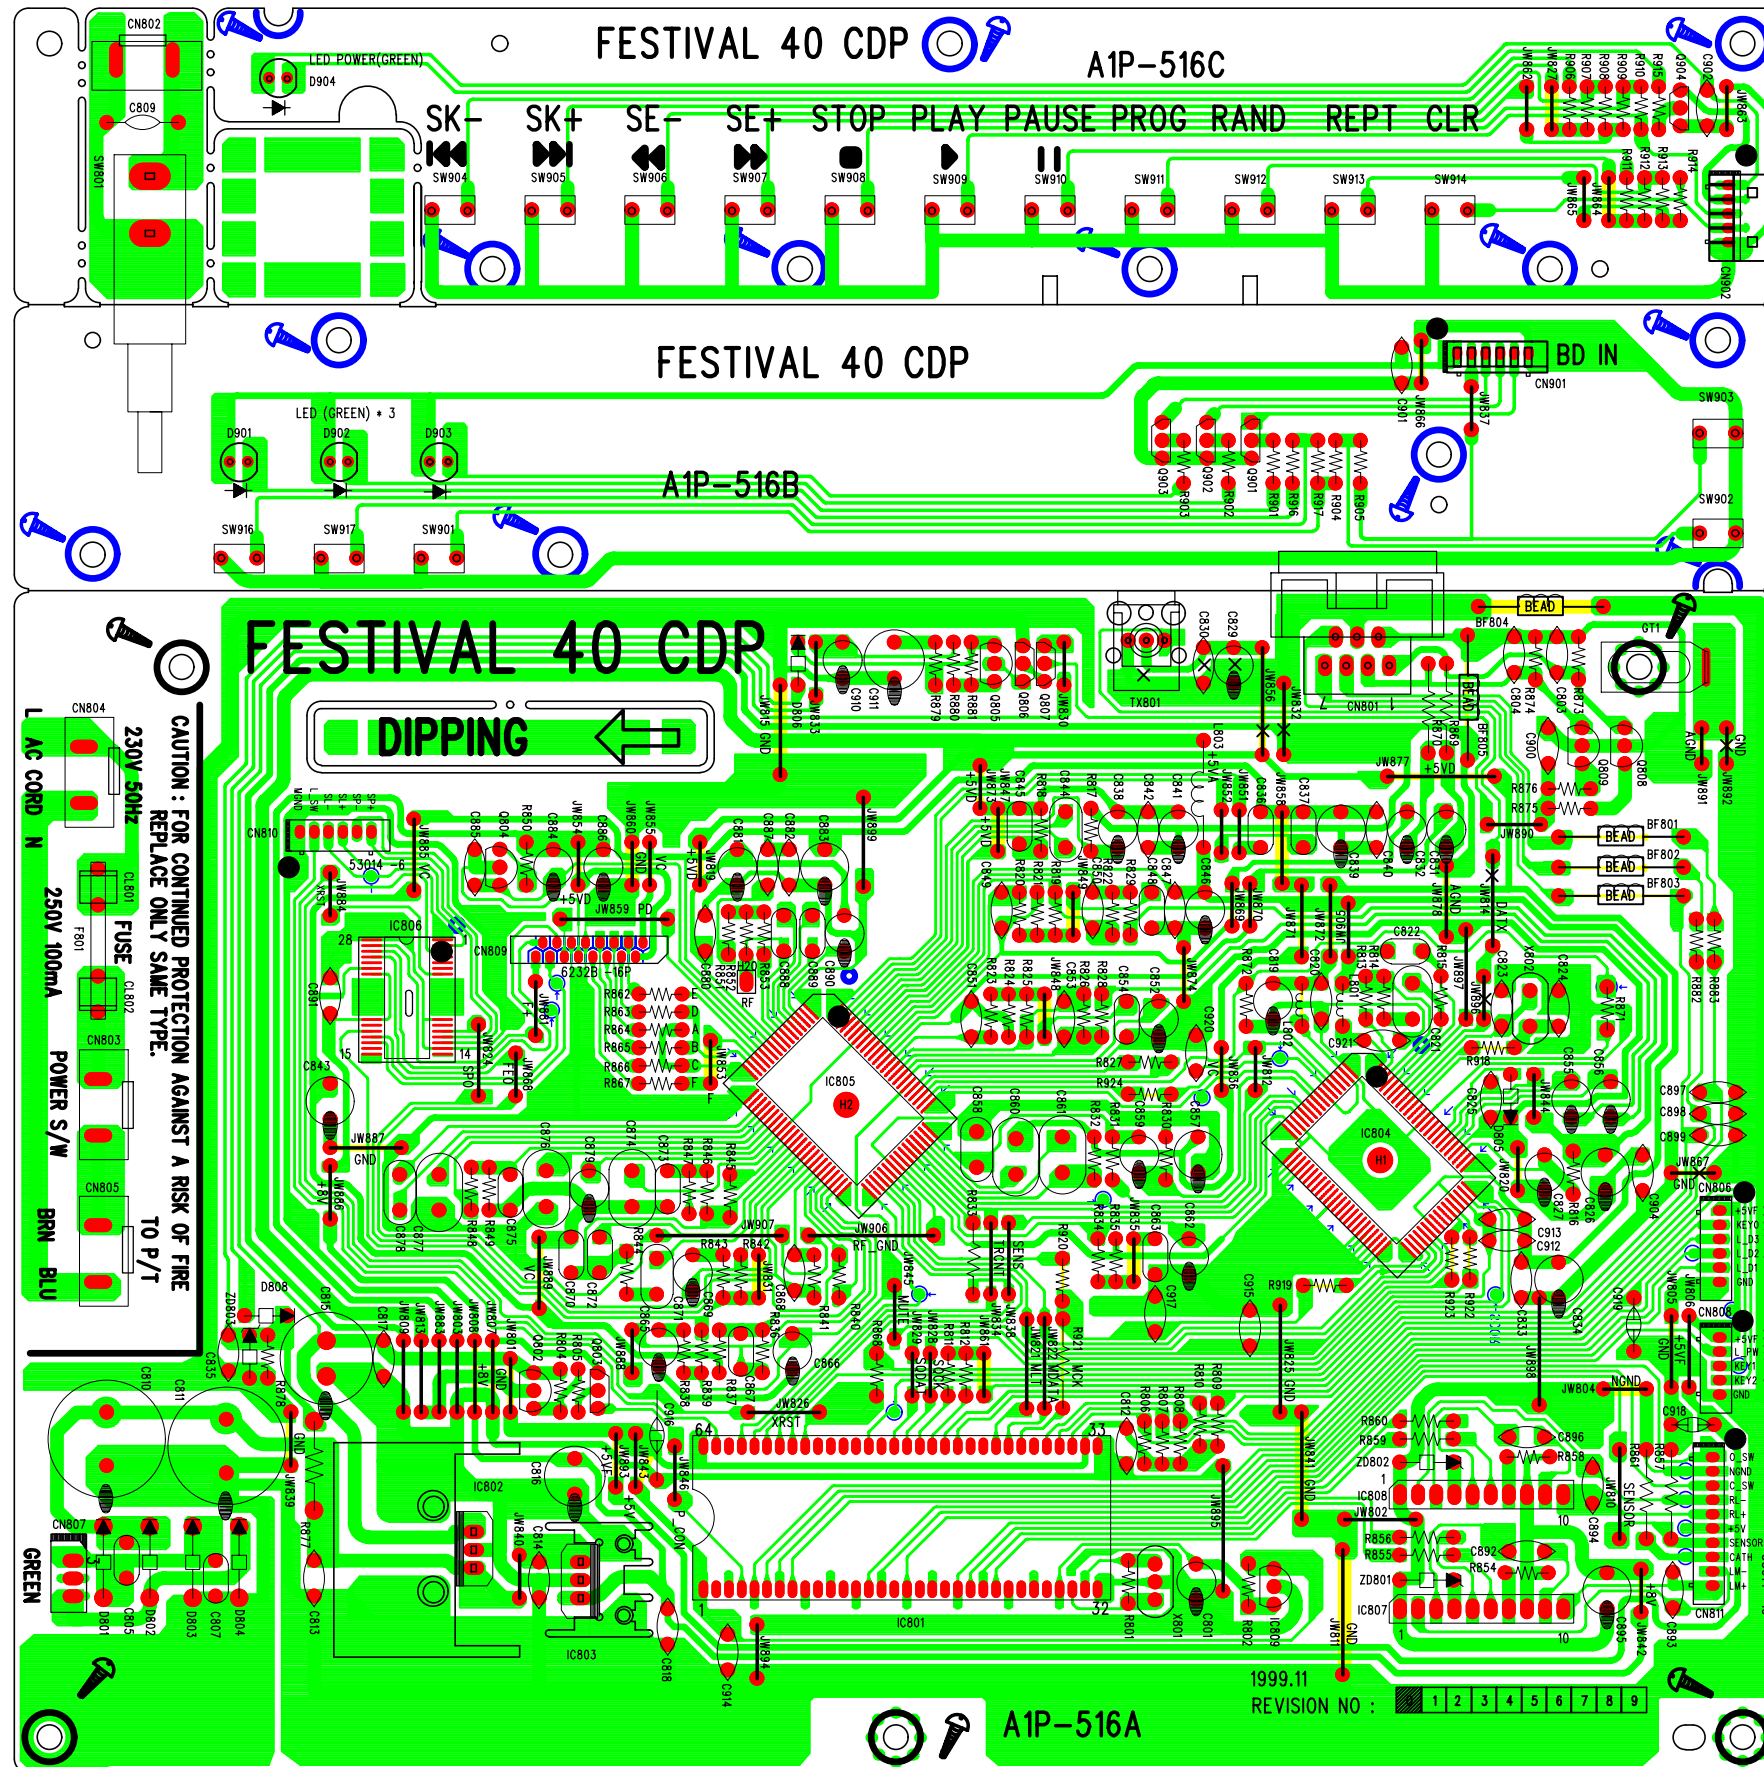


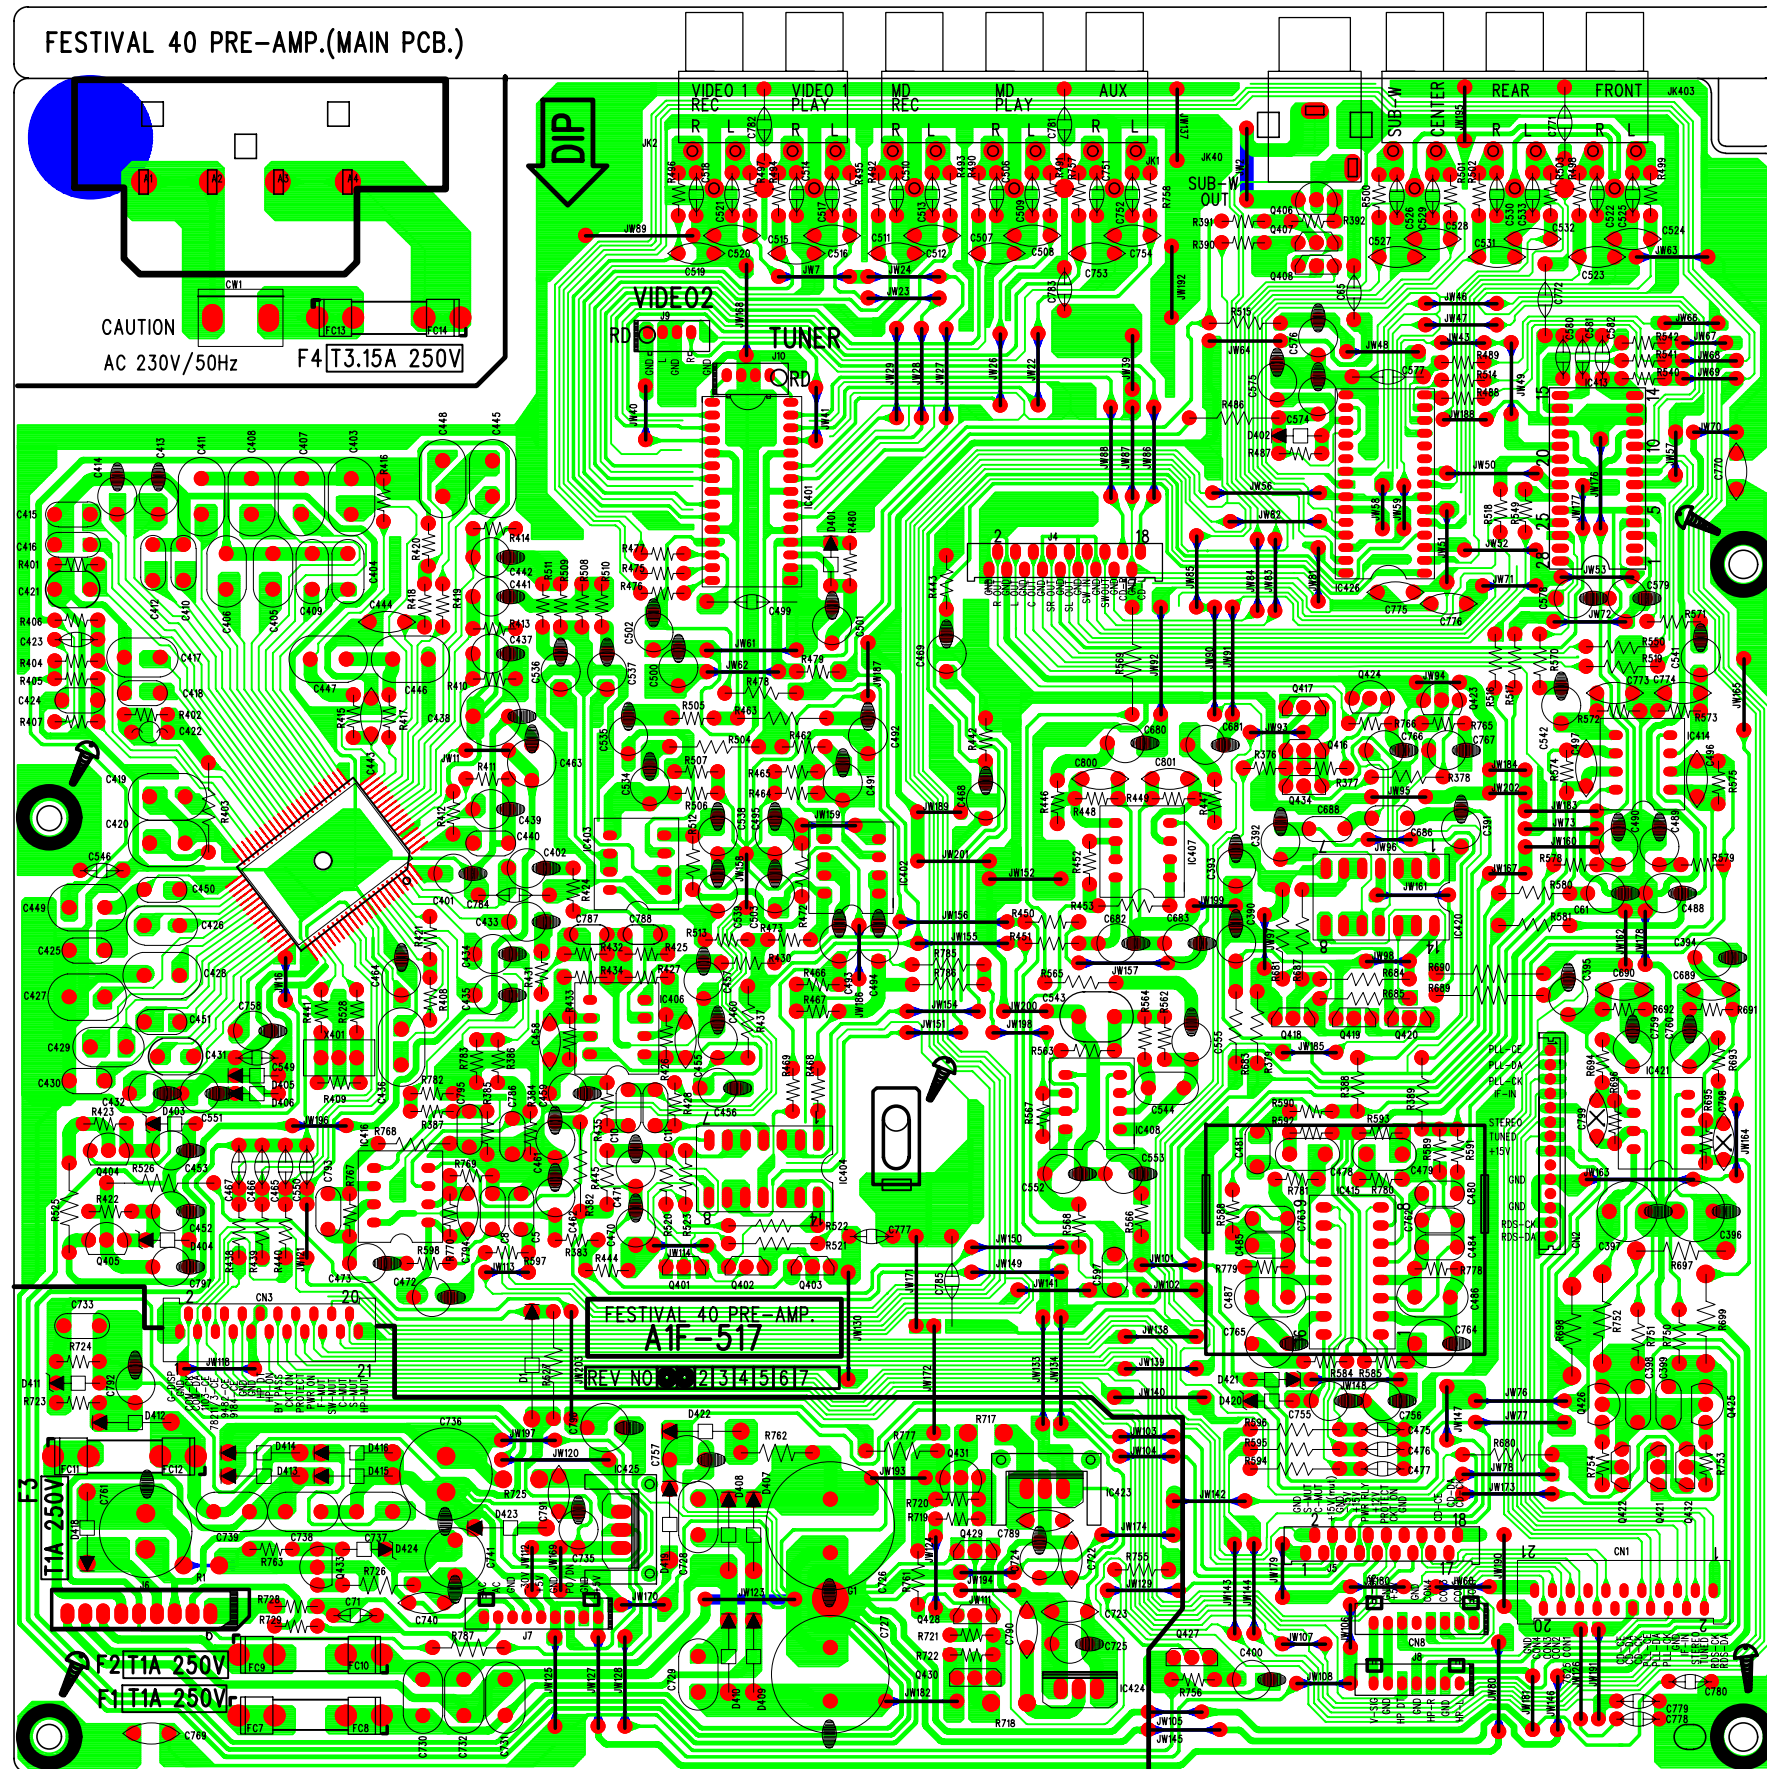


P. C. BOARD
TUNER/FRONT

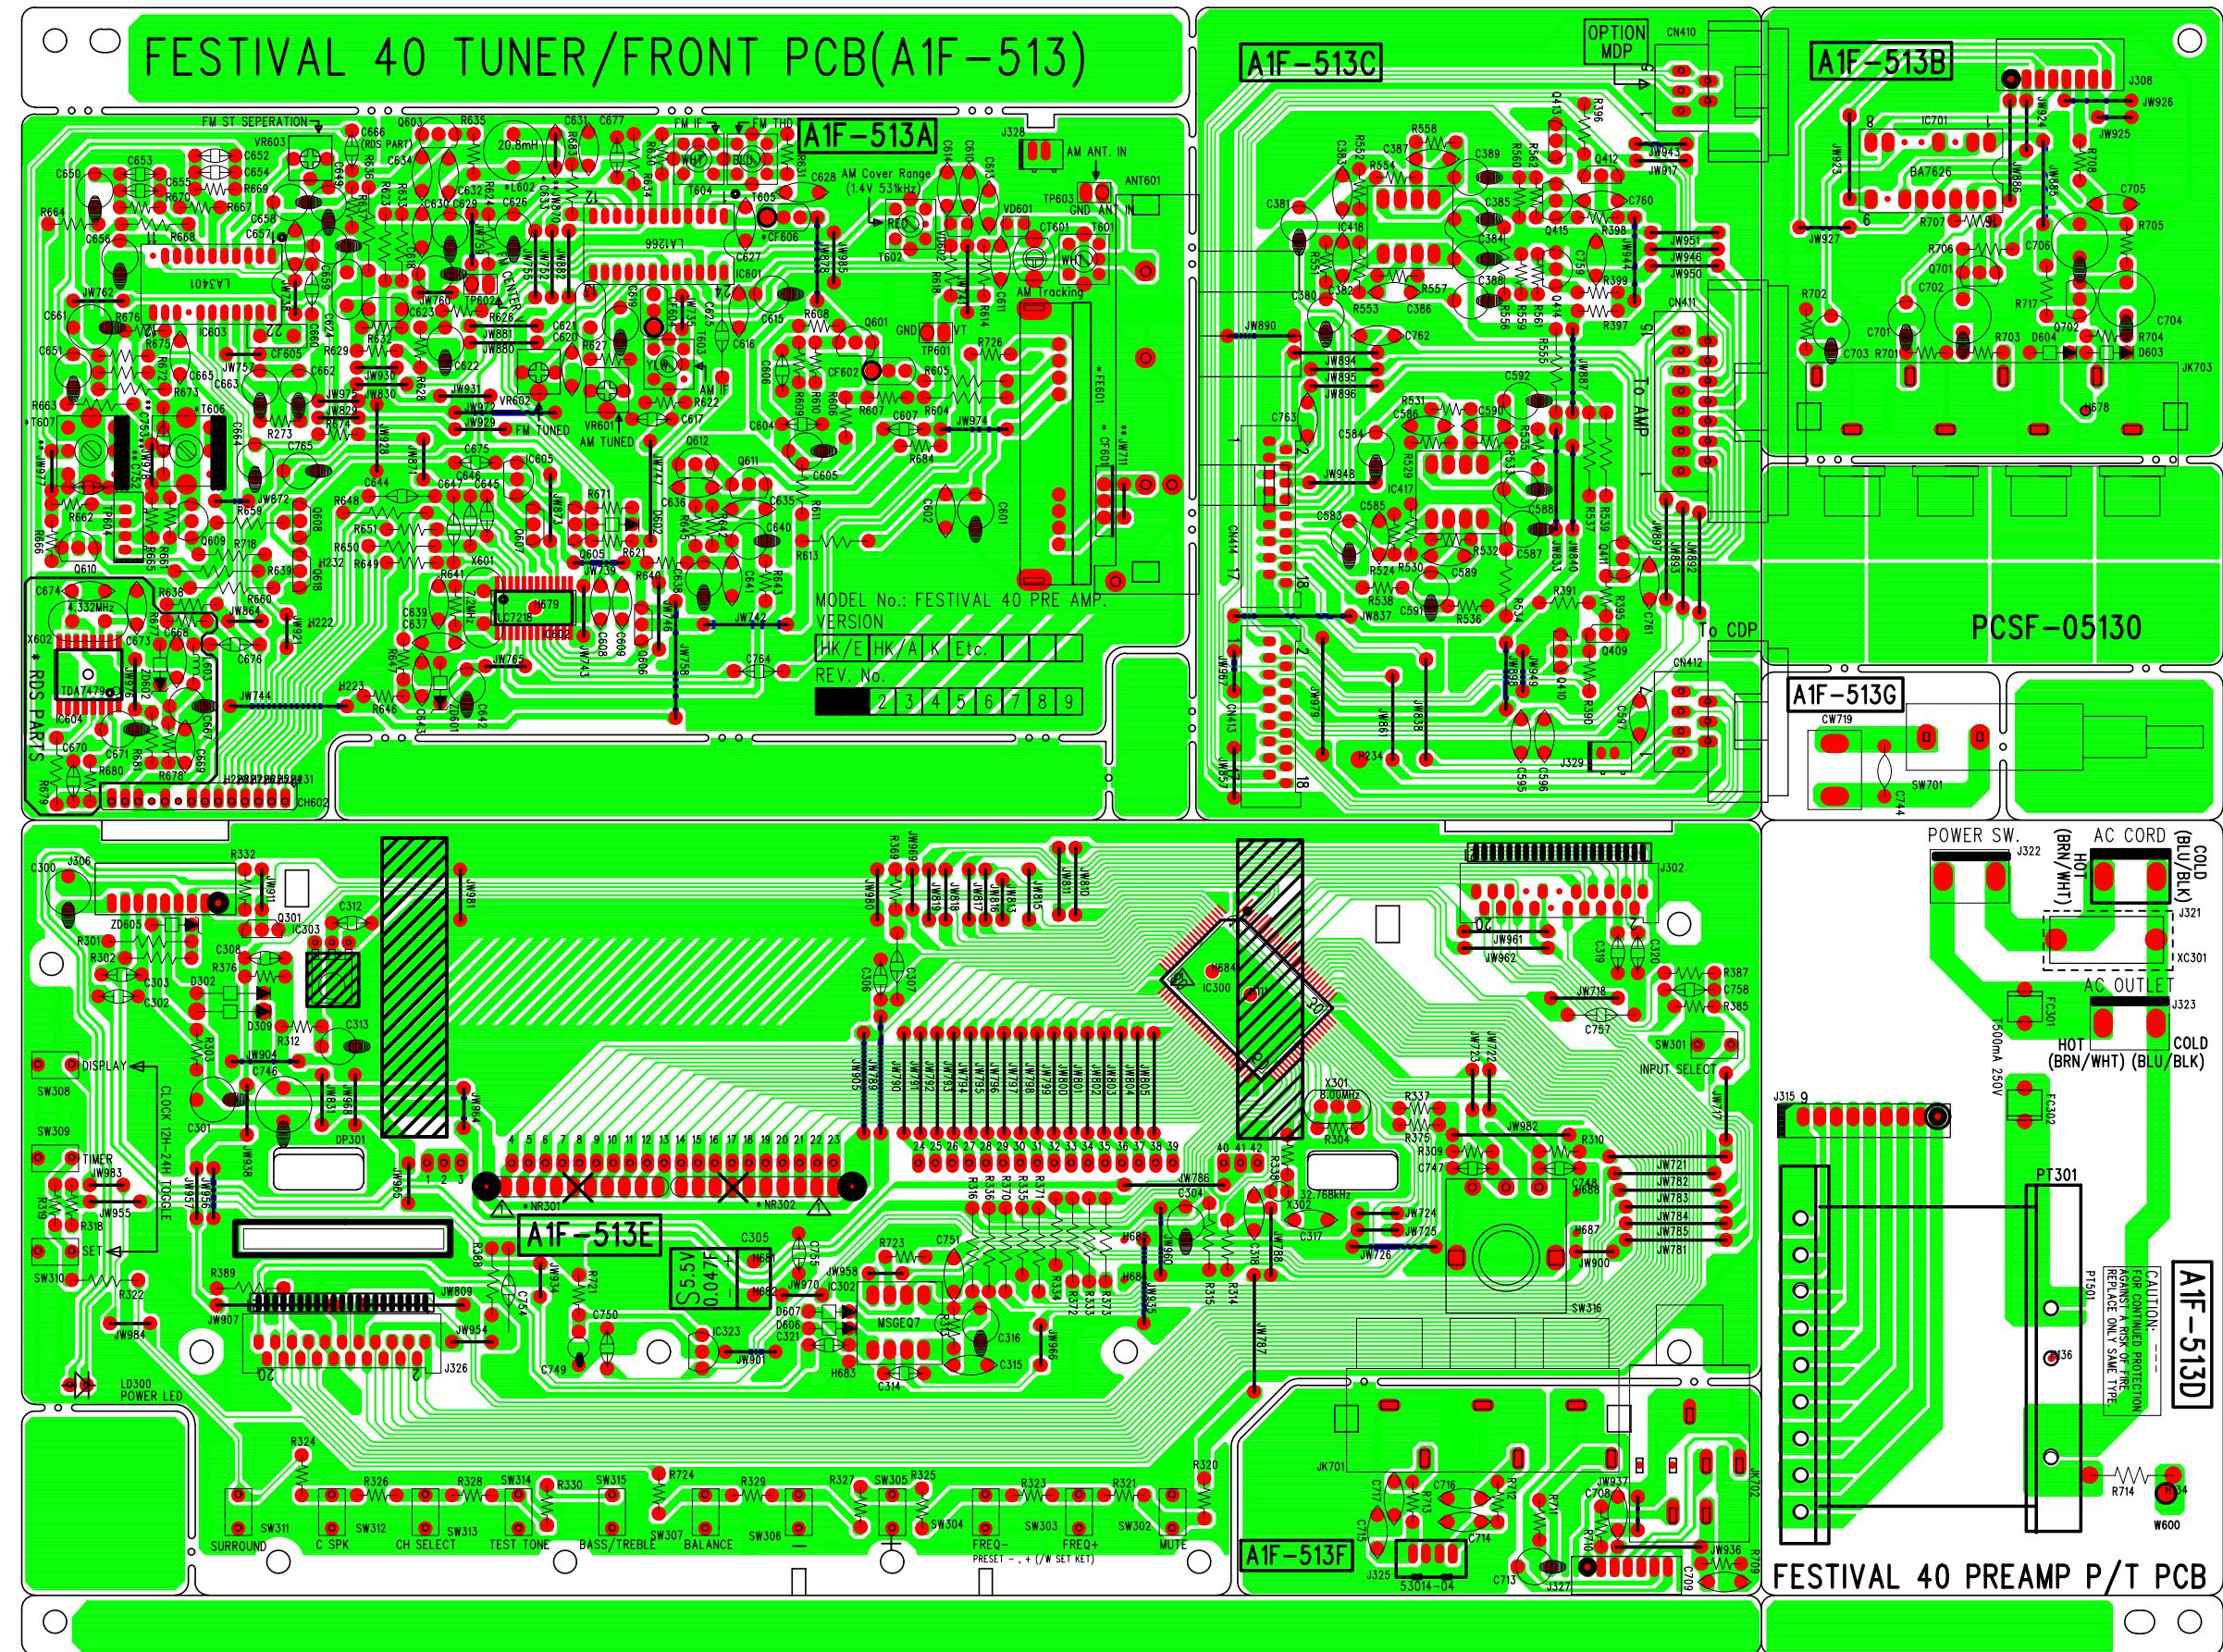

SCHEMATIC DIAGRAM
POWER-AMP (AMP)

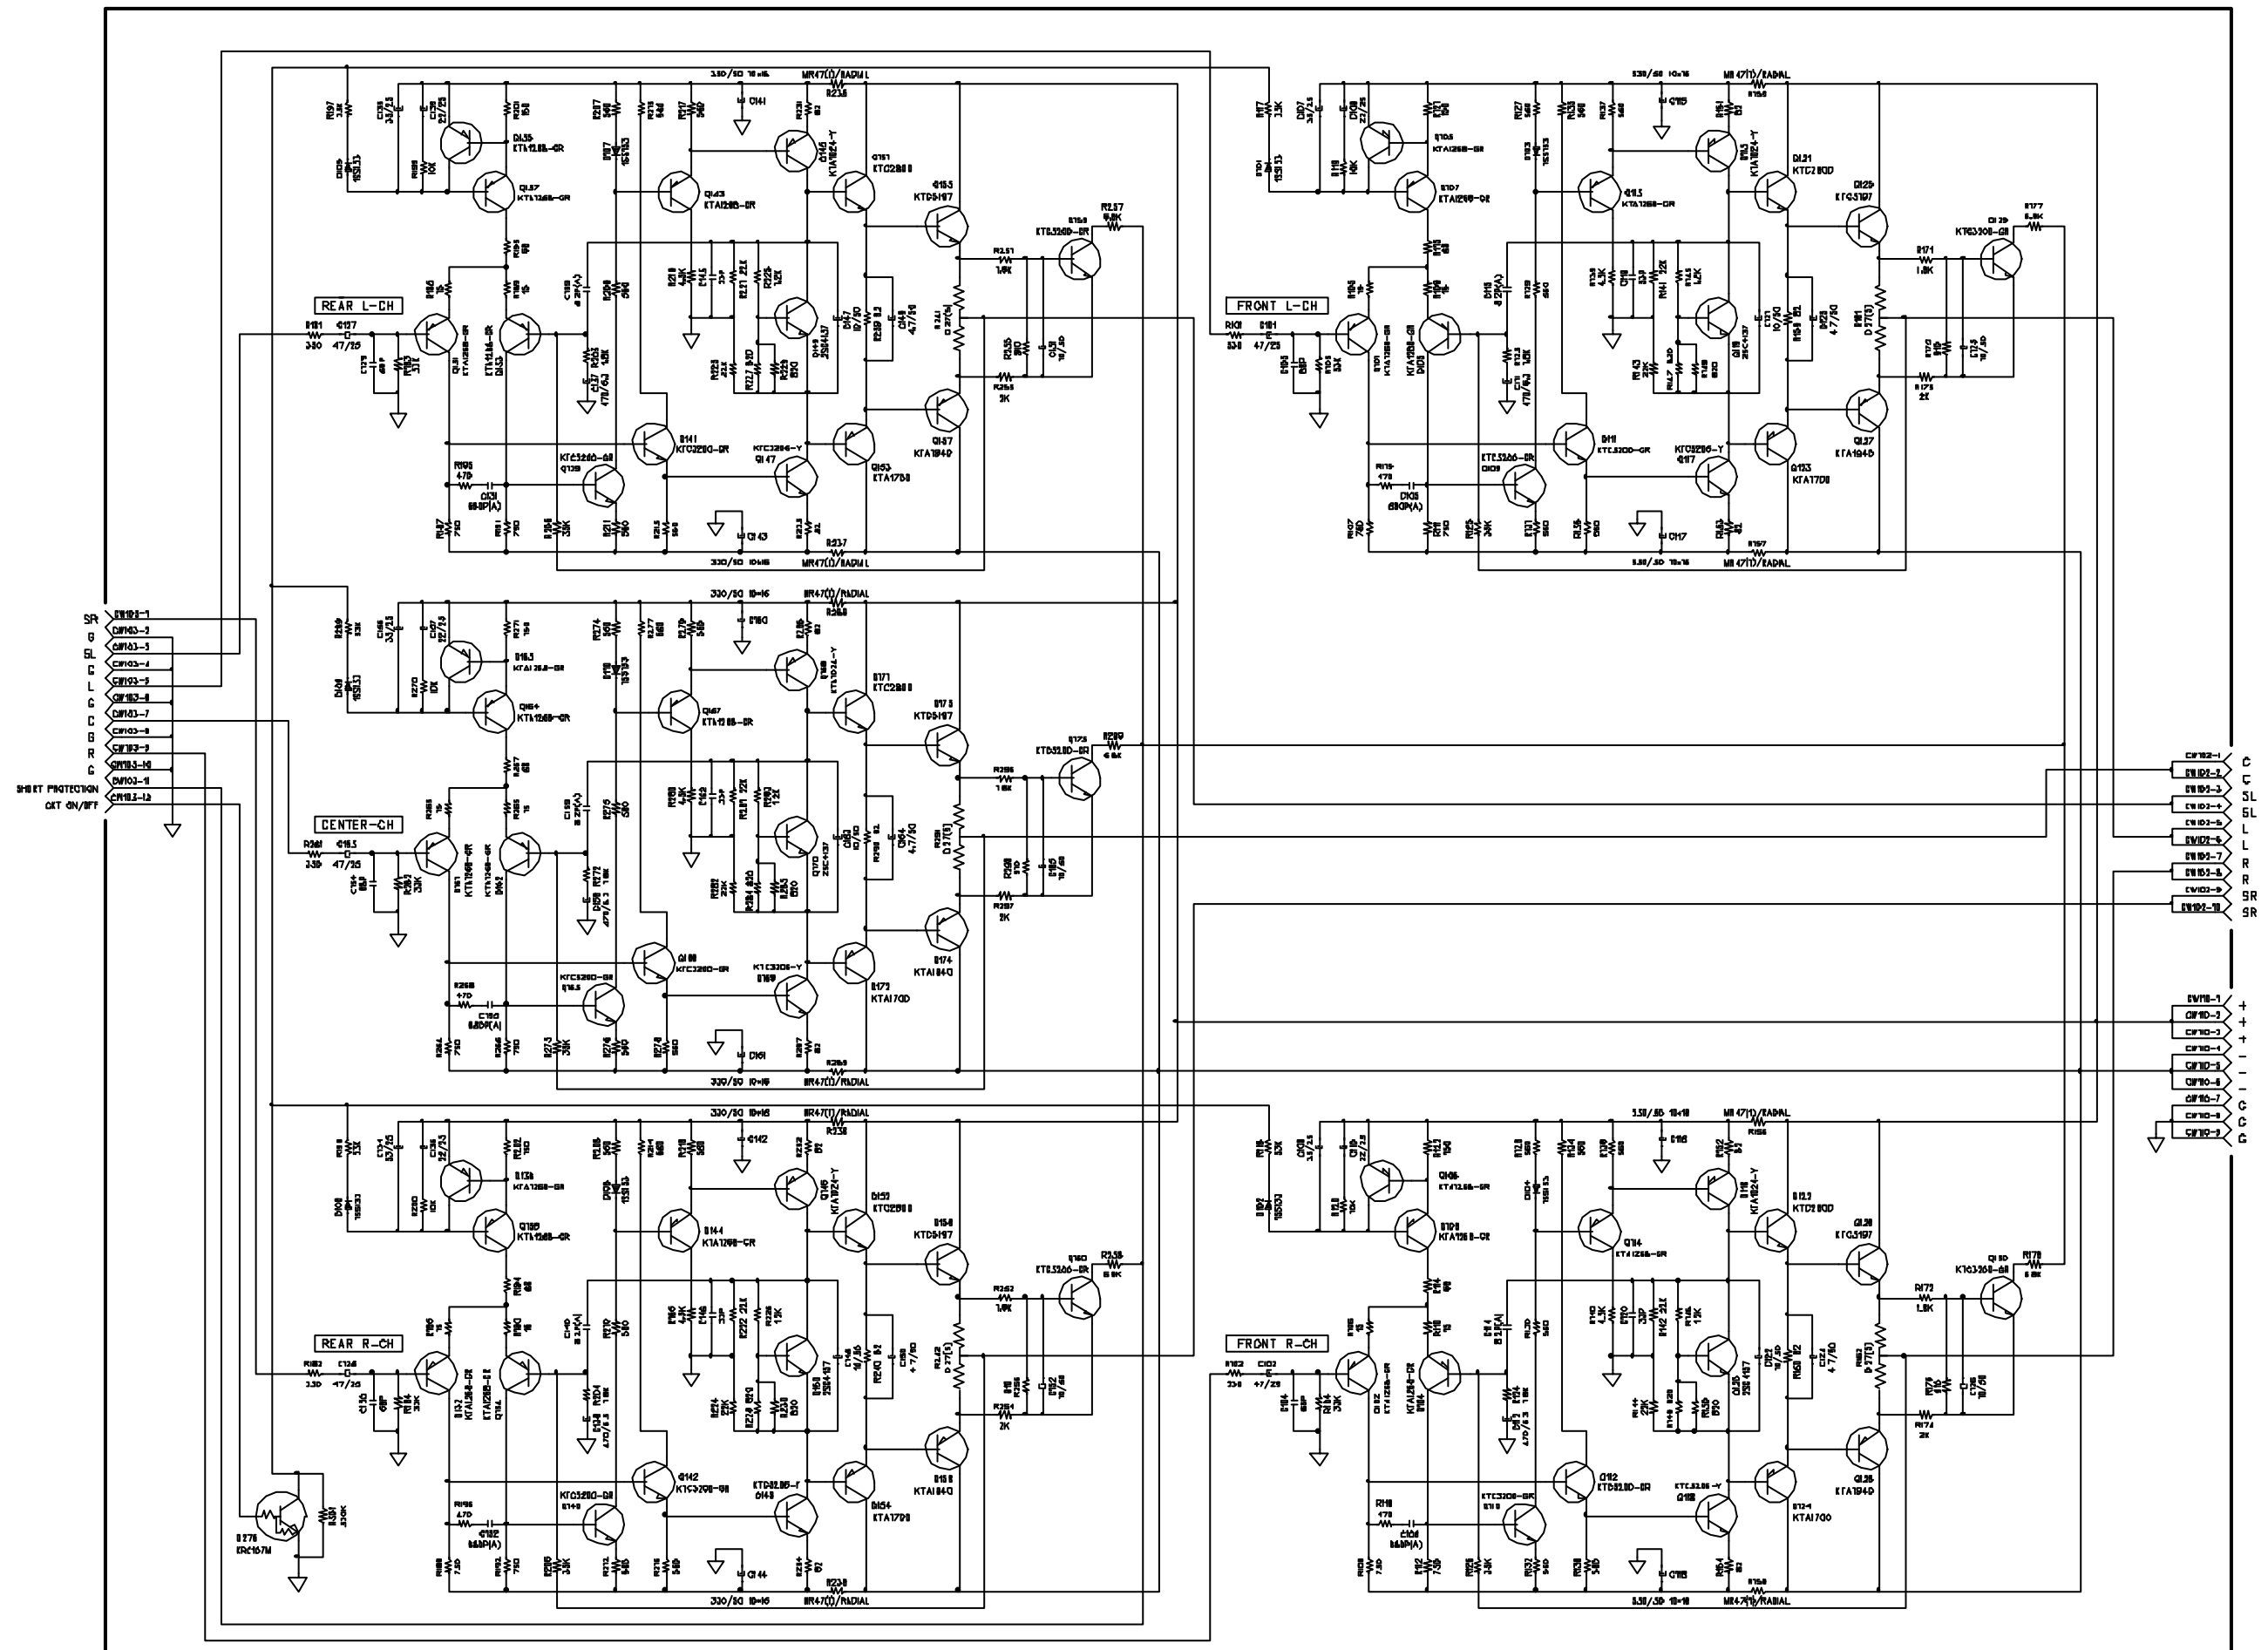

A horizontal number line with tick marks labeled 1 through 12 from right to left. The line is a solid black horizontal bar. Above the bar, there are 12 vertical tick marks. Above each tick mark is a number: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, and 12. The numbers are arranged from right to left, with 1 on the far right and 12 on the far left.




WARNING  INDICATES SAFETY CRITICAL COMPONENTS FOR CONTINUED SAFETY.


REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS

SCHEMATIC DIAGRAM
CDP (FRONT)

TOP

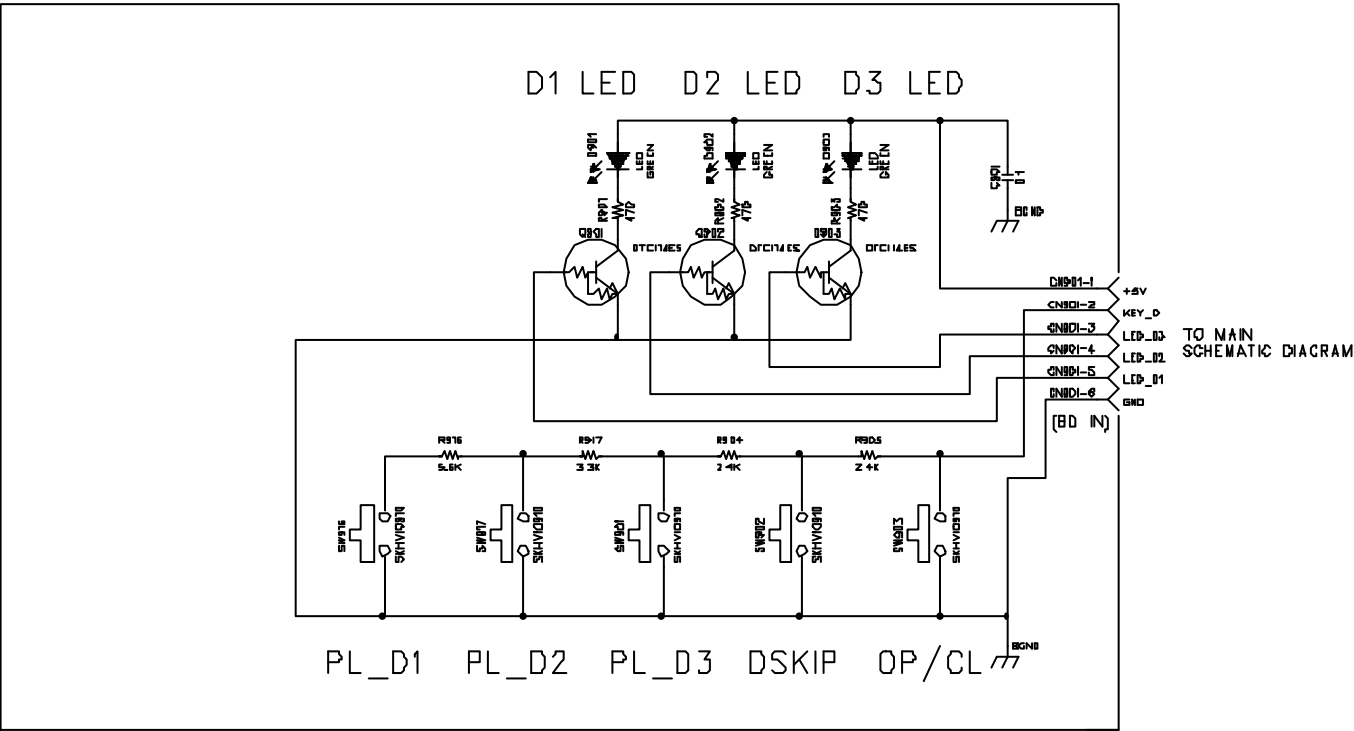


BOTTOM

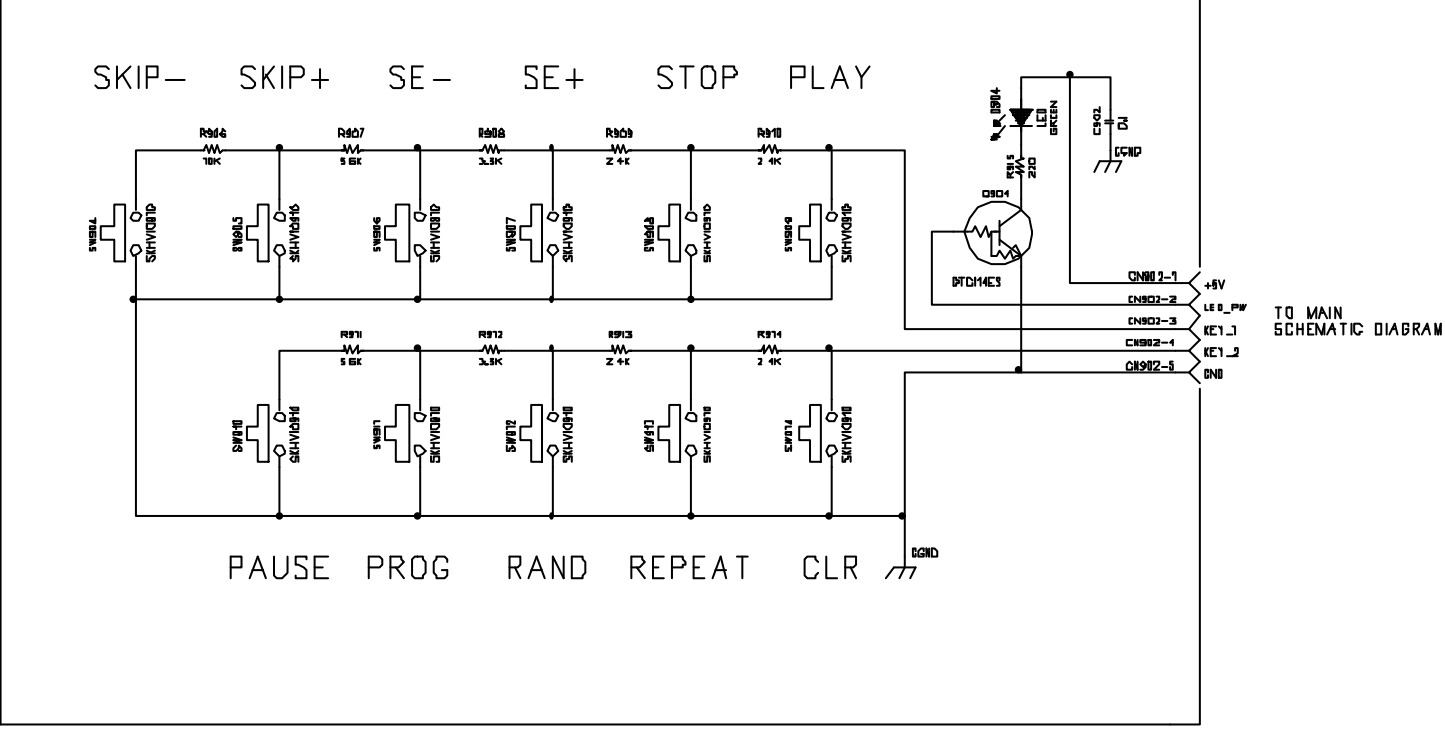


*** LED : ACTIVE AT "HIGH" STATE


SCHEMATIC DIAGRAM TUNER/FRONT (FRONT)

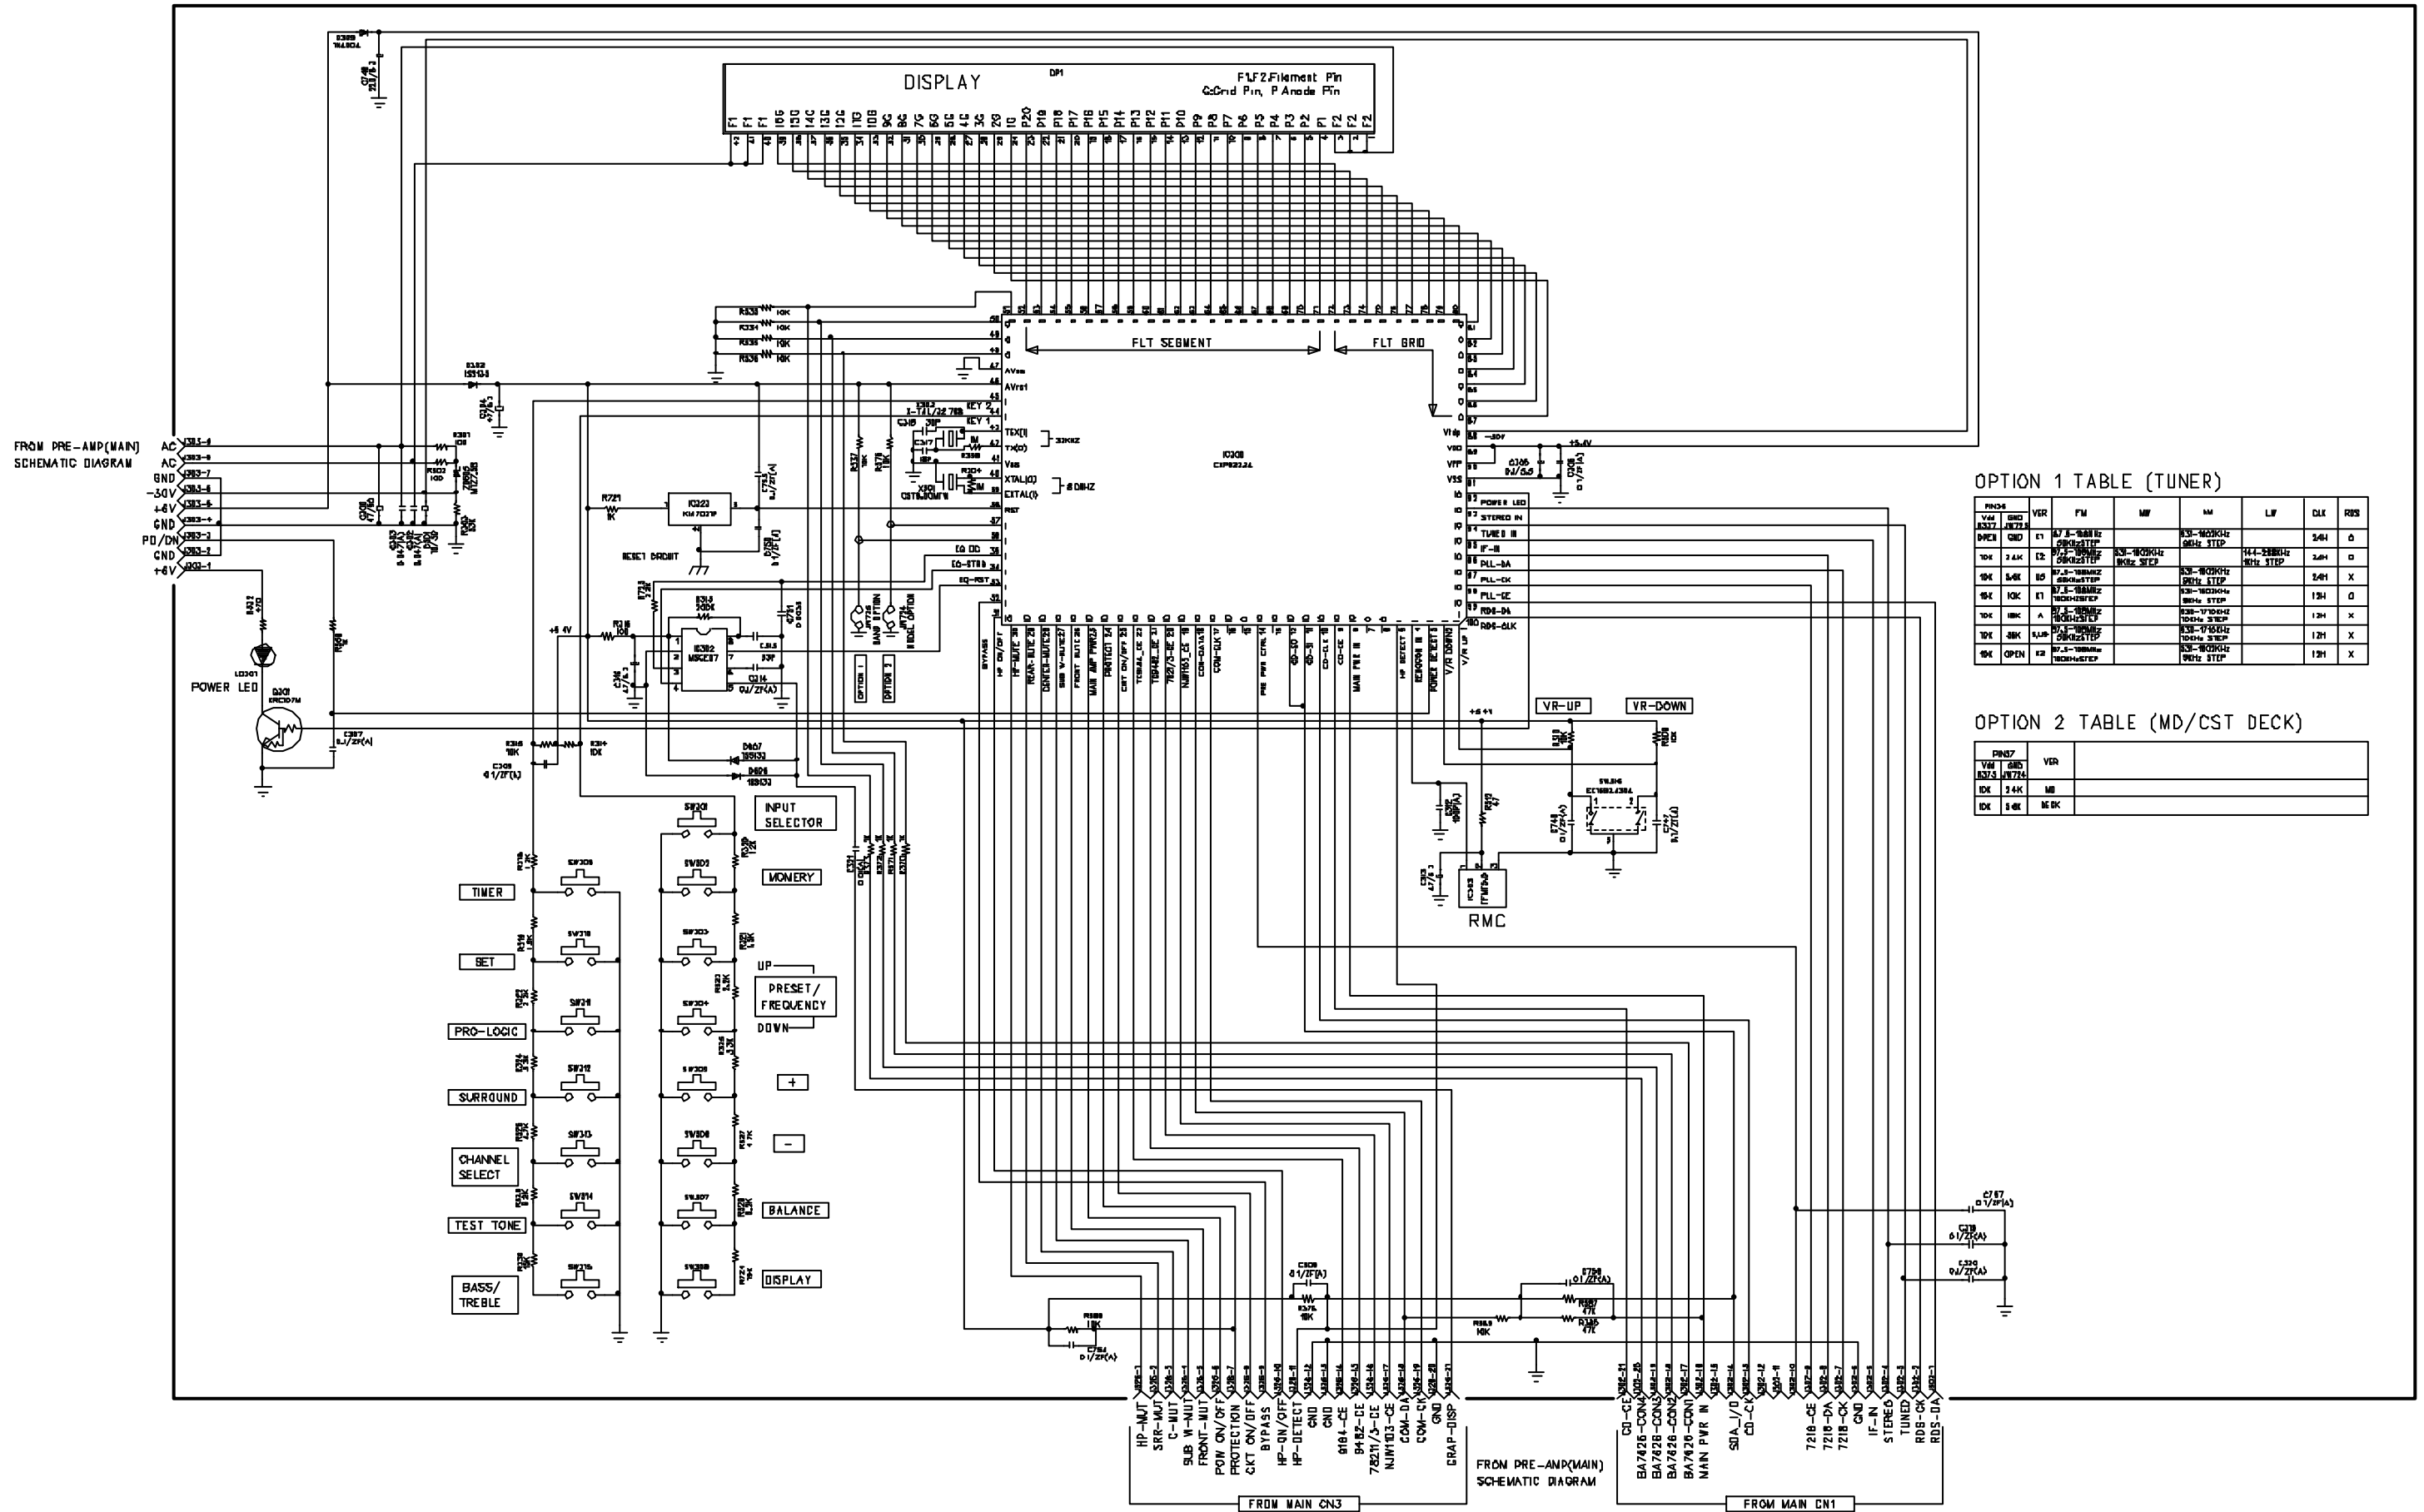

SCHEMATIC DIAGRAM TUNER/FRONT (IN/OUTPUT, VIDEO, HEADPHONE)

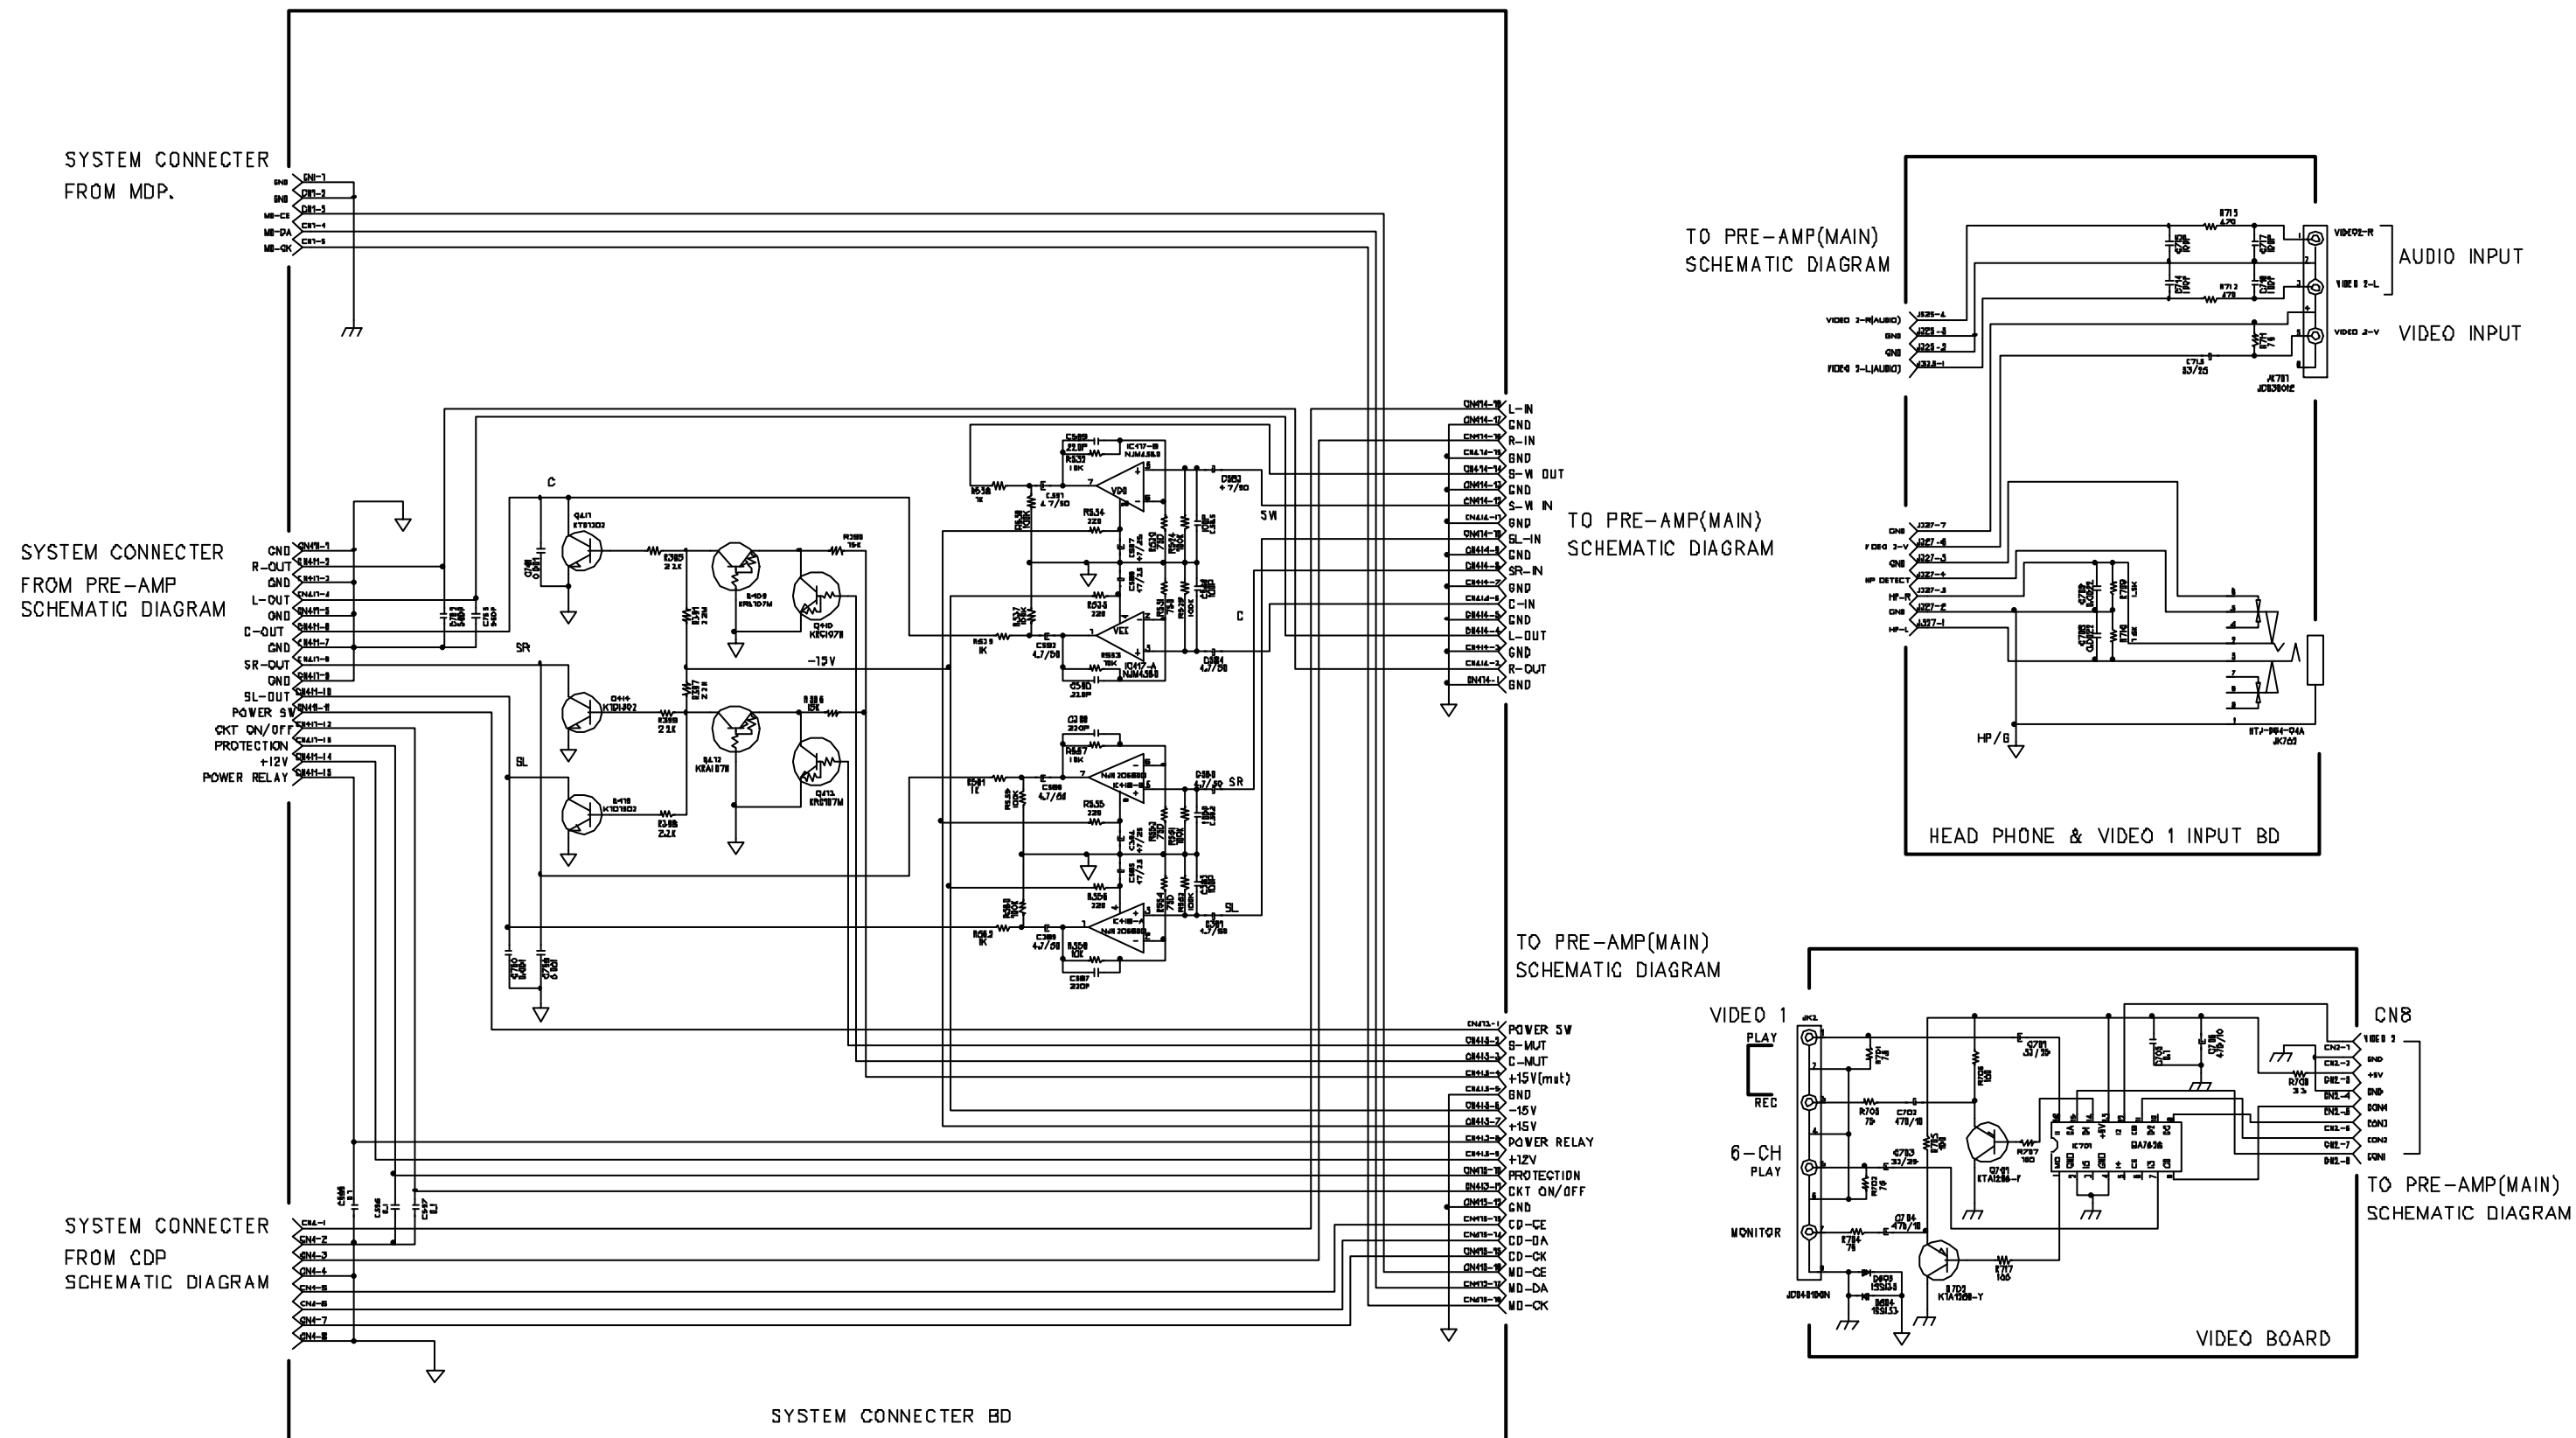


P. C. BOARD
POWER AMP

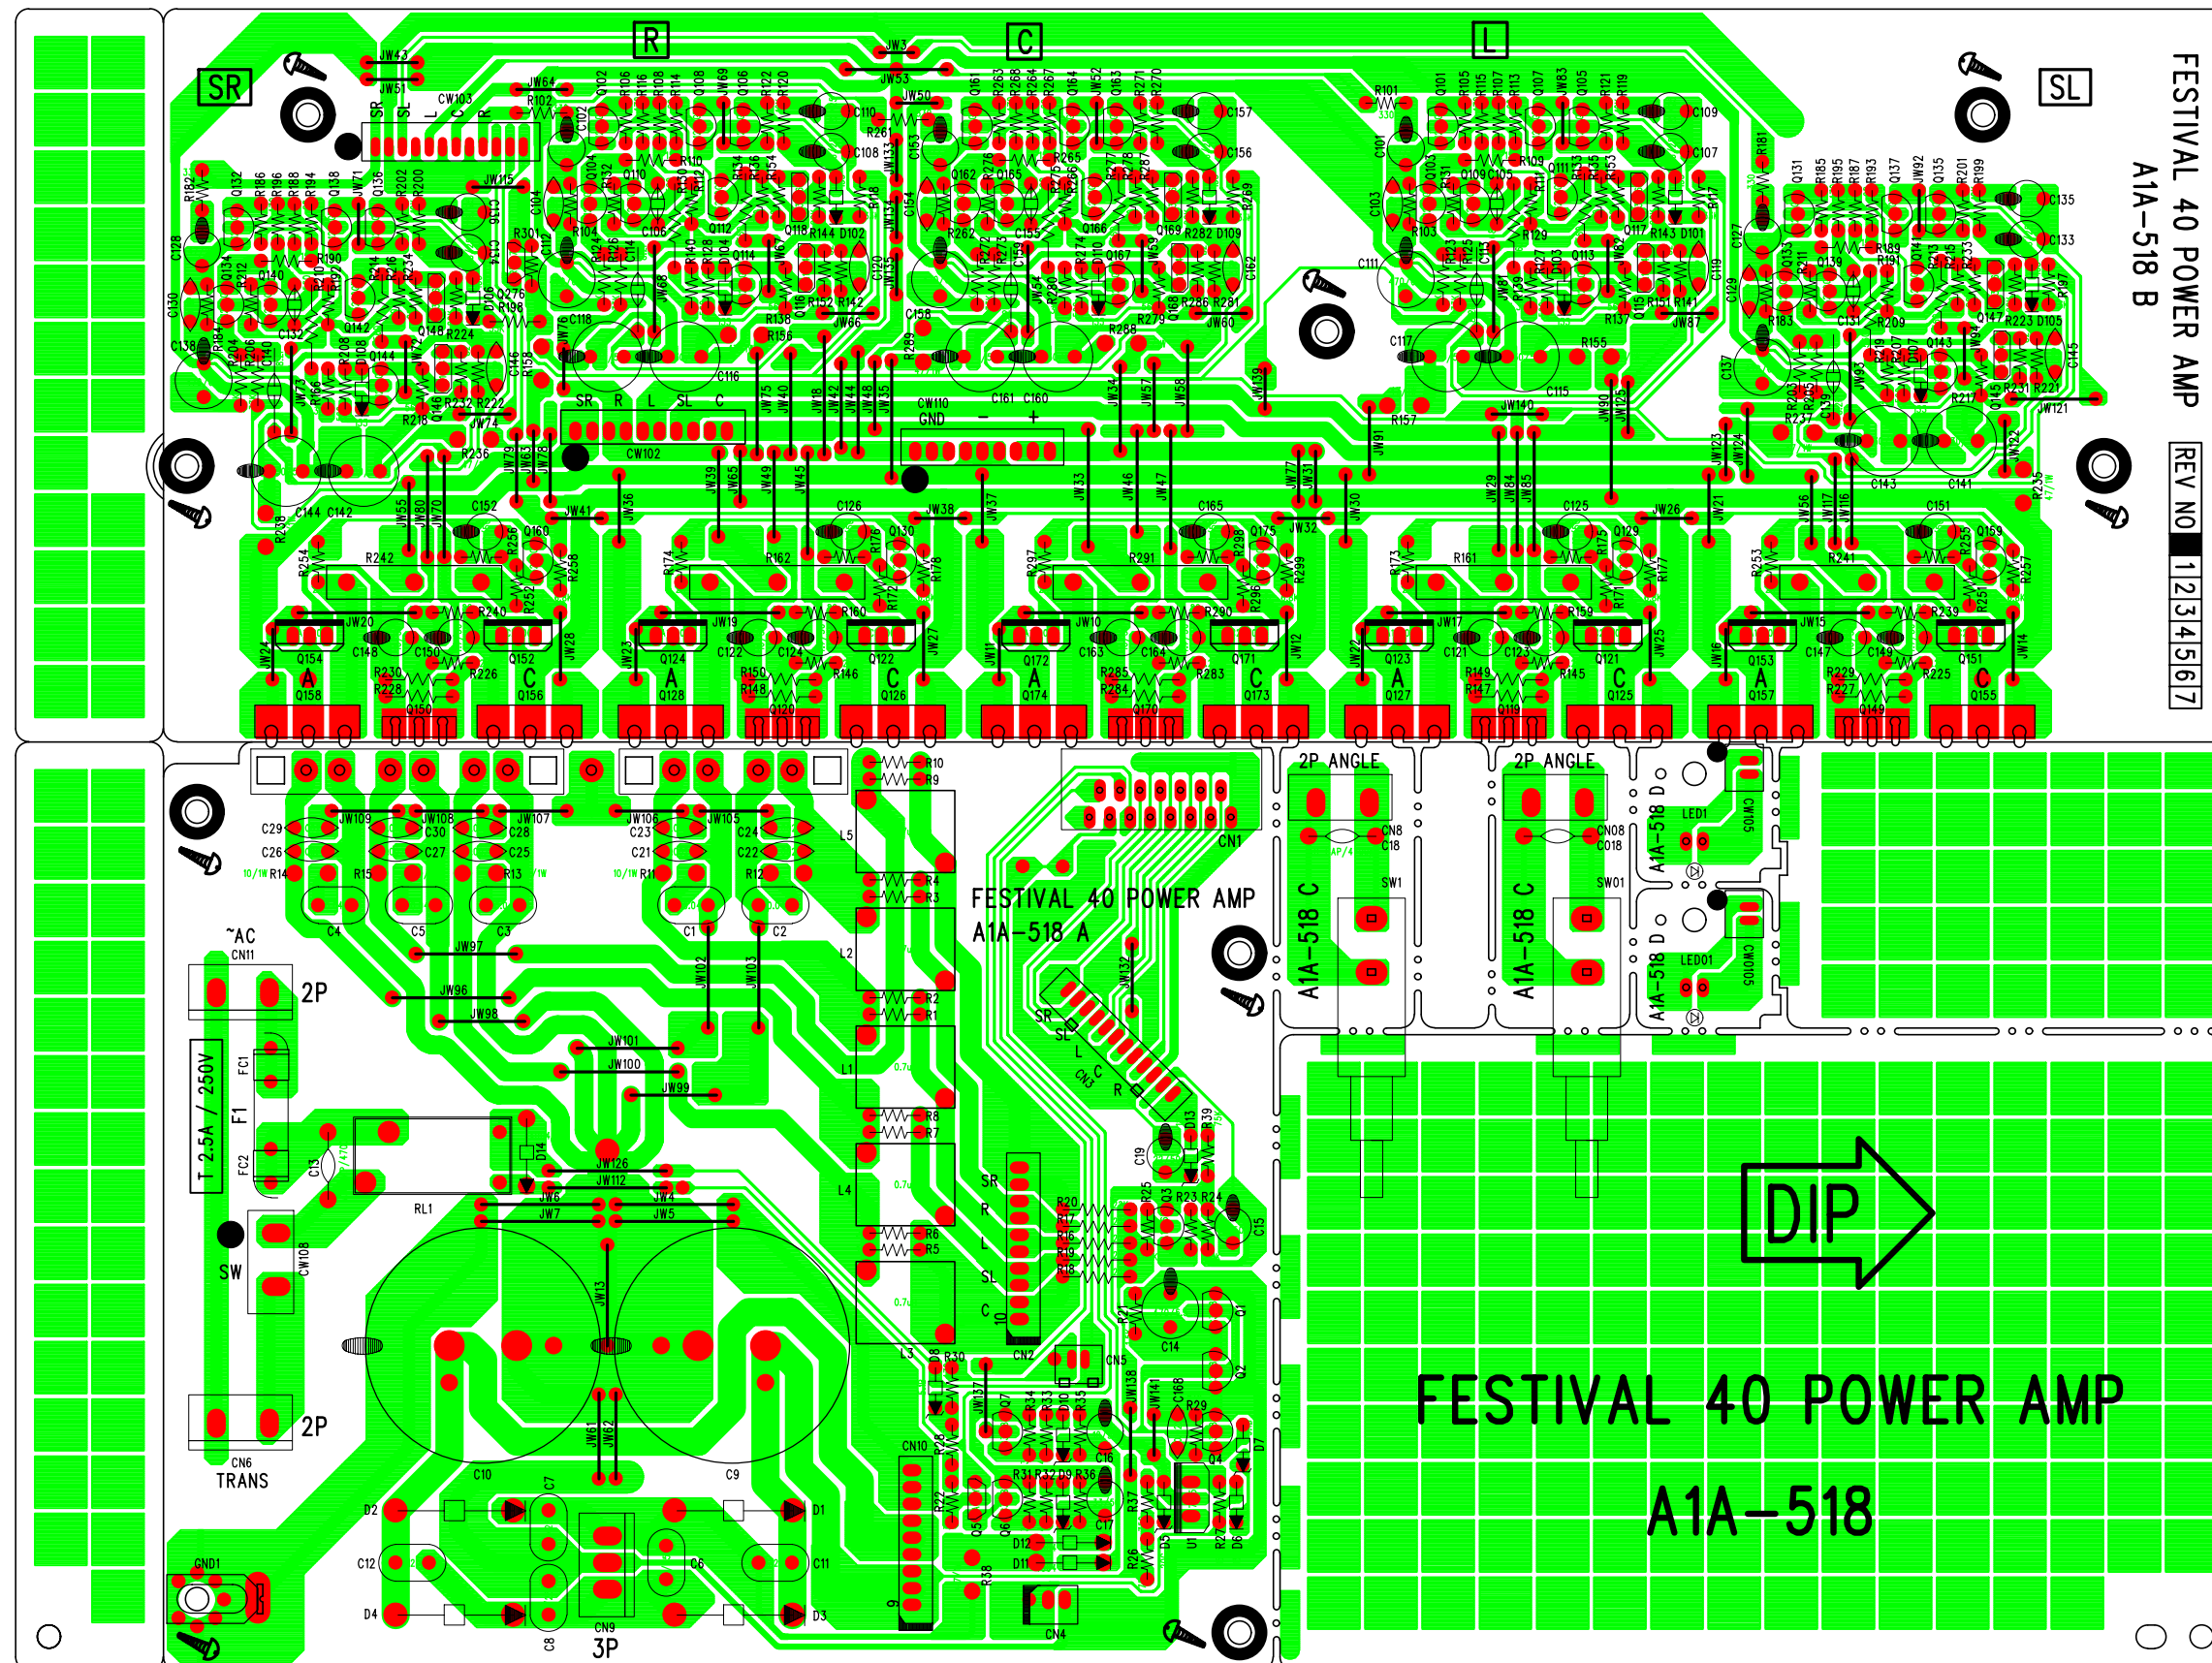



FESTIVAL 40 POWER AMP
A1A-518 B
REV NO 1234567

P.C.BOARD
CDP

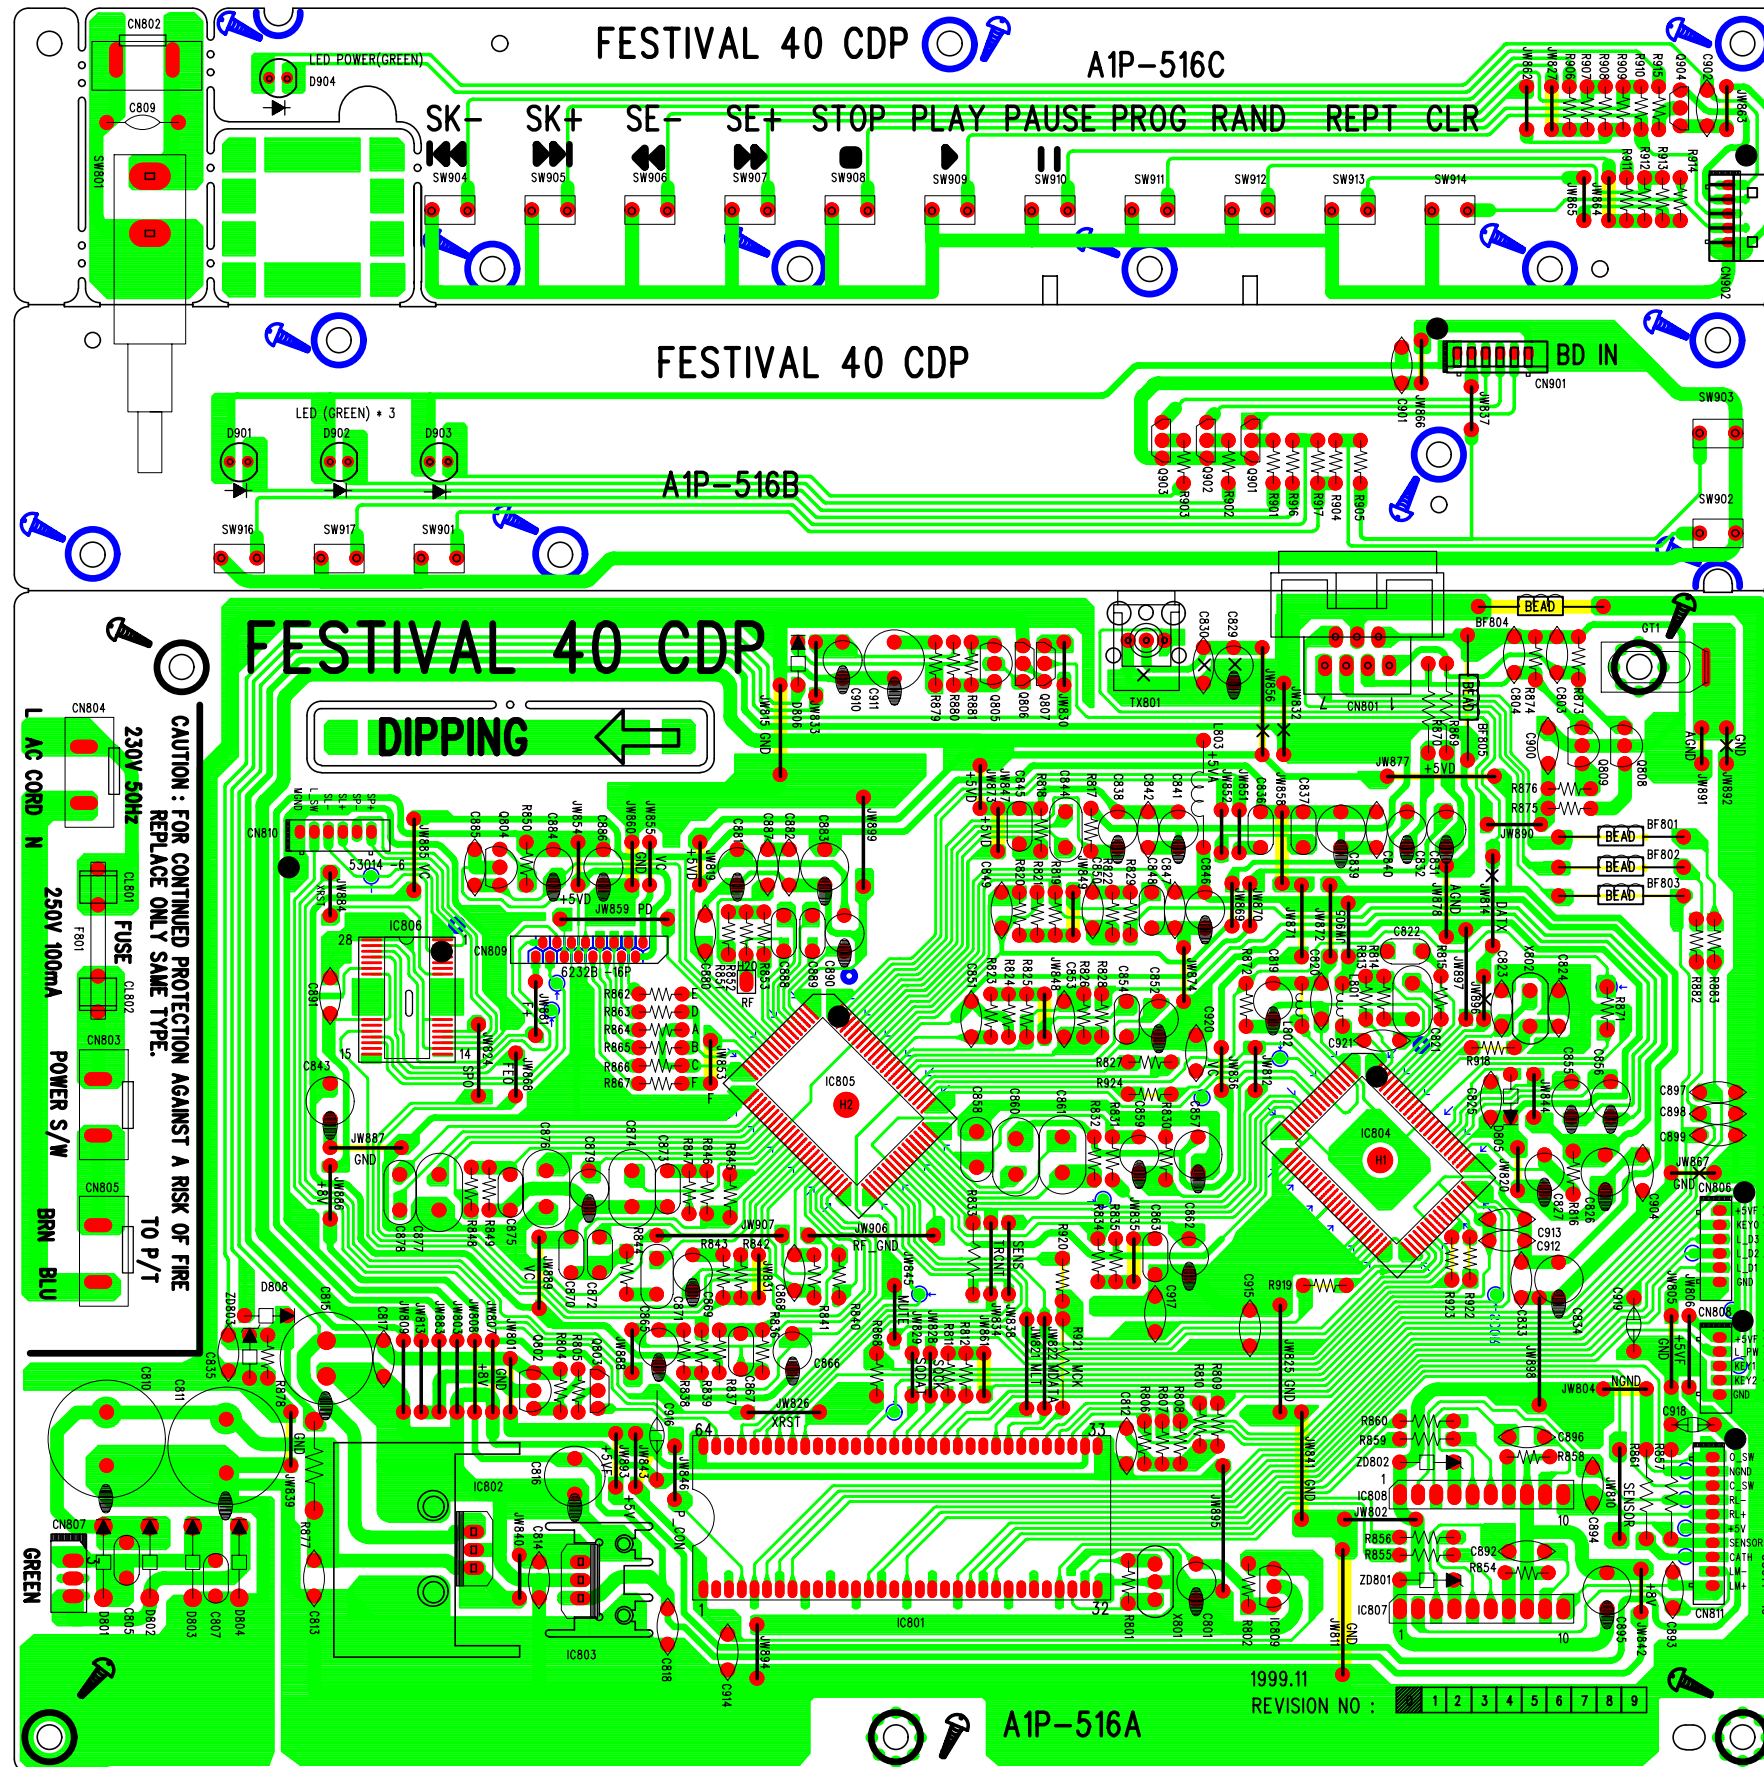



P. C. BOARD
PRE AMP

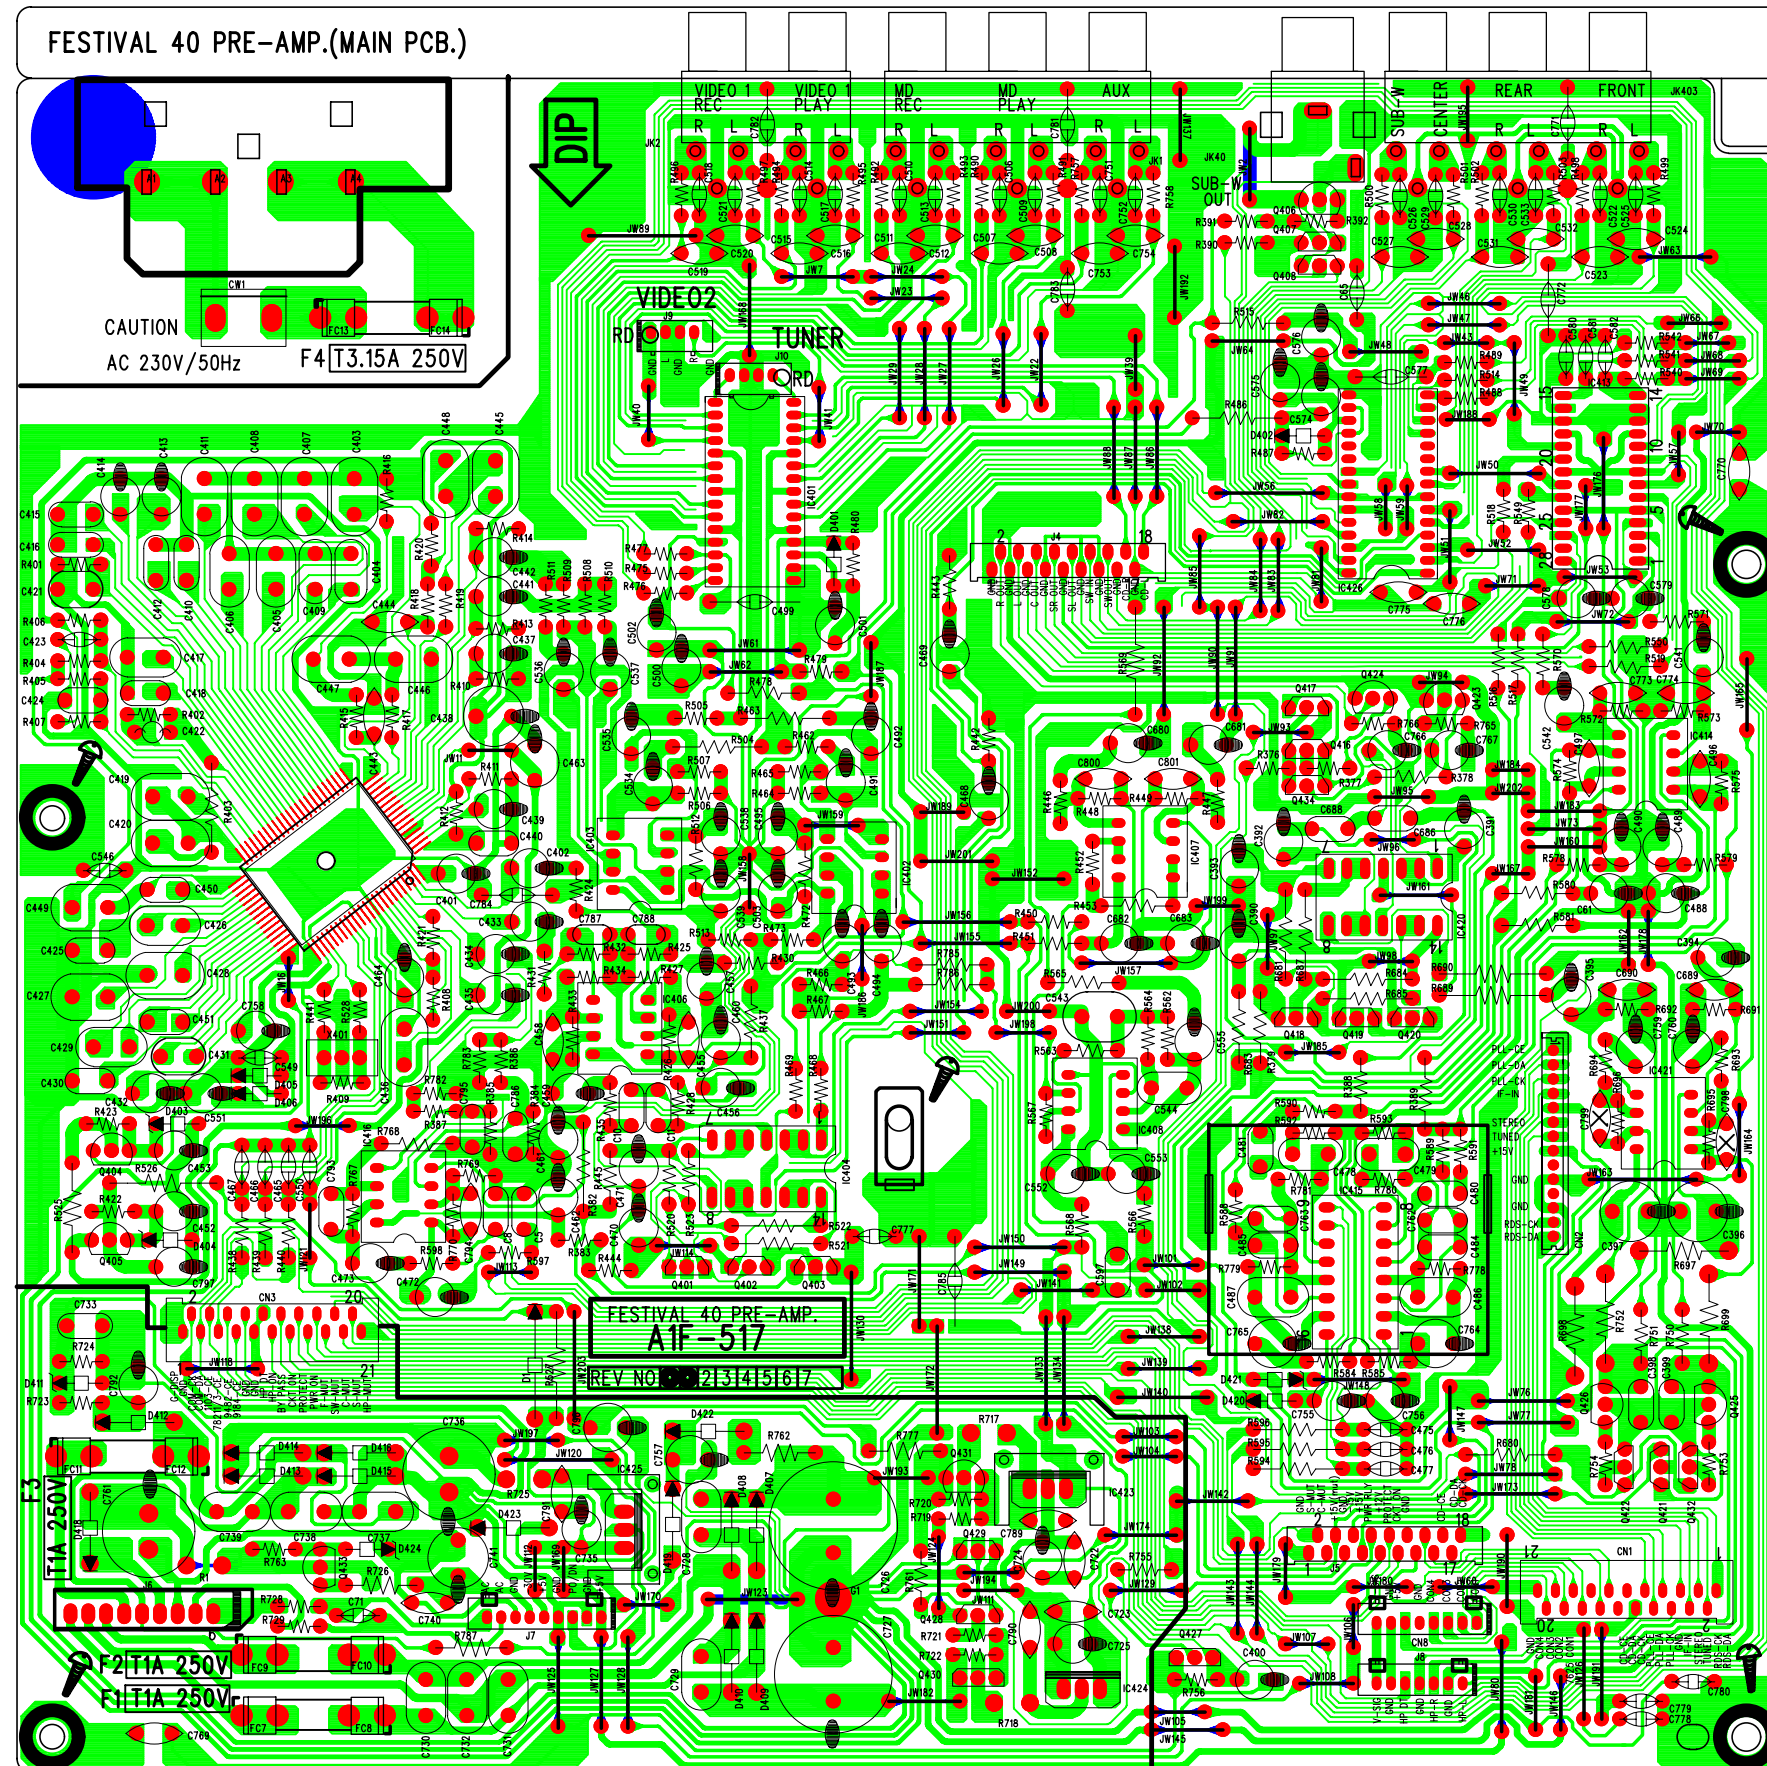

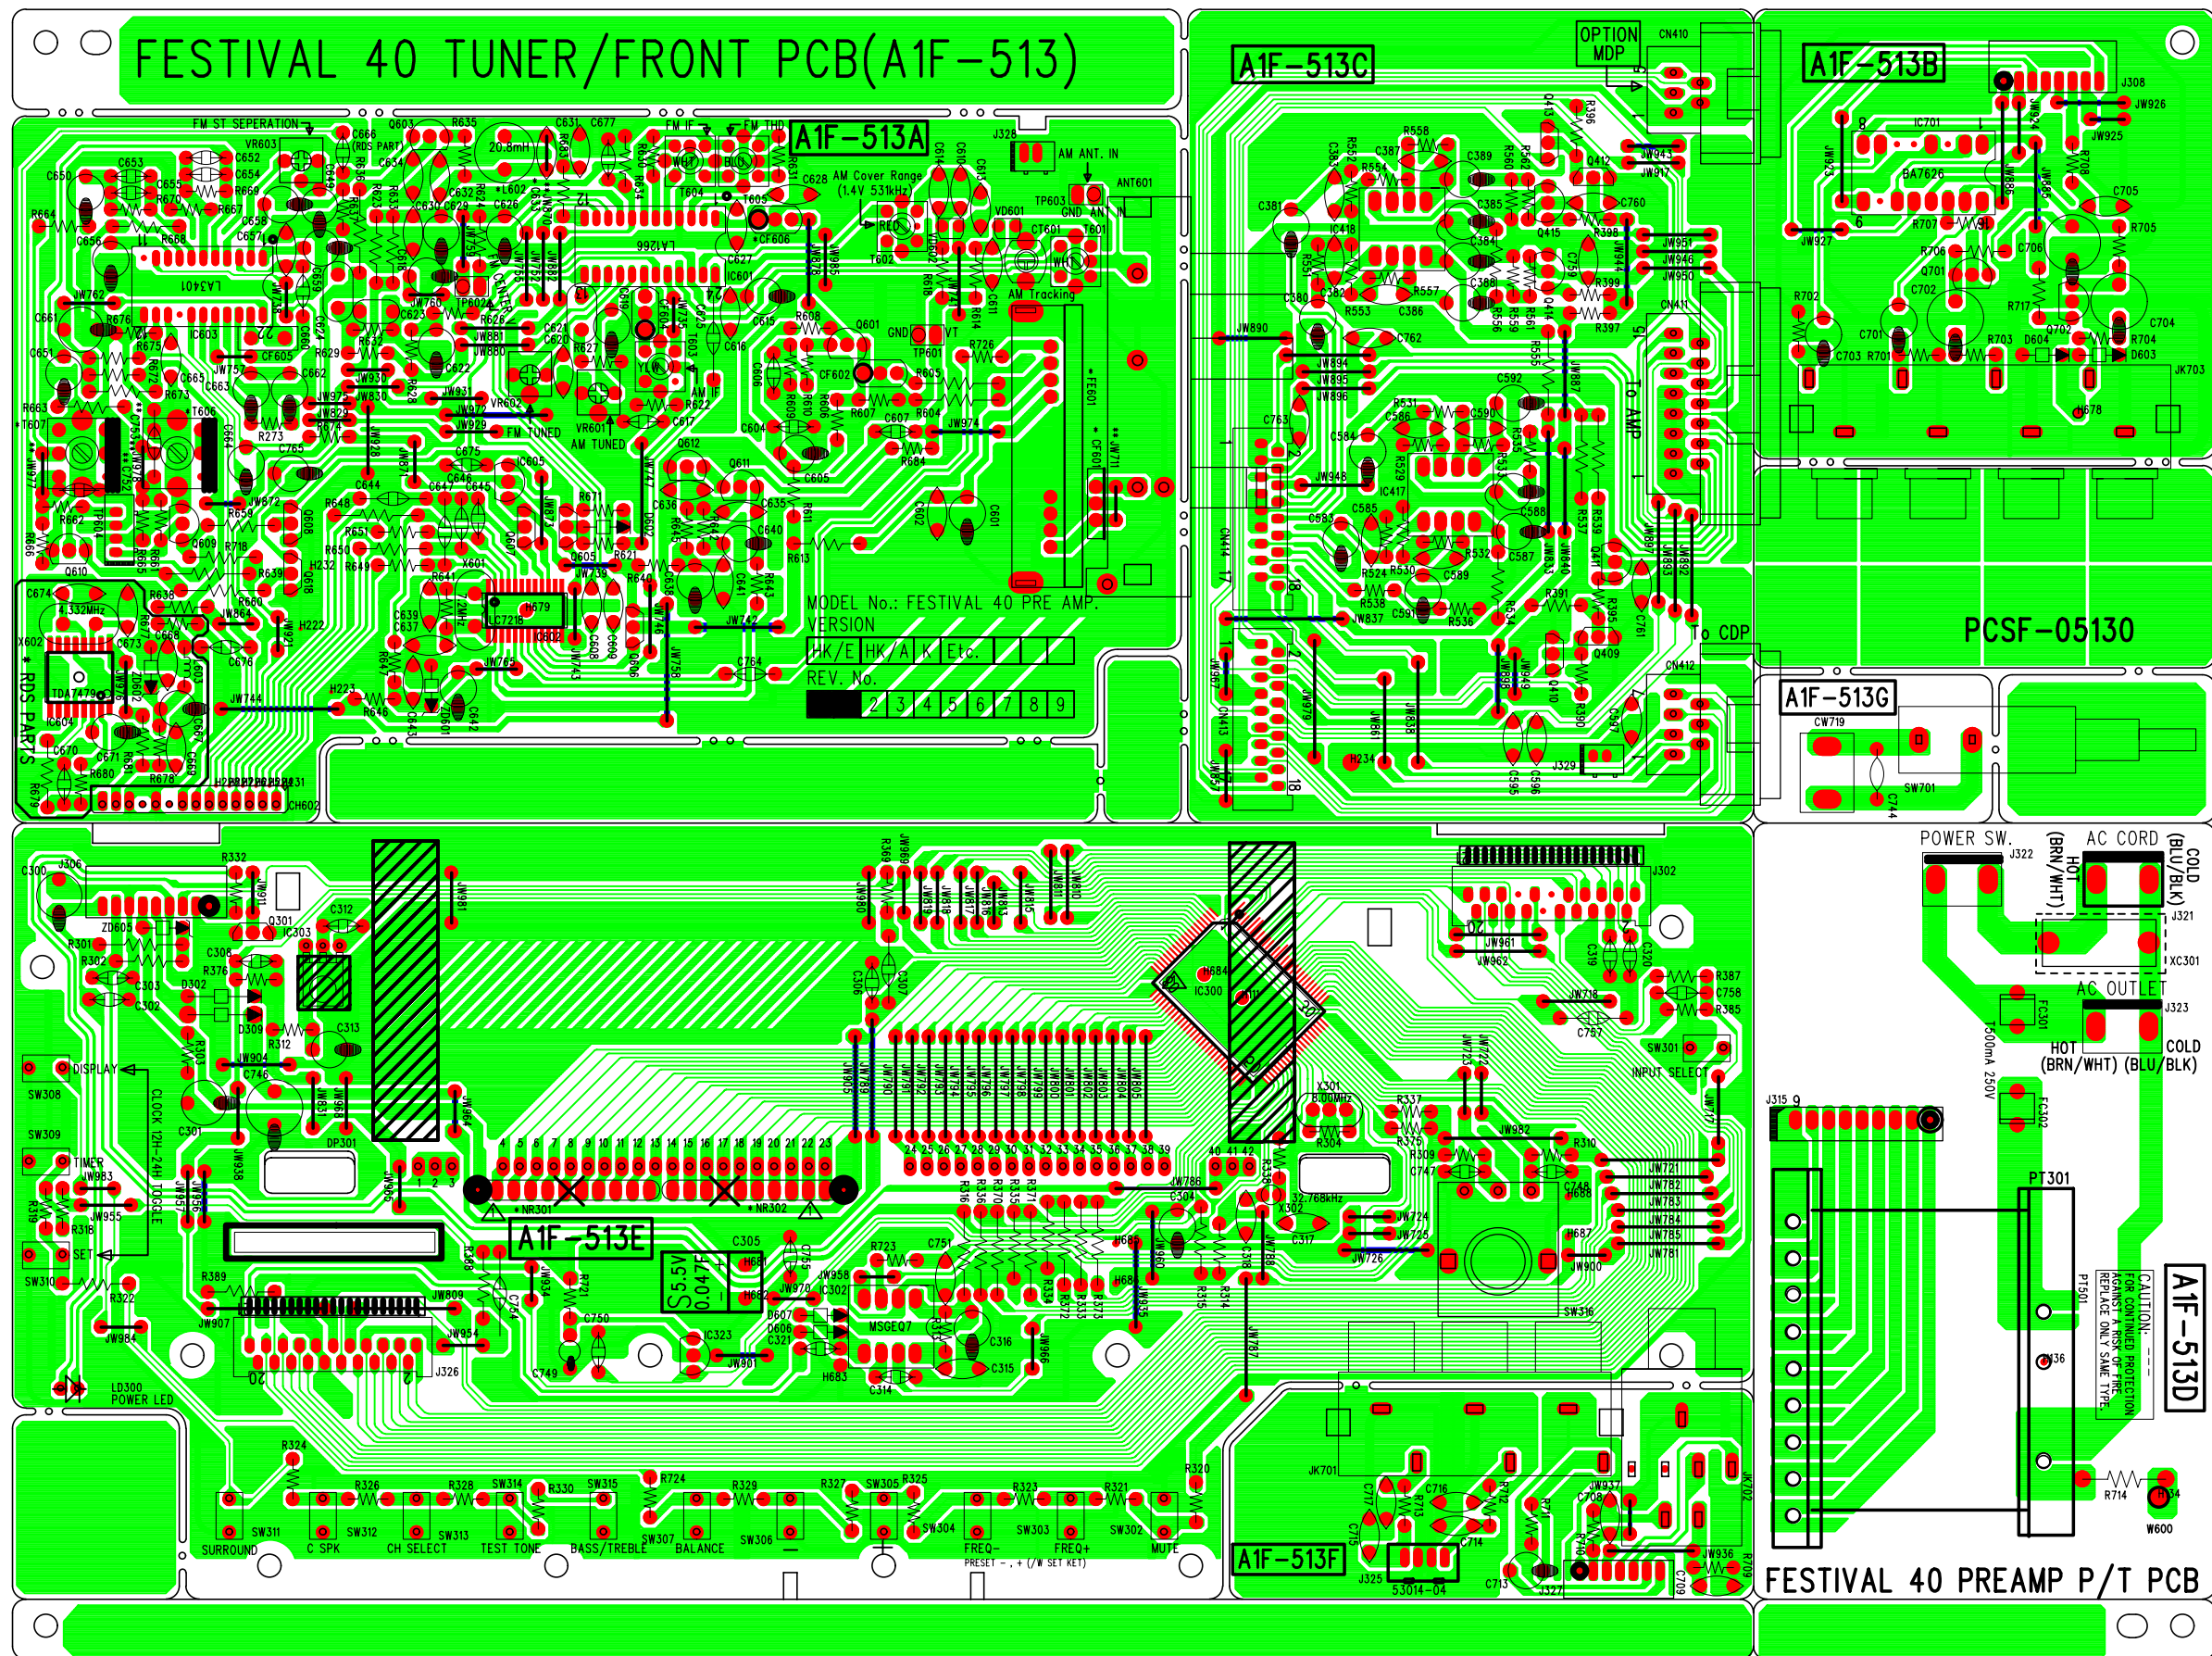

SCHEMATIC DIAGRAM POWER-AMP (AMP)

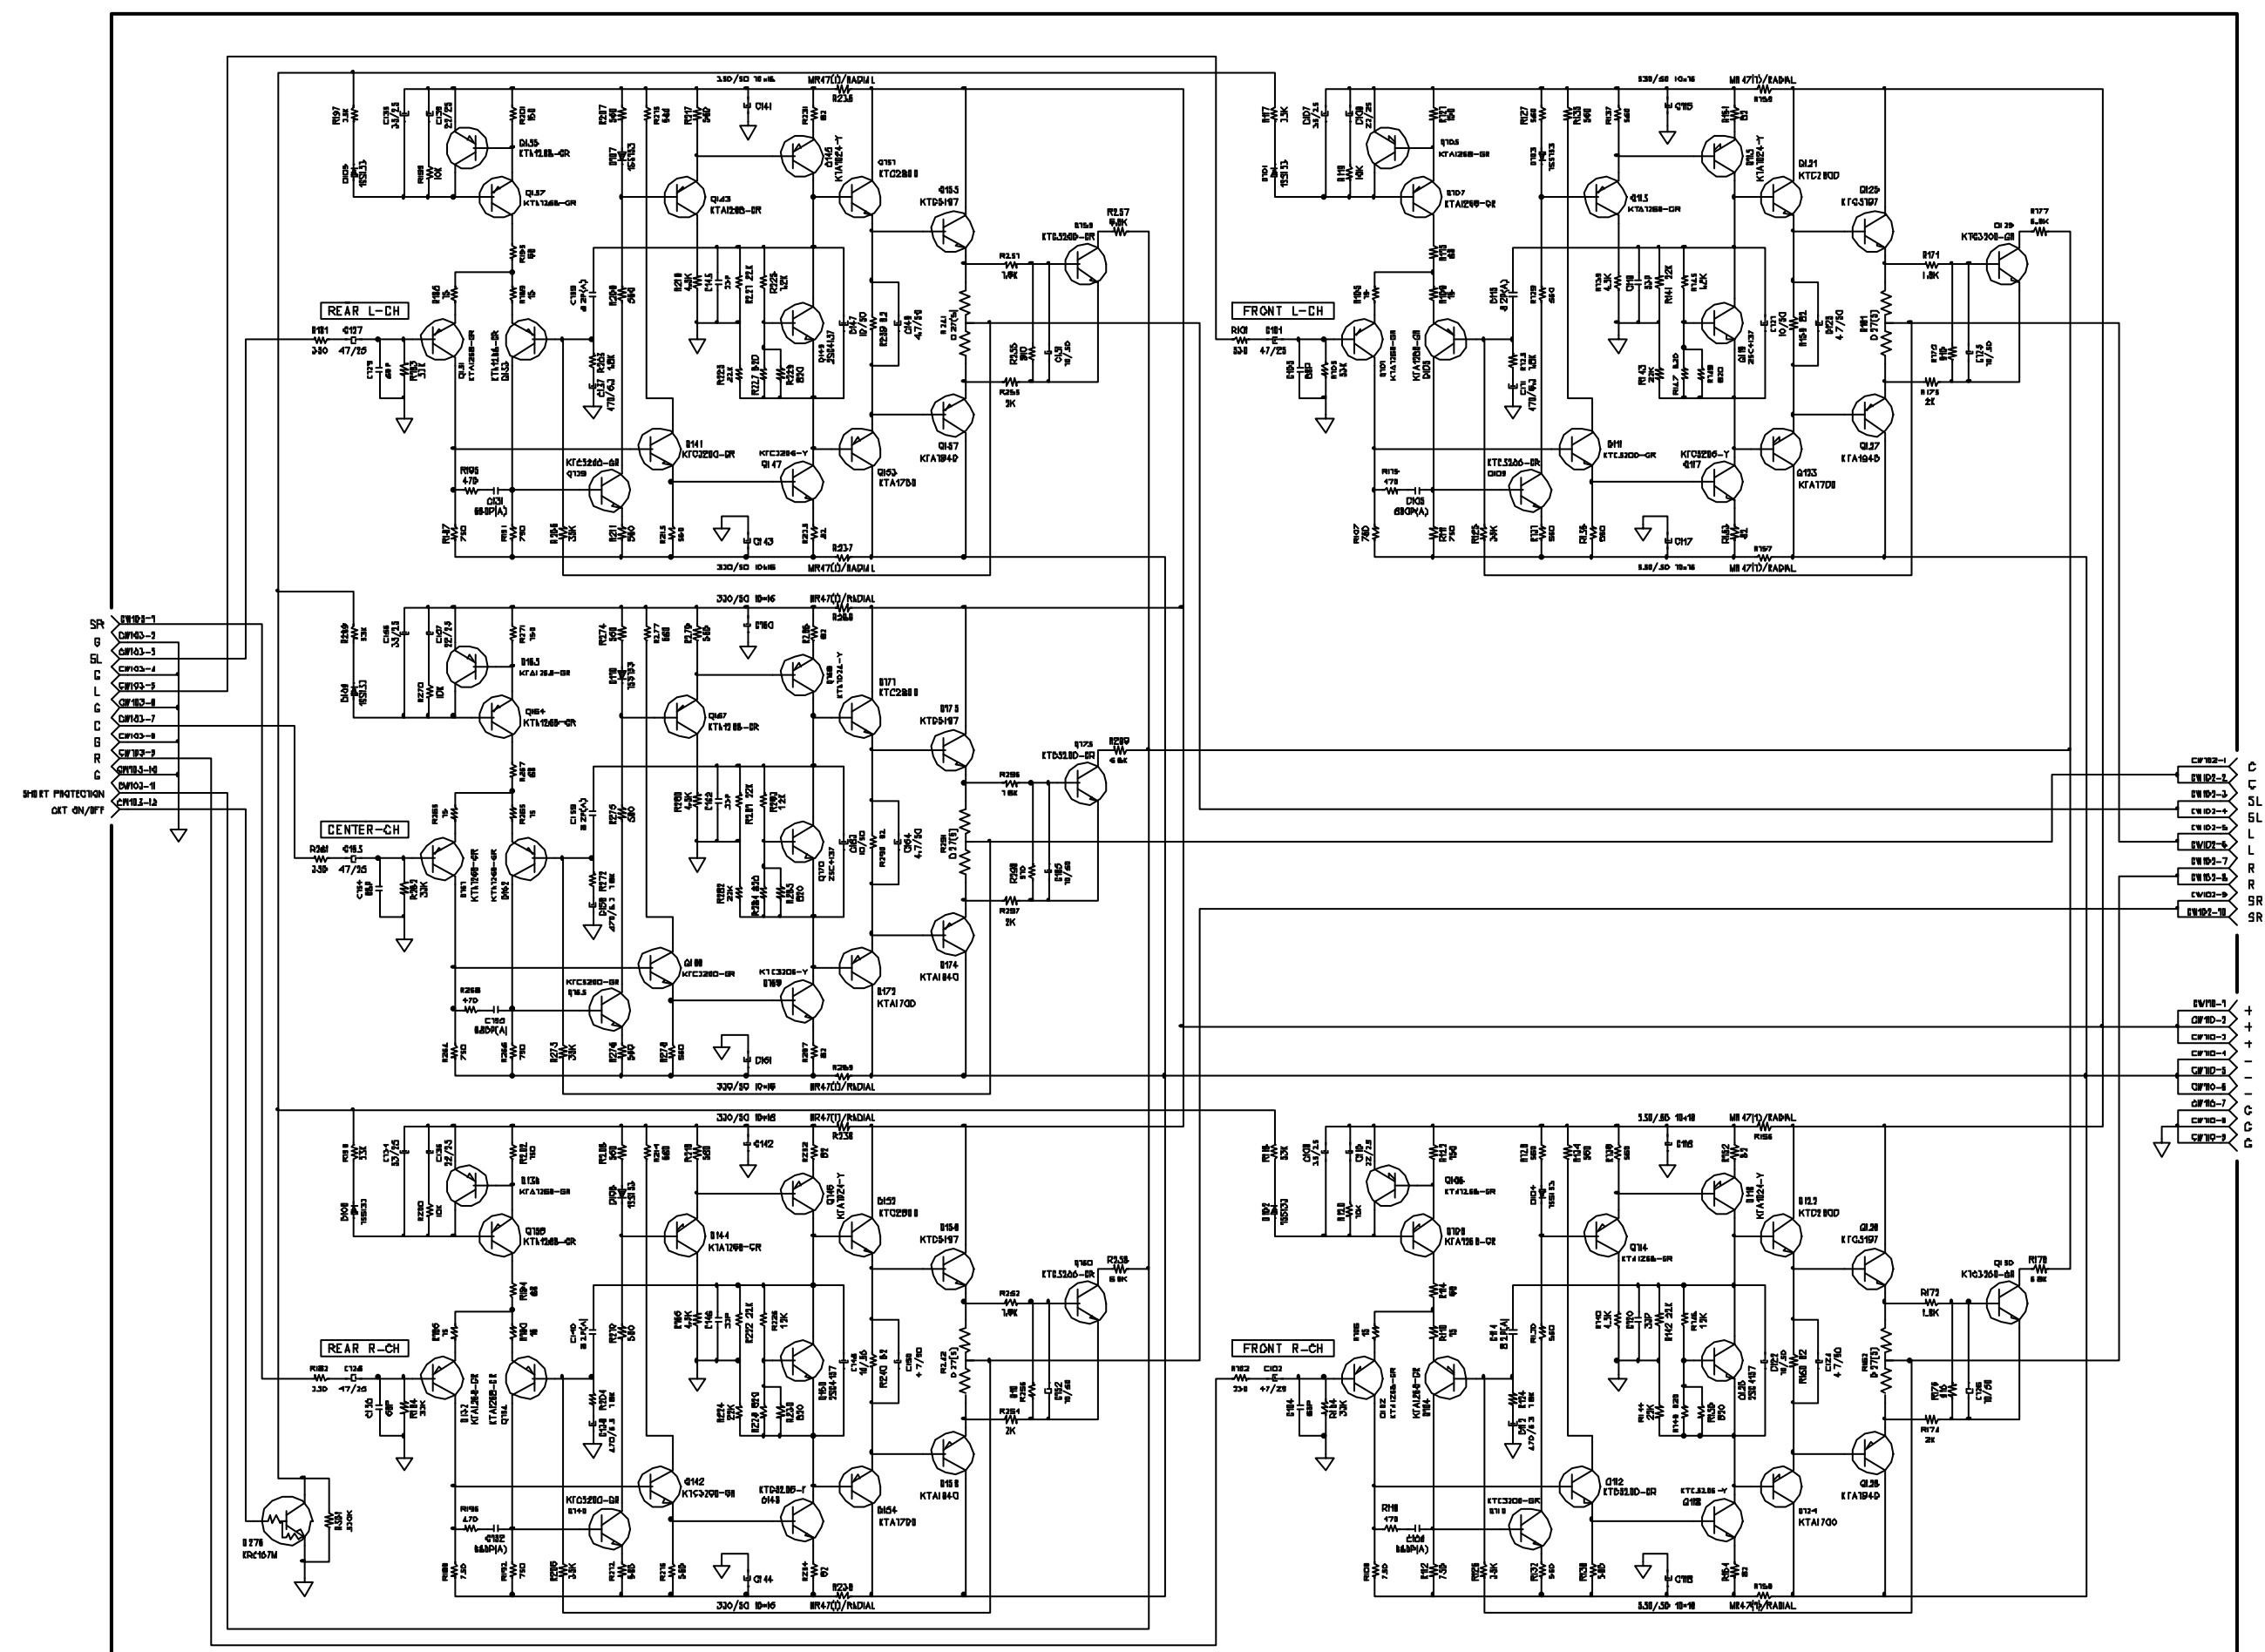




WARNING  INDICATES SAFETY CRITICAL COMPONENTS FOR CONTINUED SAFETY.


REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS

SCHEMATIC DIAGRAM
CDP (FRONT)

TOP

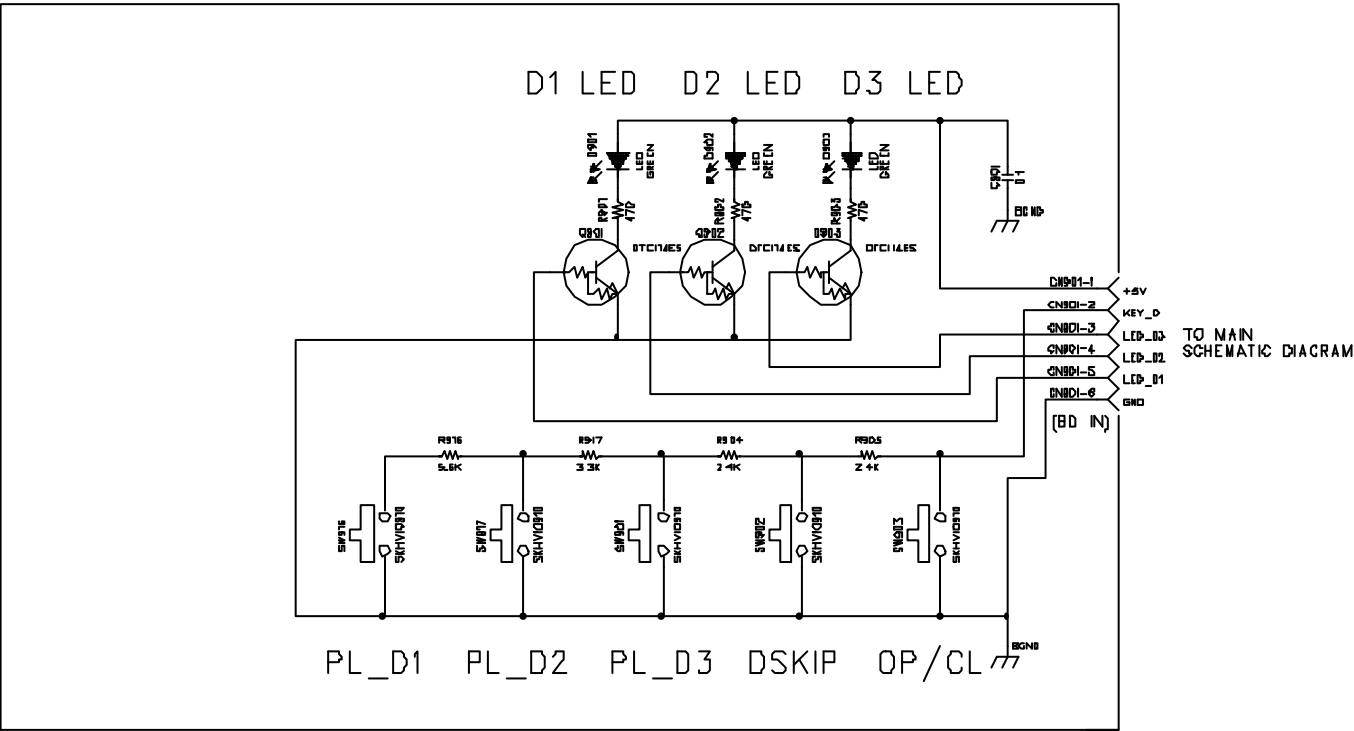


BOTTOM

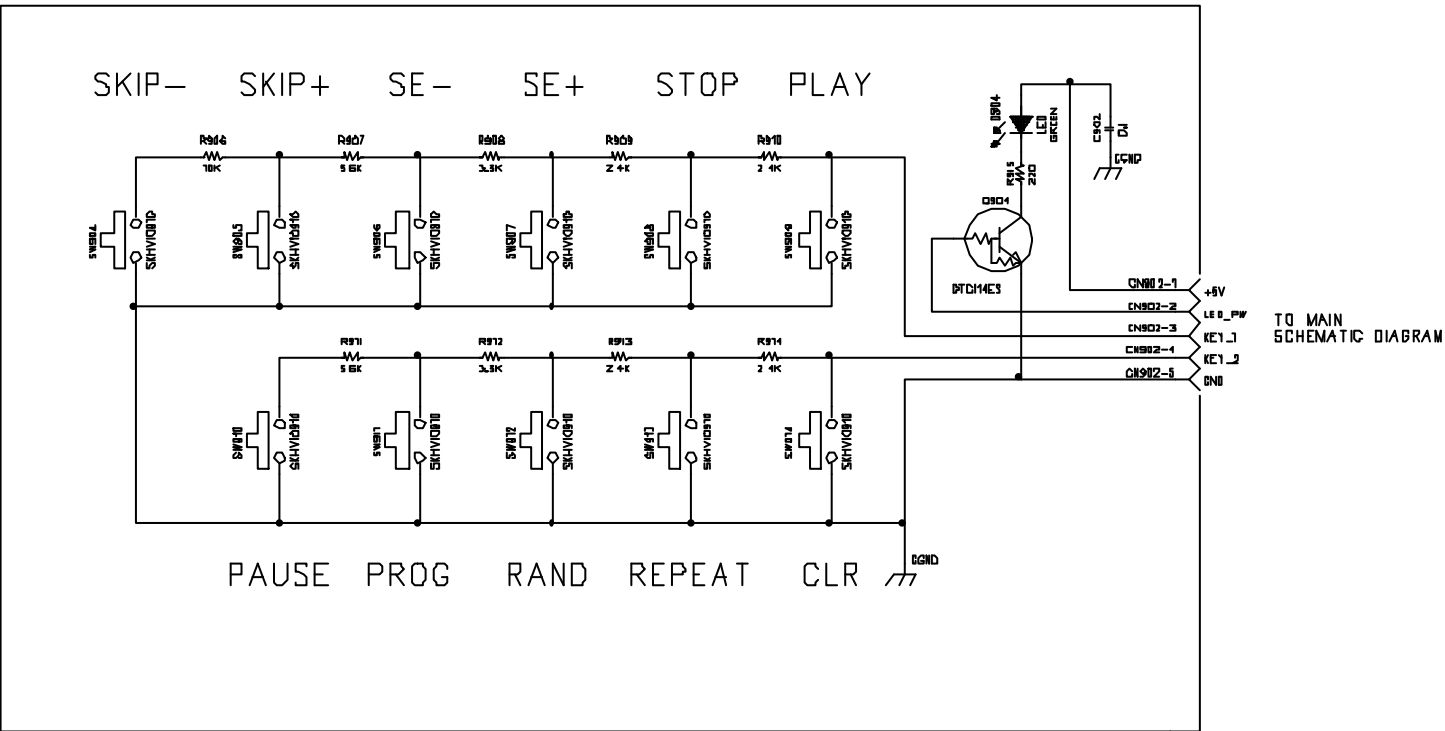



*** LED : ACTIVE AT "HIGH" STATE

SCHEMATIC DIAGRAM TUNER/FRONT (FRONT)

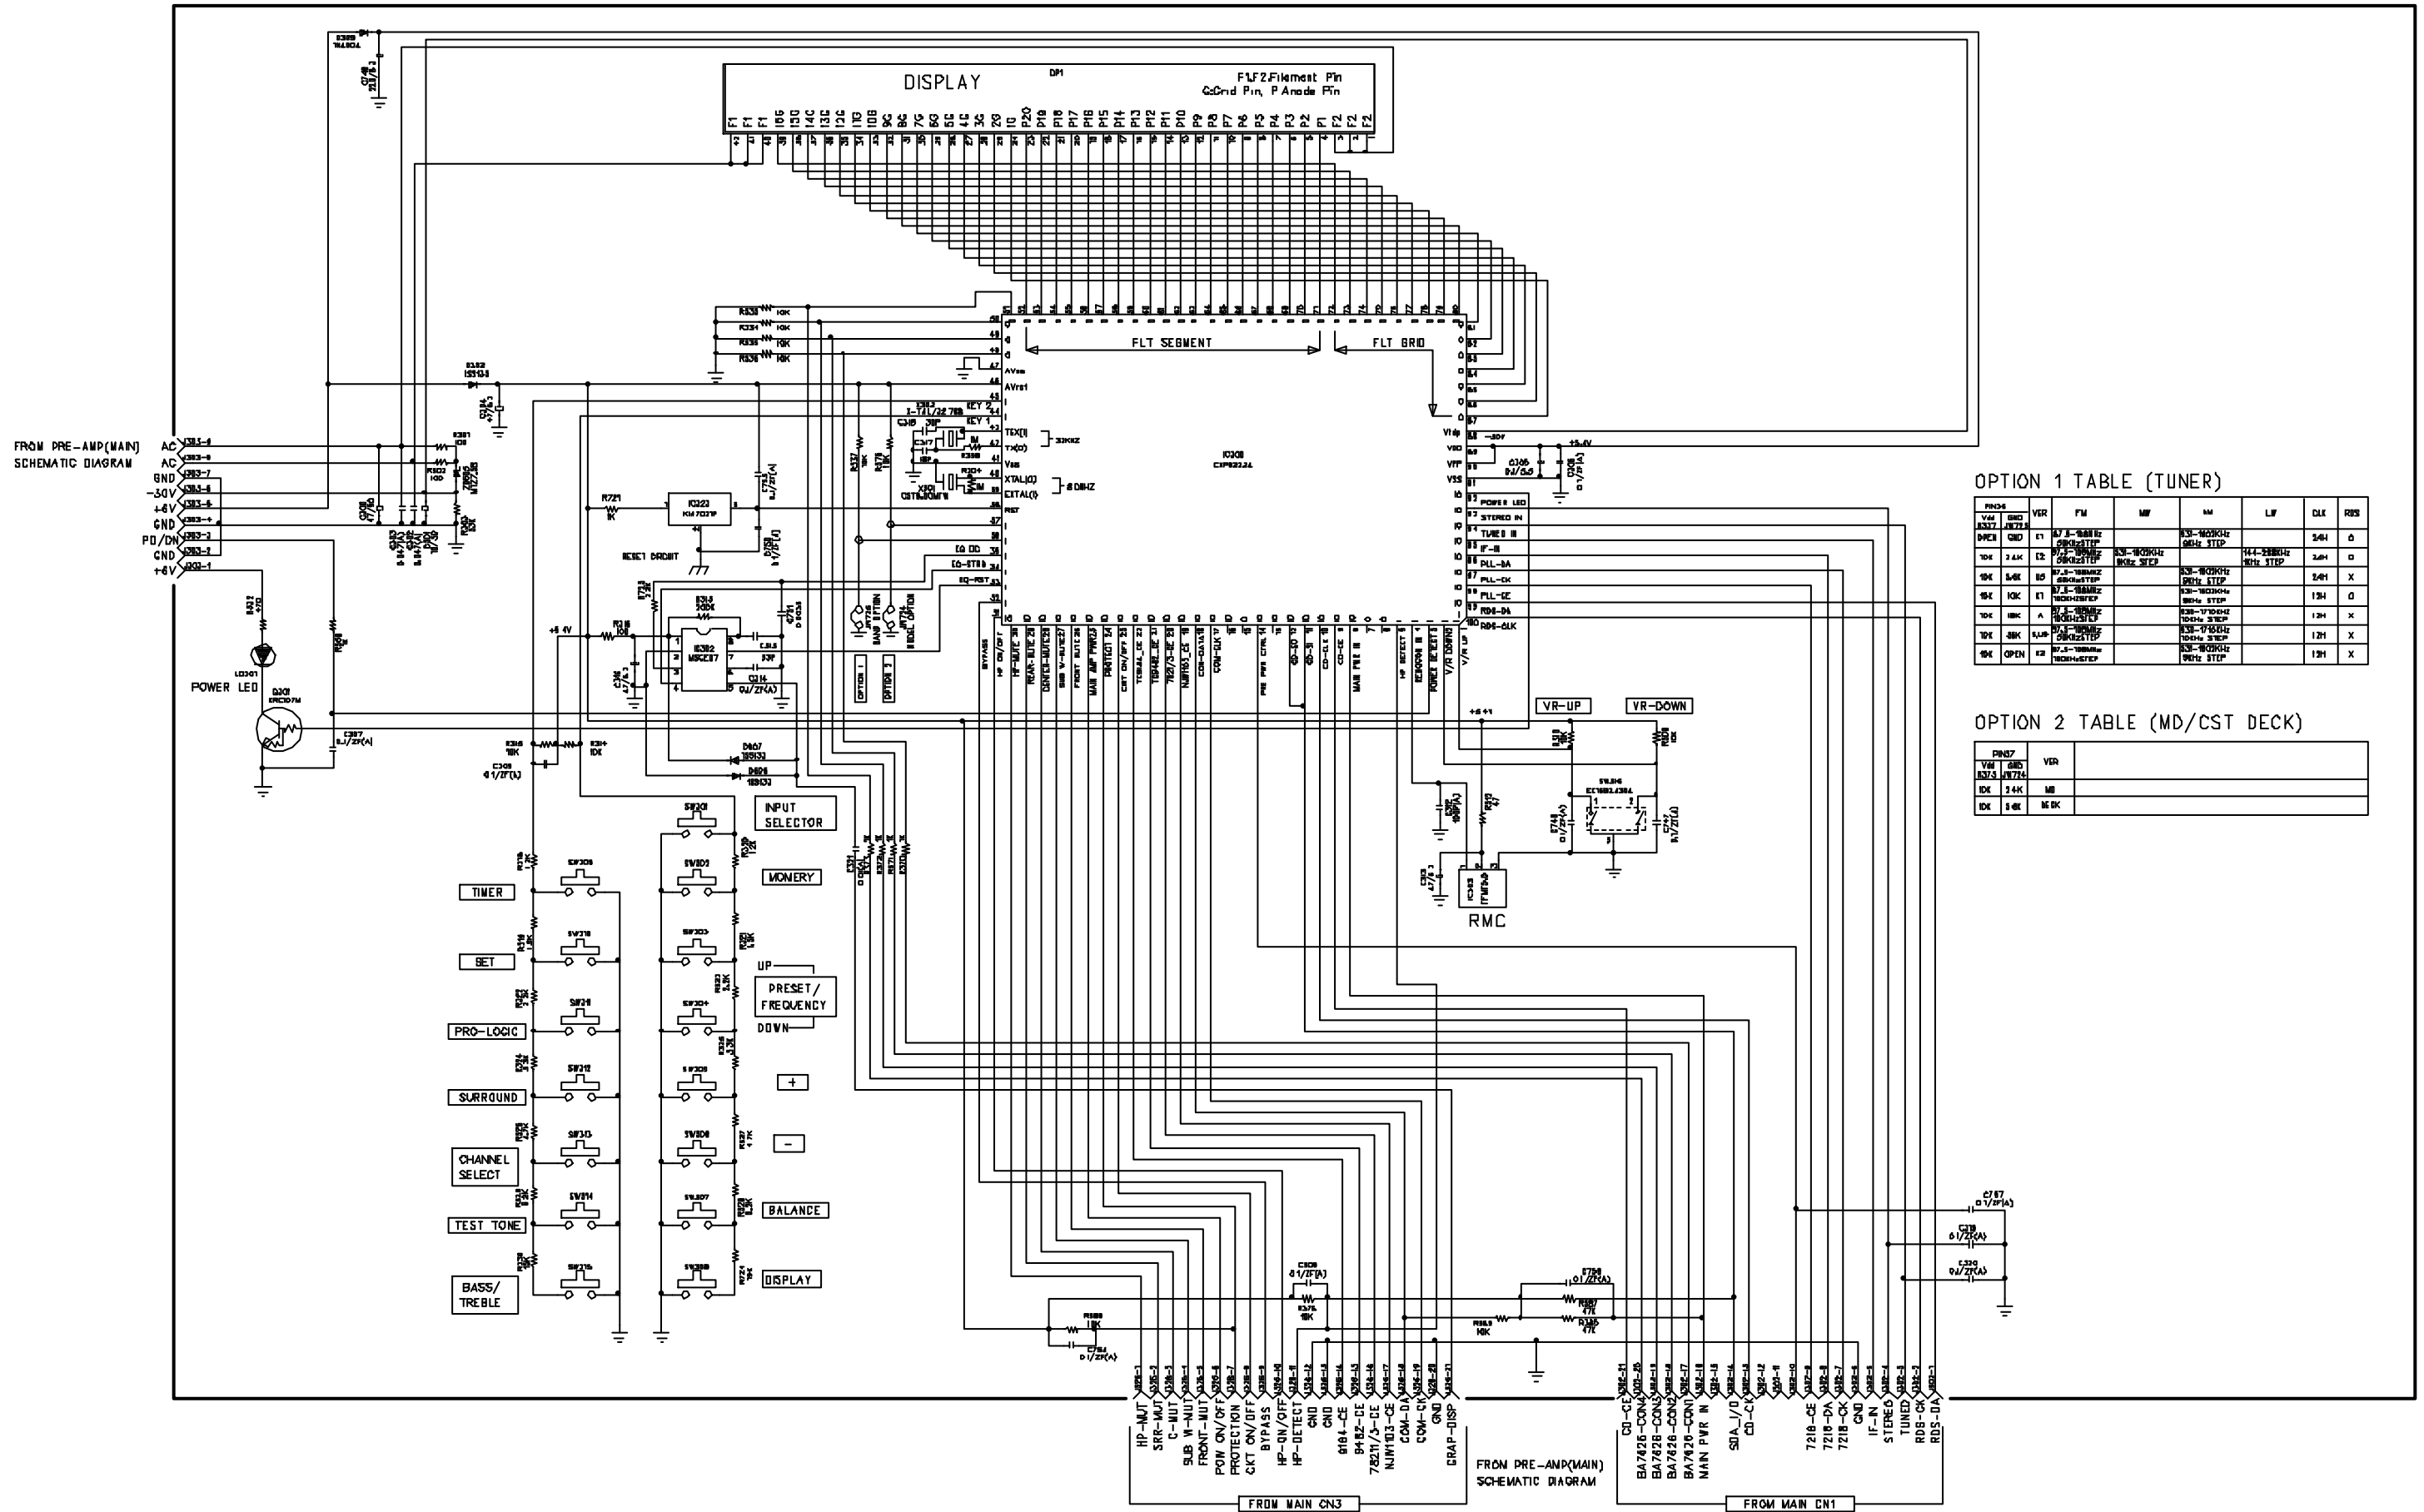

SCHEMATIC DIAGRAM
TUNER/FRONT (IN/OUTPUT, VIDEO, HEADPHONE)

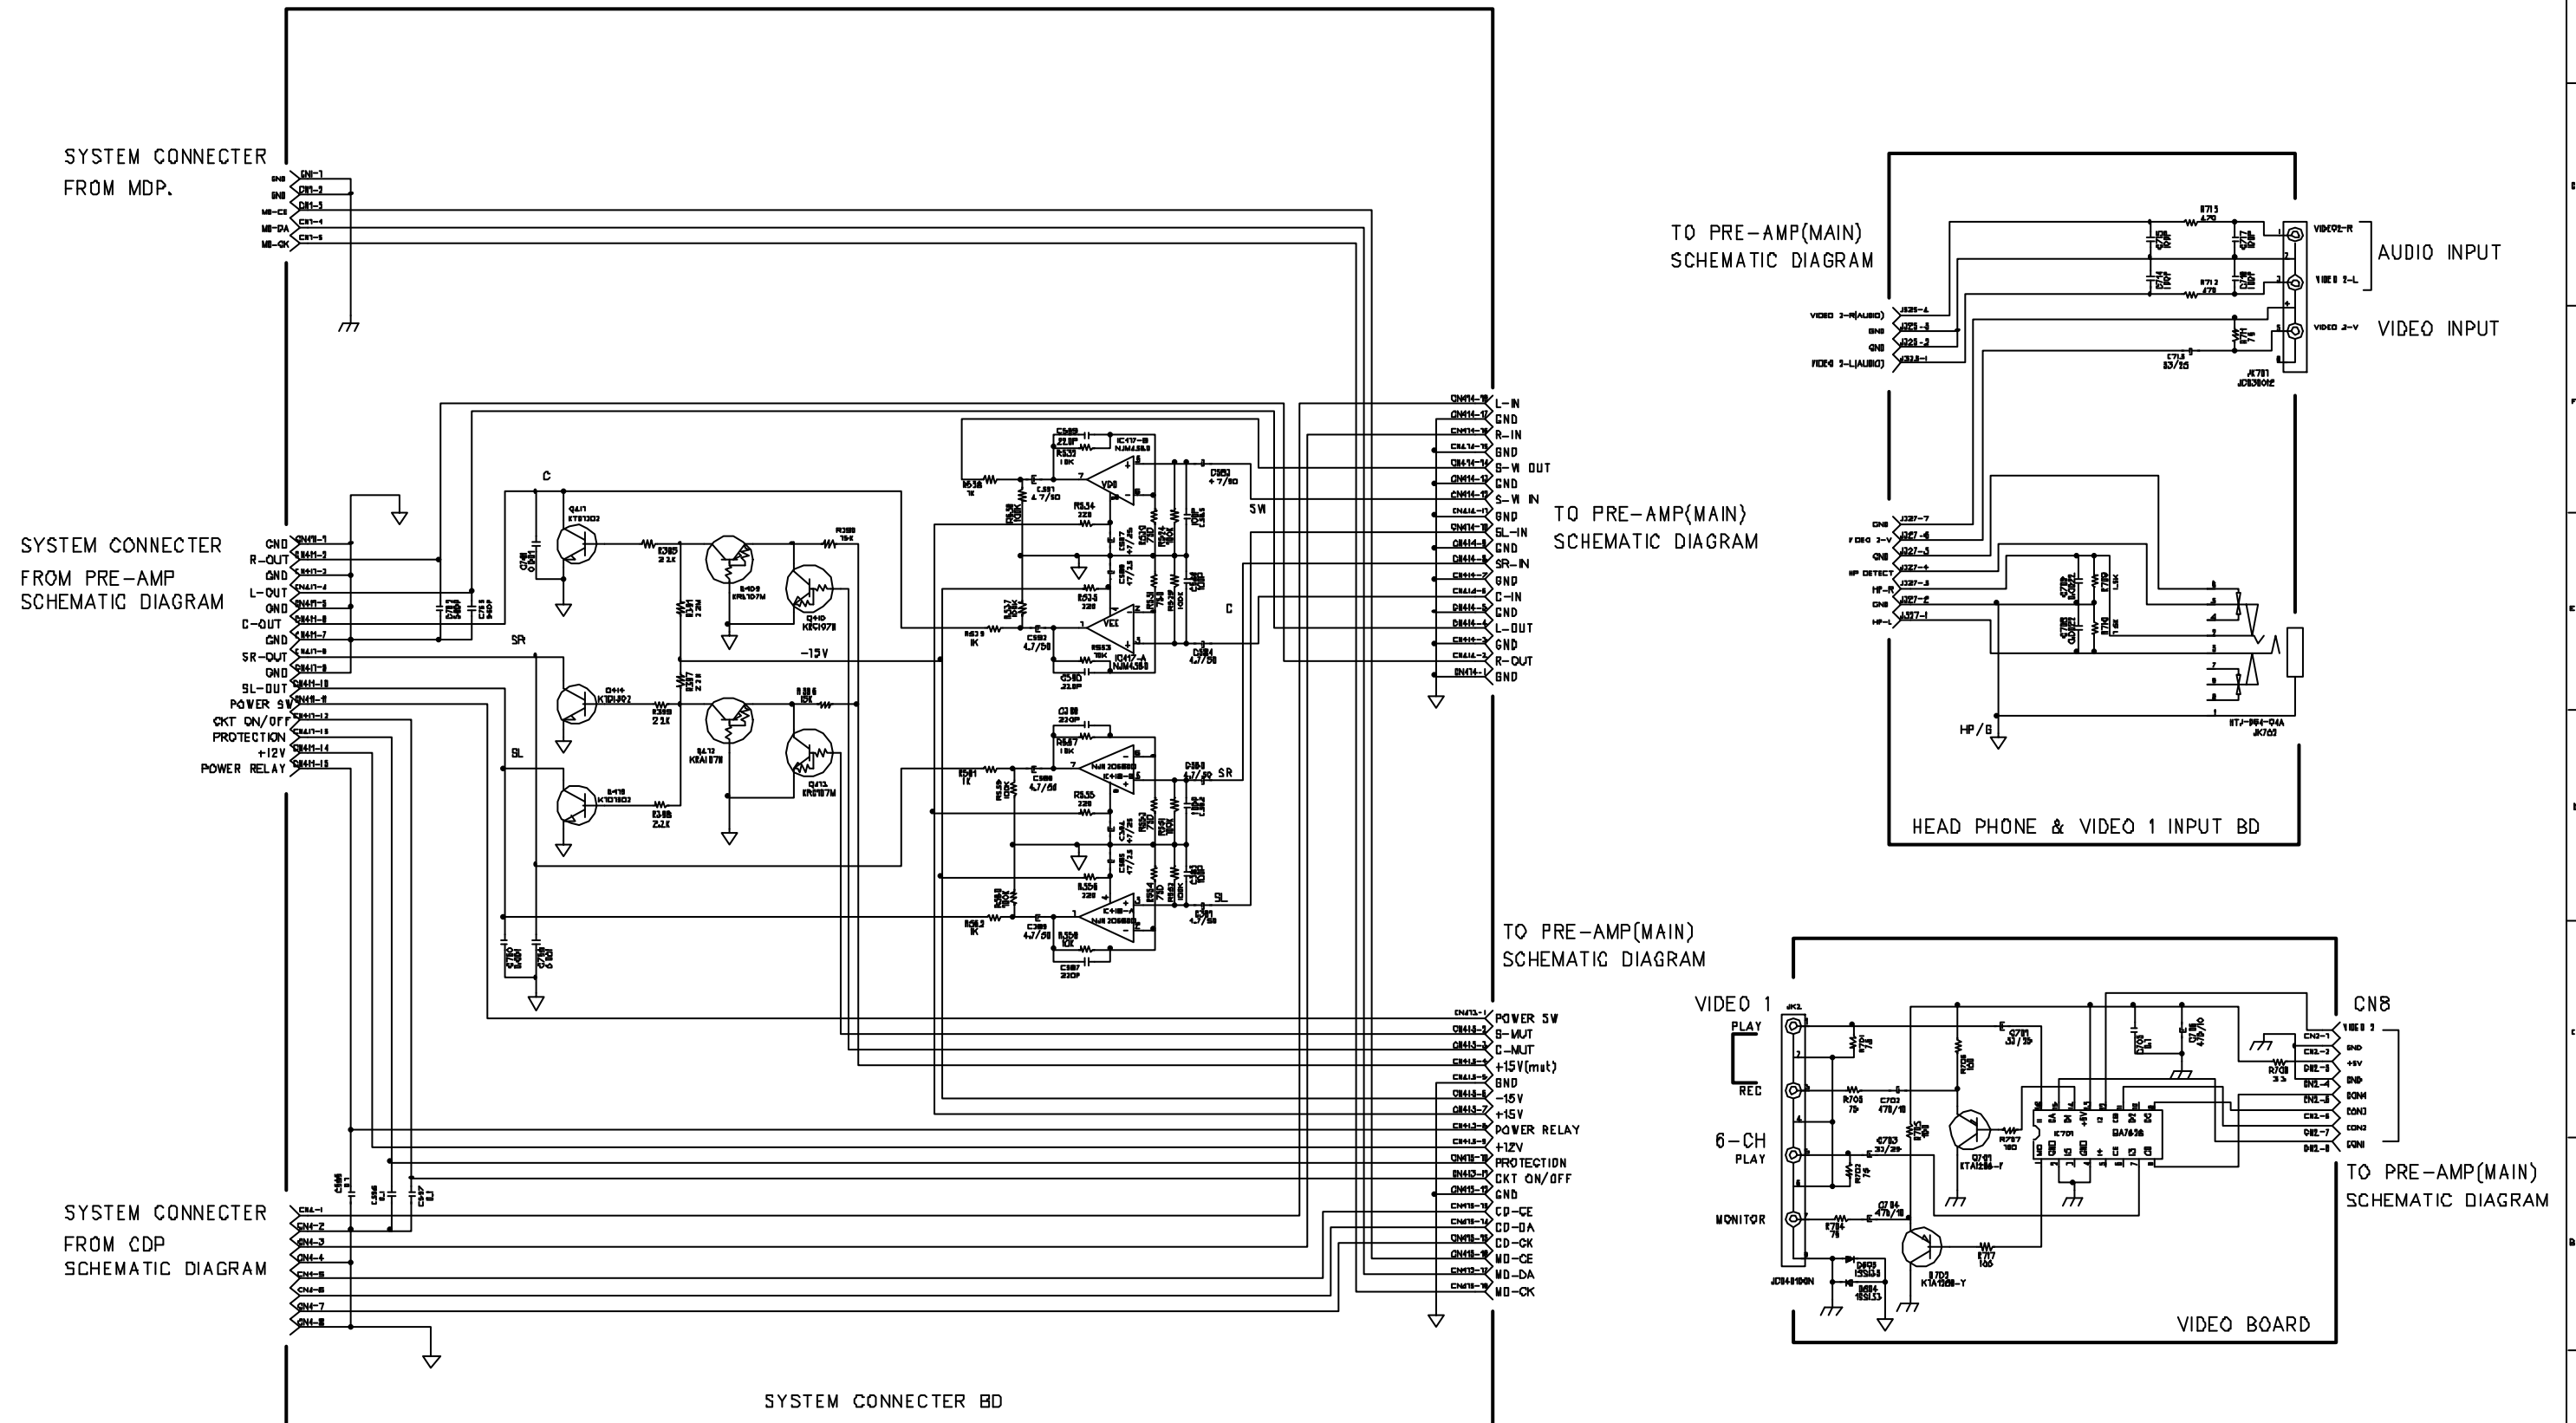

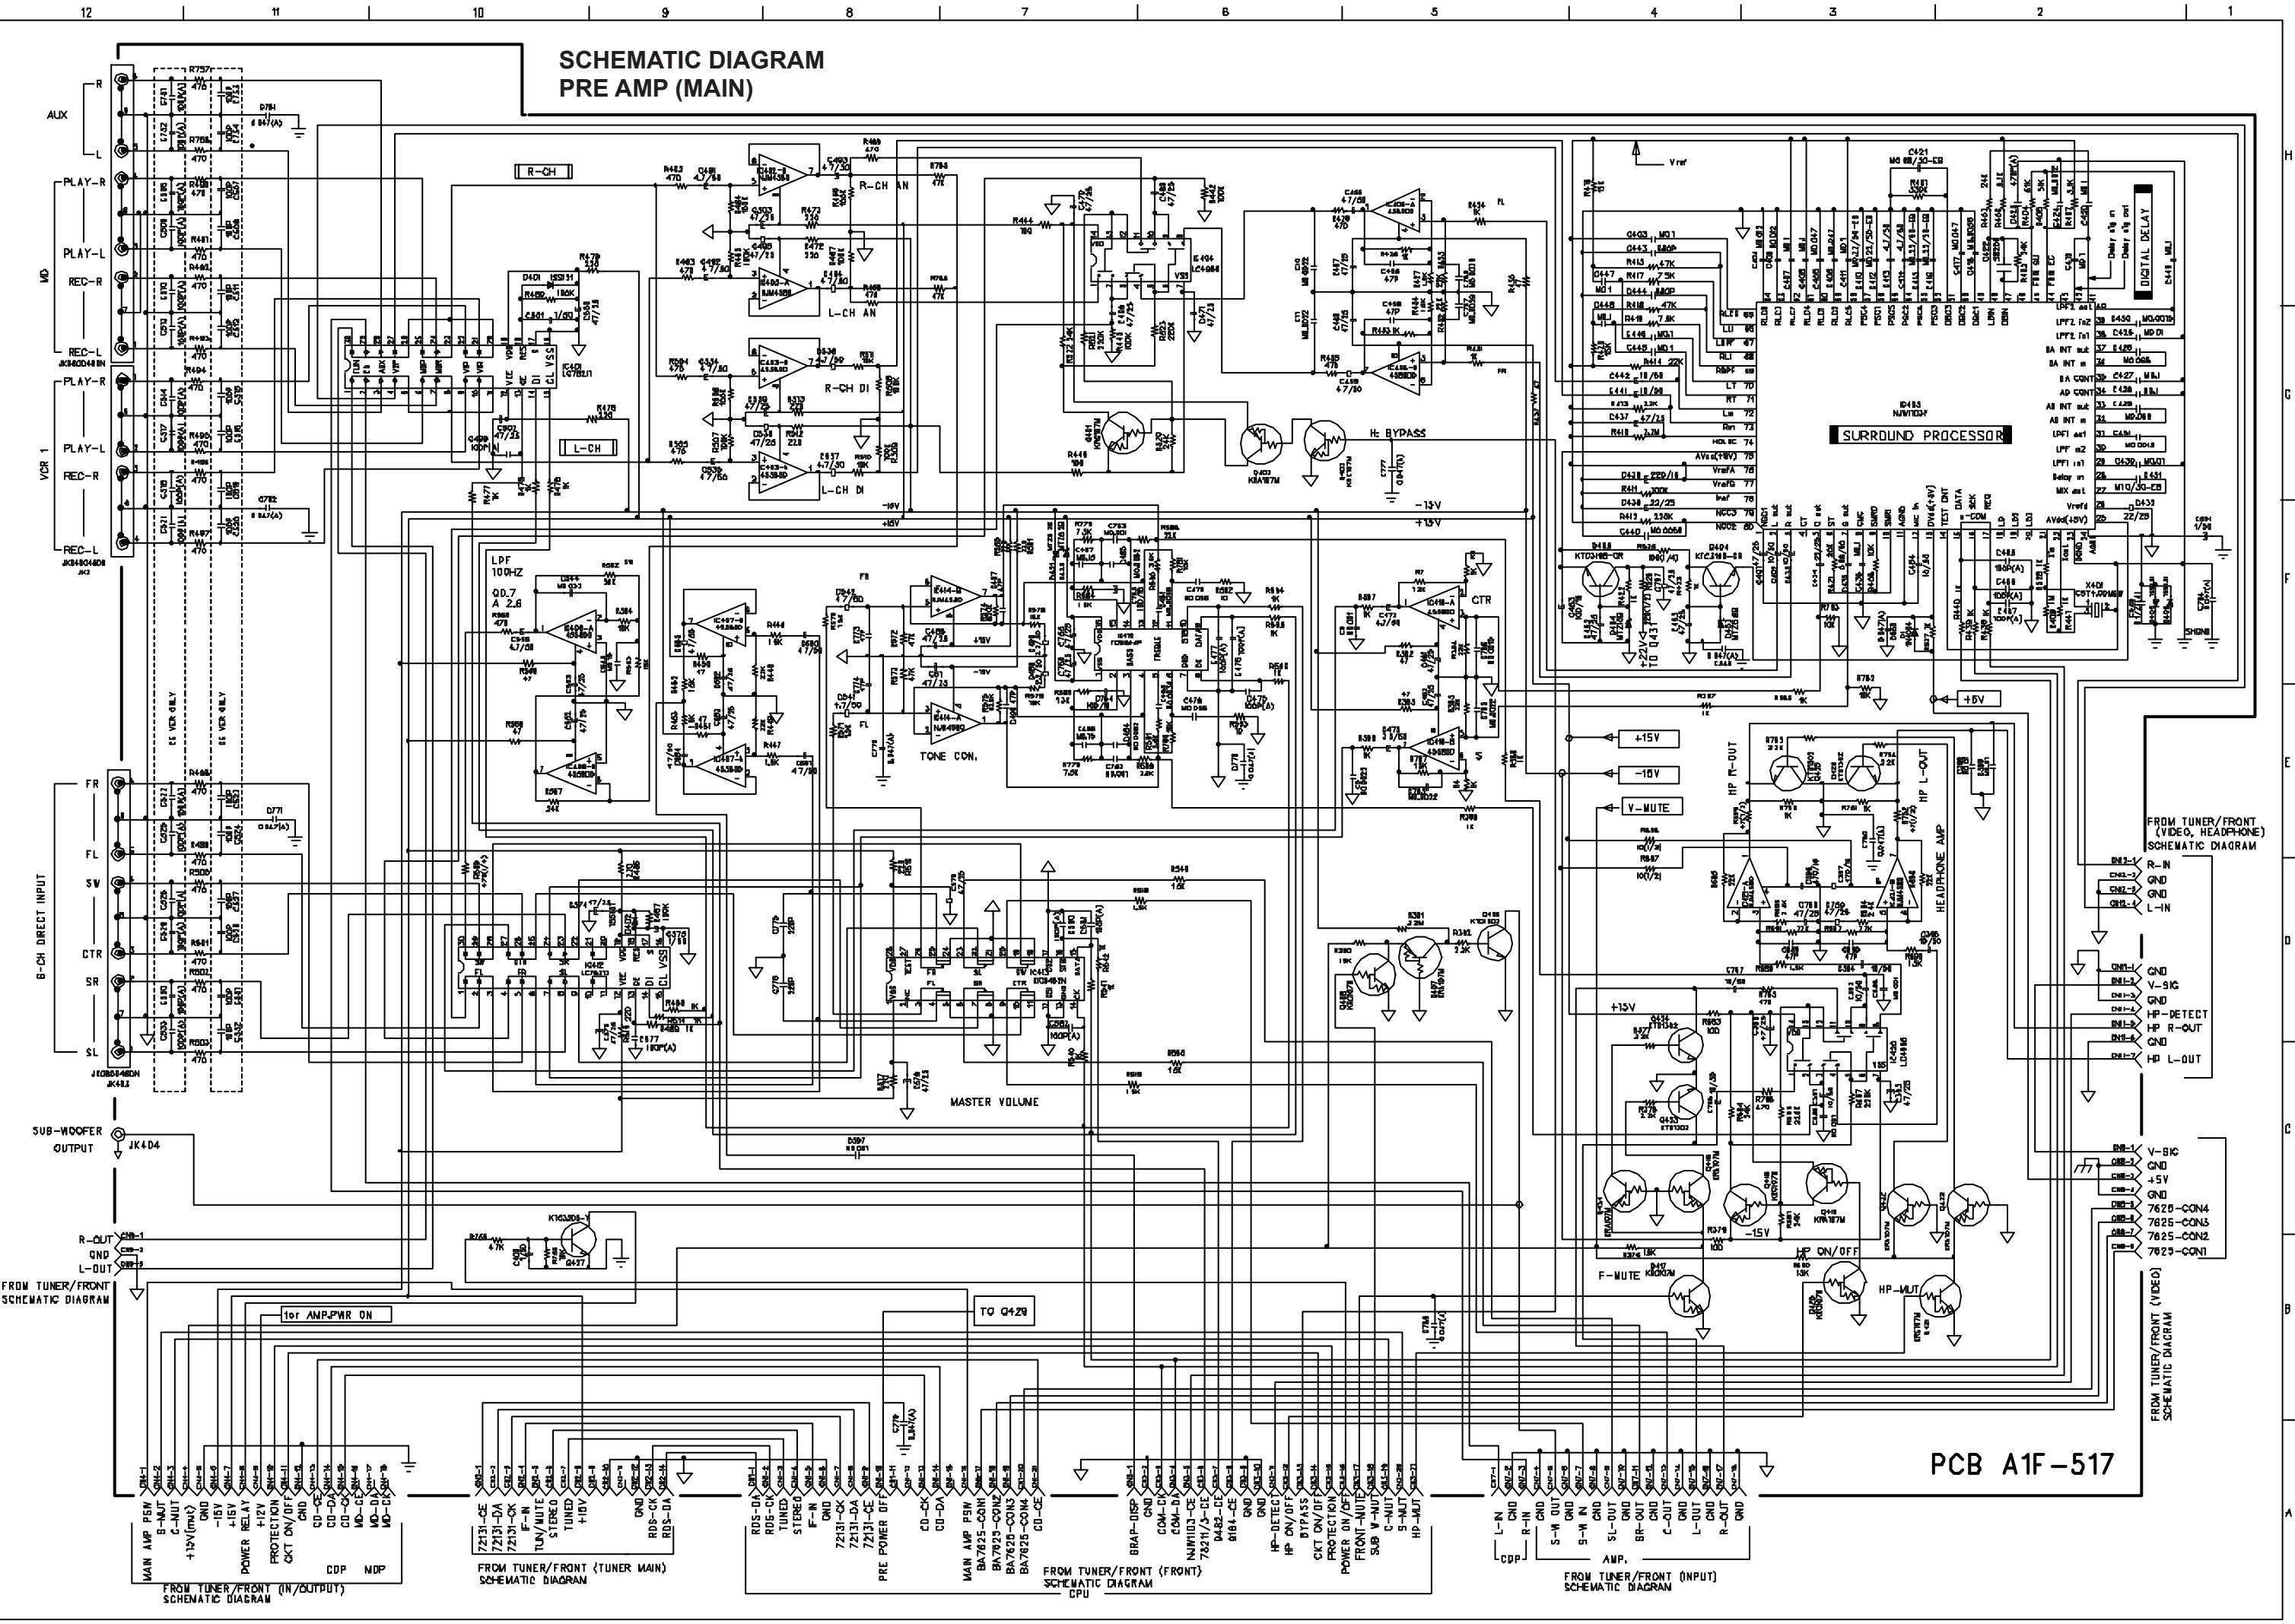


SCHEMATIC DIAGRAM
PRE AMP (MAIN)


SURROUND PROCESSOR

PCB A1F-517

SCHEMATIC DIAGRAM PRE AMP (POWER SUPPLY)

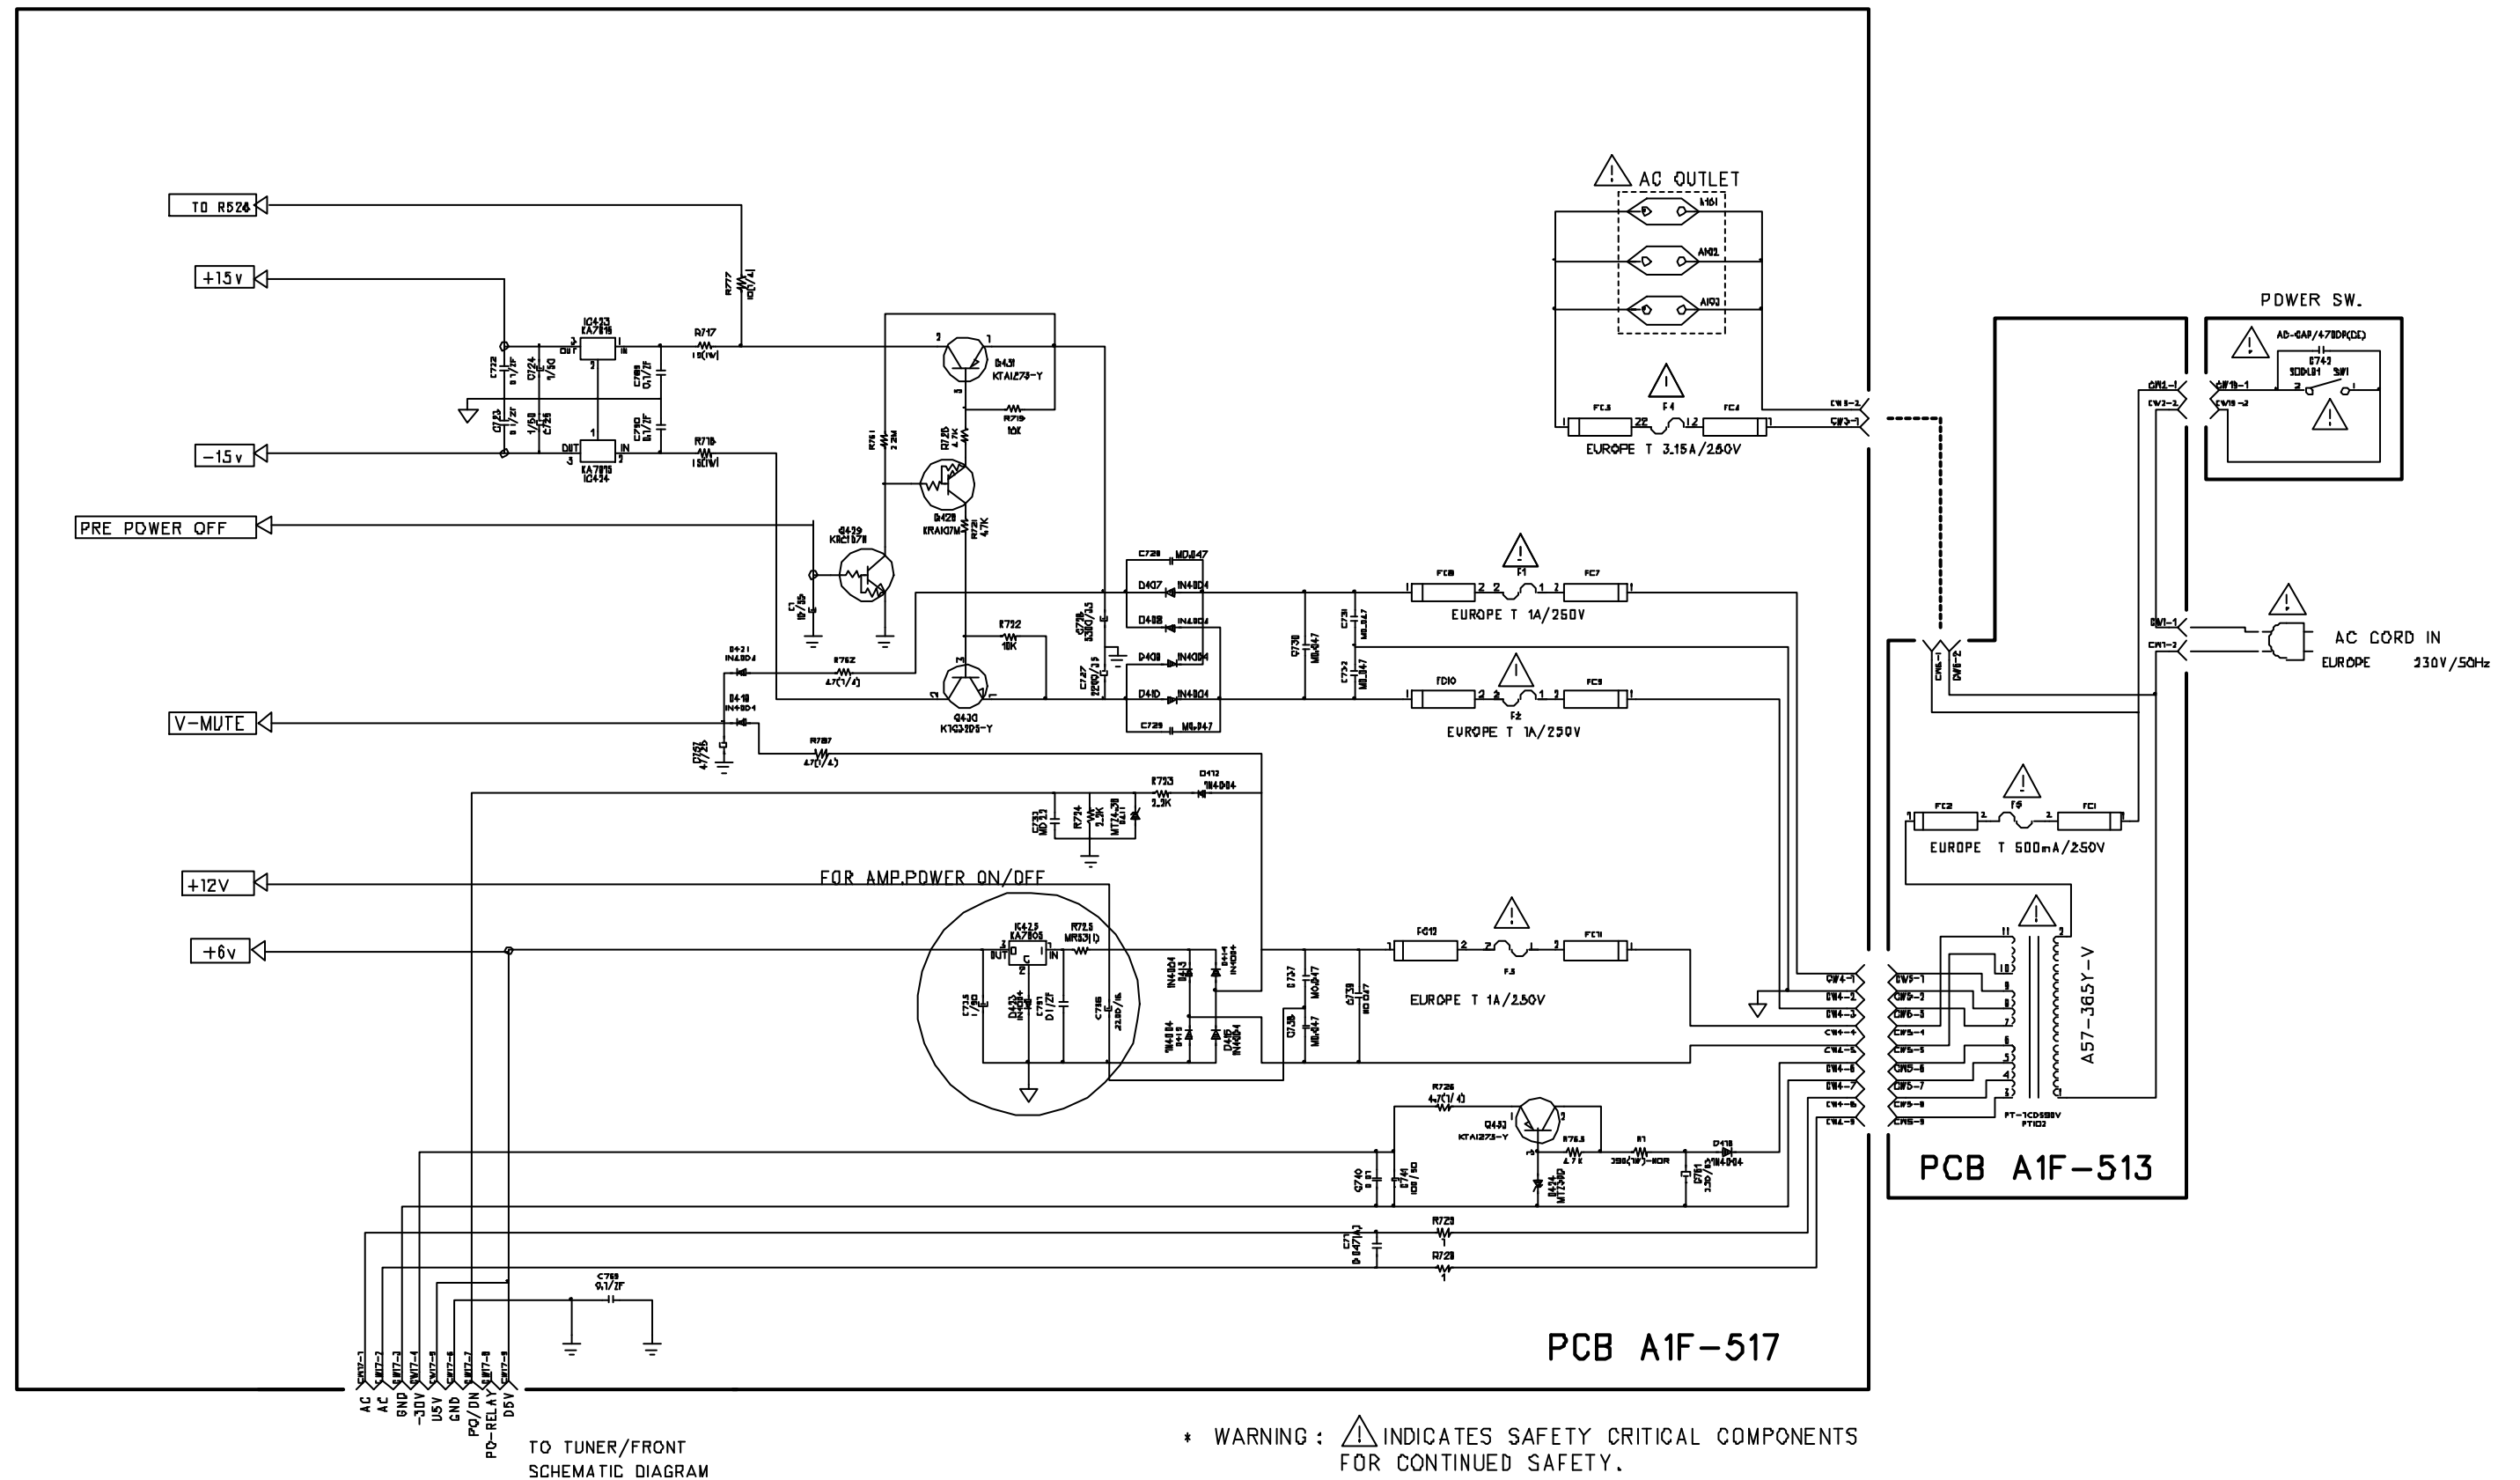


12	11	10	9	8	7	6	5	4	3	2	1
----	----	----	---	---	---	---	---	---	---	---	---

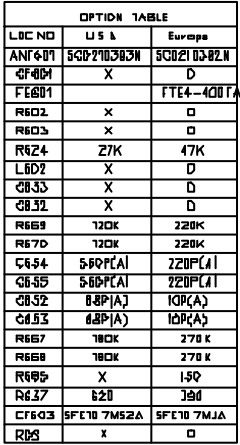


OPTION TABLE		
LBC NO	U S A	Europe
ANF-01	SG0210303N	SG0210302N
QF40A	X	D
F6001		FT4-400T
R602	X	O
R603	X	O
R624	27K	47K
L602	X	D
GB33	X	D
GB32	X	D
R669	120K	220K
R67D	120K	220K
C654	50P(1A)	220P(1)
GB35	50P(1A)	220P(1)
GB32	50P(1A)	10P(1A)
GB33	68P(1A)	10P(1A)
R667	180K	270 K
R668	180K	270 K
R669	X	180
R637	520	350
CF603	SF710 7M52A	SF710 7MJA
RDS	X	O


WIRING DIAGRAM
POWER AMP

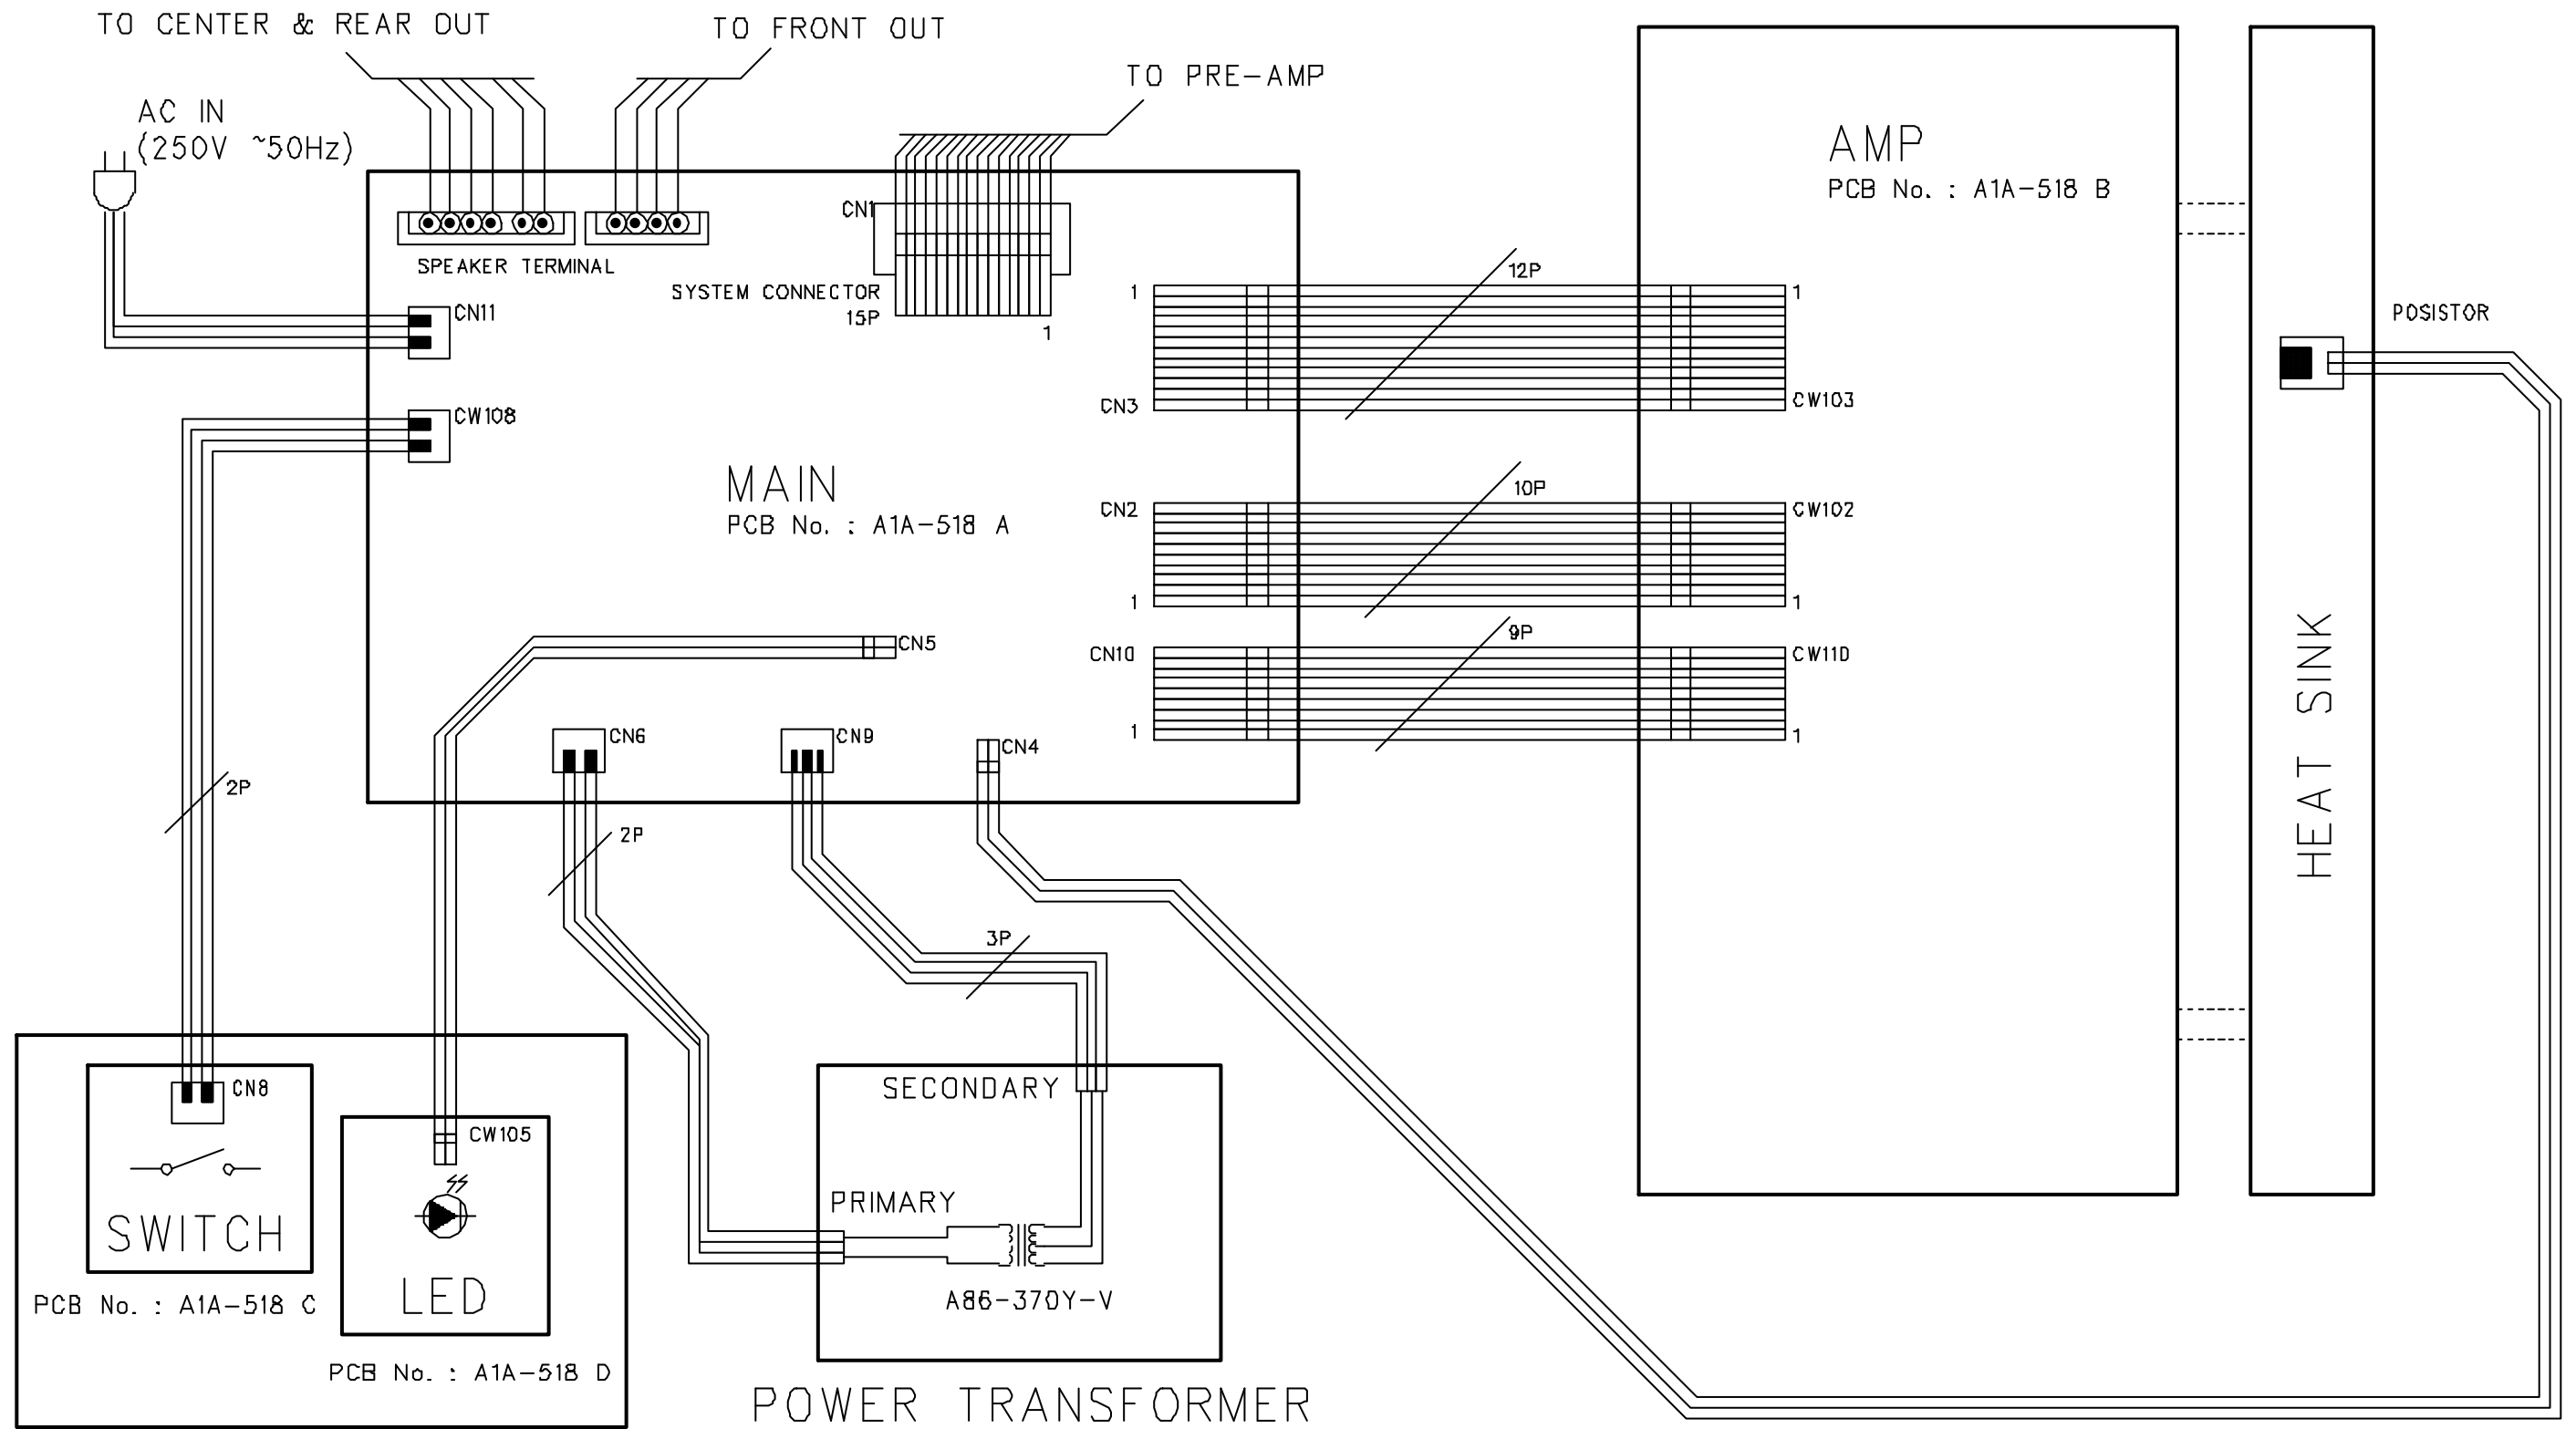


WIRING DIAGRAM
CDP

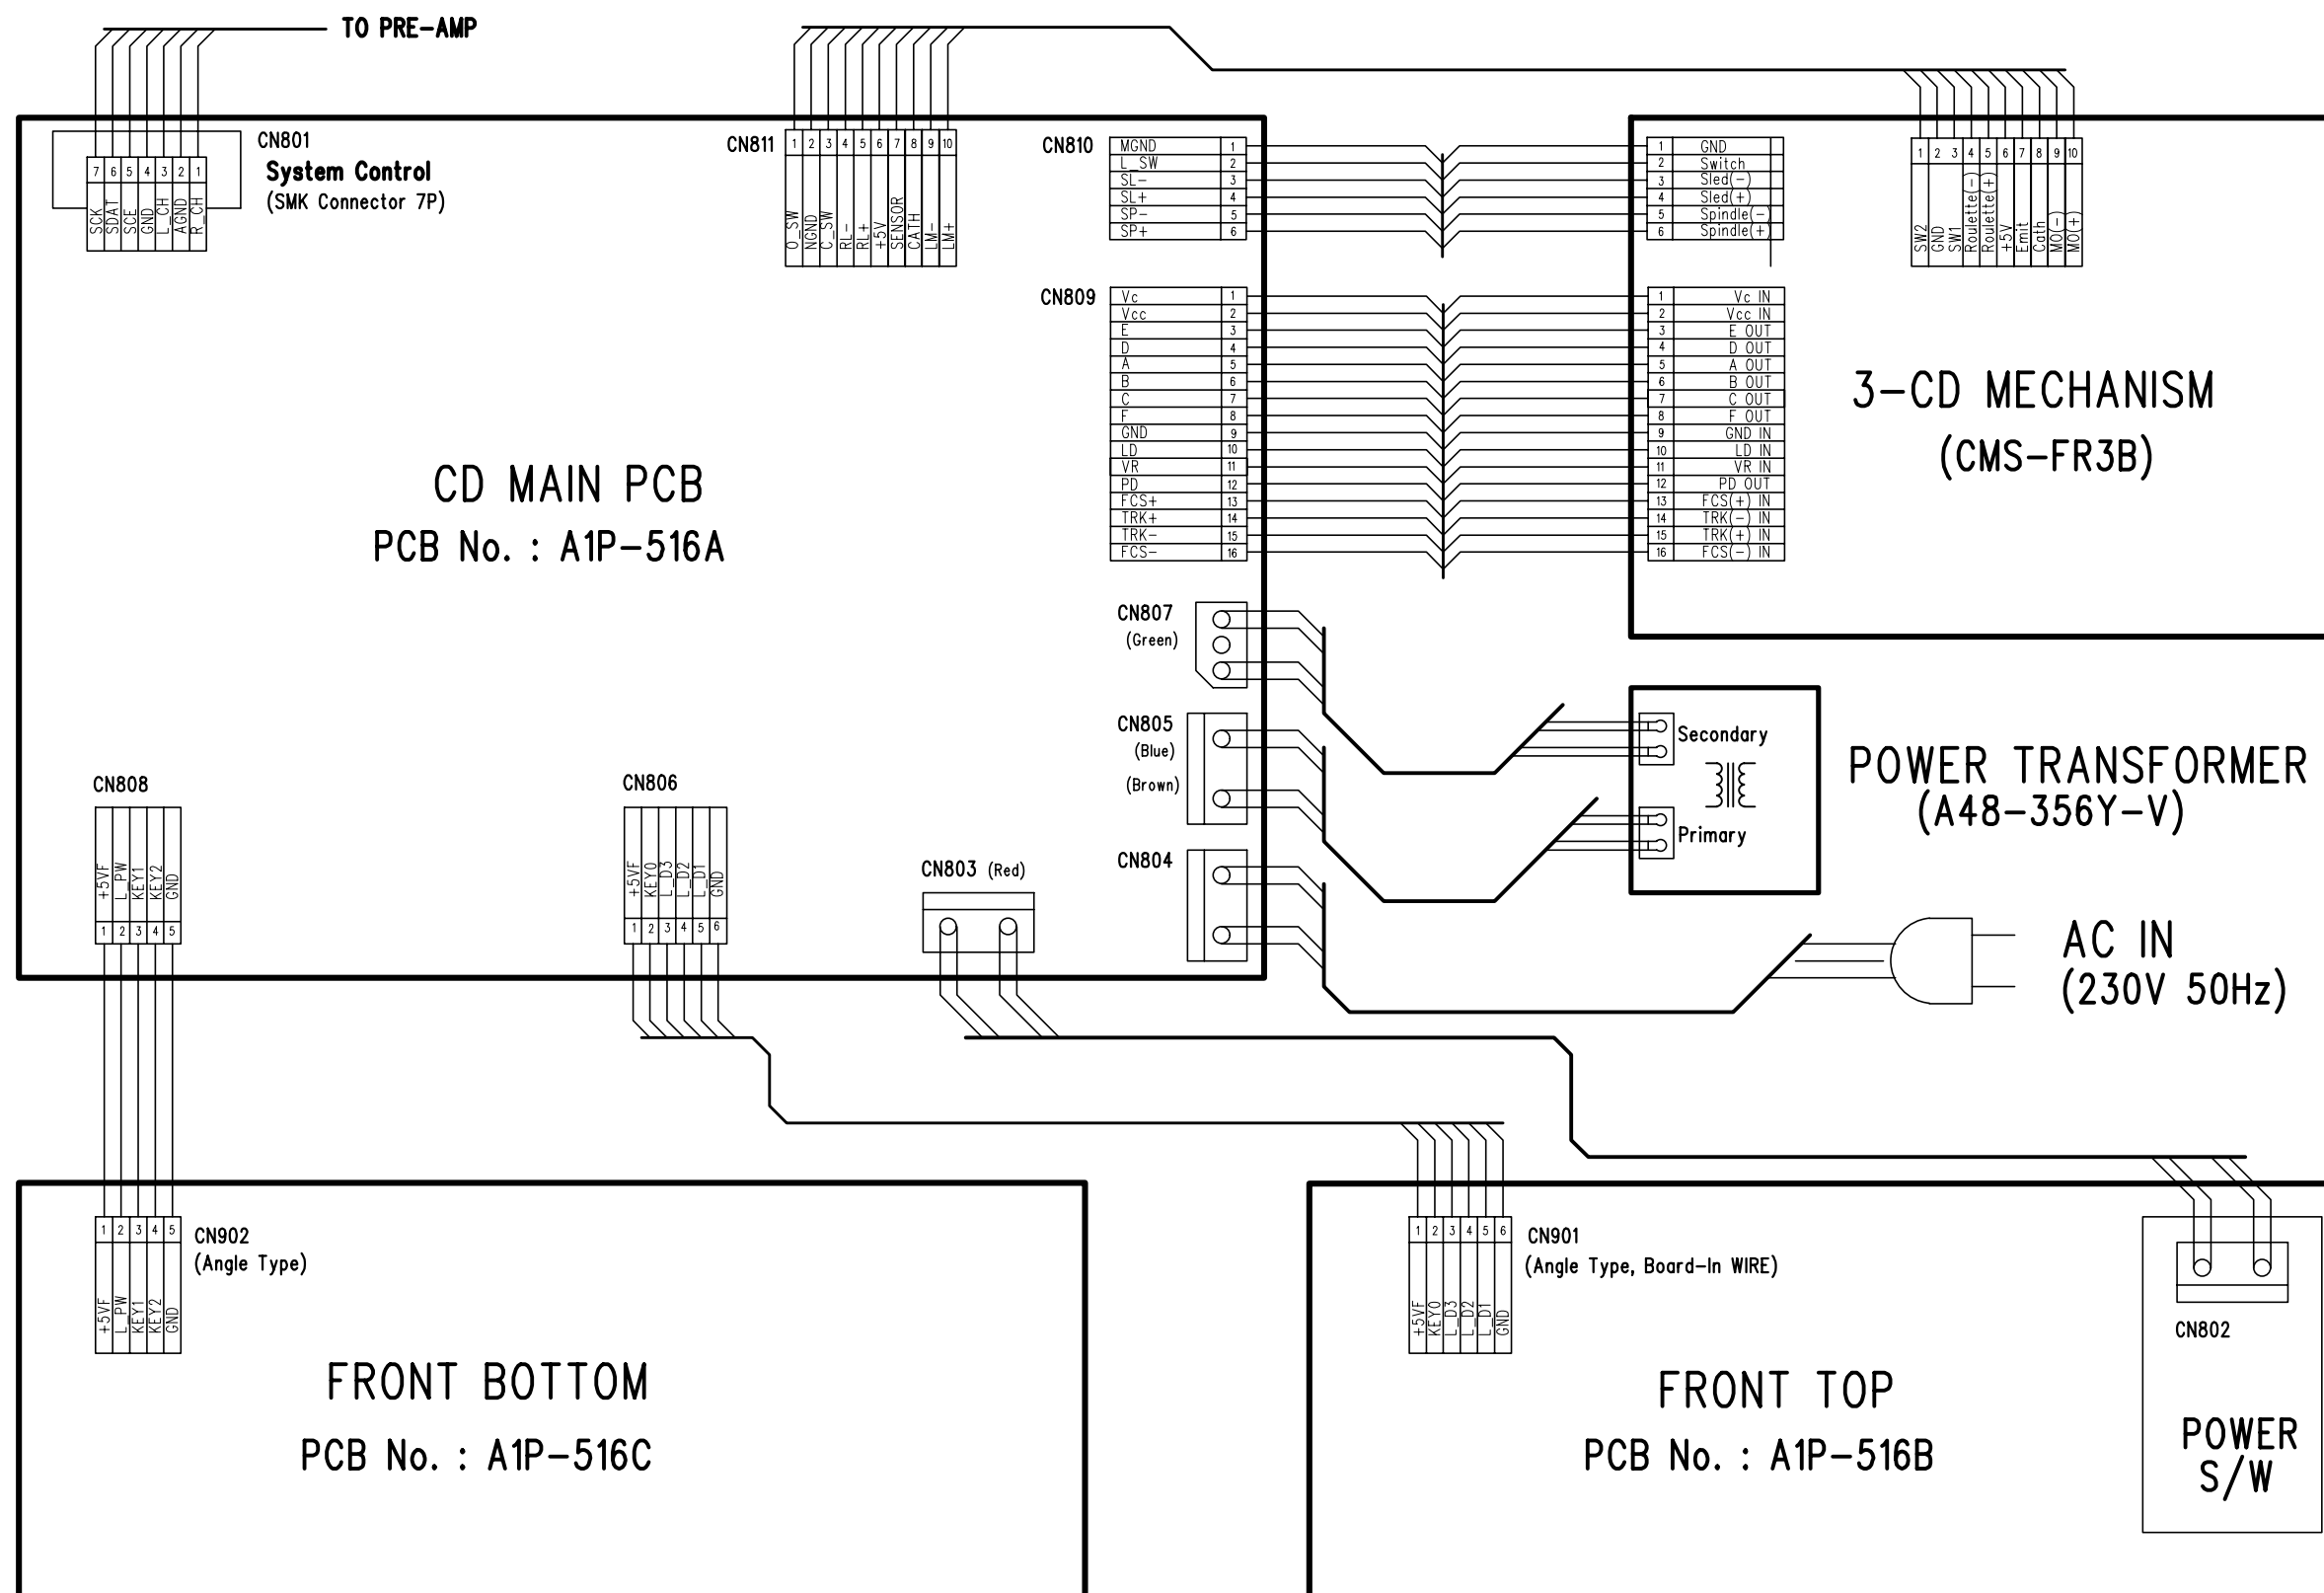


WIRING DIAGRAM
PRE/TUNER

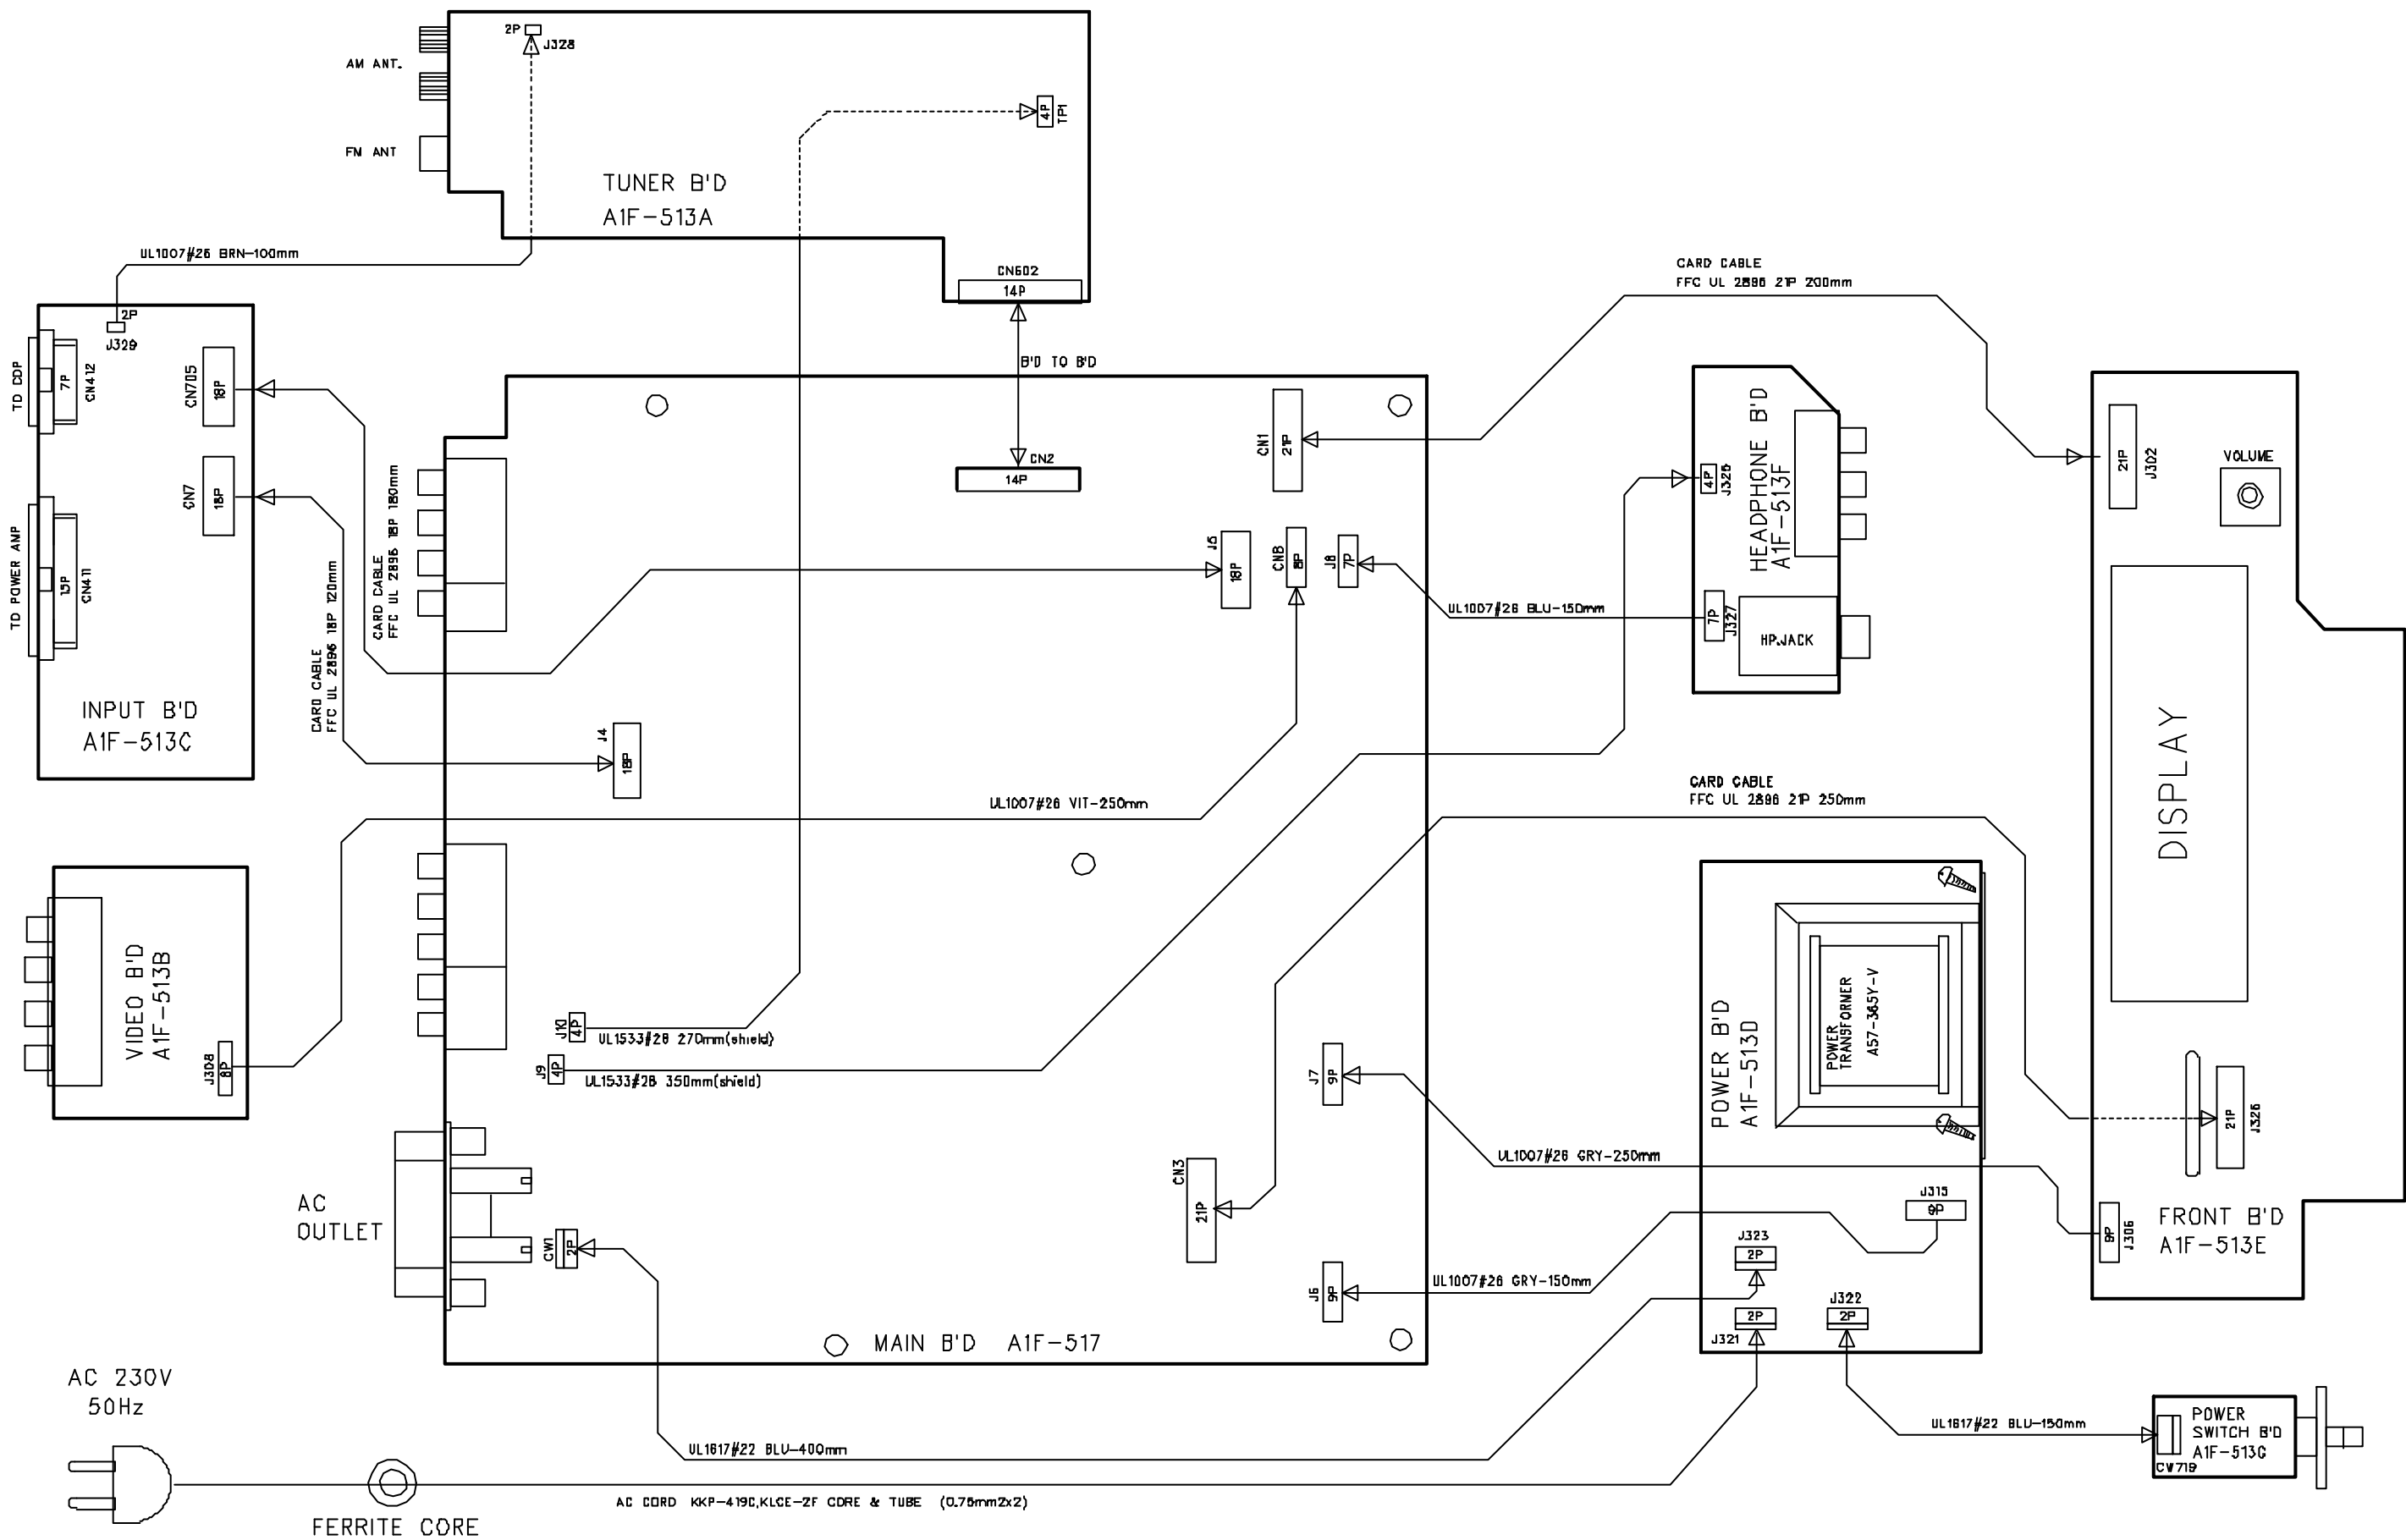

Carton Packing


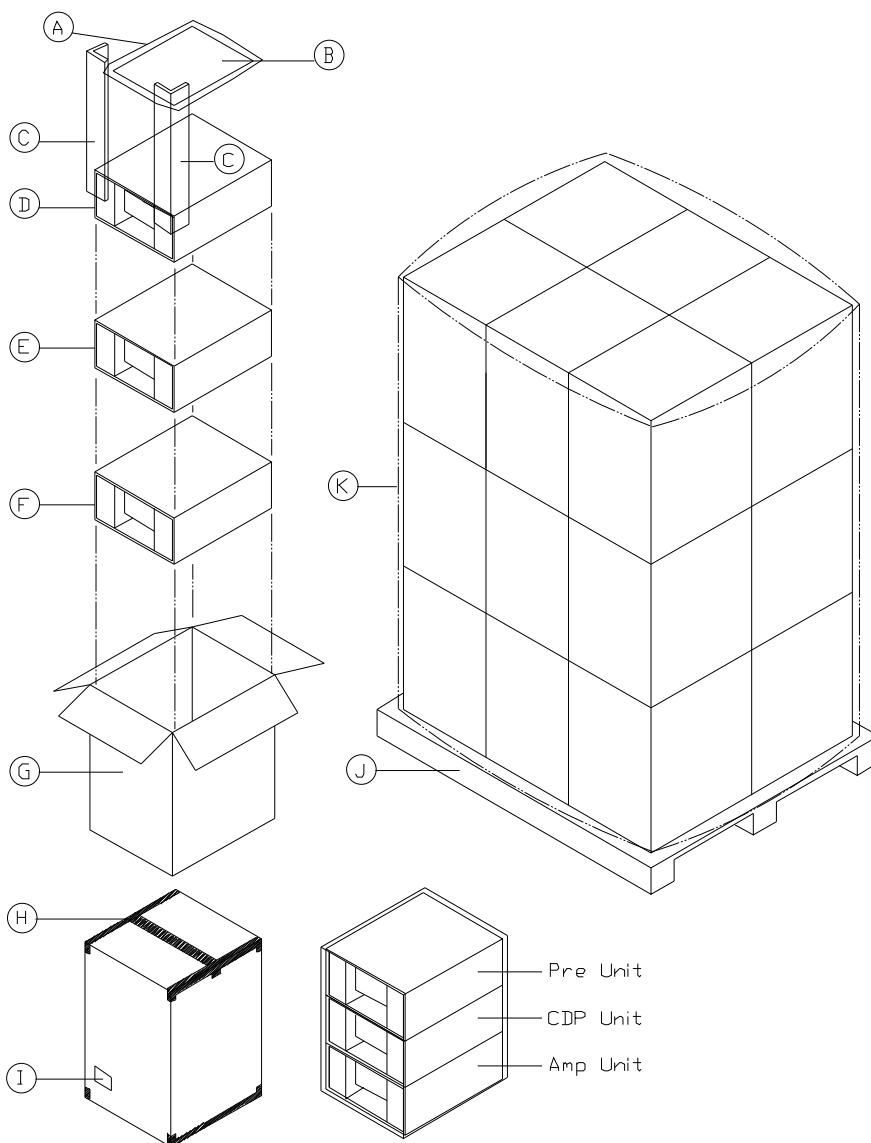


Packing Arrangement
(with Accessories)




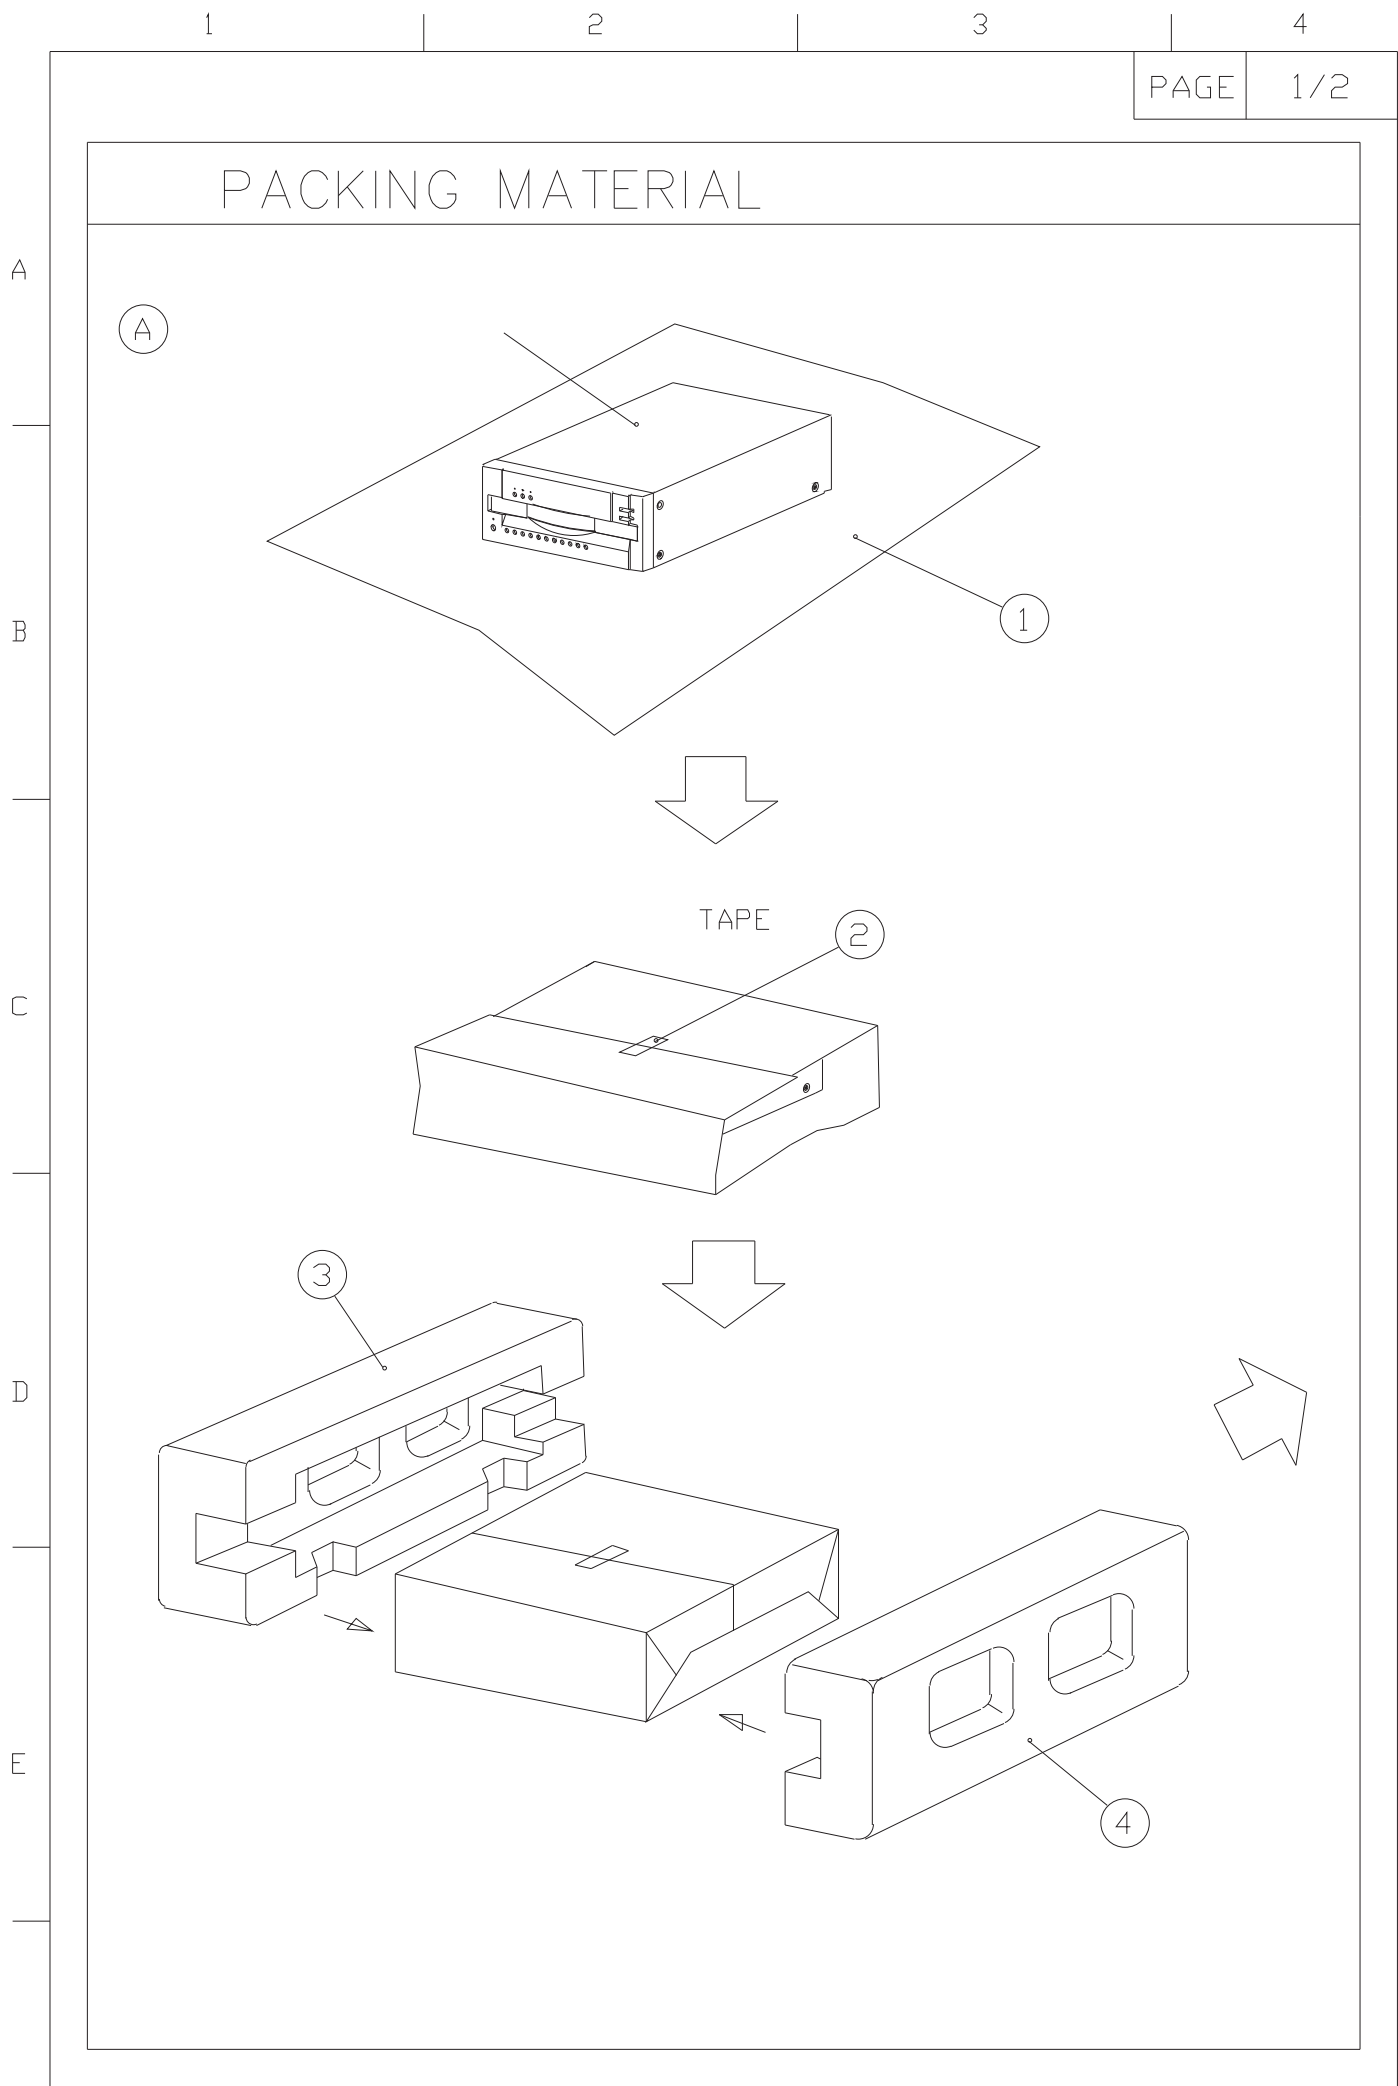


PACKING MATERIAL

Ⓐ F-40 AMP SET ASS'Y

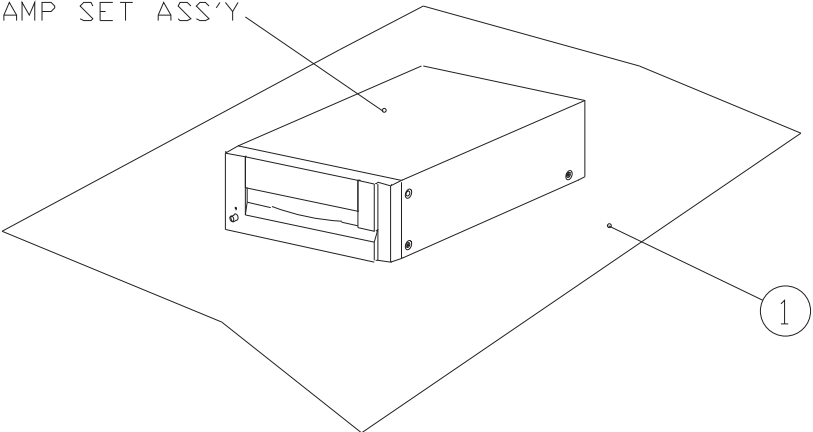


TAPE

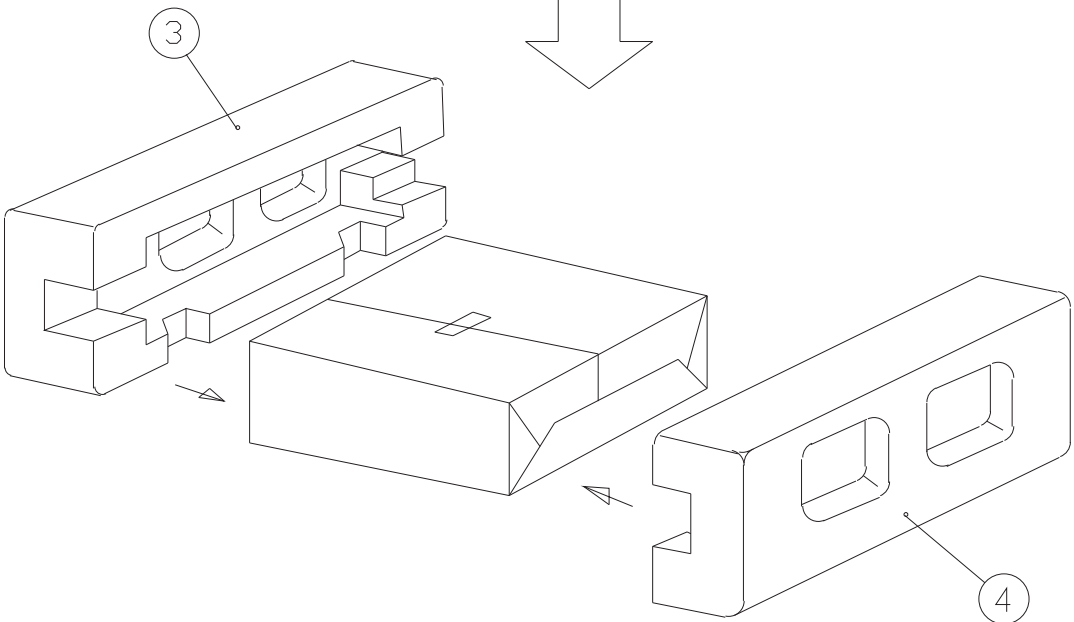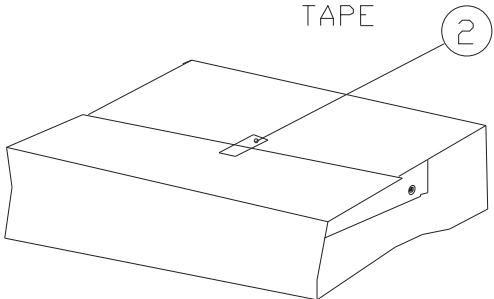


PACKING MATERIAL

NO	PARTS NAME	PART NO	Q'TY	REMARK
A	CDP SET ASS'Y	***	1	***
1	TOILON-SHEET	YVAP-13321-ZZ4	1	PE
2	TAPE	***	*	***
3	CUSHION-L	YSAP-12120-002	1	EPS
4	CUSHION-R	YSAP-12130-002	1	EPS
5	SLEEVE-PACKING	YGAP-14820-ZZ4	1	SW-1
6	BAR CODE- LABEL	***	1	PAPER

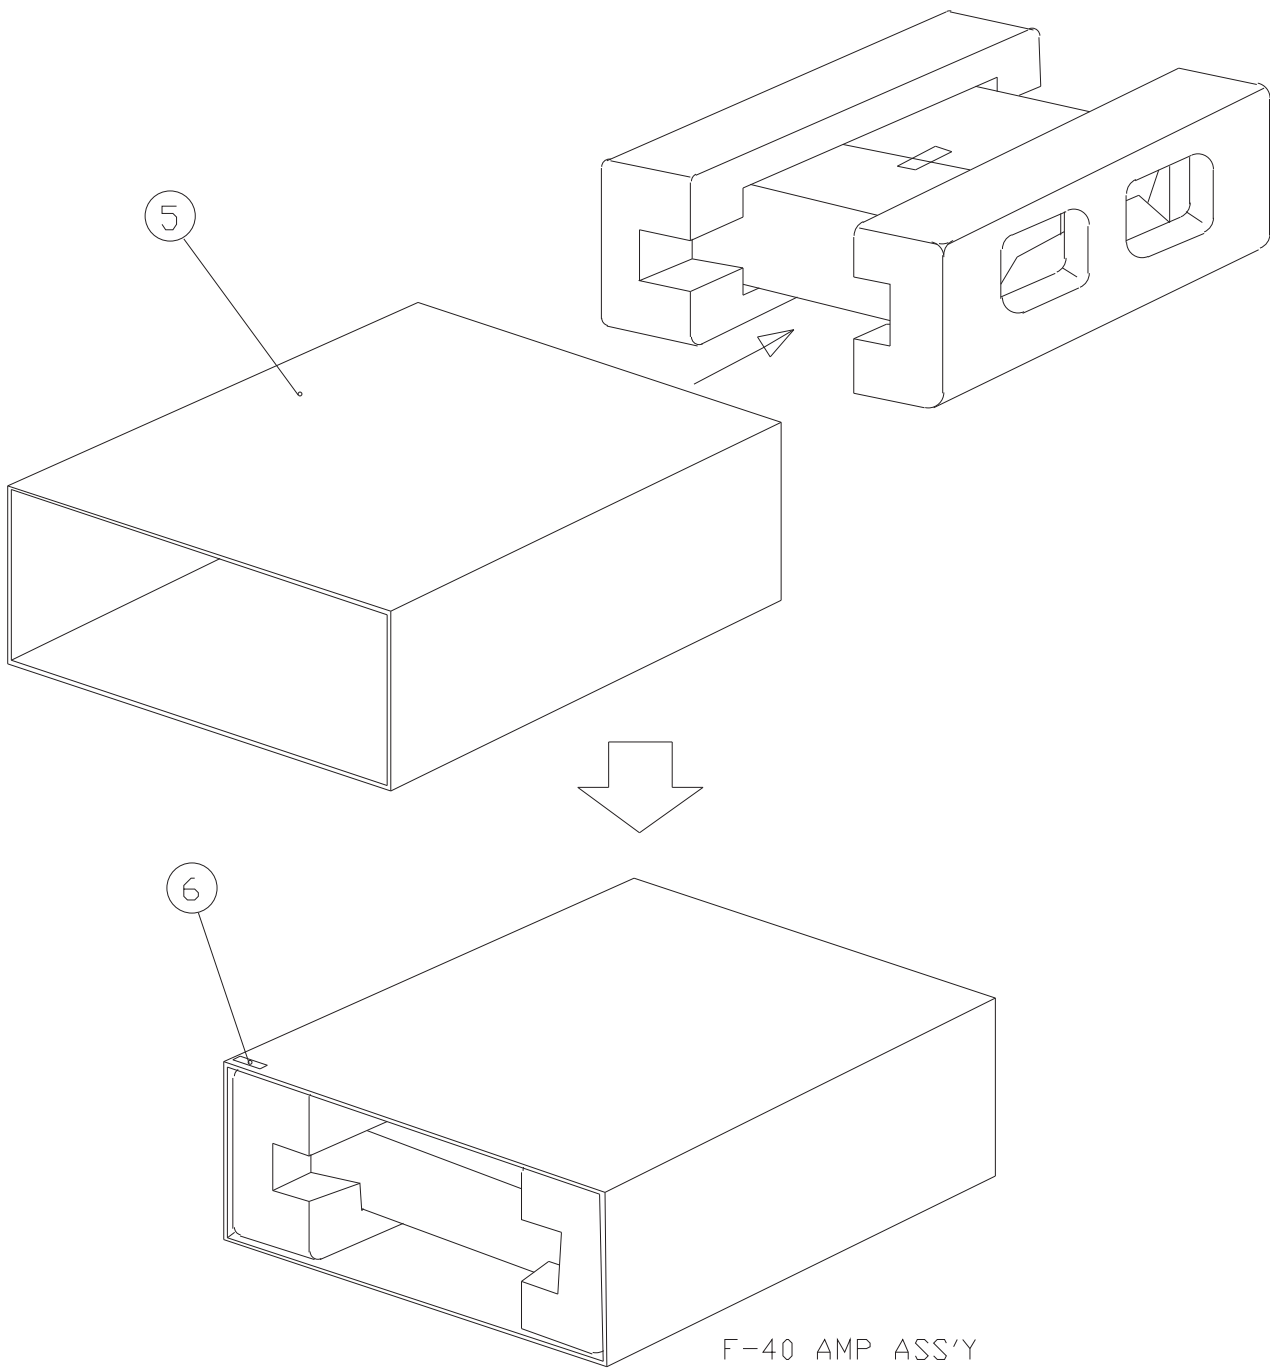

PACKING MATERIAL

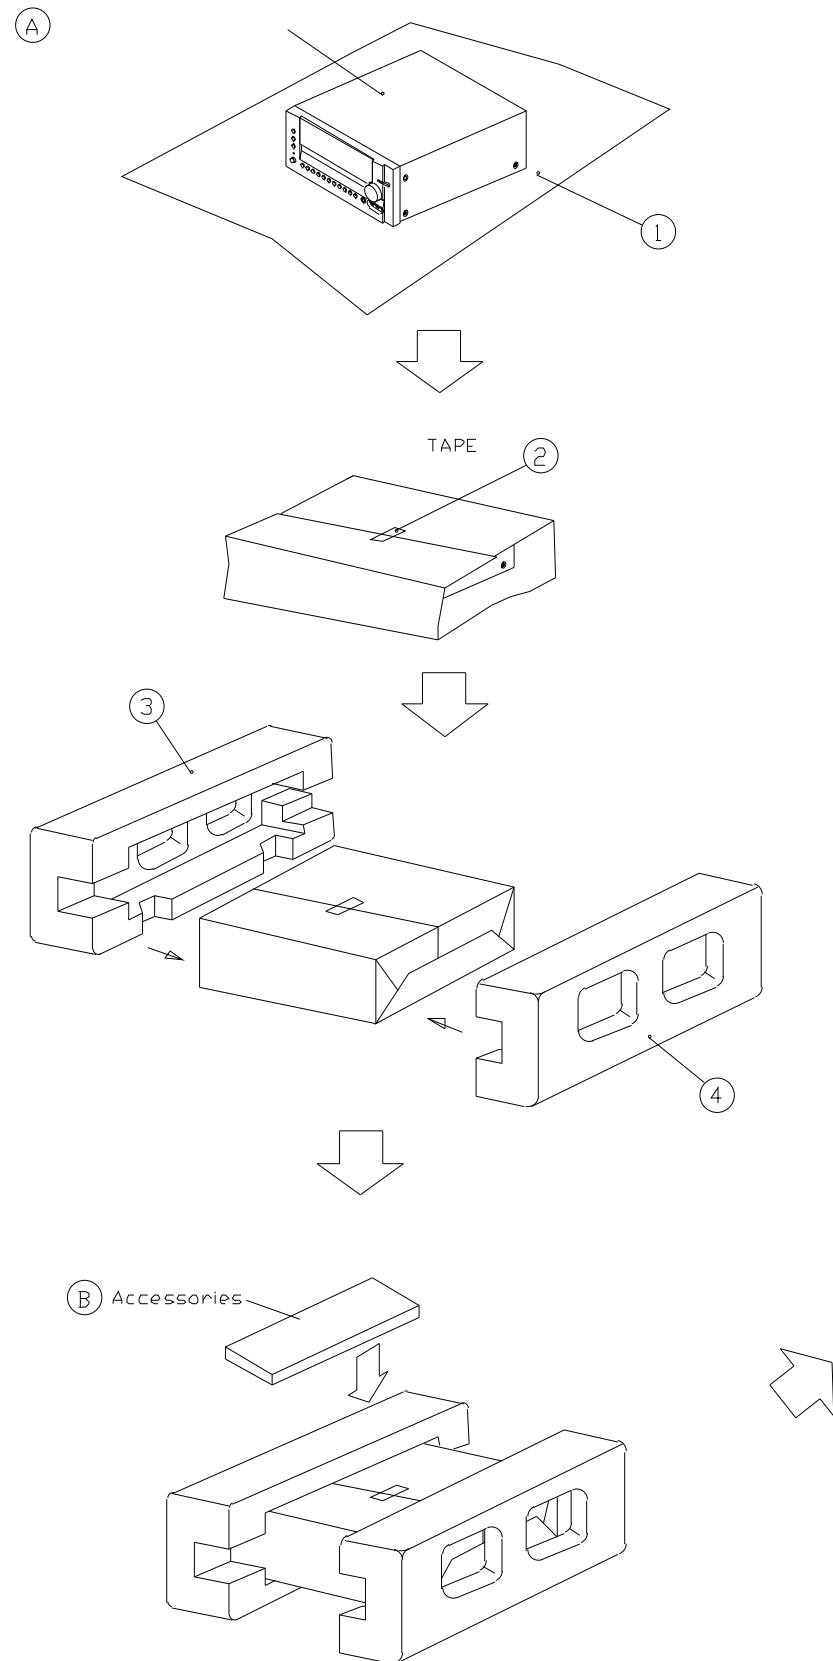

PACKING MATERIAL

NO	PARTS NAME	PART NO	Q'TY	REMARK
A	PRE SET ASS'Y	****-*****-***	1	***
1	TOILON-SHEET	YVAP-13321-ZZ4	1	PE
2	TAPE	***	*	***
3	CUSHION-L	YSAP-12120-002	1	EPS
4	CUSHION-R	YSAP-12130-002	1	EPS
5	SLEEVE-PACKING	YGAP-14820-ZZ4	1	SW-1
6	OPP-TAPE	***	*	***
7	BAR CODE- LABEL	****-*****-***	1	PAPER
B	BOX-ACCESSORIES	YGAP-14840-ZZ4	1	
	ANTENNA-LOOP	ANTL-00060-E50	1	
	ANTENNA-T TYPE	ANTT-00090-075	1	
	REMOTE CONTROLLER	****-*****-***	1	
	BATTERY MANGANESE	BAMN-00020-150	2	
	CABLE-SYSTEM	****-*****-***	1	
	CABLE-SYSTEM	****-*****-***	1	

