

AV CONTROLLER


Service Manual

PR-RZ5100

✓ Pre Issue (2016-Oct)

CONTENTS

- ✓ [Title Page \(This page\)](#)
- ✓ [Note for Parts List](#)
- ✓ [Panel](#)
- ✓ [Reset](#)
- ✓ [Protection](#)
- ✓ [Model and Destination](#)
- ✓ [WiFi 5GHz Setting](#)
- ✓ [Firmware](#)
- Hookup and Setting
- Trouble Shoot
- Disassembly
- ✓ [Schematic Diagram](#)
- ✓ [Exploded View](#)
- Appendix

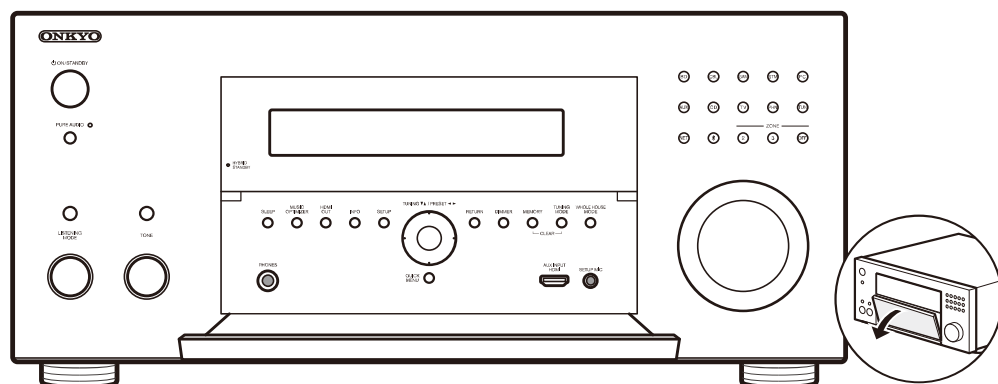

SAFETY-RELATED COMPONENT WARNING!! : COMPONENTS IDENTIFIED BY MARK  ON THE SCHEMATIC DIAGRAM AND IN THE PARTS LIST ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE THESE COMPONENTS WITH ONKYO PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL. MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.



This service manual is intended for qualified service technicians; it is not meant for the casual do-it-yourselfer. Qualified technicians have the necessary test equipment and tools, and have been trained to properly and safely repair complex products such as those covered by this manual. Improperly performed repairs can adversely affect the safety and reliability of the product and may void the warranty. If you are not qualified to perform the repair of this product properly and safely, you should not risk trying to do so and refer the repair to a qualified service technician.


ONKYO®

Published by Onkyo & Pioneer Corporation Global CS Department

File Name of Parts List File (EXCEL File)

Note for Parts List

When parts list is EXCEL file, please refer to the following explanation about file name.

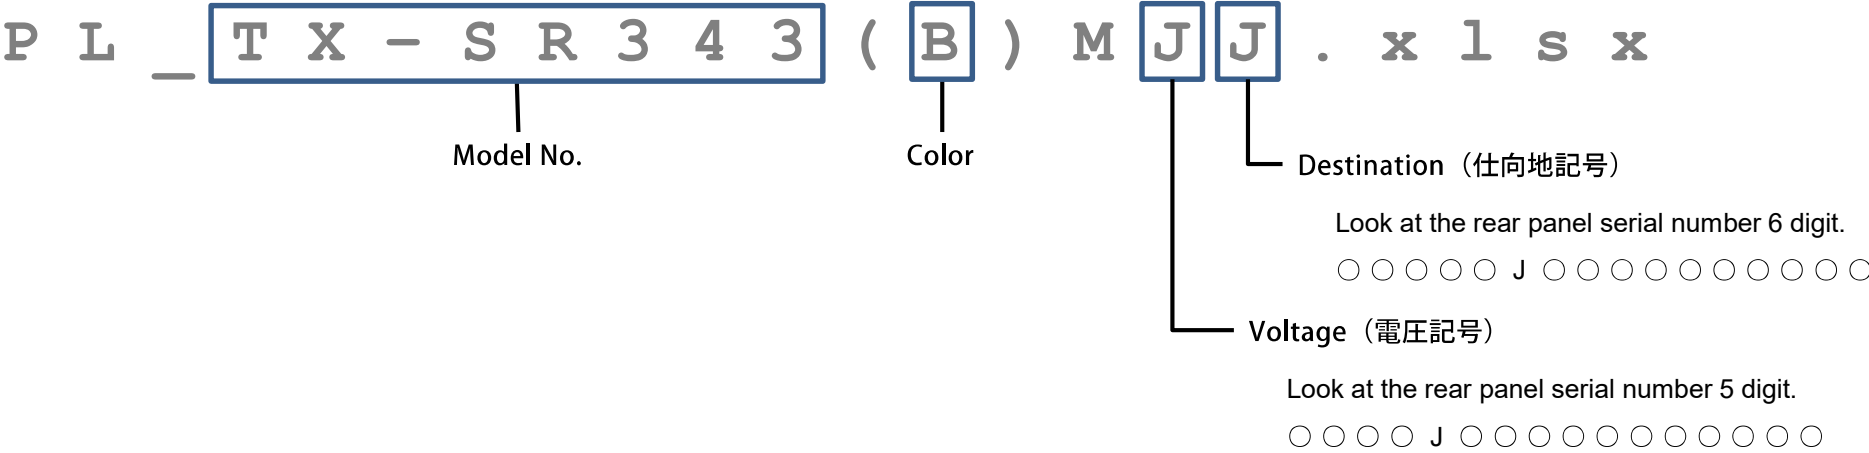

Color (色記号)			
(X)	Not related to color		
(B)	Black	(M)	Wood
(BR)	Brown	(O)	Orange
(C)	Cherry	(P)	Pink
(G)	Gold	(R)	Red
(GR)	Green	(S)	Silver
(H)	Gray	(V)	Violet
(K)	Black	(W)	White
(L)	Blue	(Y)	Yellow
(LB)	Light Blue		

Voltage (電圧記号)	
D	120V AC
G	220~230V
H	220~230／240V
J	100V AC
M	220~240V AC
P	230V AC
U	100~240V AC
V	110~240V
W	120V／220~240V
Speaker System (without AMP.) :	
0	Passive Subwoofer
F	Front Speaker
C	Center Speaker
R	Rear Speaker
B	Back Speaker

Destination (仕向地記号)			
A	Australia	Speaker System (without AMP.) :	
B	United Kingdom		
C	North American		
D	USA	L	Left channel
F	Taiwan	R	Right channel
J	Japan	0	Center channel
K	Korea		
L	Russia		
P	Europe		
Q	Hong Kong		
R	China		
S	Brazil		
T	Thai		
U	Worldwide		

COMMON

How to Reset the Unit

Reset

- Step1.

STORE (To save user preferences.)

While pressing [SETUP] button, press [ENTER] button twice.
- Step2.

RESET

While pressing [CBL] or [CBL/SAT] button, press [ON/STANDBY] button.

※) "Clear" appears on the display and the unit returns to standby. Do not unplug the power cord until "Clear" disappears from the display.
- Step3.

RECALL (To load user preferences.)

While pressing [SETUP] button, press [RETURN] button twice.

TX-RZ1100/RZ3100
PR-RZ5100
DRX-7/R1
DRC-R1

Process List

Protection

Item (signal name)	Detection Method	Status of Equipment	Warning Indication	Service information display	Recovery Procedure
XVDDERR failure Detection (XVDDERR)	Observe with 20 msec interval and Decide by 10 times continuously low level detection.	Shut down	N/A	DERR	POWER ON
AC Pulse failure Detection (ACWP)	Observe with 1~ 2 msec interval.	1) There are no change of signal(low or high) among 32 msec. Turn on the mute. 2) There are change of signal among 32msec to 42msec. Turn off the mute and reset the count. 3) There are no change of signal among 42msec. Shutdown.	N/A	N/A	POWER ON

Service information (Detected protection history)

Protection

Purpose

The number of detections for various protection processes are displayed.

How to enter to service information mode.

Step1 :
[INFO] + [ON/STANDBY] x 2

M1.xx / xxxxxAxx The version of main microprocessor.

Step2 :
[SETUP]

DC : * * DERR : * * Count of protect

DERR : XVDERR
failure Detection

How to exit the service information mode.


Step :
[INFO]
Normal Display

How to initialize the data in the service information.


Step :
[RETURN]
ProtectDataCLR

*Unit will once become standby and then turn on again automatically.

XVDDERR Detection

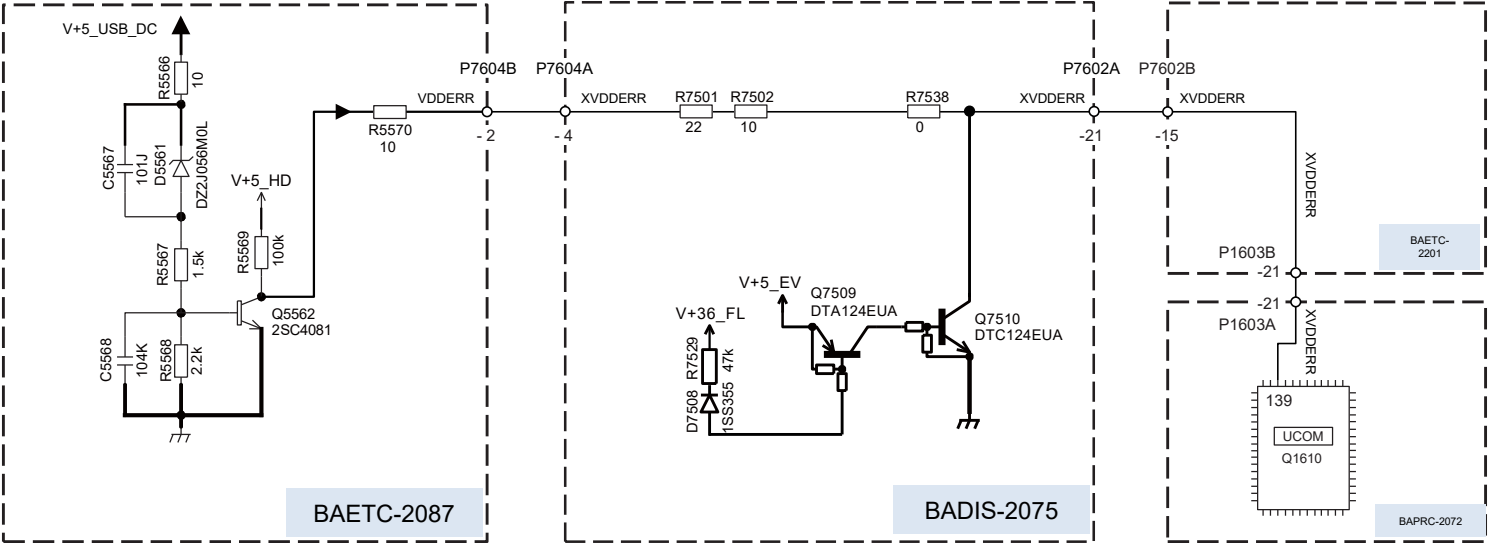

AC Pulse failure Detection

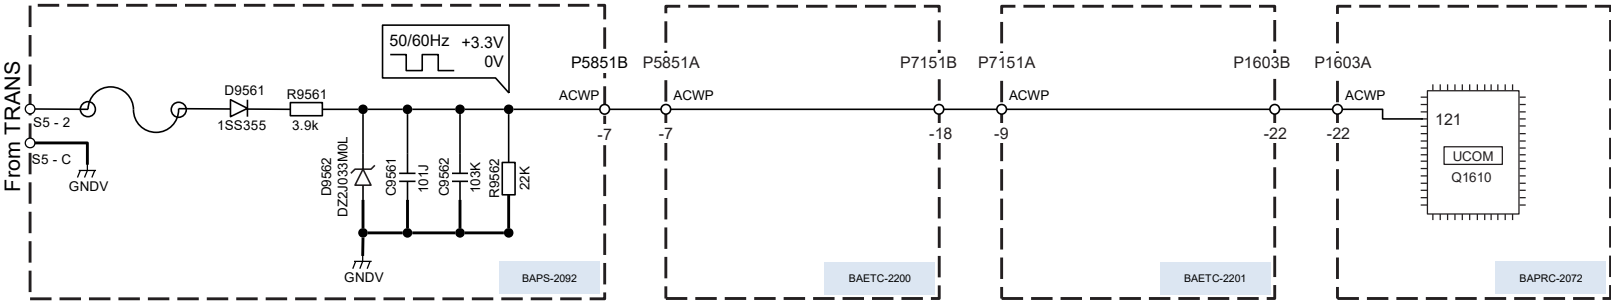

How to check Model & Destination

Model & Destination

- Step1 :
Set VOL Level = 40
- Step2 :
[TV] + [ON/STANDBY] → [DIMMER] → [TONE+] x 5

Model Name	Distination	FL Display													
TX-RZ1100	DC	R	Z	1	1	0	0		D	C		0	7	0	0
TX-RZ1100	xx	R	Z	1	1	0	0		x	x		0	7	1	0
TX-RZ1100	xR	R	Z	1	1	0	0		x	R		0	7	5	0
DRX-7	DD	D	R	X	-	7			D	D		1	7	0	0
DRX-7	xA	D	R	X	-	7			x	A		1	7	4	0
TX-RZ3100	DC	R	Z	3	1	0	0		D	C		0	8	0	0
TX-RZ3100	xx	R	Z	3	1	0	0		x	x		0	8	1	0
TX-RZ3100	xR	R	Z	3	1	0	0		x	R		0	8	5	0
DRX-R1	DD	D	R	X	-	R	1		D	D		1	8	0	0
DRX-R1	xx	D	R	X	-	R	1		x	x		1	8	1	0
DRX-R1	JJ	D	R	X	-	R	1		J	J		1	8	2	0
DRX-R1	xR	D	R	X	-	R	1		x	R		1	8	5	0
PR-RZ5100	DC	R	Z	5	1	0	0		D	C		0	9	0	0
PR-RZ5100	xx	R	Z	5	1	0	0		x	x		0	9	1	0
PR-RZ5100	xR	R	Z	5	1	0	0		x	R		0	9	5	0
DRC-R1	DD	D	R	C	-	R	1		D	D		1	9	0	0
DRC-R1	JJ	D	R	C	-	R	1		J	J		1	9	2	0
DRC-R1	xA	D	R	C	-	R	1		x	A		1	9	4	0
DRC-R1	xR	D	R	C	-	R	1		x	R		1	9	5	0

This list is MCU internal value,
And The destination code of this list,
it is different from Wi-Fi 5GHz setting Destination Code

IMPORTANT!!

Back Ground:

It is totally different from Radio Law at the each country on 5GHz band.
It means it is totally different from enabled Channel of 5GHz band at the each country.
We define the “Country Code” for 5GHz band.
You must set up the appropriate country code to the product.

Example;

Case1:
When you use the “P” destination products and bring move to Russia or Israel,
If you did not setup change country code and use in Russia and Israel,
You will be on the illegal Radio Law in Russia and Israel.
Case2;
When you use “C” or “D” destination product bring move to Japan or Taiwan,
If you did not setup change country code and use in Japan and Taiwan,
You will be on the illegal Radio Law in Japan and Taiwan.

Service Parts information:

The default country code is set on “Processing Circuit Board(PRC board)”.
You must make sure and set up the “Country Code” when you replace the processing circuit pc board (i.e. BAPRC-2072).
Otherwise You and your customer should be on the illegal Radio Law and

IT HAS POSSIBILITY TO HAVE A RISK OF
PUNISHMENT FROM EACH COUNTRY GOVERNMENT.

If you did not make sure country code and no setup code and face any trouble,
We does not have any responsibility.

For setting up the Country Code,
**Please ask the procedure of changing country code
to your distributor or our sales.**
It is no described the procedure of changing Country Code on this Service Manual

If you have any trouble of unclear procedure for update country code,
Please contact our sales department.

PRC Board Default Value of Country Code

The PRC board is already set default Country Code by the representative destination.
To confirm the default country code, Please refer to the “How to read PRC Board part
number and Default value of Country Code” section.

IMPOTANT!!**Make sure and Setup Country Code**


You have to make sure country code for using or replacing “Processing Circuit PC Board”.

It means that you have to make sure [country code](#) between using Processing Circuit PC board(PRC Board) and your customer’s country code.


When it is not match PRC board default country code and customer’s country, you have to setup [Country Code](#).

Case3;


When you repair the “P” destination products and replace “P” destination PRC Board and the customer live in UK, It is no necessary to setup Country Code
Because “P” destination PRC board already setup “EU” country code.

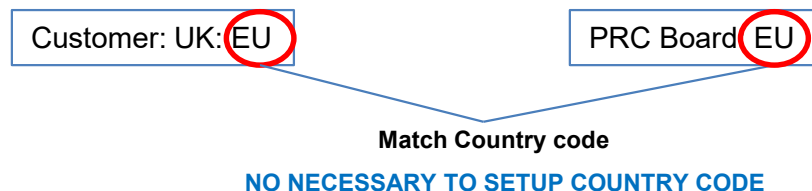**Case4;**


When you repair the “P” destination products and replace “P” destination PRC board and the customer live in Russia, It is necessary to setup Country Code
Because “P” destination PRC Board already setup “EU” country code.
However, the customer’s country code is “RU”. It means no match PRC Board code and Customer’s code.

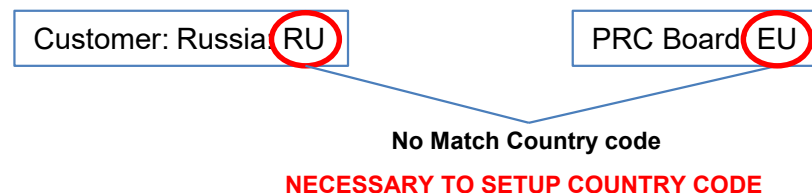**Case5;**

When you repair the “C” destination products and replace “C” destination PRC board and the customer live in US, it is no necessary to setup Country Code
Because “C” destination PRC board already setup “US” country code.

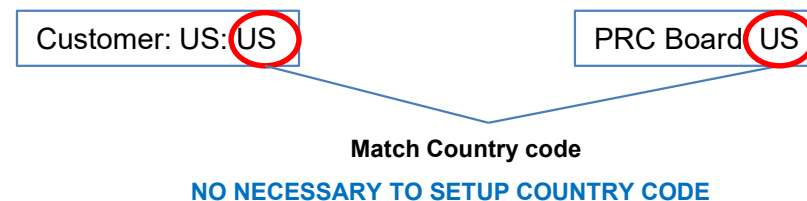**Case6;**

When you repair the “C” destination product and replace “C” destination PRC board and the customer live in Taiwan, It is necessary to setup Country Code.
Because “C” destination PRC Board already setup “US” country code as default.
However, the customer’s country code is “TW”. It means no match PRC Board code and the customer’s country code

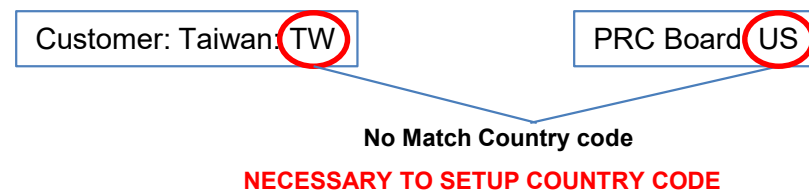

Region	Country	Code
America	USA	US
	Canada	US
	Mexico	US
	Brazil	US
	Chile	CL
	Guatemala	US
	Puerto Rico	US
	Trinidad	TT
	Dominican Rep	US
	Argentina	AR
	Ecuador	US
	Paraguay	PY
	Colombia	US
	Guam	US
	Panama	US
	Costa Rica	US
	Uruguay	UY
	Peru	PE

Region	Country	Code
Asia / Oceania	Japan	JP
	China	CN
	Hong Kong	EU
	Korea	KR
	Taiwan	TW
	Singapore	SG
	Malaysia	MY
	Philippines	EU
	Vietnam	EU
	Indonesia	ID
	Sri Lanka	EU
	Australia	AU
	New Zealand	AU
	Thailand	EU
	India	IN
	Pakistan	PK

Region	Country	Code
Middle East	UAE	EU
	Bahrain	BH
	Kuwait	KW
	Oman	EU
	Qatar	QA
	Lebanon	EU
	Jordan	JO
	Saudi Arabia	EU

Region	Country	Code
Europe / Africa	Germany	EU
	UK	EU
	France	EU
	Netherlands	EU
	Italy	EU
	Switzerland	EU
	Denmark	EU
	Sweden	EU
	Austria	EU
	Belgium	EU
	Spain	EU
	Norway	EU
	Finland	EU
	Czech	EU
	Israel	IL
	Ukraine	EU
	Hungary	EU
	Slovakia	EU
	Luxembourg	EU
	Turkey	EU
	Portugal	EU
	Malta	EU
	Latvia	EU
	Poland	EU

Region	Country	Code
Europe / Africa	Cyprus	EU
	Estonia	EU
	Slovenia	EU
	Bulgaria	EU
	Greece	EU
	Romania	EU
	Lithuania	EU
	Serbia	EU
	Croatia	EU
	Ireland	EU
	Macedonia	EU
	Moldova	EU
	Russia	RU
	Andorra	EU
	Armenia	EU
	Azerbaijan	EU
	Belarus	EU
	Bosnia and Herzegovina	EU
	Northern Cyprus(Turkey)	EU
	Georgia	EU
	Iceland	EU
	Kazakhstan	EU

Region	Country	Code
Europe / Africa	Liechtenstein	EU
	Monaco	EU
	Montenegro	EU
	San Marino	EU
	Vatican City	EU
	Kosovo	EU
	Kaliningrad(Russia)	RU
	Gibraltar(UK)	EU
	Canary Islands(Spain)	EU
	Ceuta	EU
	Melilla	EU
	Morocco	MA
	Algeria	EU
	Tunisia	TN
	Egypt	EG
	Mauritius	US
	South Africa	EU

1B5142072-1A310MDC

Board No.

Suffix No.

Model Number Last 3 Digit

- 110 : TX-RZ1100
- 310 : TX-RZ3100
- 510 : PR-RZ5100

Destination

PRC Board Default setting Country Code

Dst	Code	Main Country
C	US	North America
D	US	United State
S	US	Brazil
P	EU	Europe
B	EU	United Kingdom
Q	EU	Hong Kong
T	EU	Thai
L	RU	Russia
A	AU	Australia / New Zealand
R	CN	China
F	TW	Taiwan
K	KR	Korea
J	JP	Japan

How to check Firmware Version & Preparation of Update

Firmware

Step1 : [INFO] + [ON/STANDBY] x 2

Main Firmware Version will appear on the main unit's display.

Step2 : [TONE +1] (Rotate "TONE" knob right 1 click)

NET Firmware Version will appear on the main unit's display.

Step3 : [TONE +2] (Rotate "TONE" knob right 2 click)

DSP1 Firmware Version will appear on the main unit's display.

Step4 : [TONE +3] (Rotate "TONE" knob right 3 click)

DSP2 Firmware Version will appear on the main unit's display.

Step5 : [TONE +4] (Rotate "TONE" knob right 4 click)

DSP2 Firmware Version will appear on the main unit's display.

Step6 : [TONE +5] (Rotate "TONE" knob right 5 click)

Video Firmware Version will appear on the main unit's display.

Step7 : [TONE +6] (Rotate "TONE" knob right 6 click)

OSD Firmware Version will appear on the main unit's display.

Step8 : [TONE +7 over] (Push Up Key 7 click over)

Return to Display Main Firmware Version (Return Step1)

When it is rotated TONE knob to left , the order will be reversed.

[Preparation of Update]

1. Connect the USB storage device to your PC. If there is any data in the USB storage device, remove it.
2. Download the firmware file (package file) from the service website normally accessed.

Filename is as follows: ONKAVR0022*****.zip

Unzip the downloaded file. A following file is created.

ONKAVR0022*****.of0

ONKAVR0022*****.of1

ONKAVR0022*****.of2

ONKAVR0022*****.of3

ONKAVR0022*****.of4

3. Copy it to the USB storage device. Be careful not to copy the zip file.
4. Remove the USB storage device from your PC.

Overwriting is also possible.

1. Connect the USB storage to the USB port on the unit.



2. Turn on the unit. It takes some time to start after you switch on the unit.

Press: [INFO] + [ON/STANDBY] x 2

3. Press [RETURN] button, Then it is displayed as below



If you need each module of the firmware update, you can select the module by pressing PRESET < and > button.

If you need change source NET or USB, you can select the source by pressing TUNING UP and Down key

TUNING UP and Down key

It should be updated firmware by selecting USB -> ALL normally.

Please do NOT choose T-SRV(it is test server)

USB -> ALL: ALL firmware update (default)

USB -> DSP1: DSP1 firmware update

USB -> DSP2: DSP2 firmware update

USB -> DSP3: DSP3 firmware update

USB -> OSD: OSD firmware update

USB -> VMPU: VMPU firmware update

USB -> NET: NET firmware update

USB -> MMPU: Main MPU firmware update

USB -> WORK: Compare between AVR and USB, Only update new version firmware

NET -> ALL: ALL firmware update (default)

NET -> DSP1: DSP1 firmware update

NET -> DSP2: DSP2 firmware update

NET -> DSP3: DSP3 firmware update

NET -> OSD: OSD firmware update

NET -> VMPU: VMPU firmware update

NET -> NET: NET firmware update

NET -> MMPU: Main MPU firmware update

NET -> WORK: Compare between AVR and server, Only update new version firmware

The default setting is " ALL"



CAUTION: When you will update each module firmware, you have to keep combination of firmware.

How to Update (service mode) 2/2

Firmware

4. Press [ENTER] button. Start update firmware.



5. Wait until update is completed. When the update ends, “Completed!” is displayed.
When “ Completed!” message appeared, you can power off by pressing “ ON/STANDBY” button.



6. Press [ON/STANDBY] button, and the unit turns on.

7. Check the new FW version number.

<Note>


If the procedure might not be successful, please select “USB -> ALL”.

Schematic Diagram

MODEL No.SC-LX701/801/901,TX-RZ1100/3100,DRX-7/R1,PR-RZ5100,DRC-R1

SCHEMATIC DIAGRAM(PART-1) MPU SECTION

BAPRC-2072 (1/14)

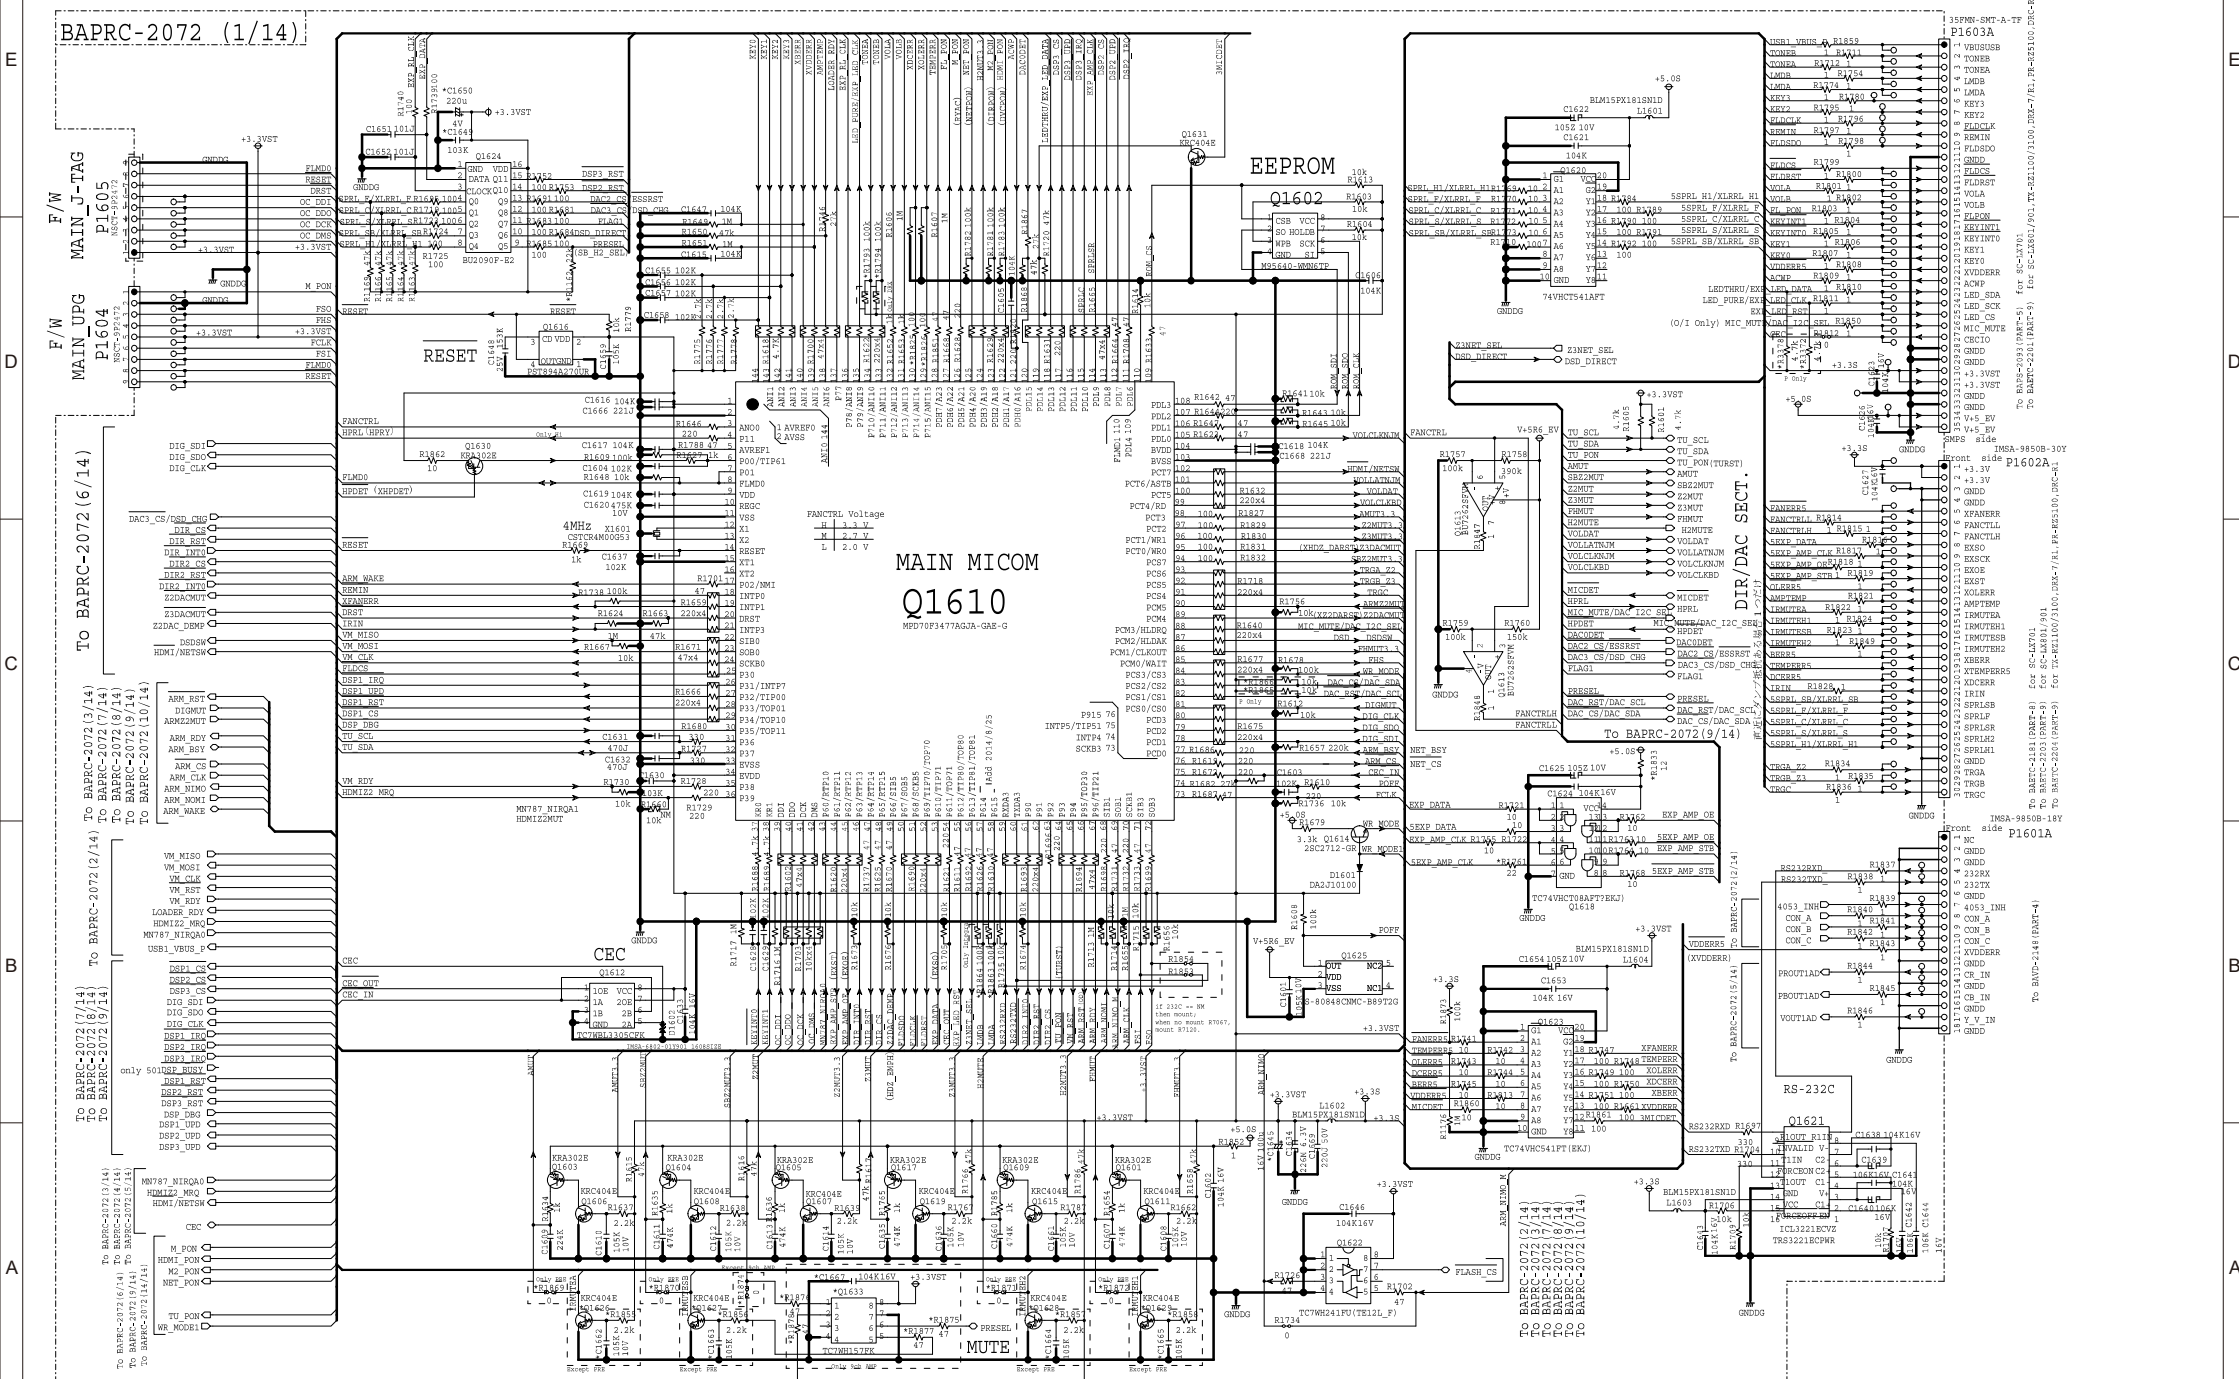

5	6
Schematic Diagram	


E

D



MODEL No. SC-LX701/801/901, TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1

SCHEMATIC DIAGRAM(PART-1) VSP SECTION

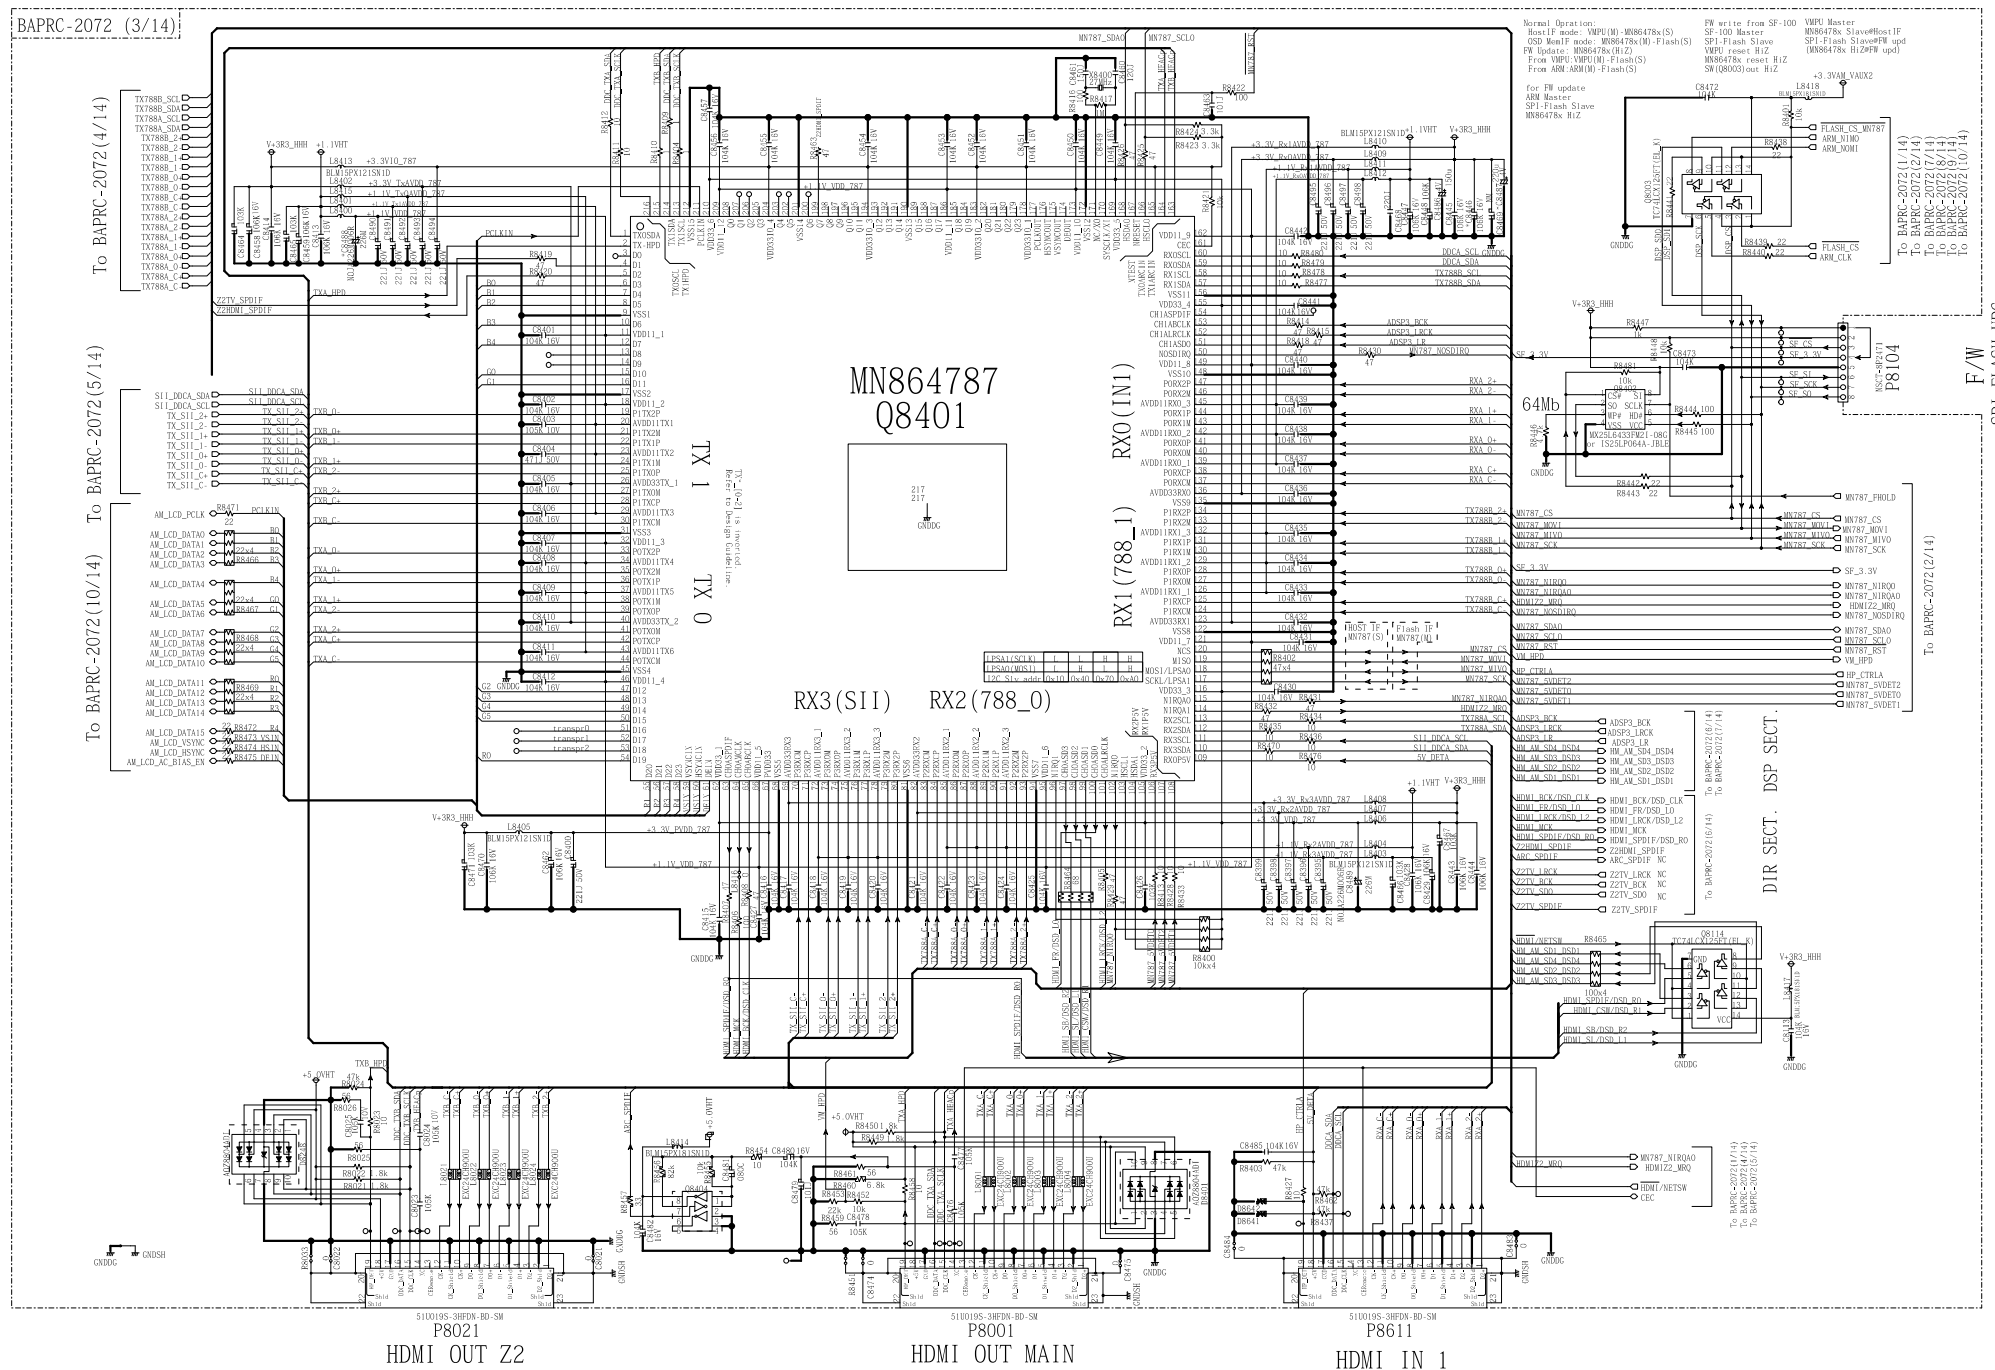


Schematic Diagram

MODEL No. SC-LX701/801/901, TX-RZ1100/3100,
DRX-7/R1, PR-RZ5100, DRC-R1

E SCHEMATIC DIAGRAM (PART-1) HDMI RX1 SECTION

BAPRC-2072 (4/14)

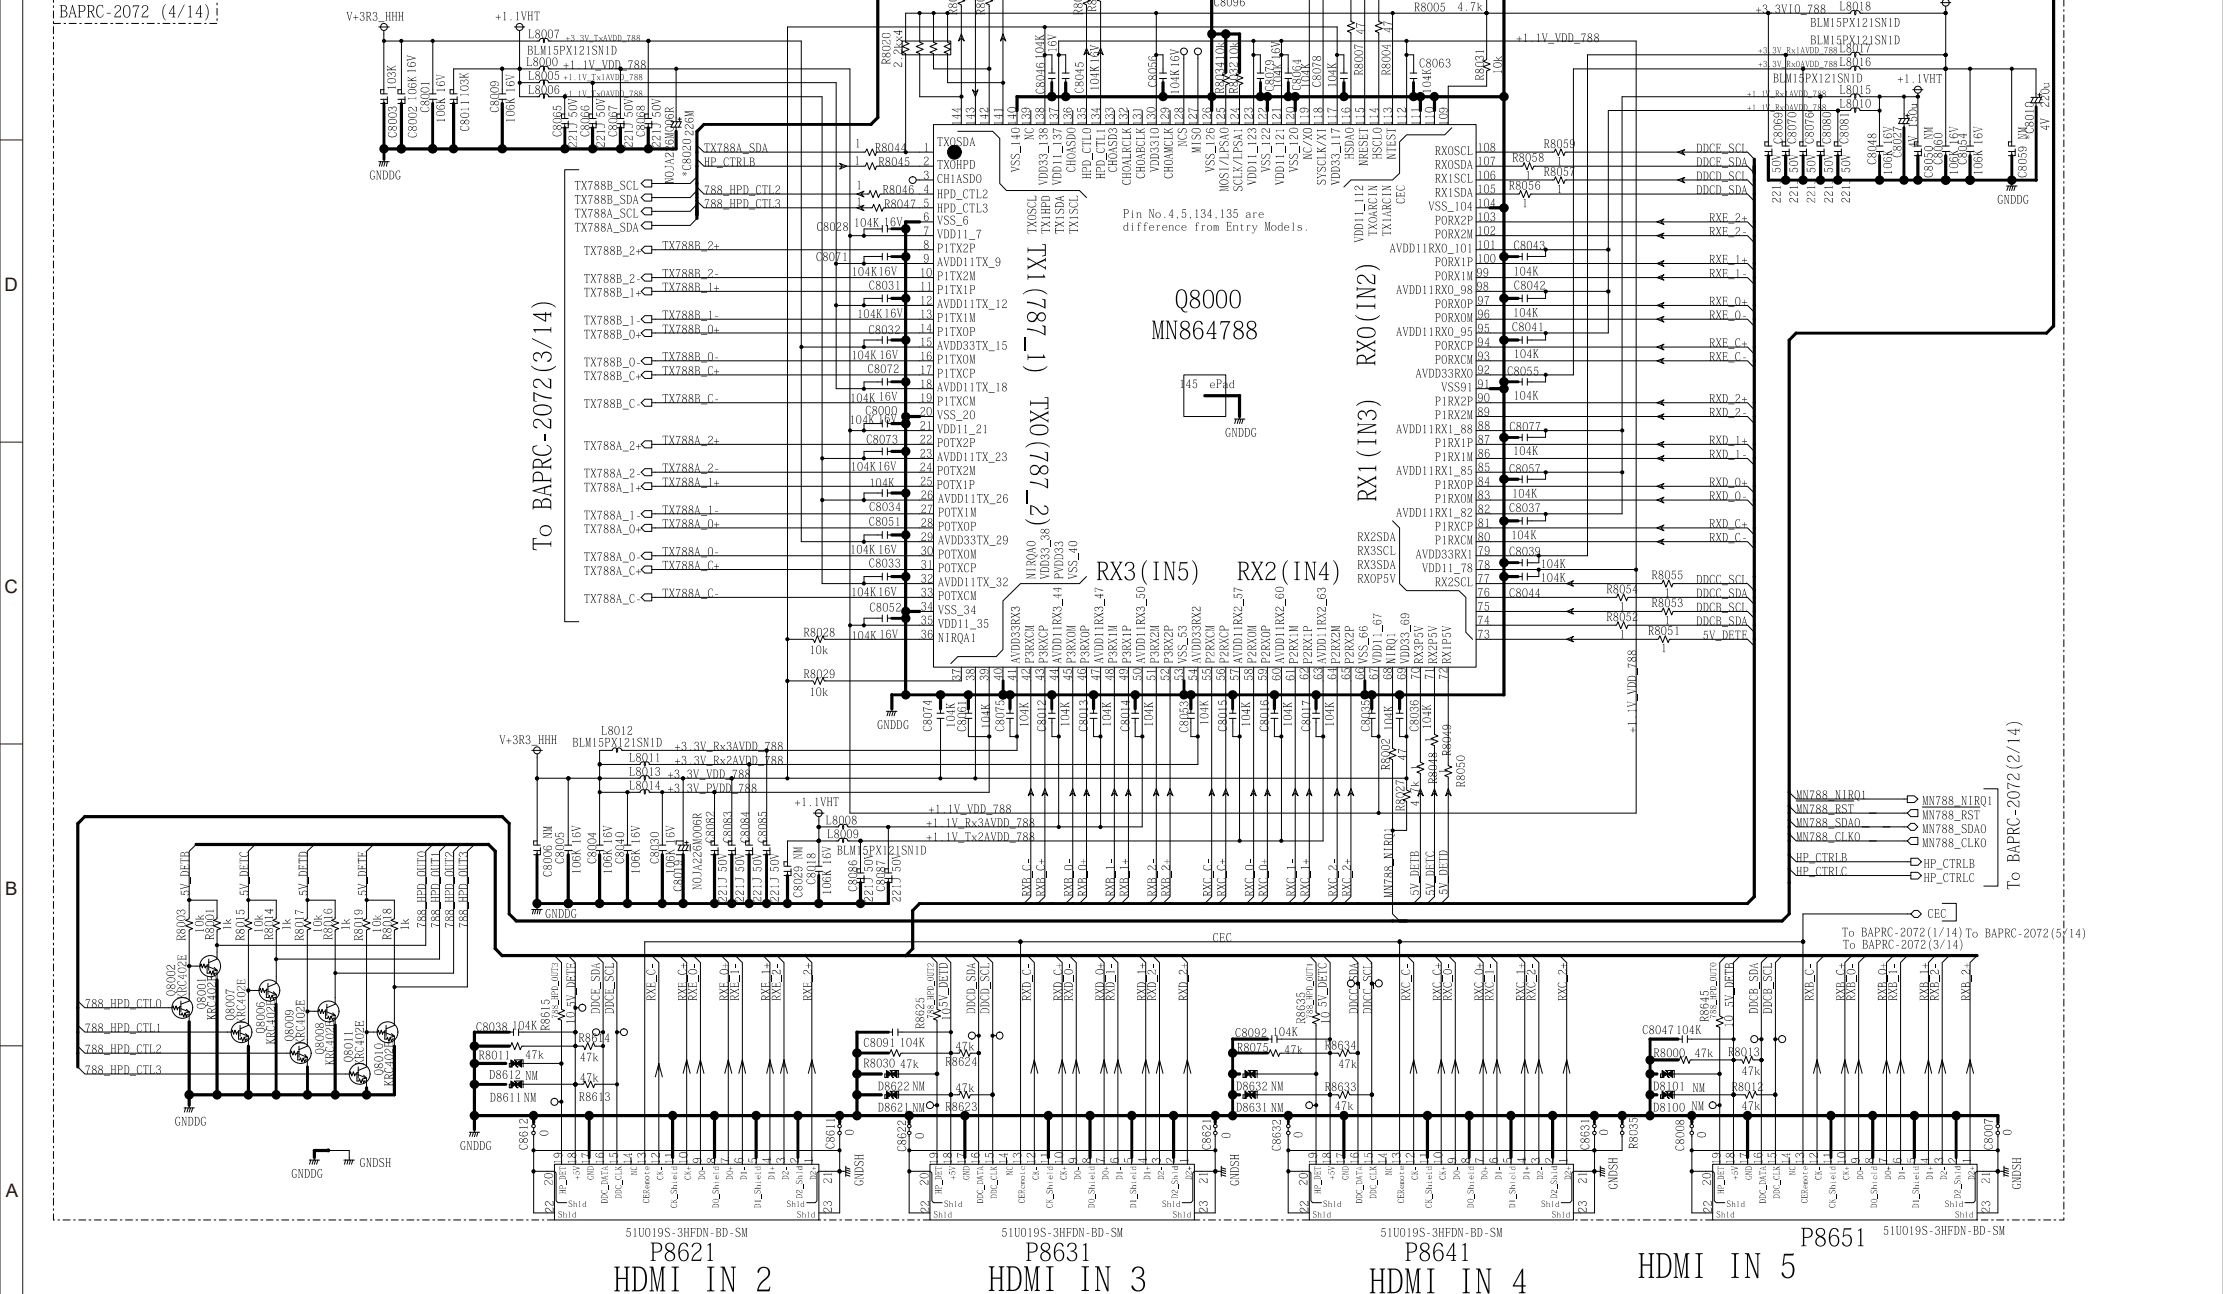


Schematic Diagram

MODEL No. SC-LX701/801/901, TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1

SCHEMATIC DIAGRAM (PART-1)
HDMI RX2 SECTION


BAPRC-2072 (5/14)

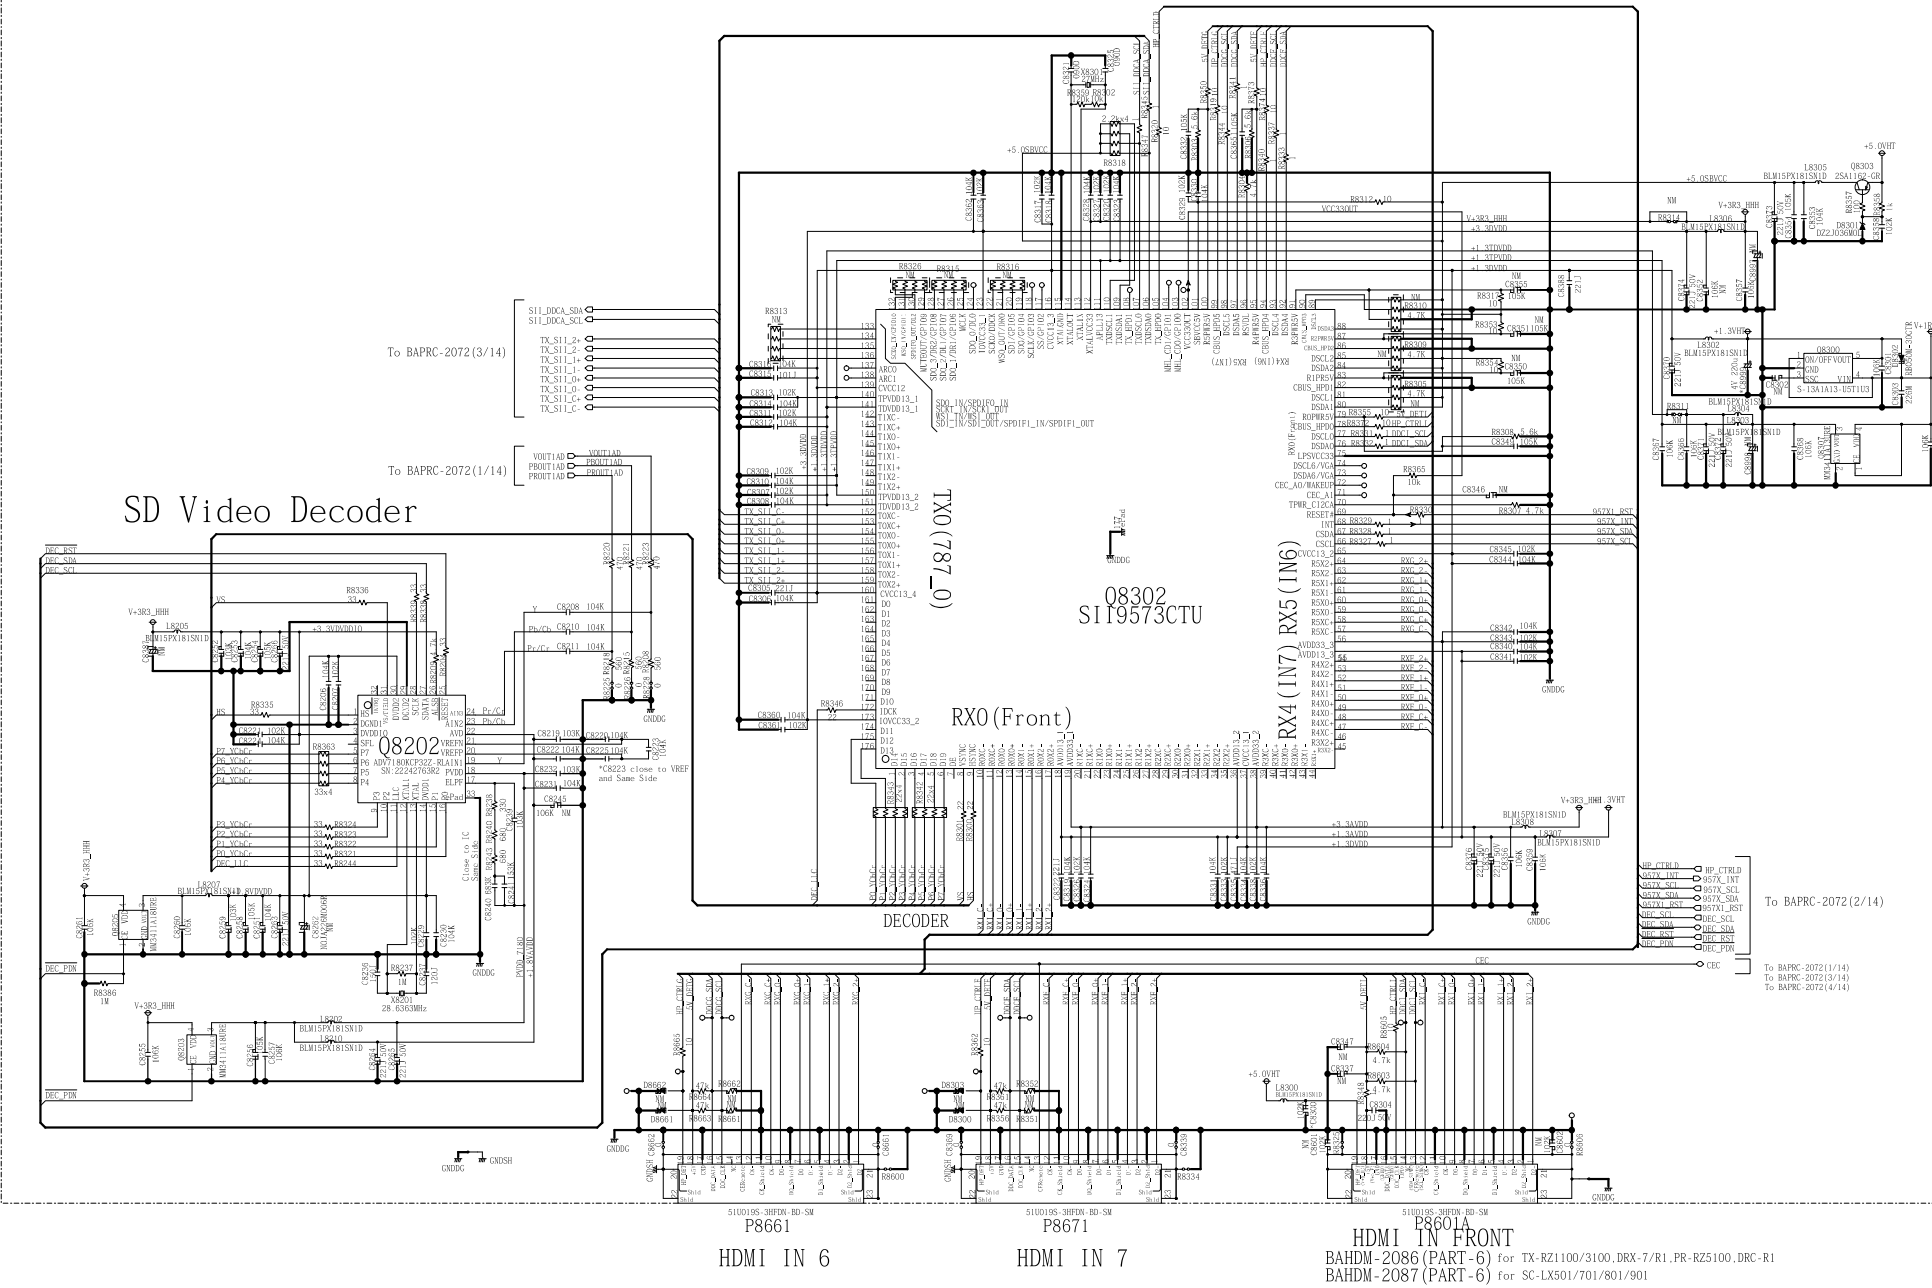

Schematic Diagram

MODEL No. SC-LX701/801/901, TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1 SCHEMATIC DIAGRAM

BAPRC-2072 (6/14)

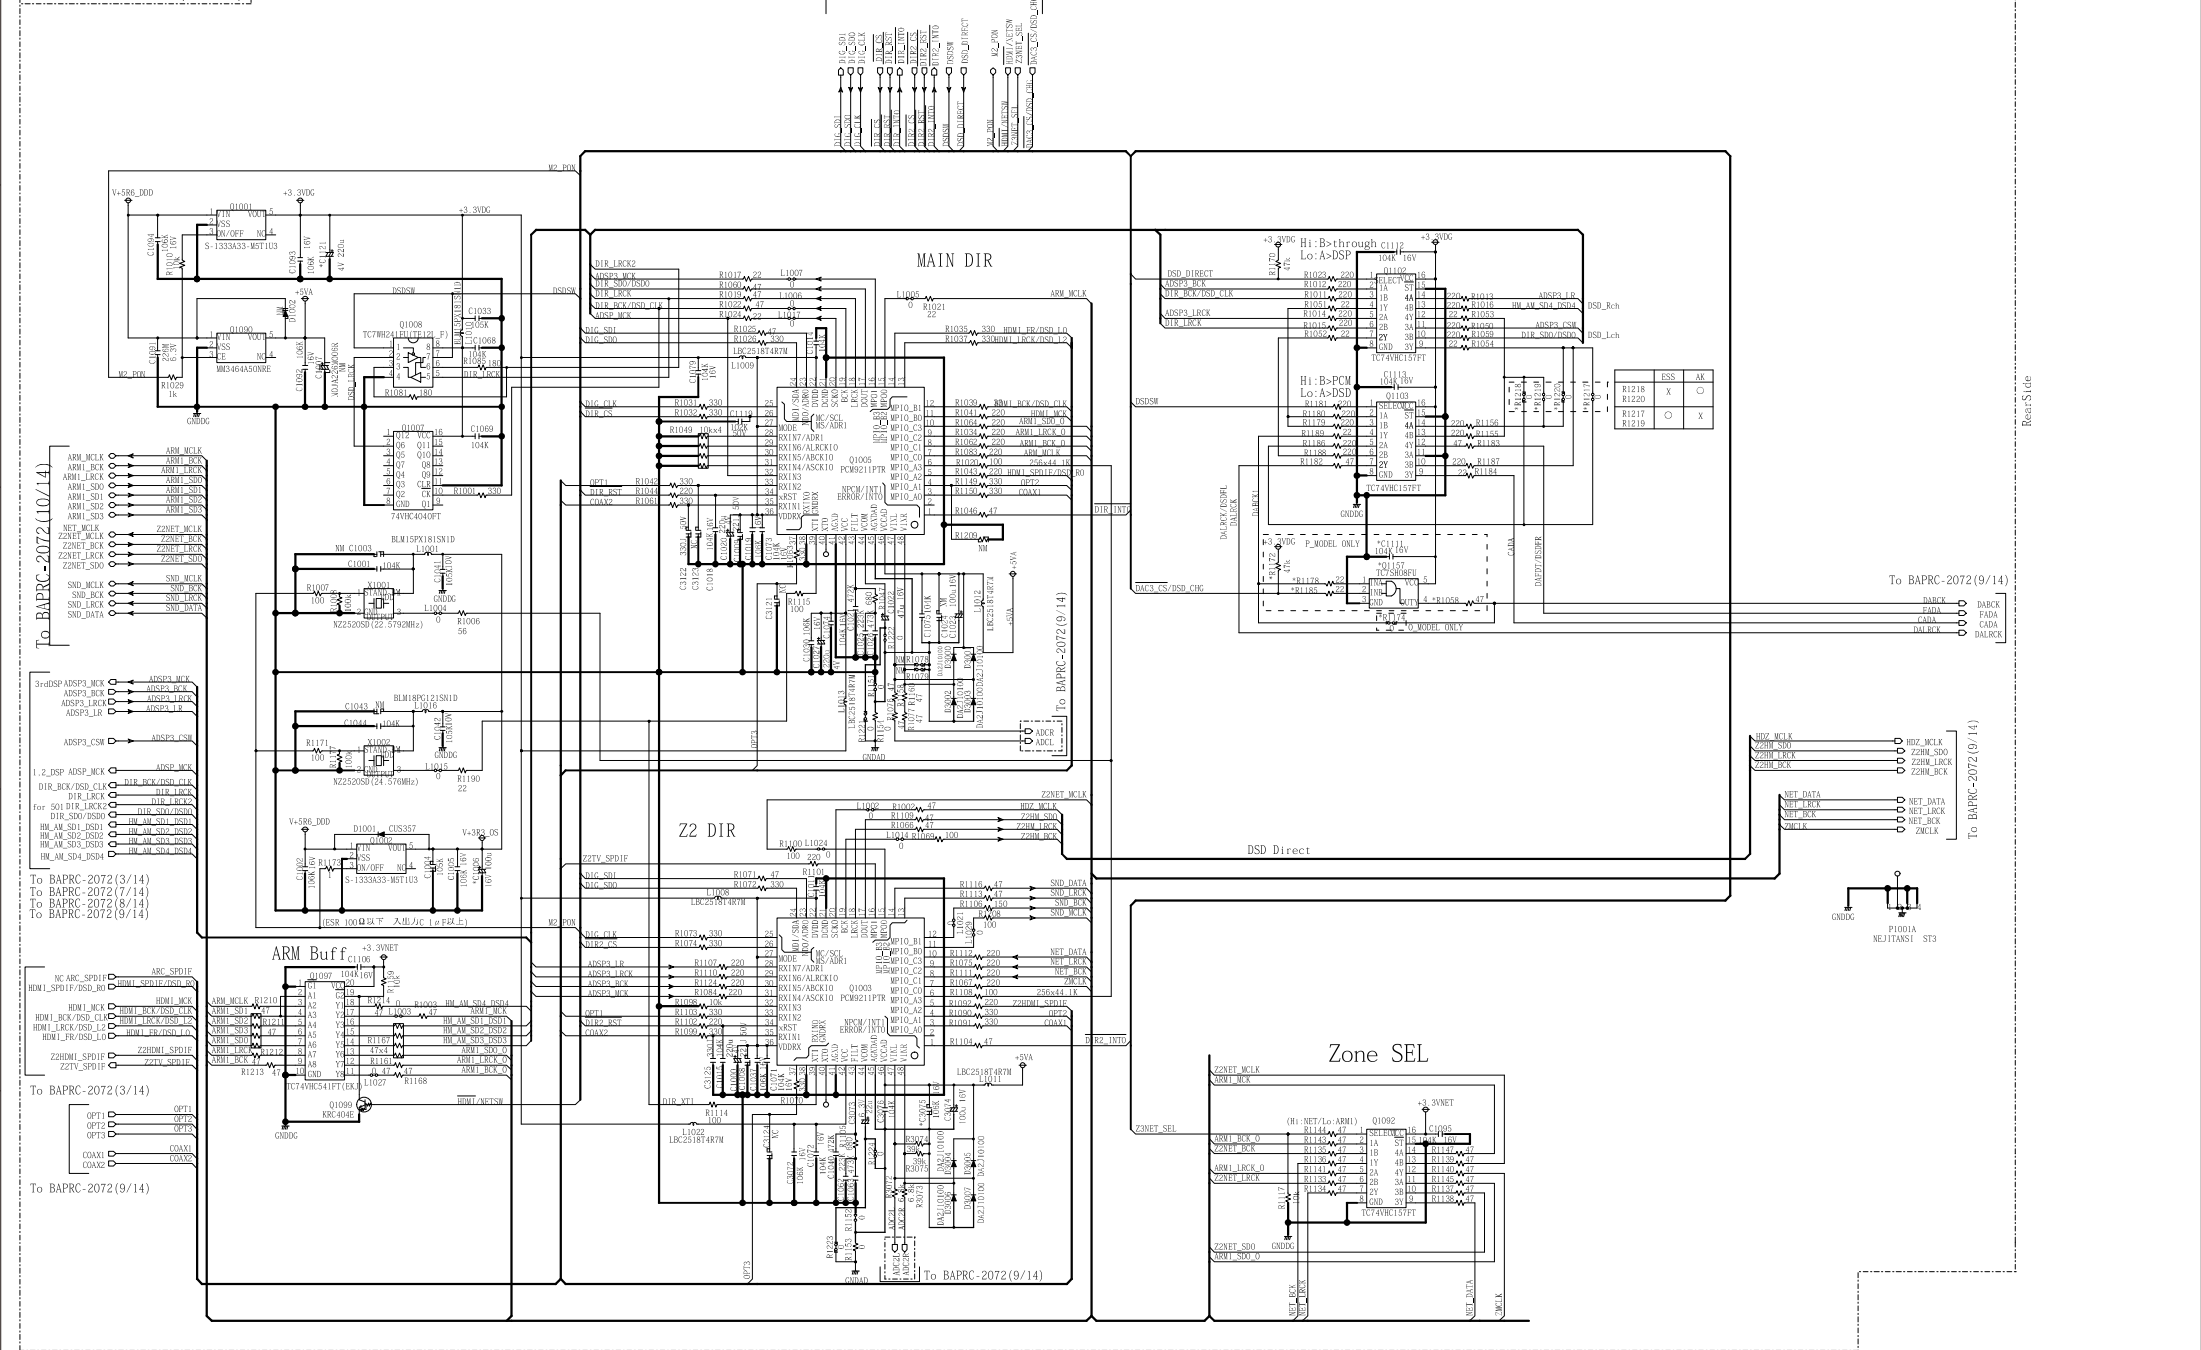


Schematic Diagram

MODEL No. SC-LX701/801/901, TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1

SCHEMATIC DIAGRAM (PART-1) 1stDSP SECTION


BAPRC-2072 (7/14)

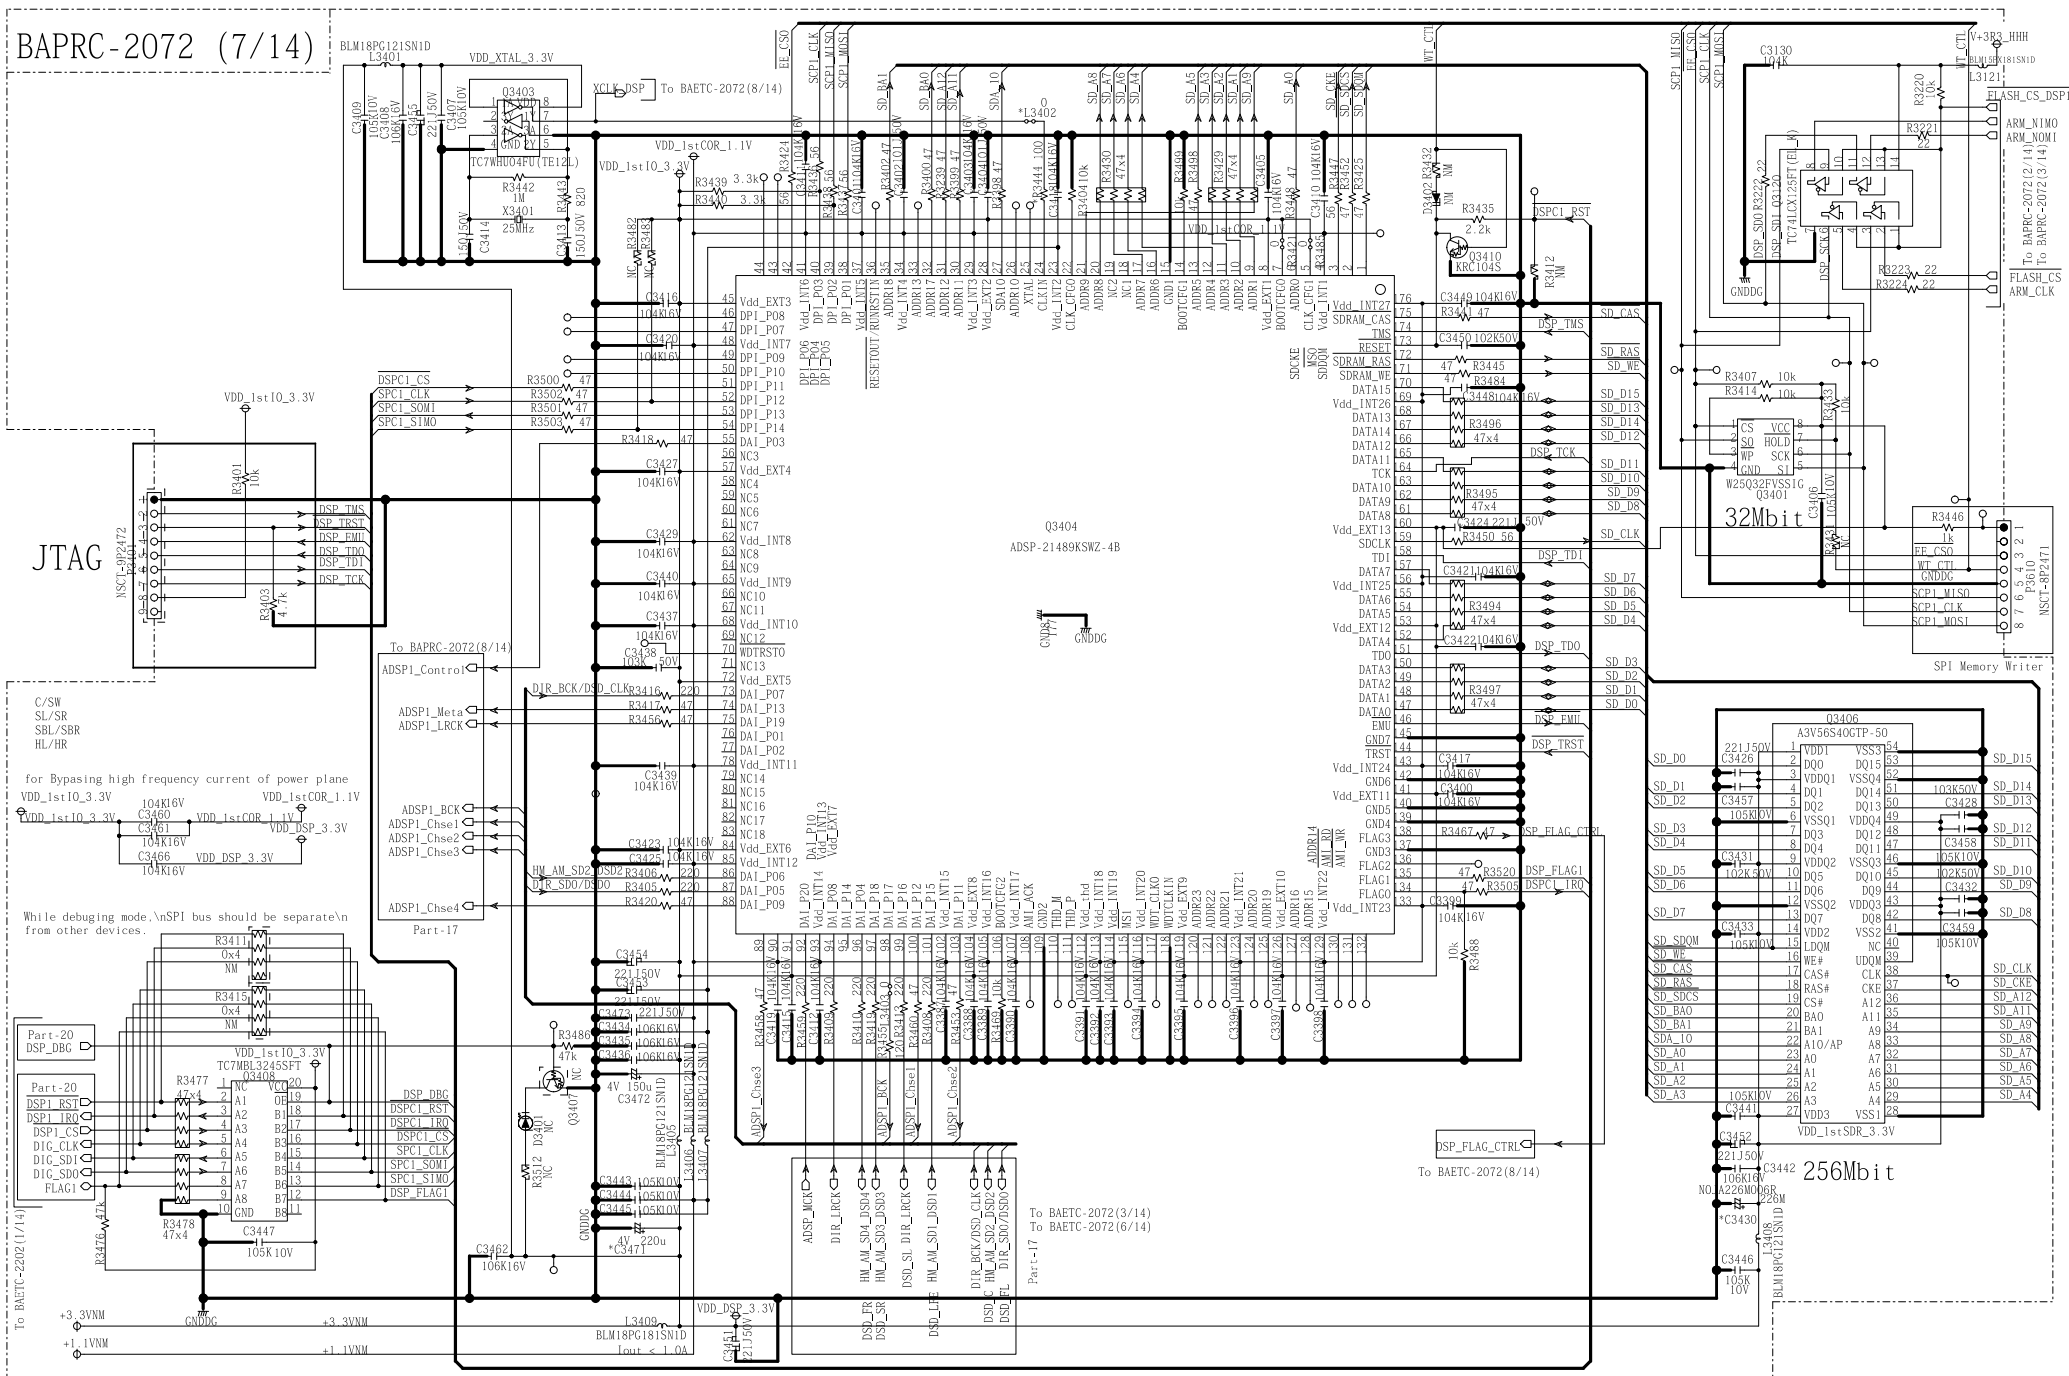

5	6
Schematic Diagram	

MODEL No. SC-LX701/801/901, TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1 SCHEMATIC DIAGRAM

BAPRC-2072 (8/14)

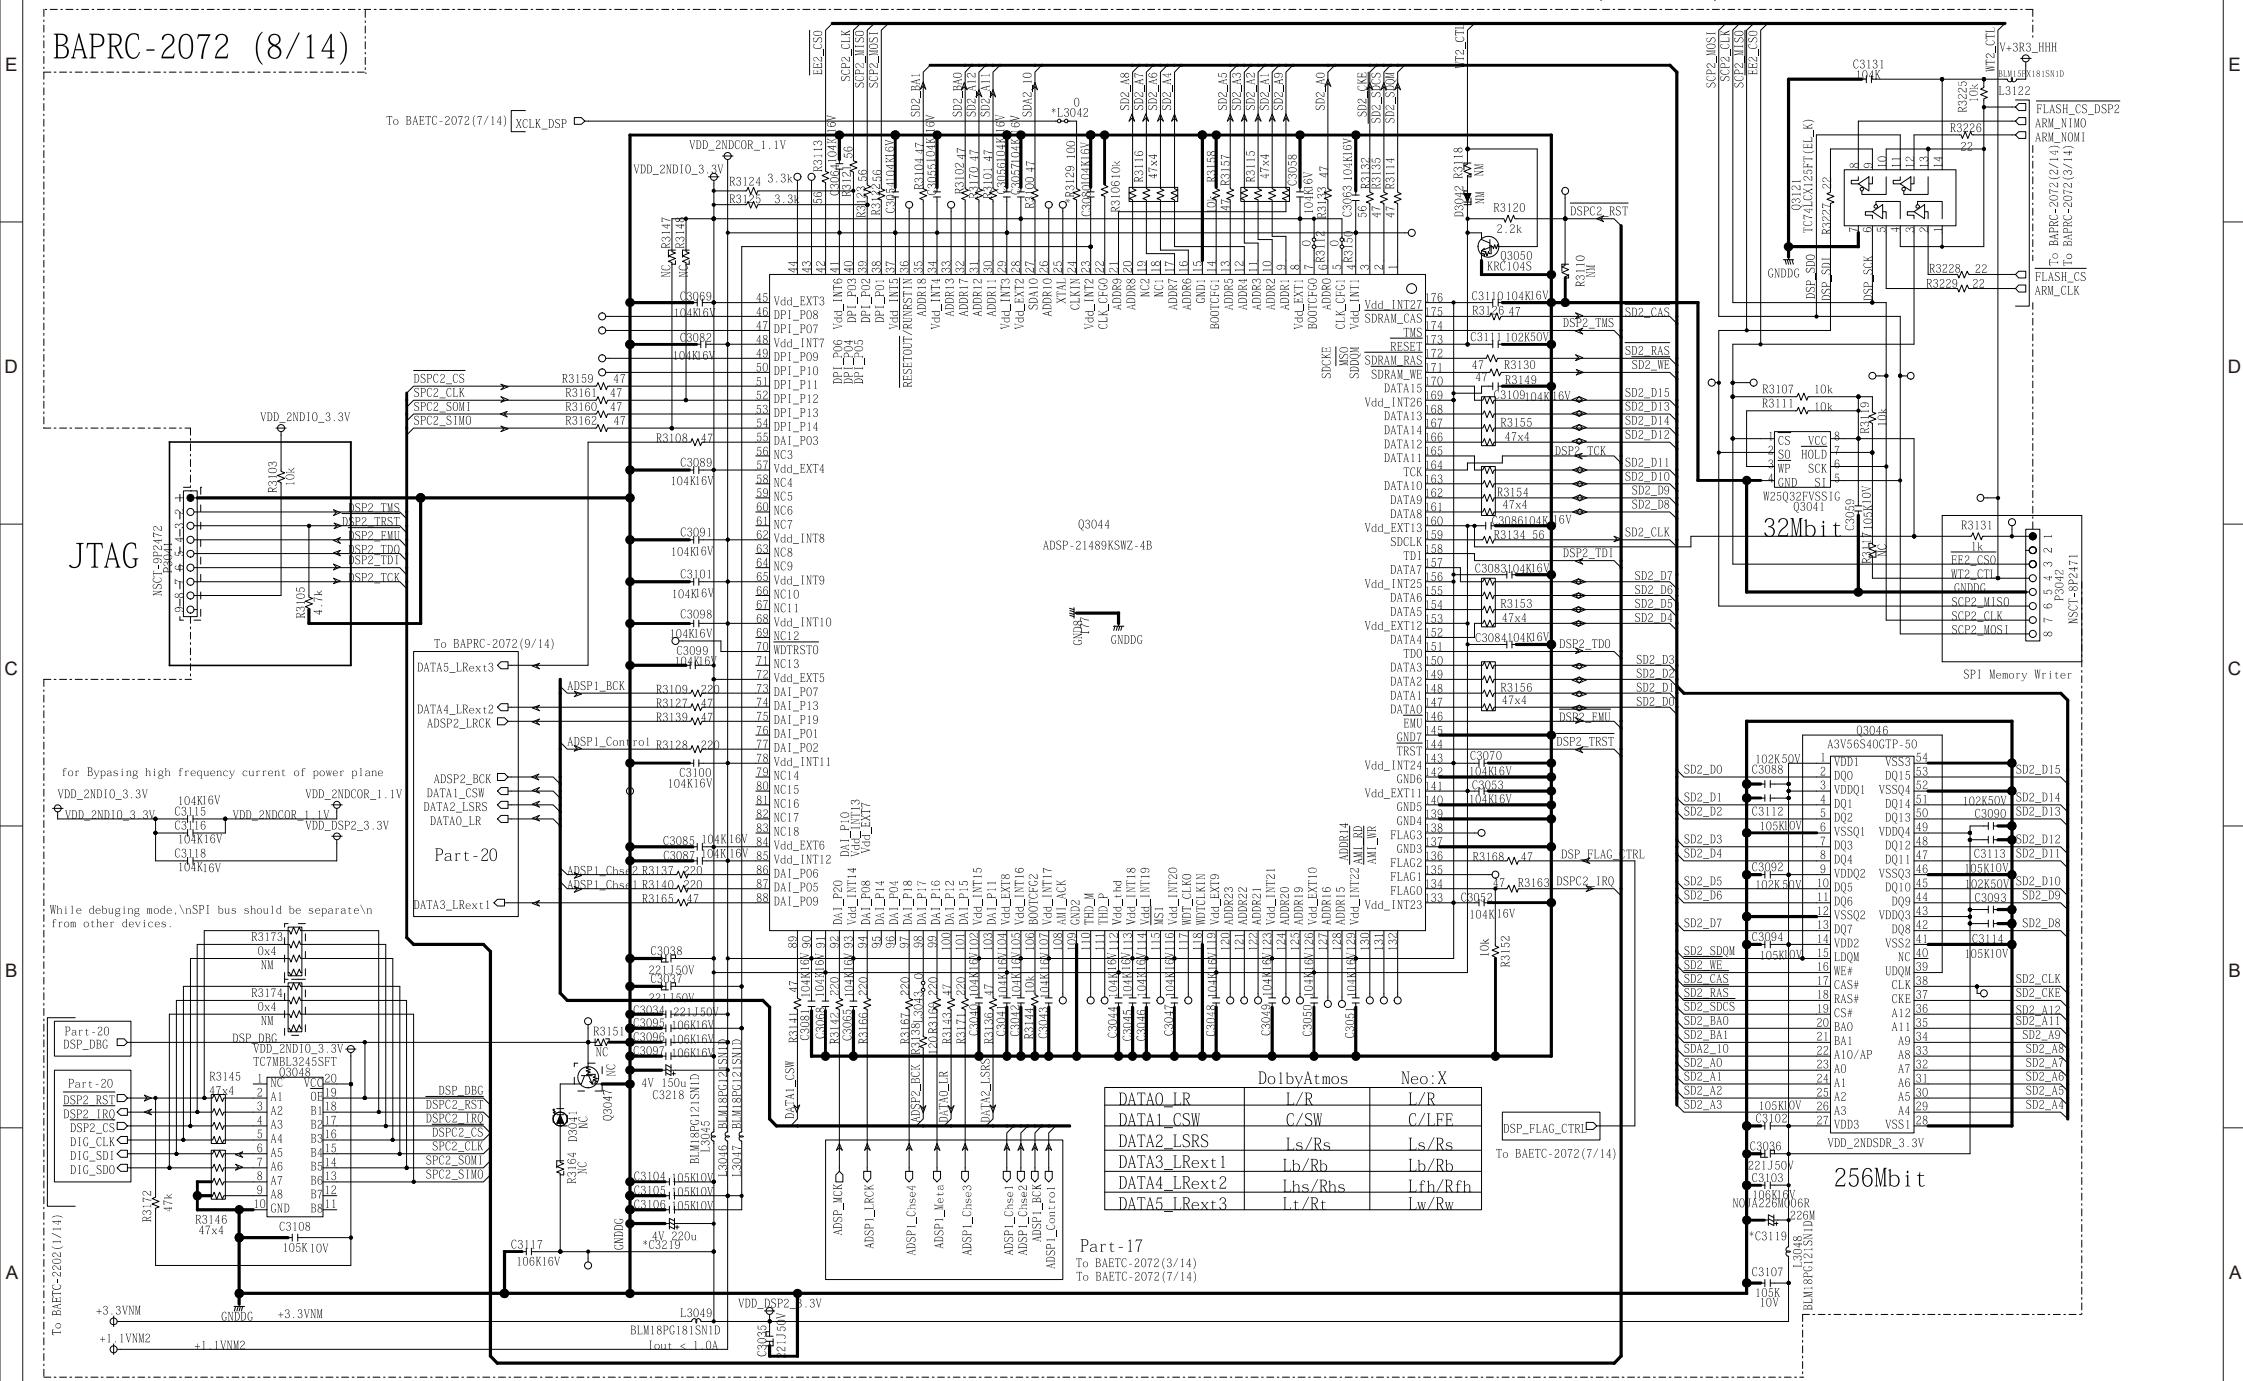

Schematic Diagram

A	B	C	D	E
---	---	---	---	---

	5	6
	Schematic Diagram	




Schematic Diagram

A	B	C	D	E
---	---	---	---	---

[illegible]

BAPRC-2072 (11/14)

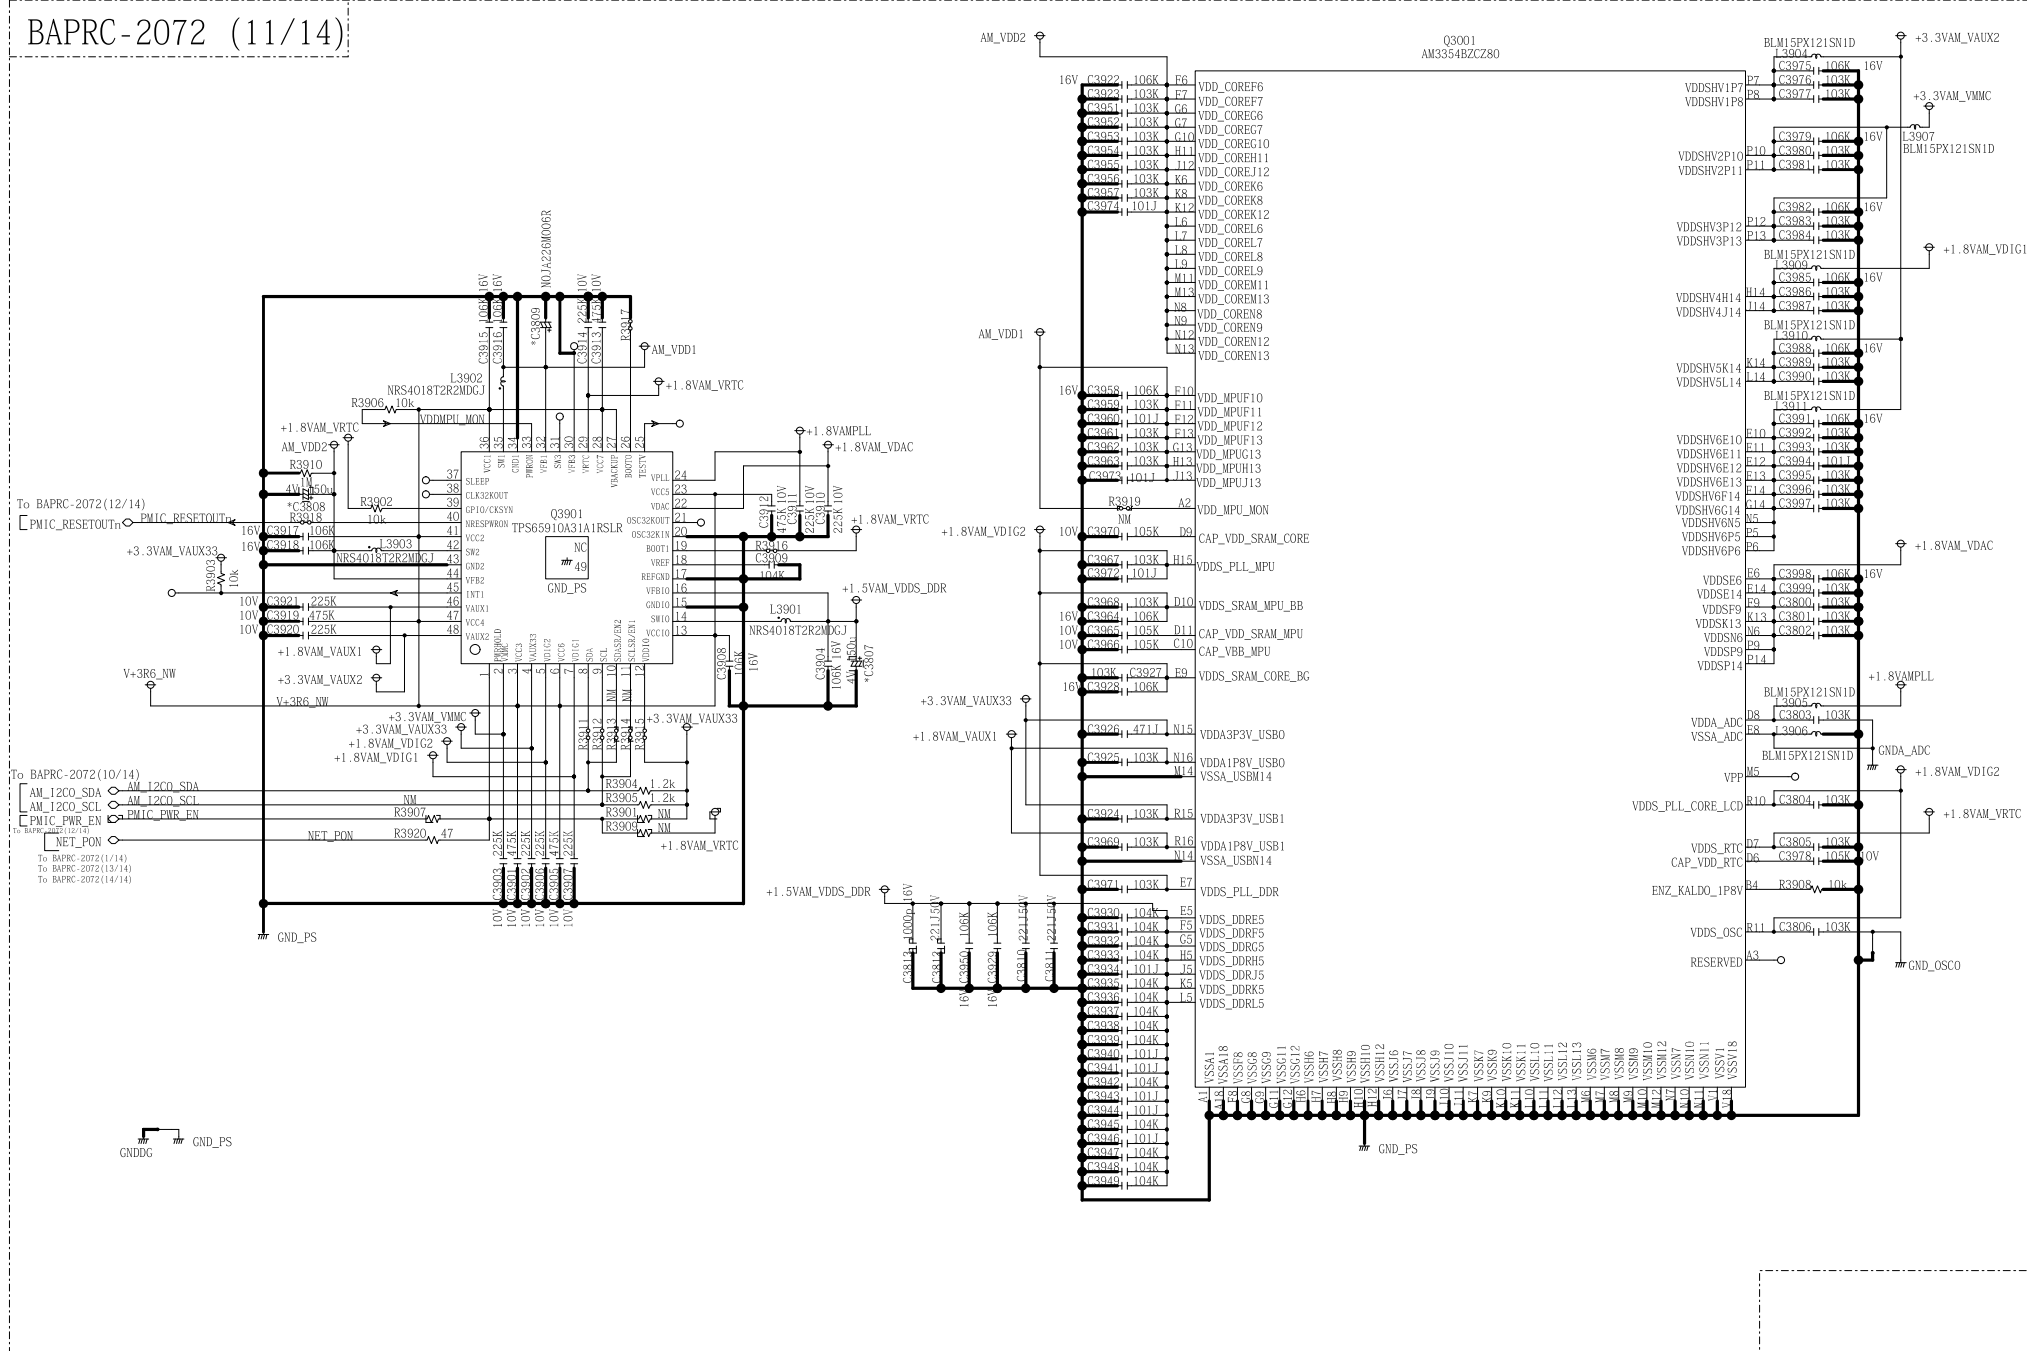


5	6
Schematic Diagram	

MODEL No.SC-LX701/801/901,TX-RZ1100/3100,DRX-7/R1,PR-RZ5100,DRC-R1	Schematic Diagram SCHEMATIC DIAGRAM (PART-1) ARM Memory SECTION
--	---

SCHEMATIC DIAGRAM (PART-1)
ARM Memory SECTION

BAPRC-2072 (12/14)

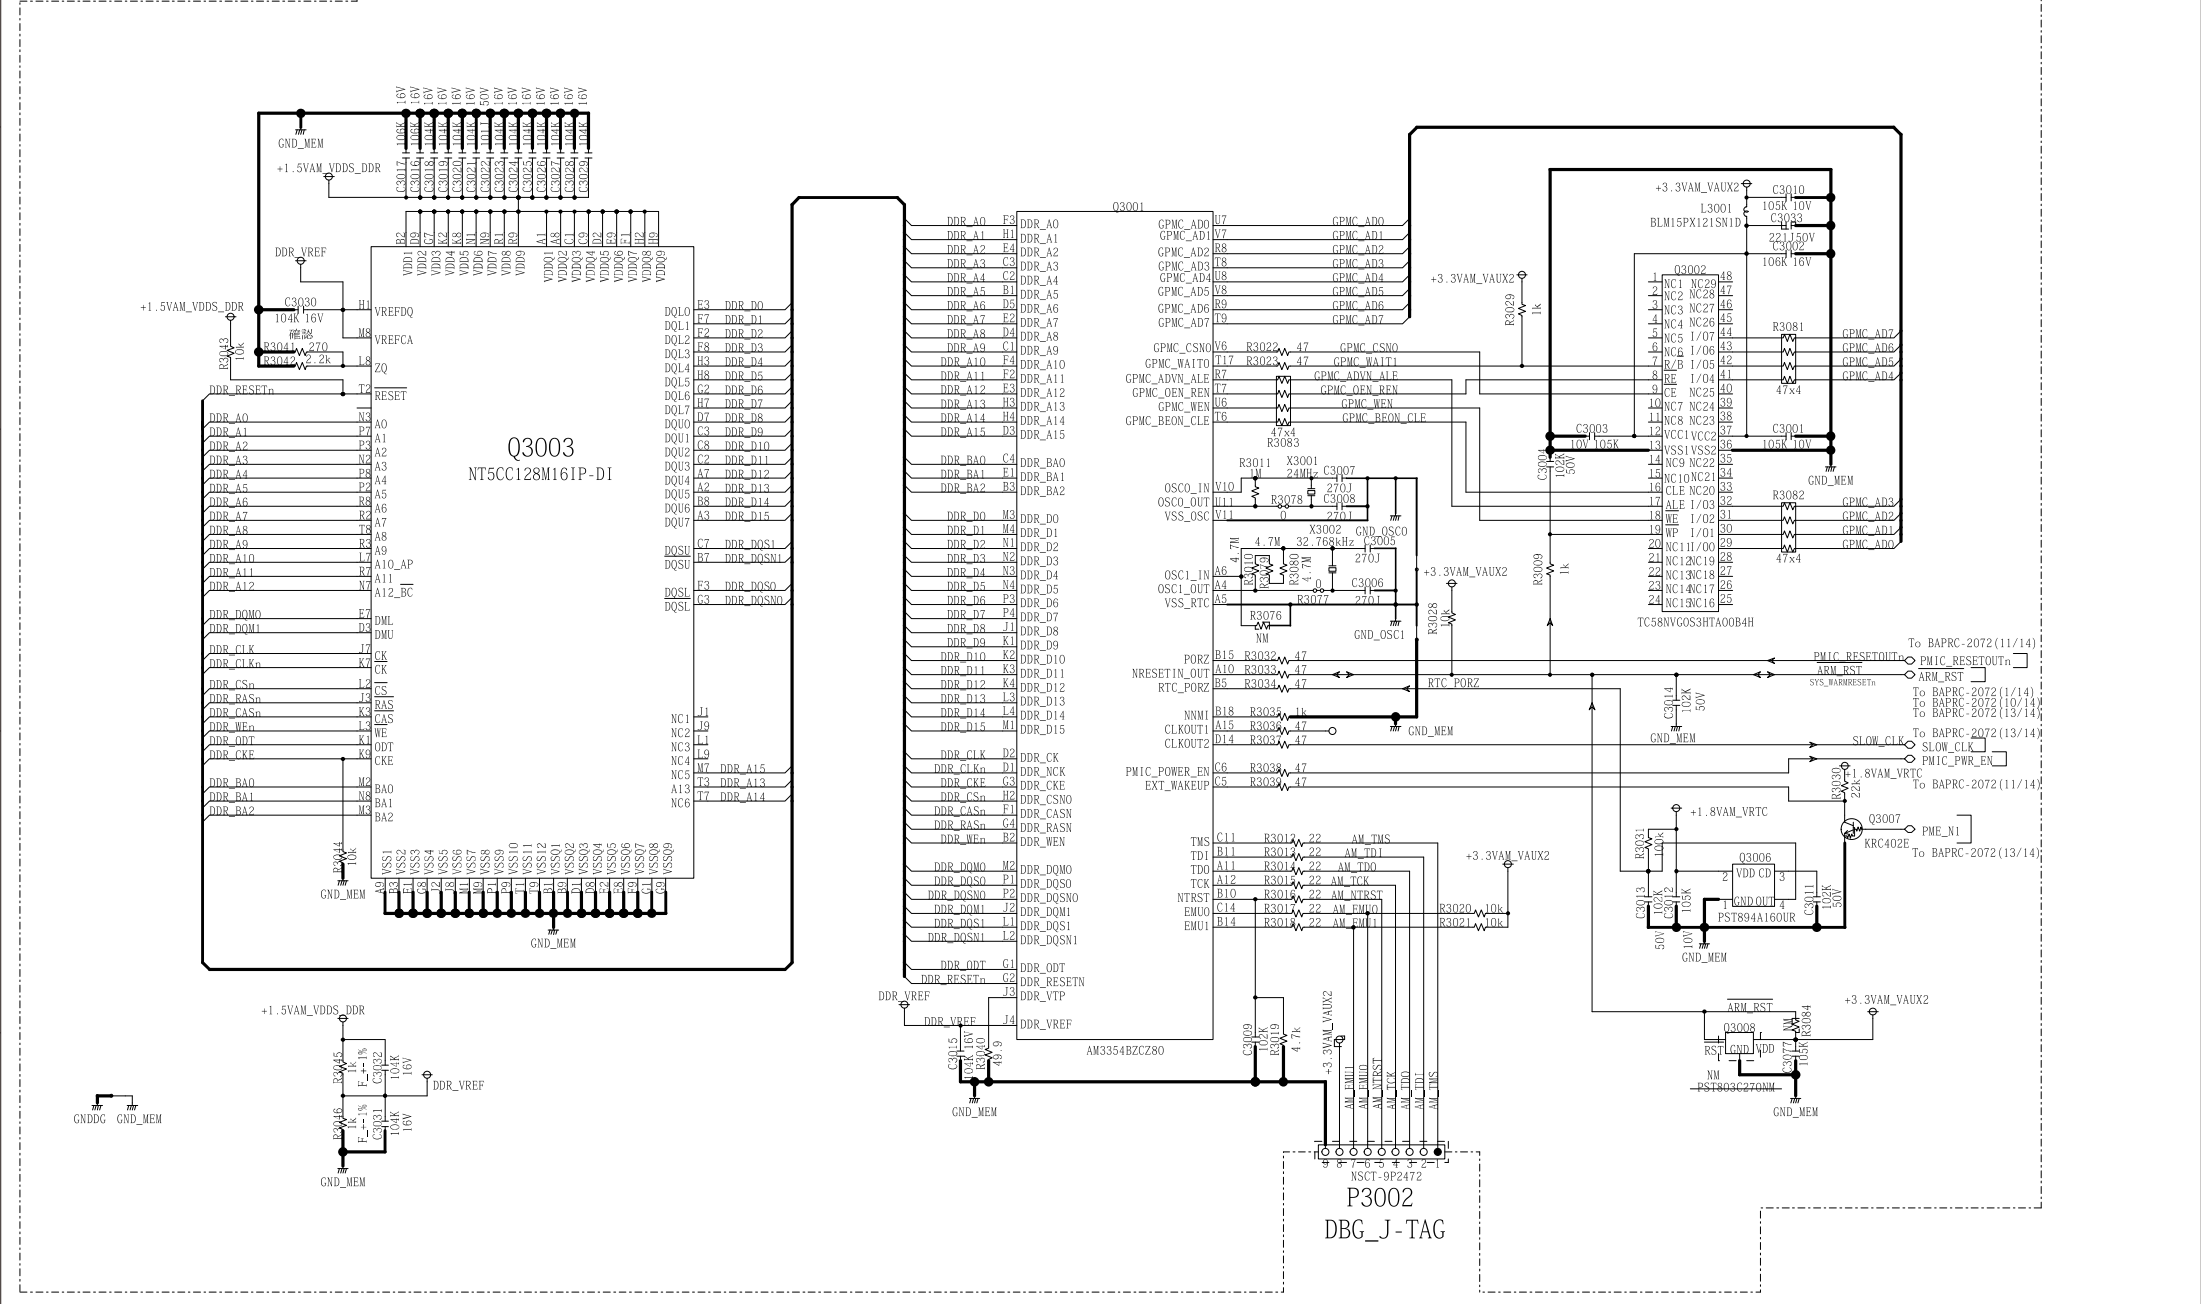


MODEL No. SC-LX701/801/901, TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1

BAPRC-2072 (13/14)

SCHEMATIC DIAGRAM (PART-10)


ARM USB/Ethwernet/WiFi SECTION

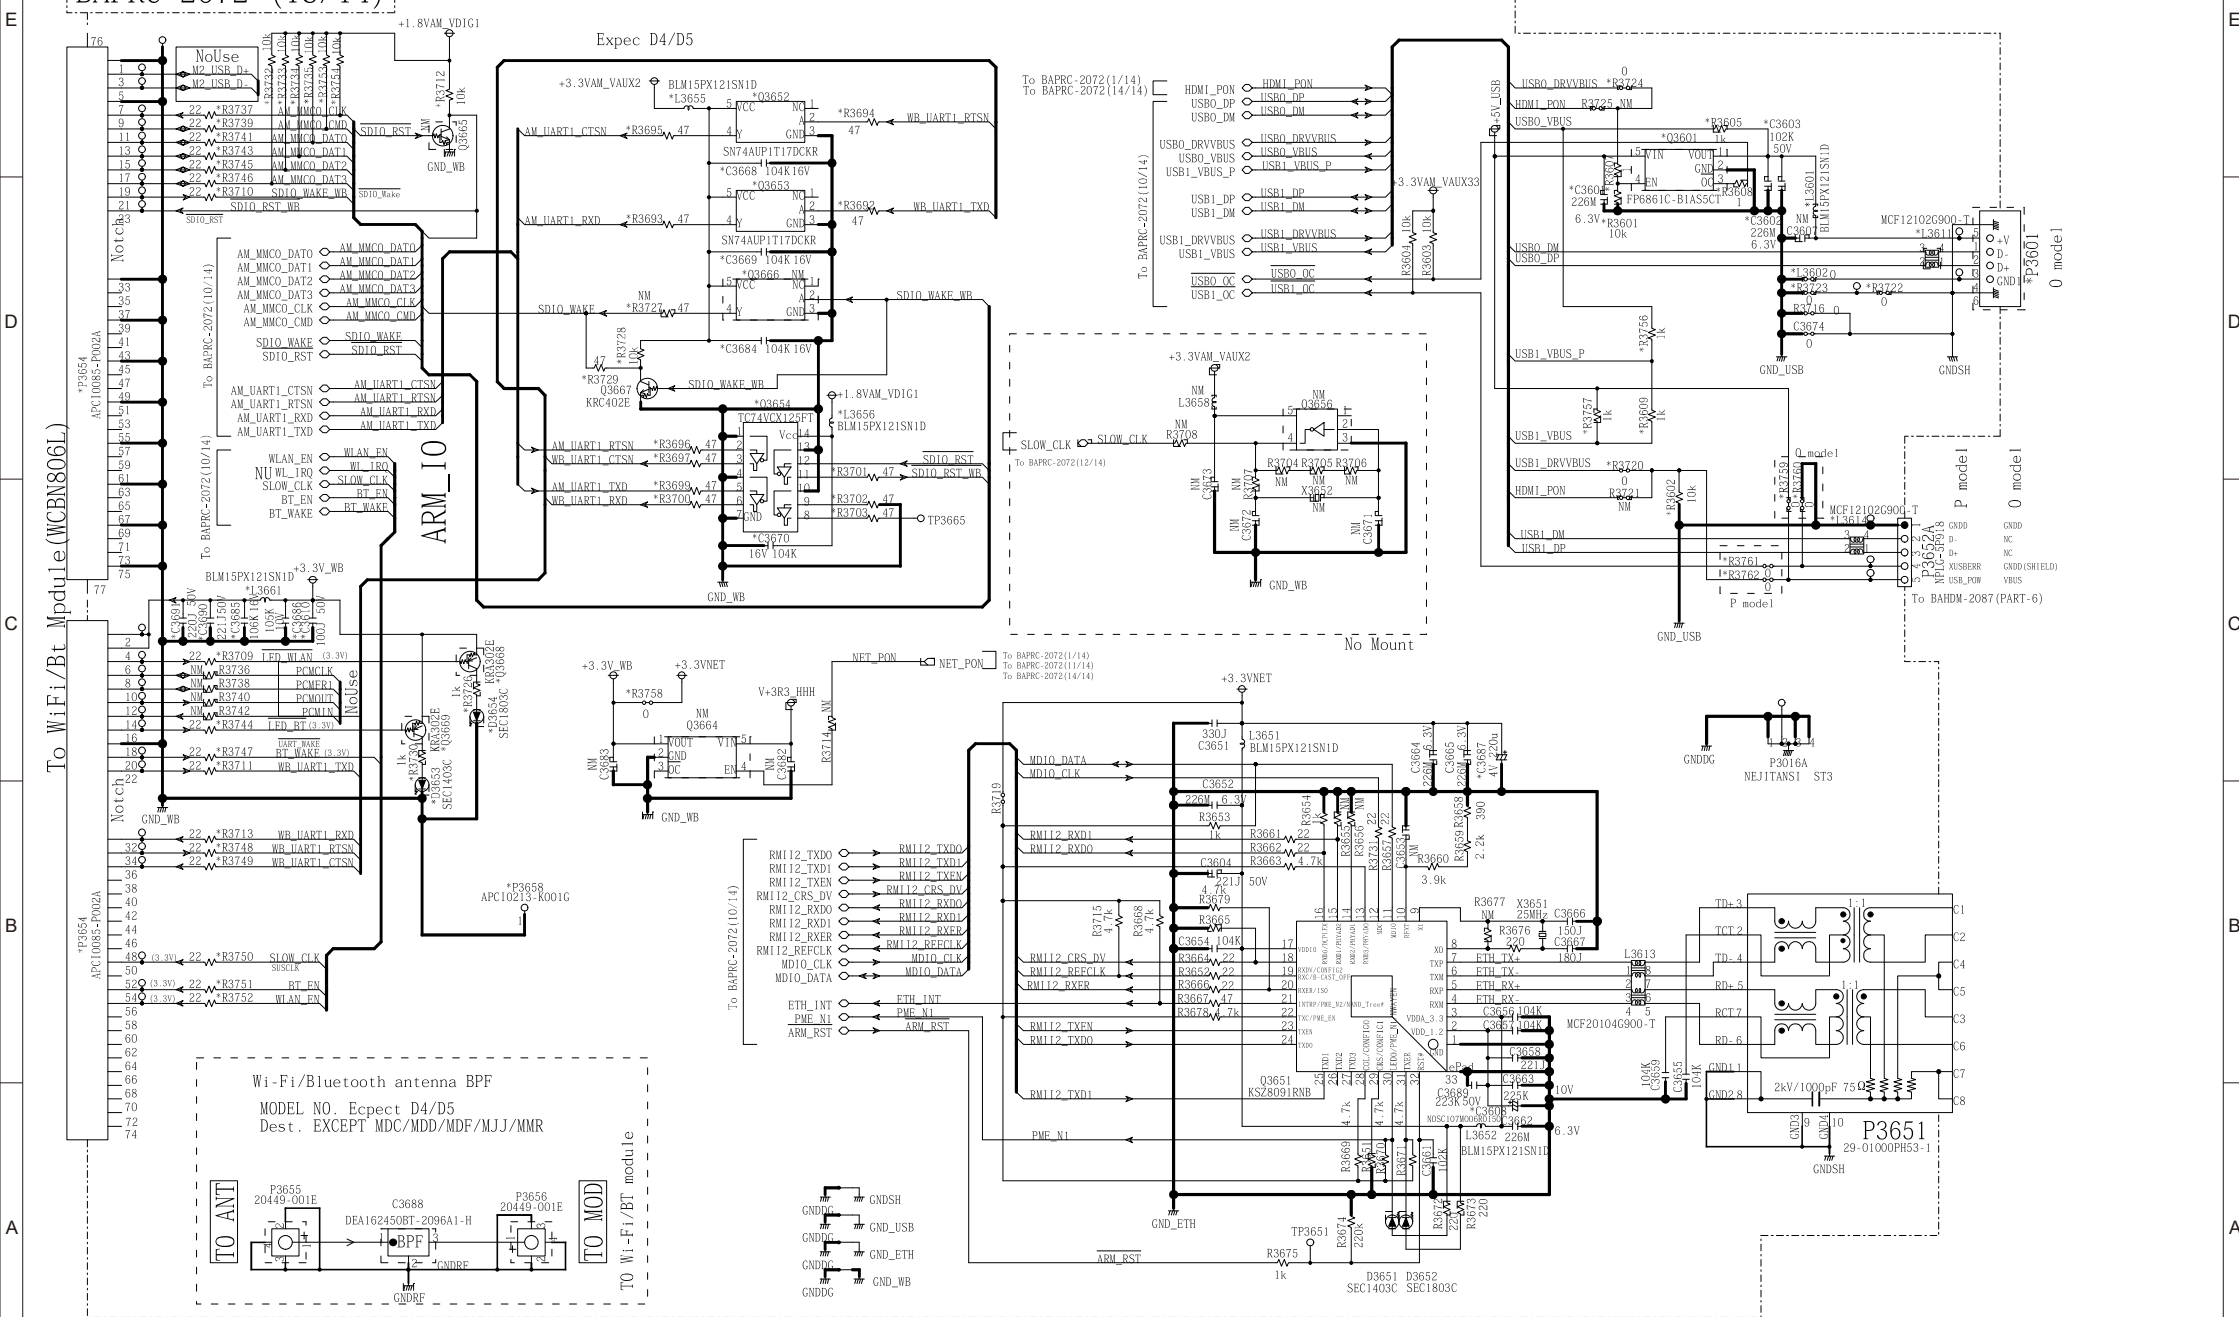

Schematic Diagram


MODEL NO. TX-RZ1100/3100, PR-RZ5100

SCHEMATIC DIAGRAM (PART-2) DISPLAY SECTION

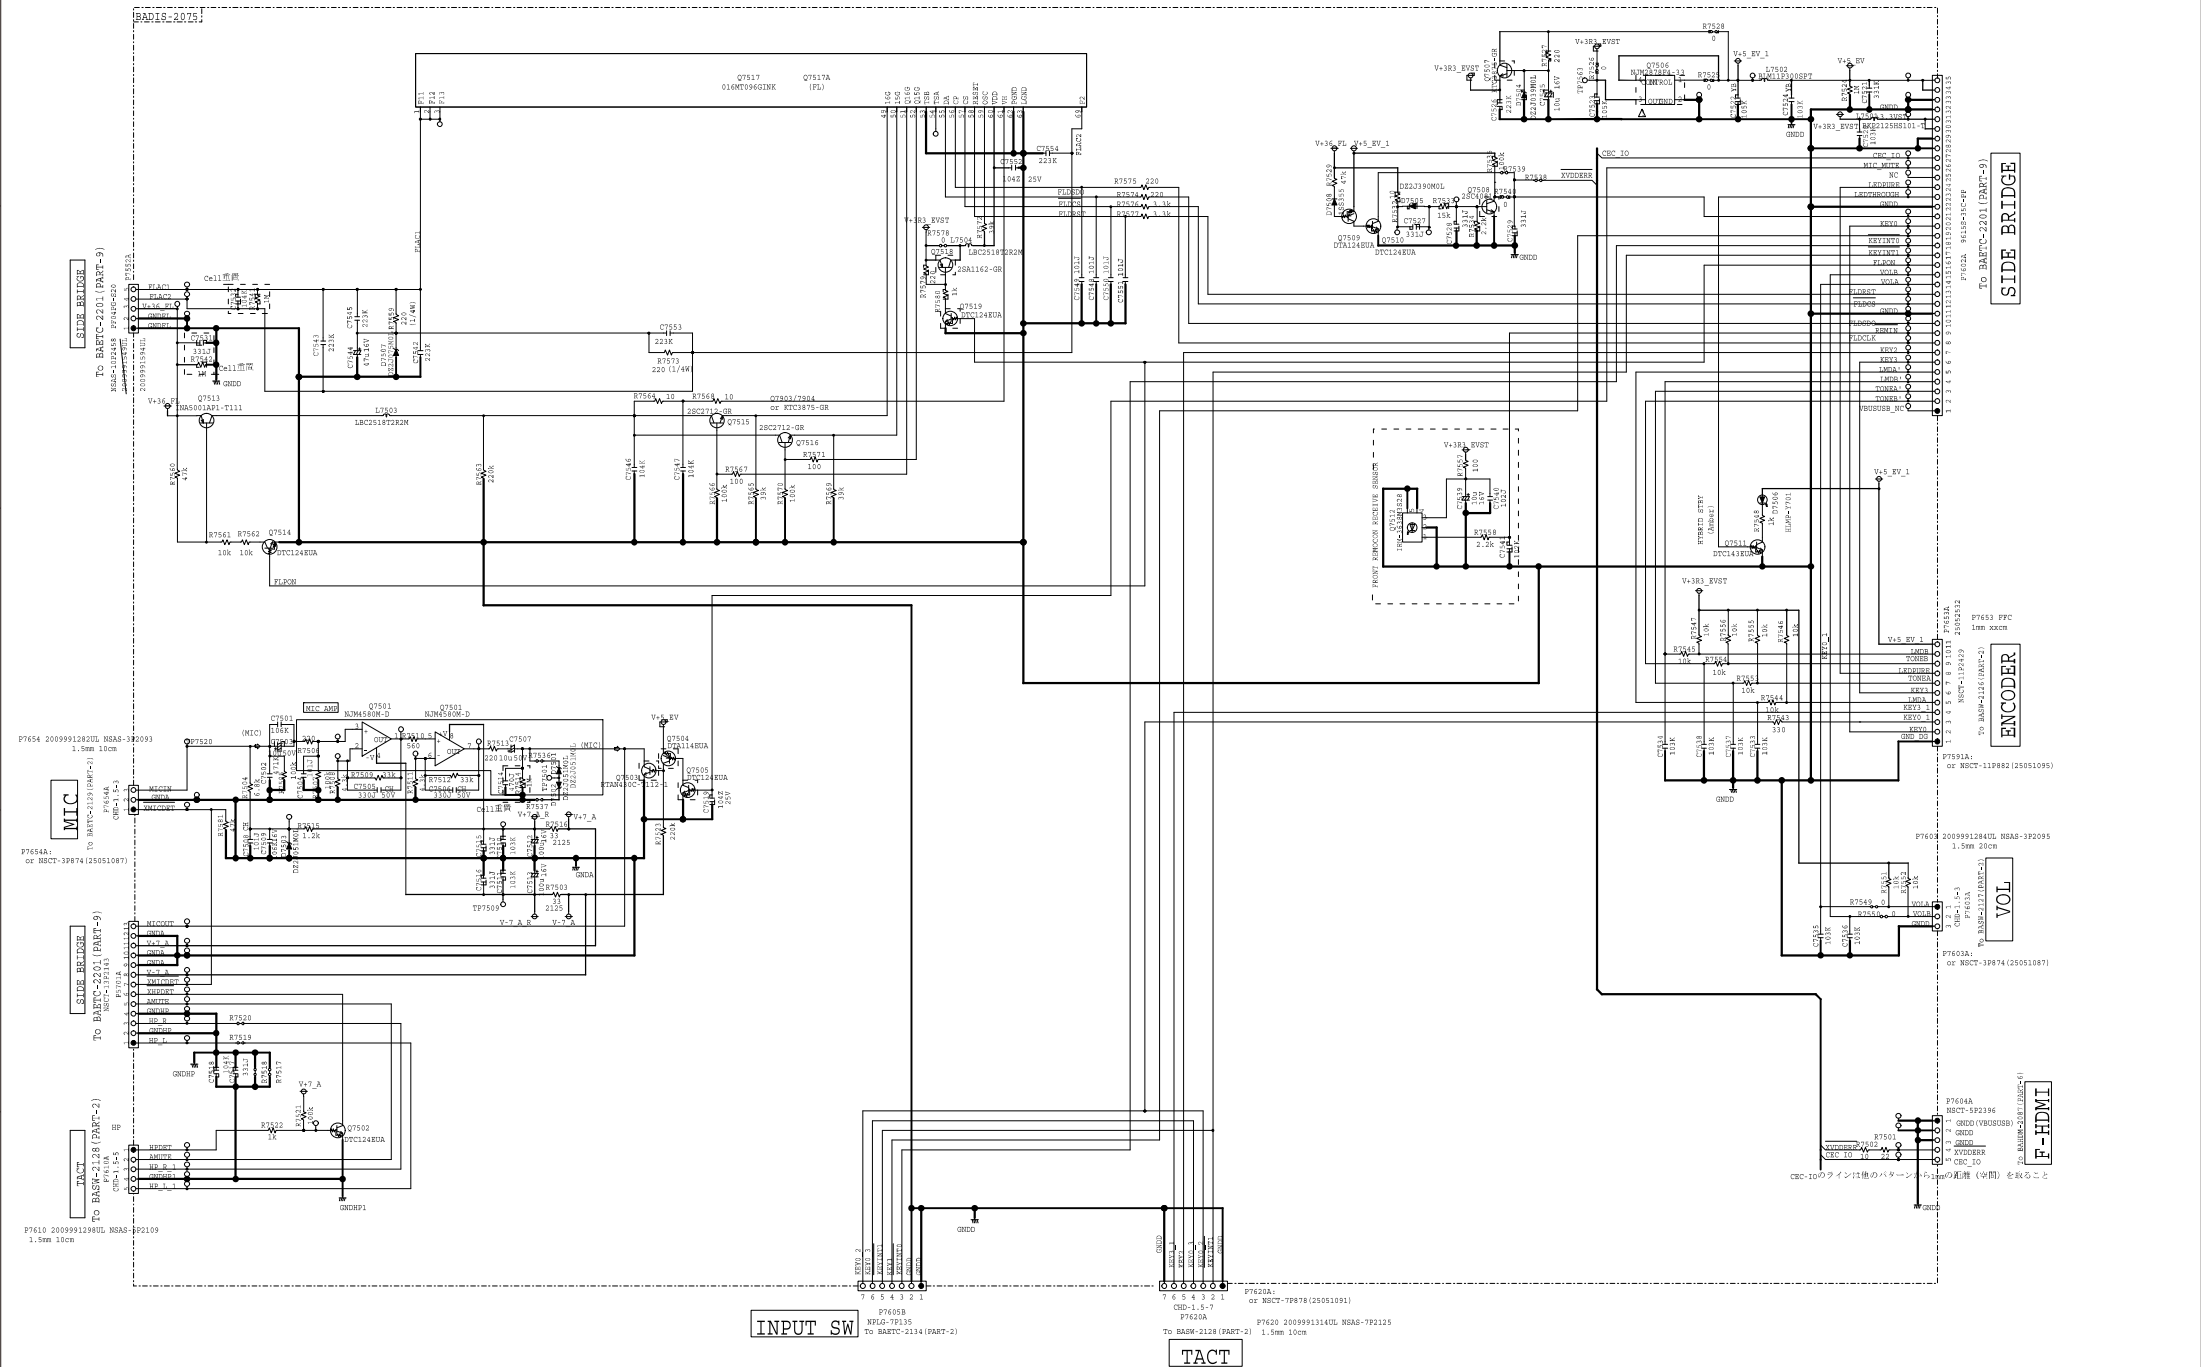


MODEL NO. TX-RZ1100/3100, PR-RZ5100

SCHEMATIC DIAGRAM (PART-2) ENCODER SECTION

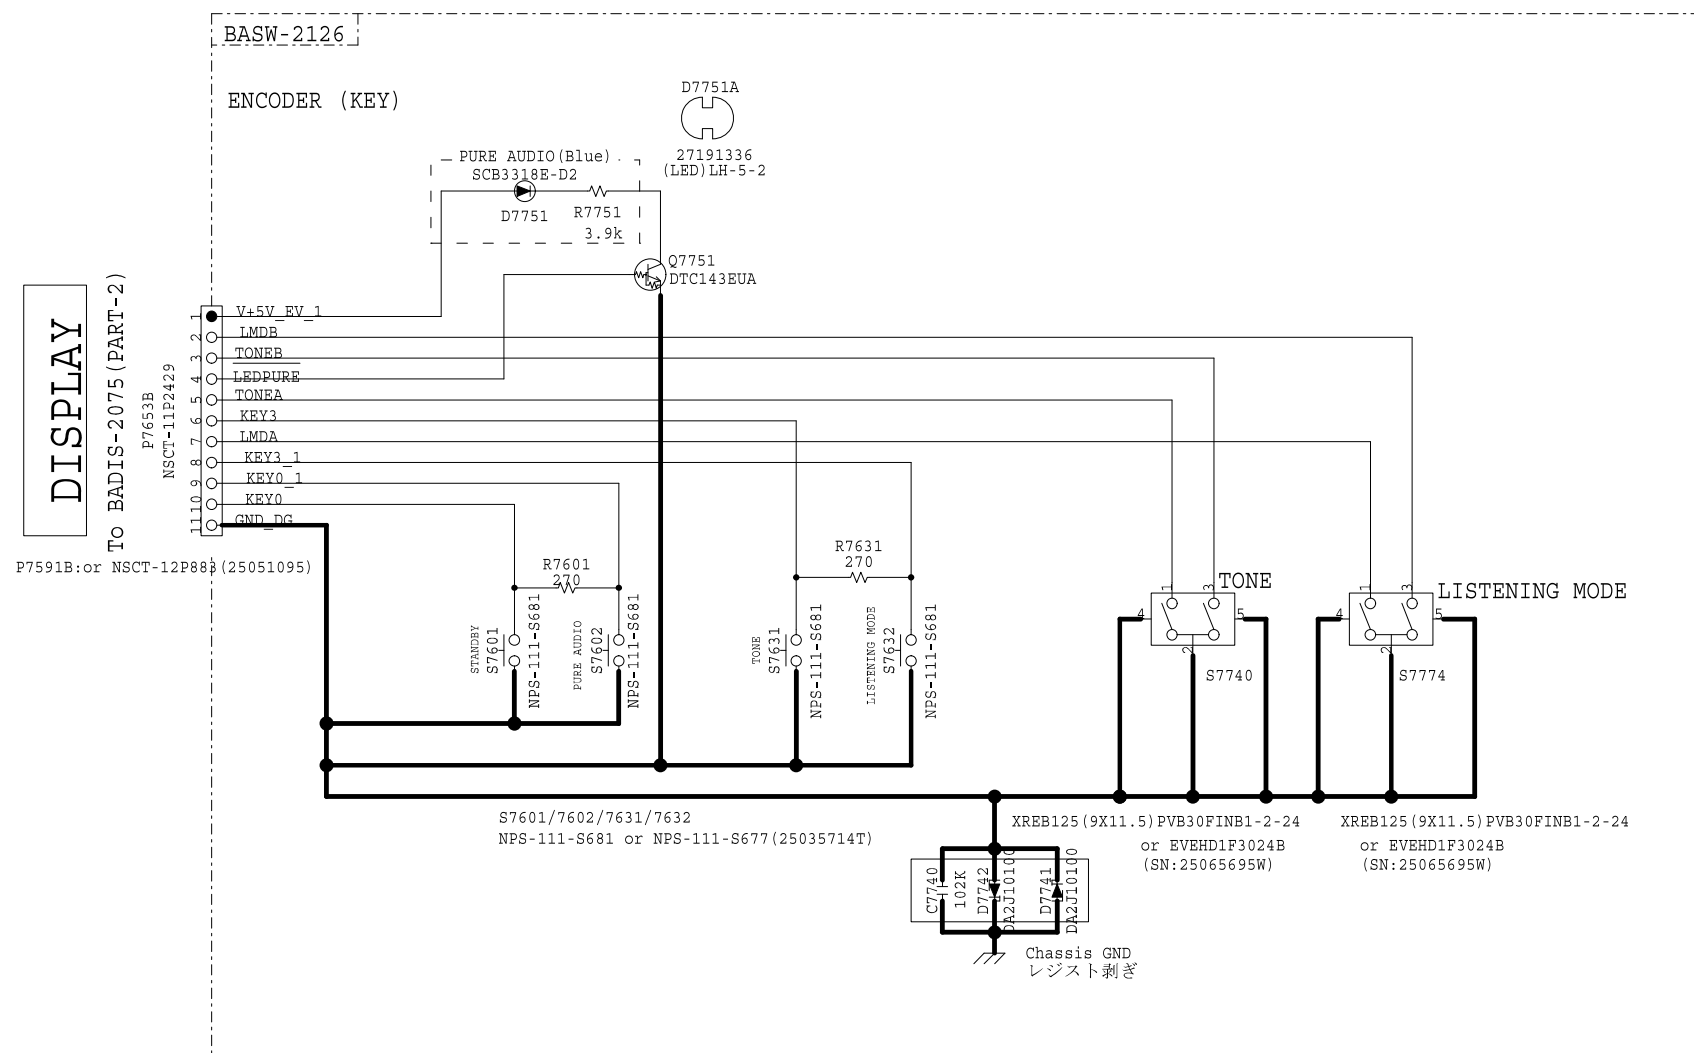


MODEL NO.TX-RZ1100/3100,PR-RZ5100

SCHEMATIC DIAGRAM(PART-2) VOL SECTION

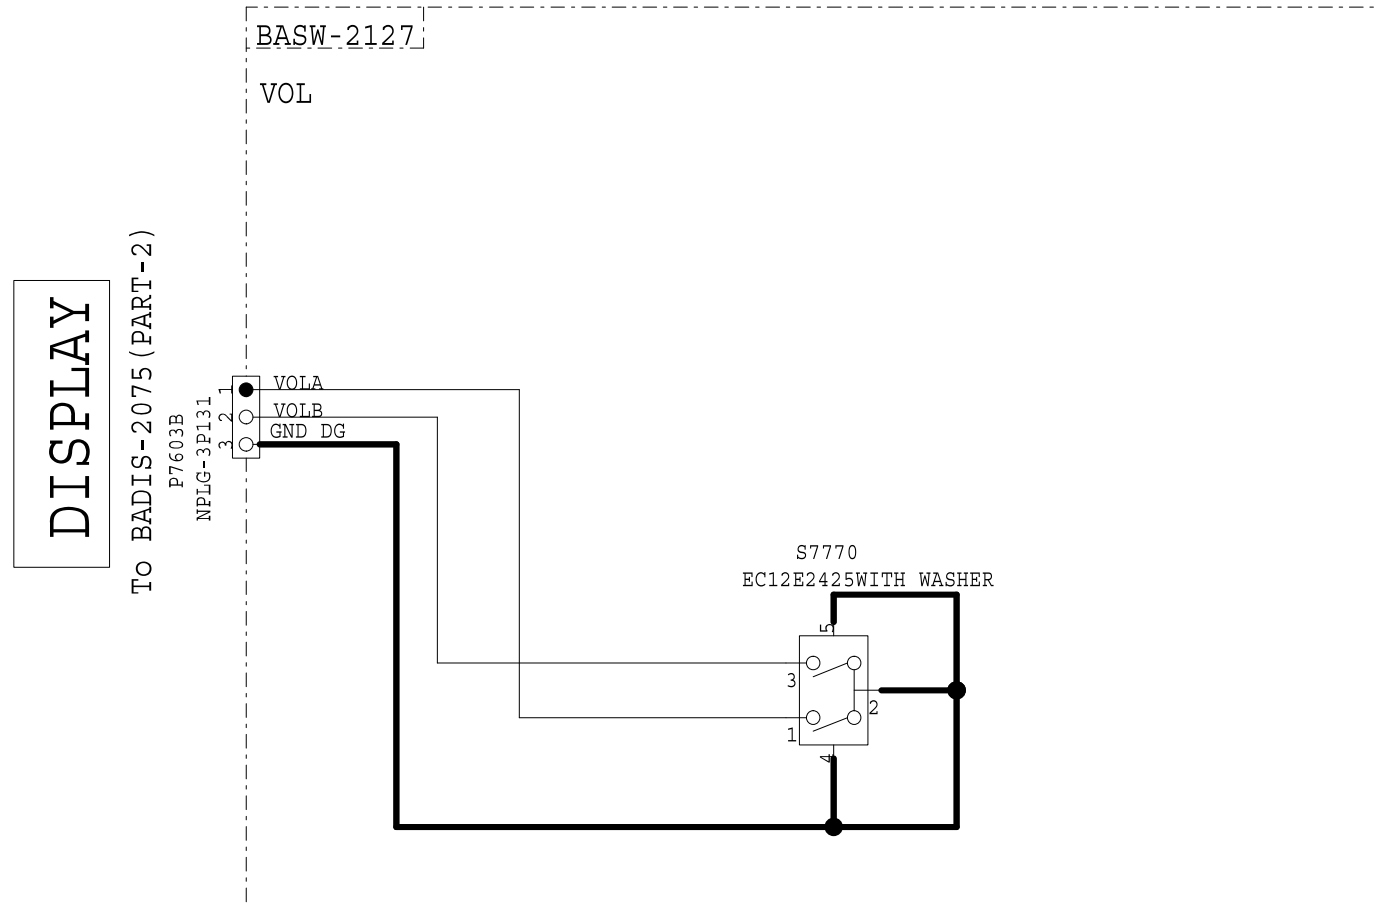

MODEL NO.TX-RZ1100/3100,PR-RZ5100

SCHEMATIC DIAGRAM(PART-2) MIC SECTION

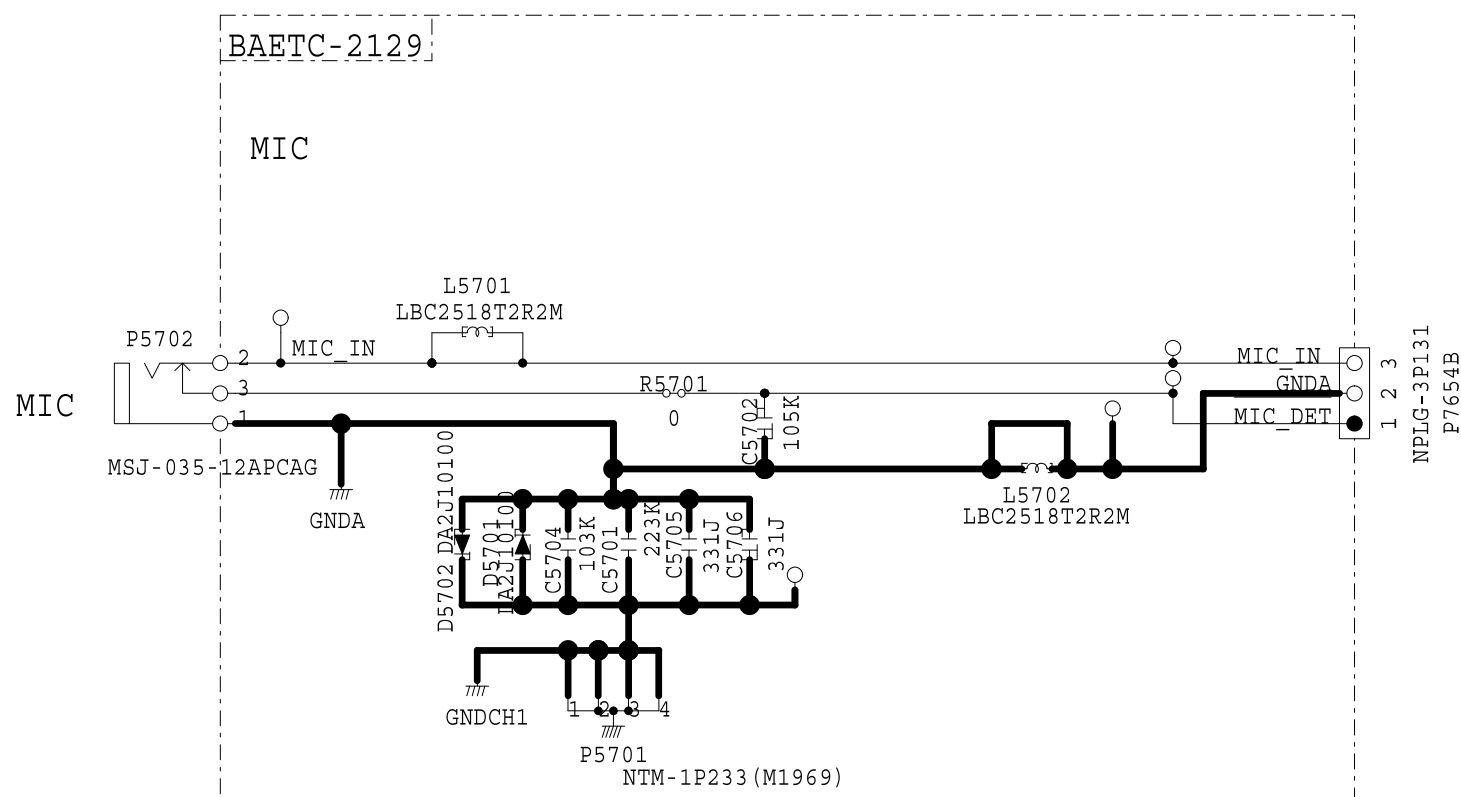


To BADIS-2075 (PART-2)

DISPLAY

MODEL NO.TX-RZ1100/3100,PR-RZ5100

SCHEMATIC DIAGRAM(PART-2) HP SECTION

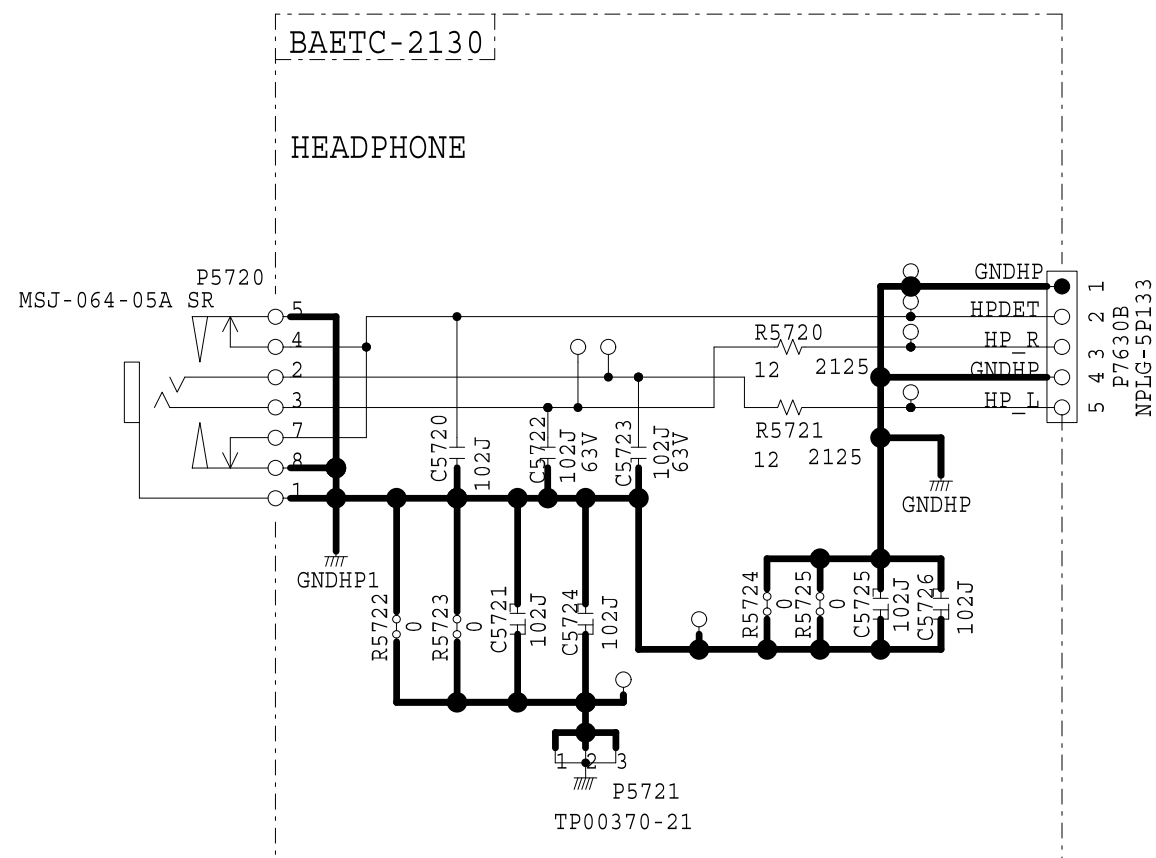


TO BASW-2128 (PART-2)

TO TACT


MODEL No. TX-RZ1100/3100, PR-RZ5100

SCHEMATIC DIAGRAM(PART-2) PRIMARY SECTION

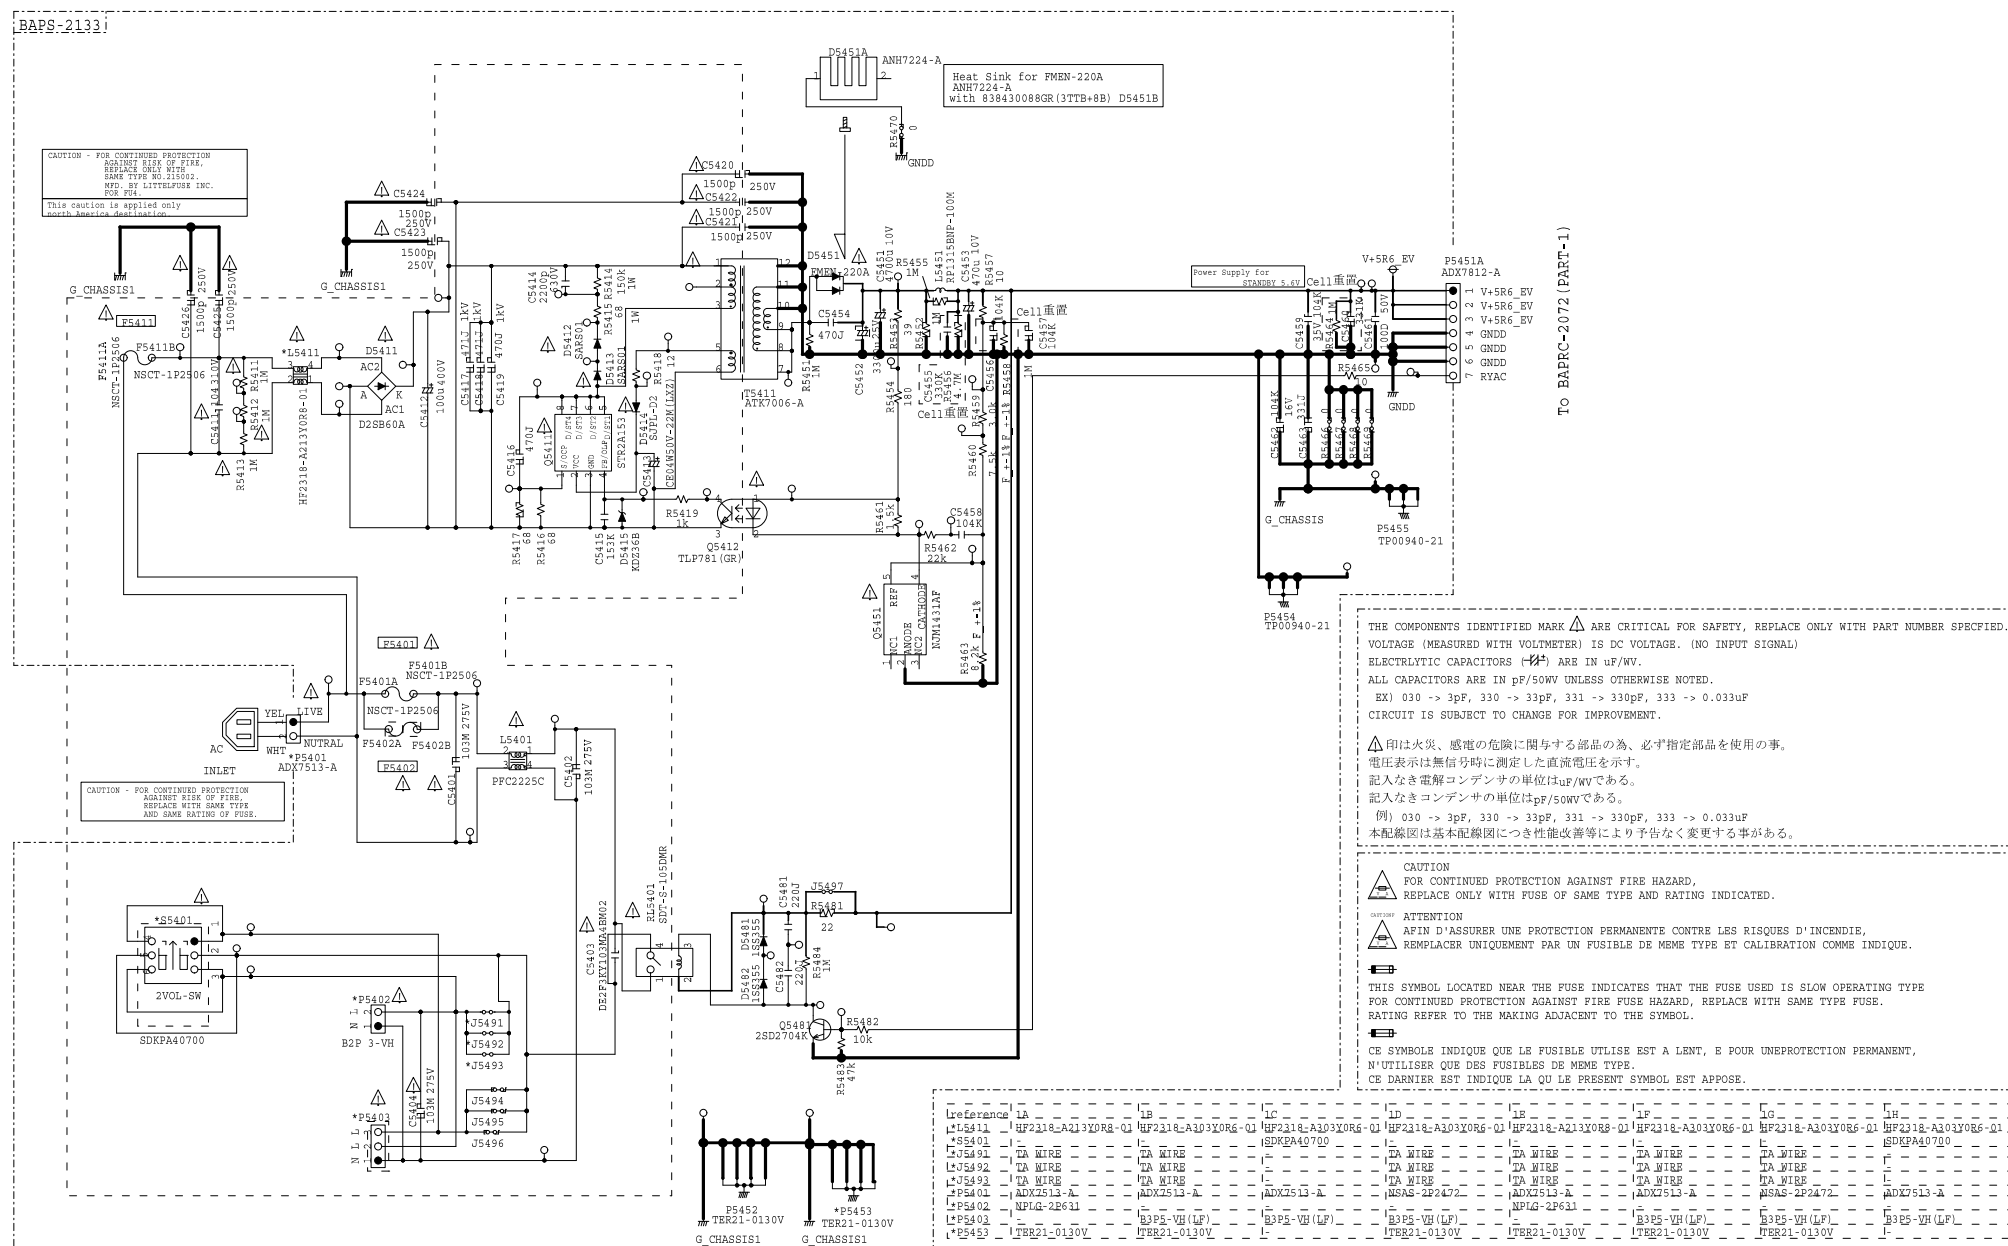

MODEL NO.TX-RZ1100/3100,PR-RZ5100

SCHEMATIC DIAGRAM(PART-2) INPUT SW SECTION

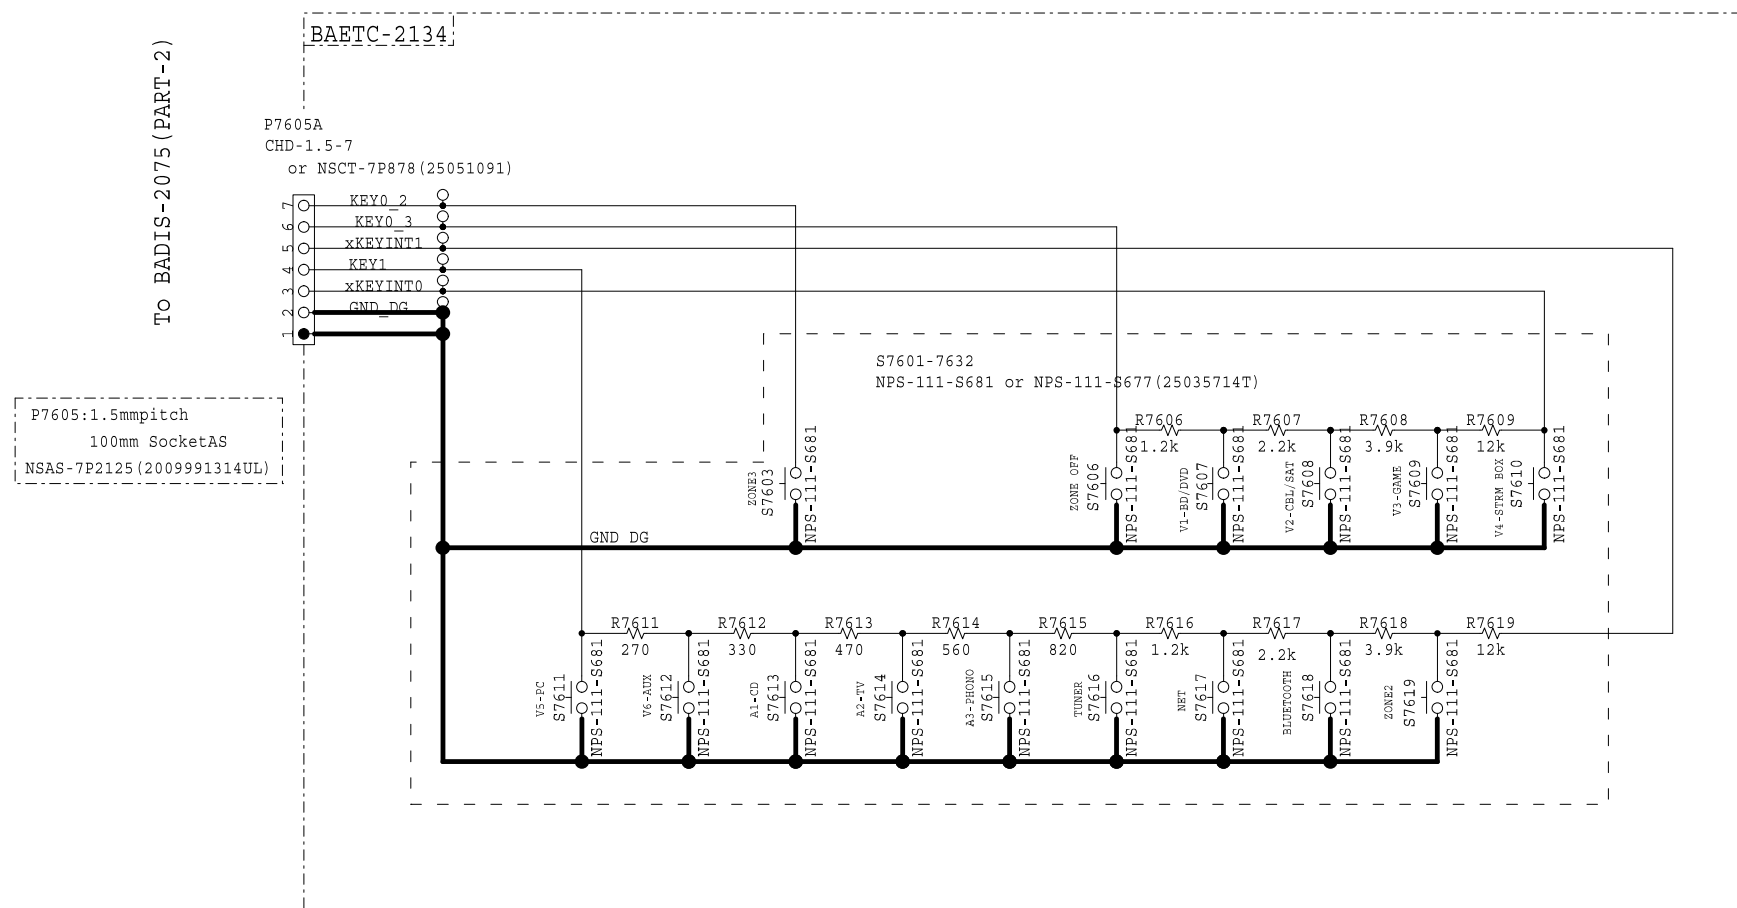

MODEL No. TX-RZ1100/3100, PR-RZ5100

SCHMATIC DIAGRAM (PART-2) BIND_DM_CABLE SECTION

BAETC-2141



P5901


260261

CB-71683 (L=50)

MODEL NO. TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1

SCHEMATIC DIAGRAM (PART-3) DAC_0 SECTION

1 2 3 4 5 6

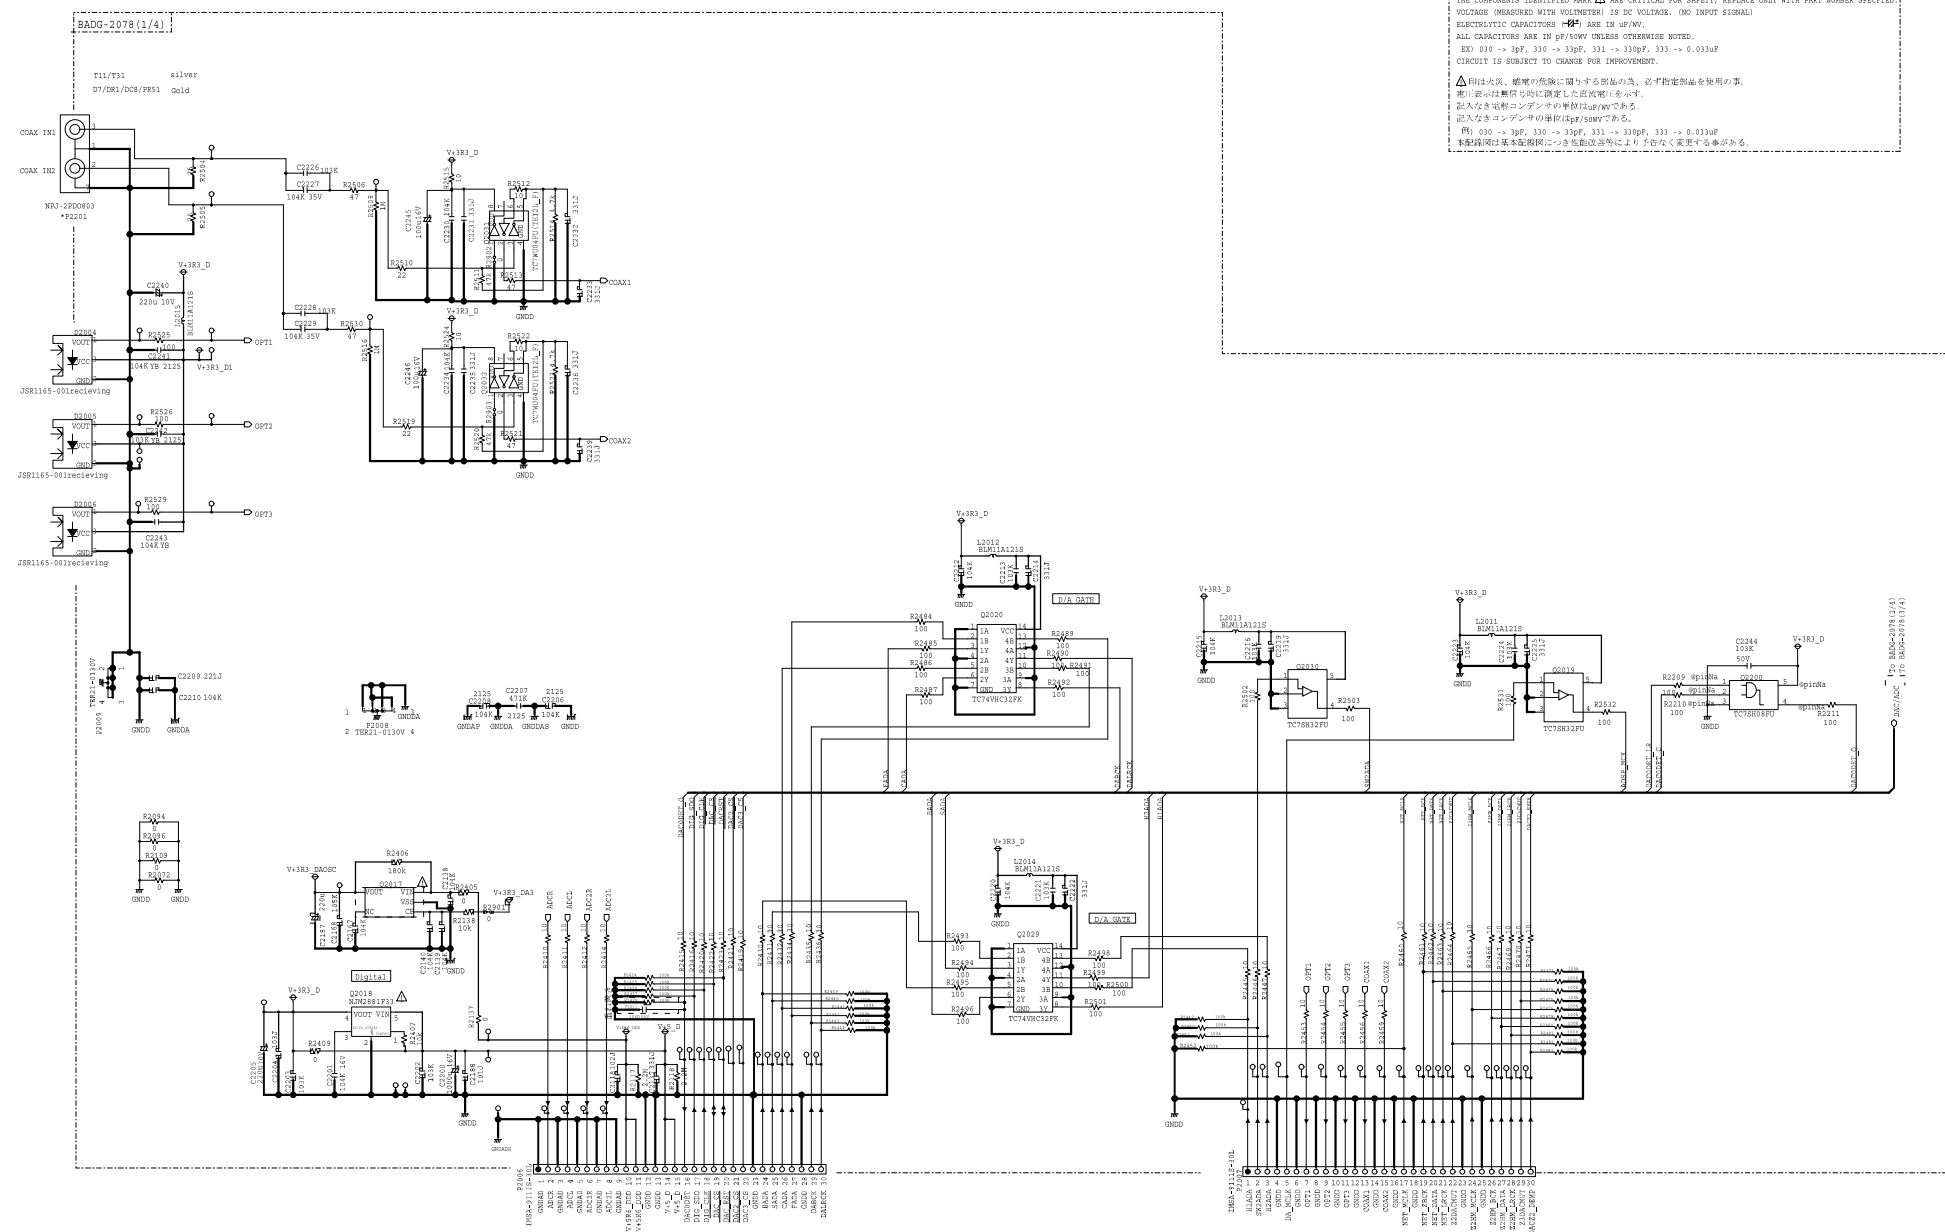

To BAETC-2149 (PART-4)


To BAETC-2149 (PART-4)

Schematic Diagram

MODEL NO.TX-RZ1100/3100,DRX-7/R1,PR-RZ5100,DRC-R1

SCHEMATIC DIAGRAM(PART-3) DAC_O SECTION


BADG-2078 (3/4)

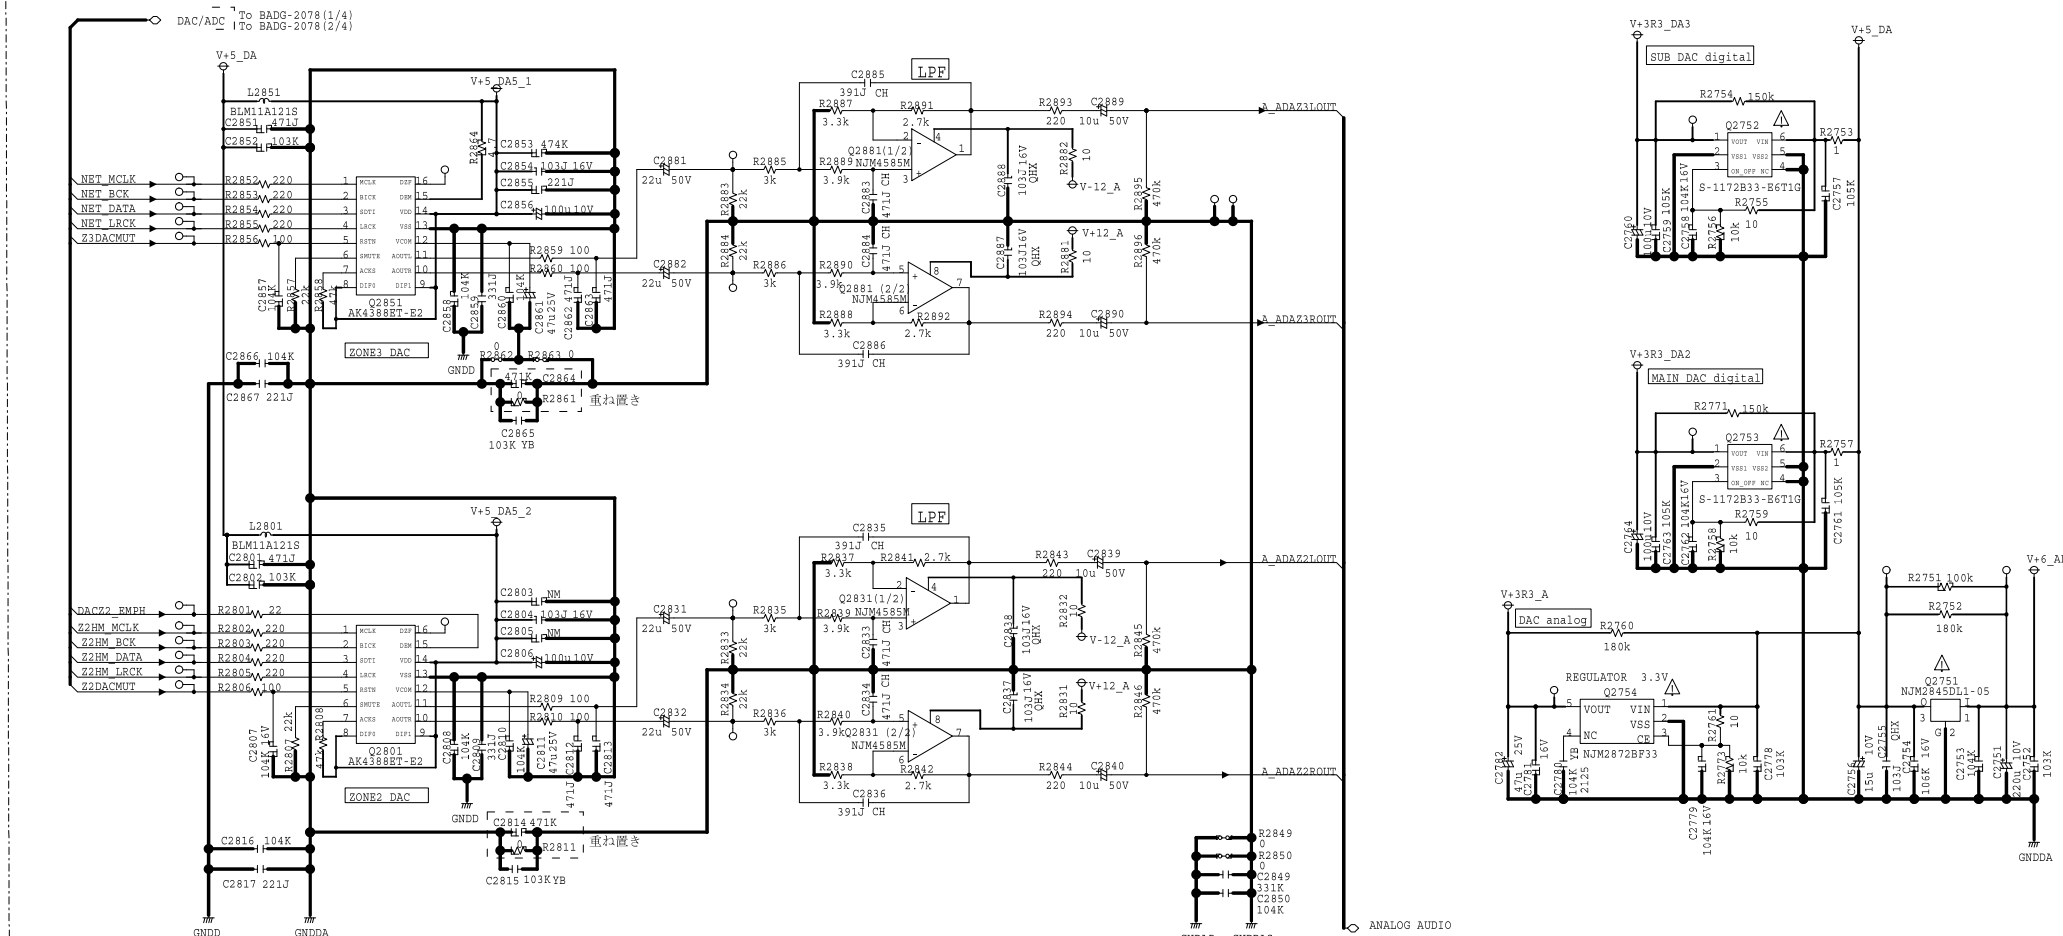

THE COMPONENTS IDENTIFIED MARK Δ ARE CRITICAL FOR SAFETY, REPLACE ONLY WITH PART NUMBER SPECIFIED.
VOLTAGE (MEASURED WITH VOLTMMETER) IS DC VOLTAGE. (NO INPUT SIGNAL)
ELECTROLYTIC CAPACITORS (∇) ARE IN μ F/WV.
ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.
EX) 030 $\rightarrow$ 3pF, 330 $\rightarrow$ 33pF, 331 $\rightarrow$ 330pF, 333 $\rightarrow$ 0.033 μ F
CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

Δ 印は火災、感電の危険に関与する部品の為、必ず指定部品を使用の事。
電圧表示は無信号時に測定した直流電圧を示す。
記入なき電解コンデンサの単位は μ F/WVである。
記入なきコンデンサの単位はpF/50WVである。
例) 030 $\rightarrow$ 3pF, 330 $\rightarrow$ 33pF, 331 $\rightarrow$ 330pF, 333 $\rightarrow$ 0.033 μ F
本配線図は基本配線図につき性能改善等により予告なく変更する事がある。

Schematic Diagram

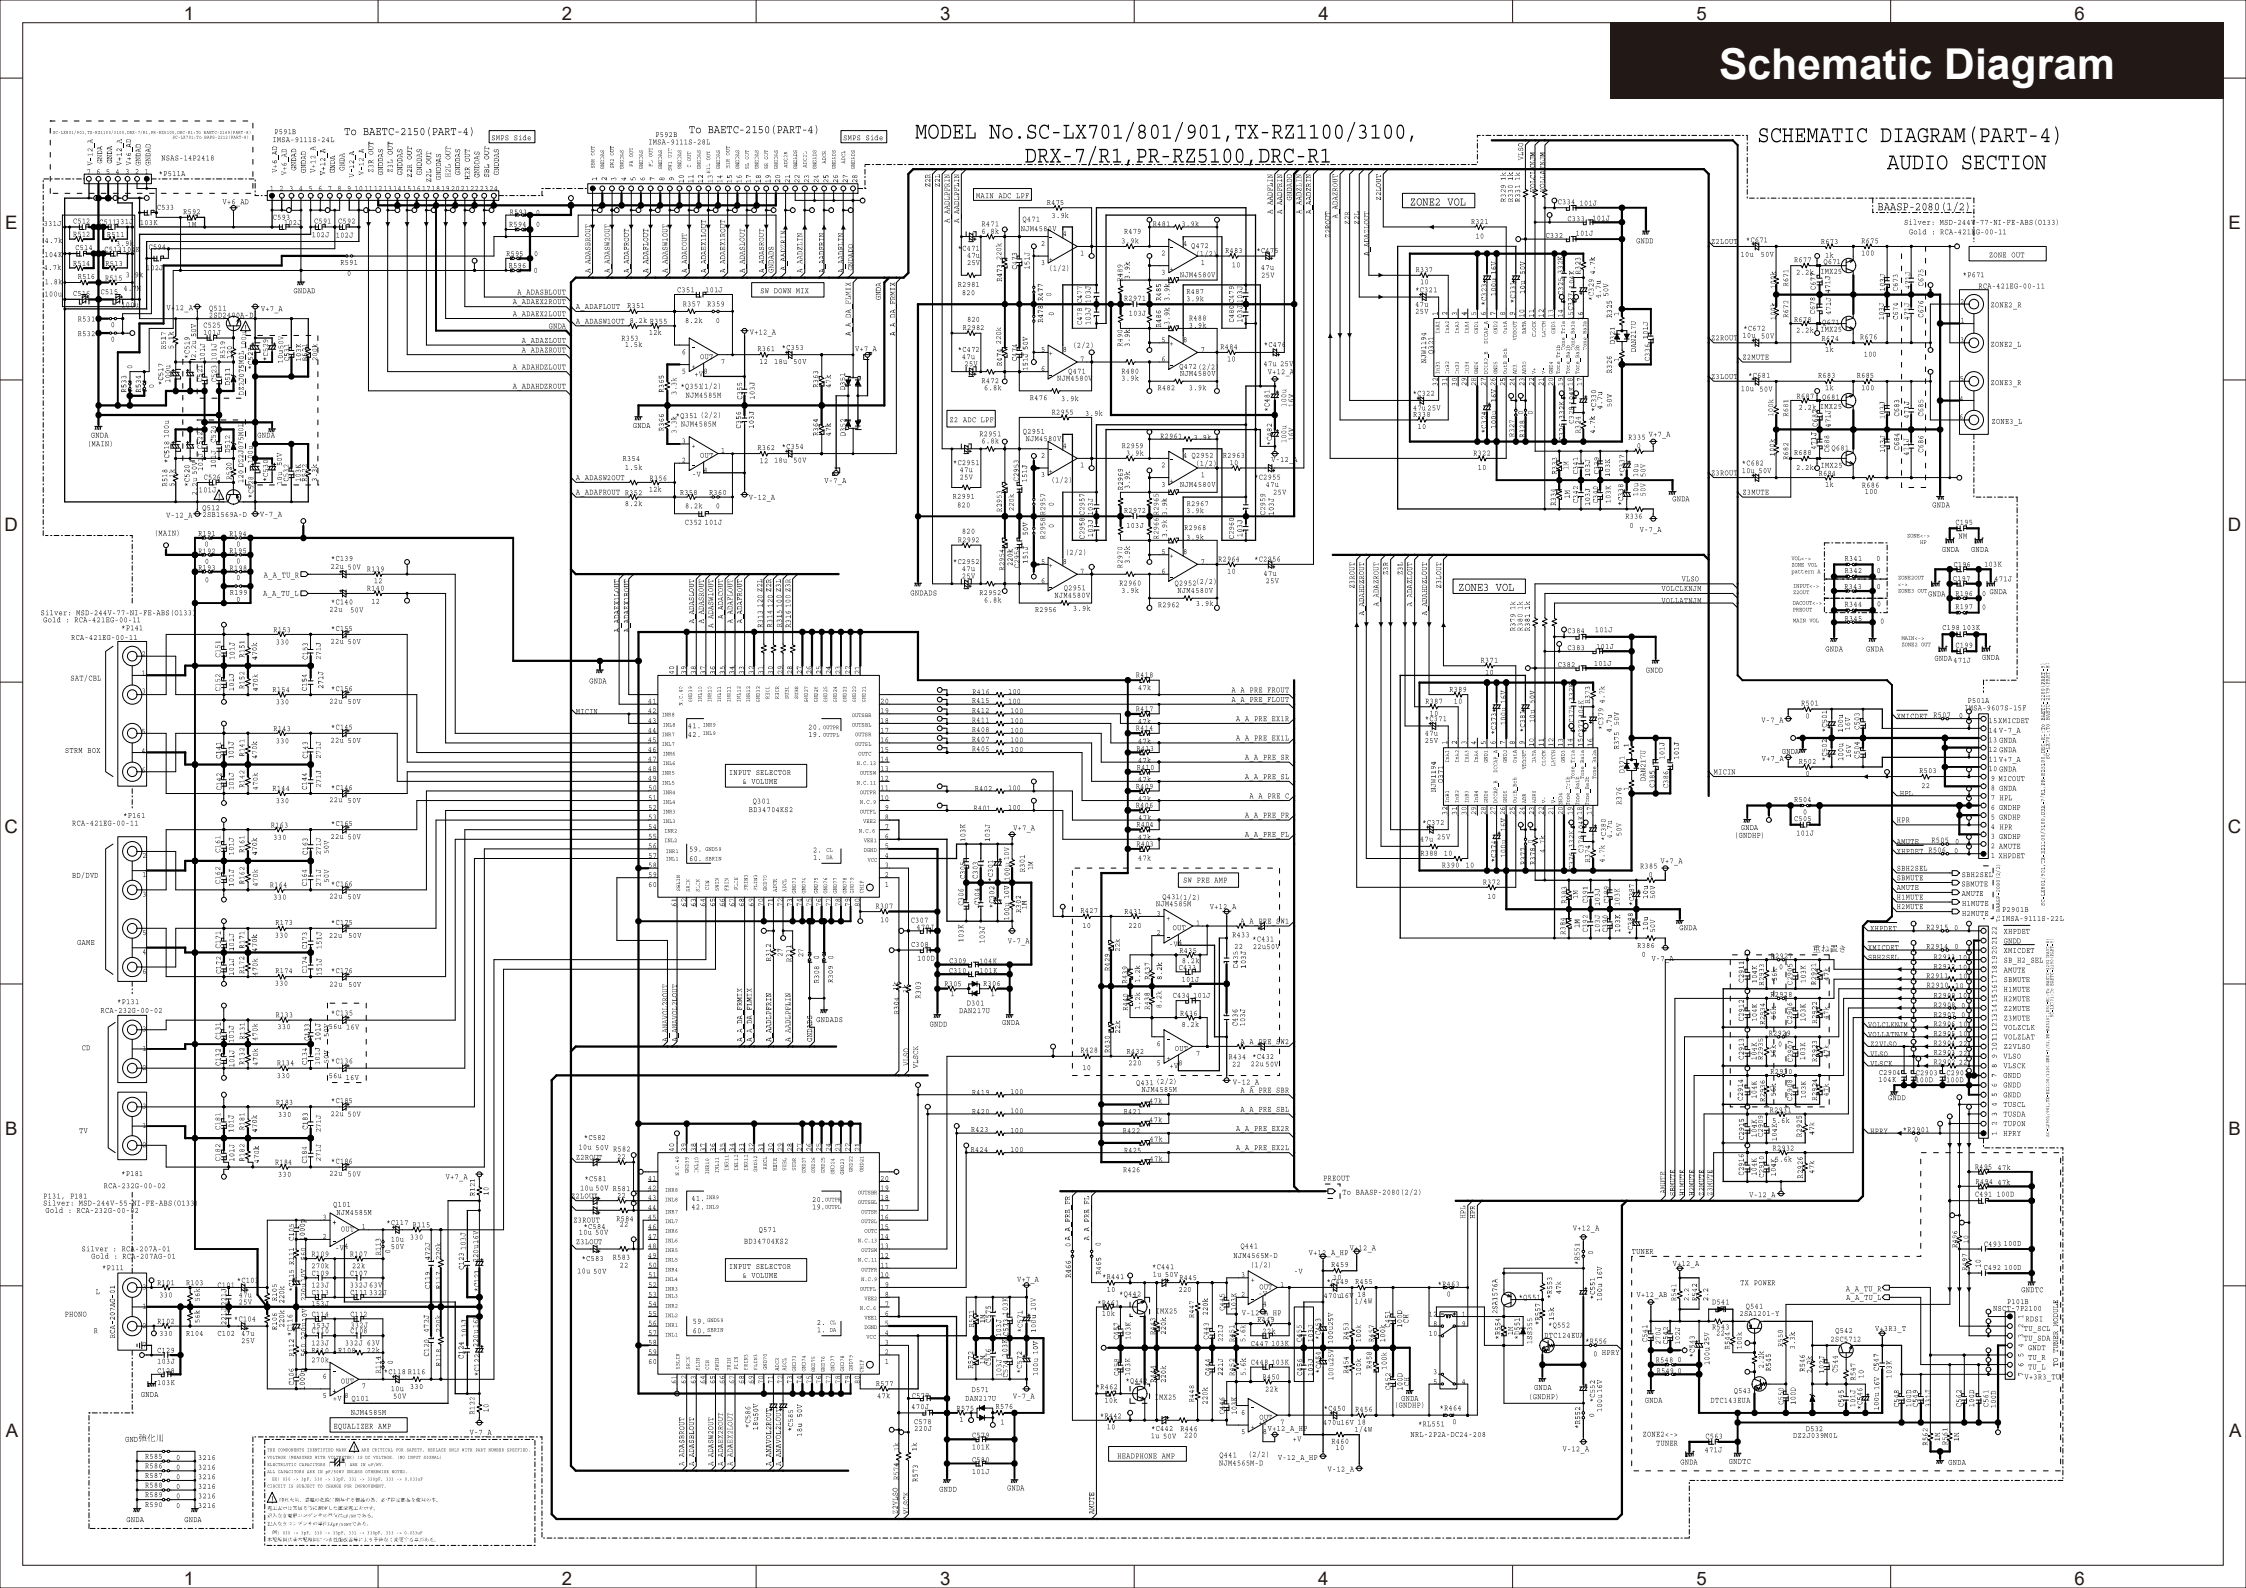


Schematic Diagram

MODEL No. SC-LX701/801/901, TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1

```
PRE BUFFER
```

SCHEMATIC DIAGRAM(PART-4) AUDIO SECTION

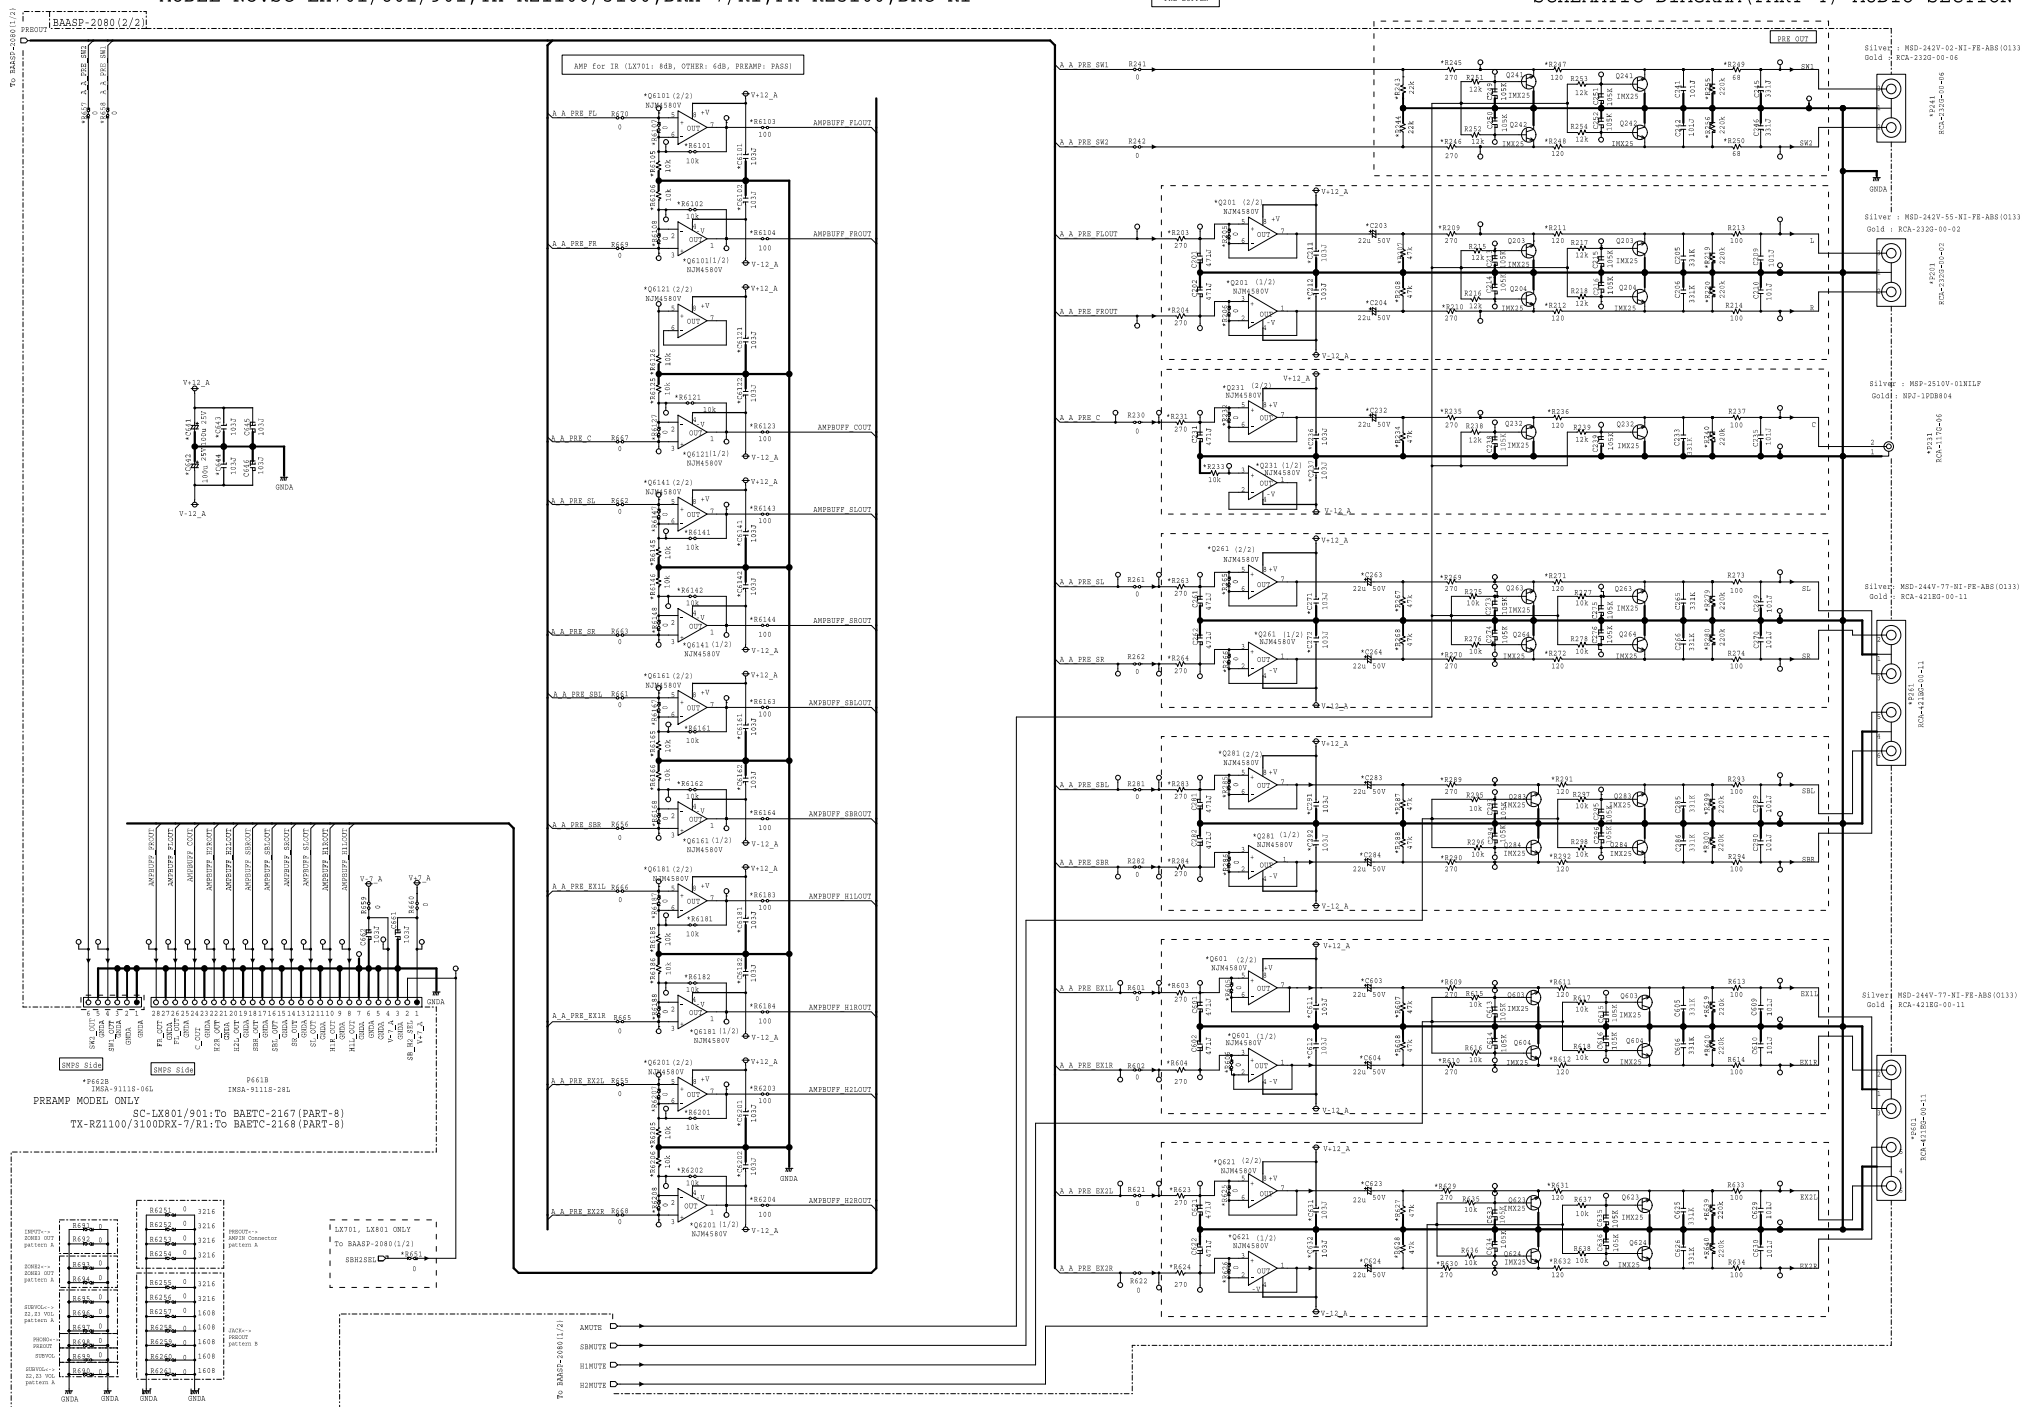

```


*P662B
IMSA-9111S-06L
PREAMP MODEL ONLY
SC-LX801/901:To BAETC-2167(PART-8)
TX-RZ1100/3100DRX-7/R1:To BAETC-2168(PART-8)

```

Figure 1 is a schematic representation of the experimental design. It shows four groups of patients (A, B, C, D) each receiving a different treatment (1, 2, 3, 4) over a 12-week period. The treatments are represented by colored bars (red, green, blue, yellow) and the patients are represented by numbered boxes. The groups are labeled 'patients A', 'patients B', 'patients C', and 'patients D'.

Schematic Diagram

MODEL No.SC-LX701/801/901,TX-RZ1100/3100,DRX-7/R1,PR-RZ5100,DRC-R1 SCHEMATIC DIAGRAM(PART-4) COMPOSITE SECTION

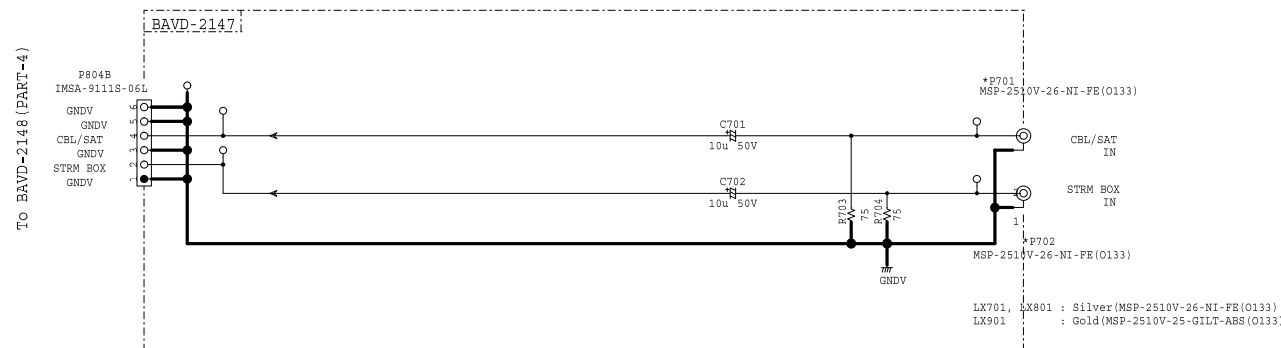

```

Reference 1A ----- 1B ----- 1C ----- 1D ----- 1E ----- 1F -----
*P701_ MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-25-GILT-ABS(0133)
*P702_ MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-25-GILT-ABS(0133)

Reference 1F ----- 1G ----- 1H ----- 1I ----- 1J ----- 1K -----
*P701_ MSP-2510V-25-GILT-ABS(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133)
*P702_ MSP-2510V-25-GILT-ABS(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133)

Reference 1L ----- 1M ----- 1N ----- 1O ----- 1P ----- 1Q -----
*P701_ MSP-2510V-25-GILT-ABS(0133) MSP-2510V-25-GILT-ABS(0133) MSP-2510V-25-GILT-ABS(0133) MSP-2510V-25-GILT-ABS(0133) MSP-2510V-25-GILT-ABS(0133)
*P702_ MSP-2510V-25-GILT-ABS(0133) MSP-2510V-25-GILT-ABS(0133) MSP-2510V-25-GILT-ABS(0133) MSP-2510V-25-GILT-ABS(0133) MSP-2510V-25-GILT-ABS(0133)

```


NOTE

- RESISTORS
Units: k Ω , M Ω or Ω unless
otherwise noted.
Rated Power: 1/2W unless
otherwise noted.
Tolerances: 0.1% unless
otherwise noted.
- CAPACITORS
Units: pF or μ F unless
otherwise noted.
Rated Voltage: 50V unless
otherwise noted.
Dielectric: C0402
- NO MARKED : EXCEPT
1. 000 : No Mount

Schematic Diagram


MODEL No.SC-LX701/801/901,TX-RZ1100/3100,DRX-7/R1,PR-RZ5100,DRC-R1

SCHEMATIC DIAGRAM(PART-4) COMPONENT SECTION

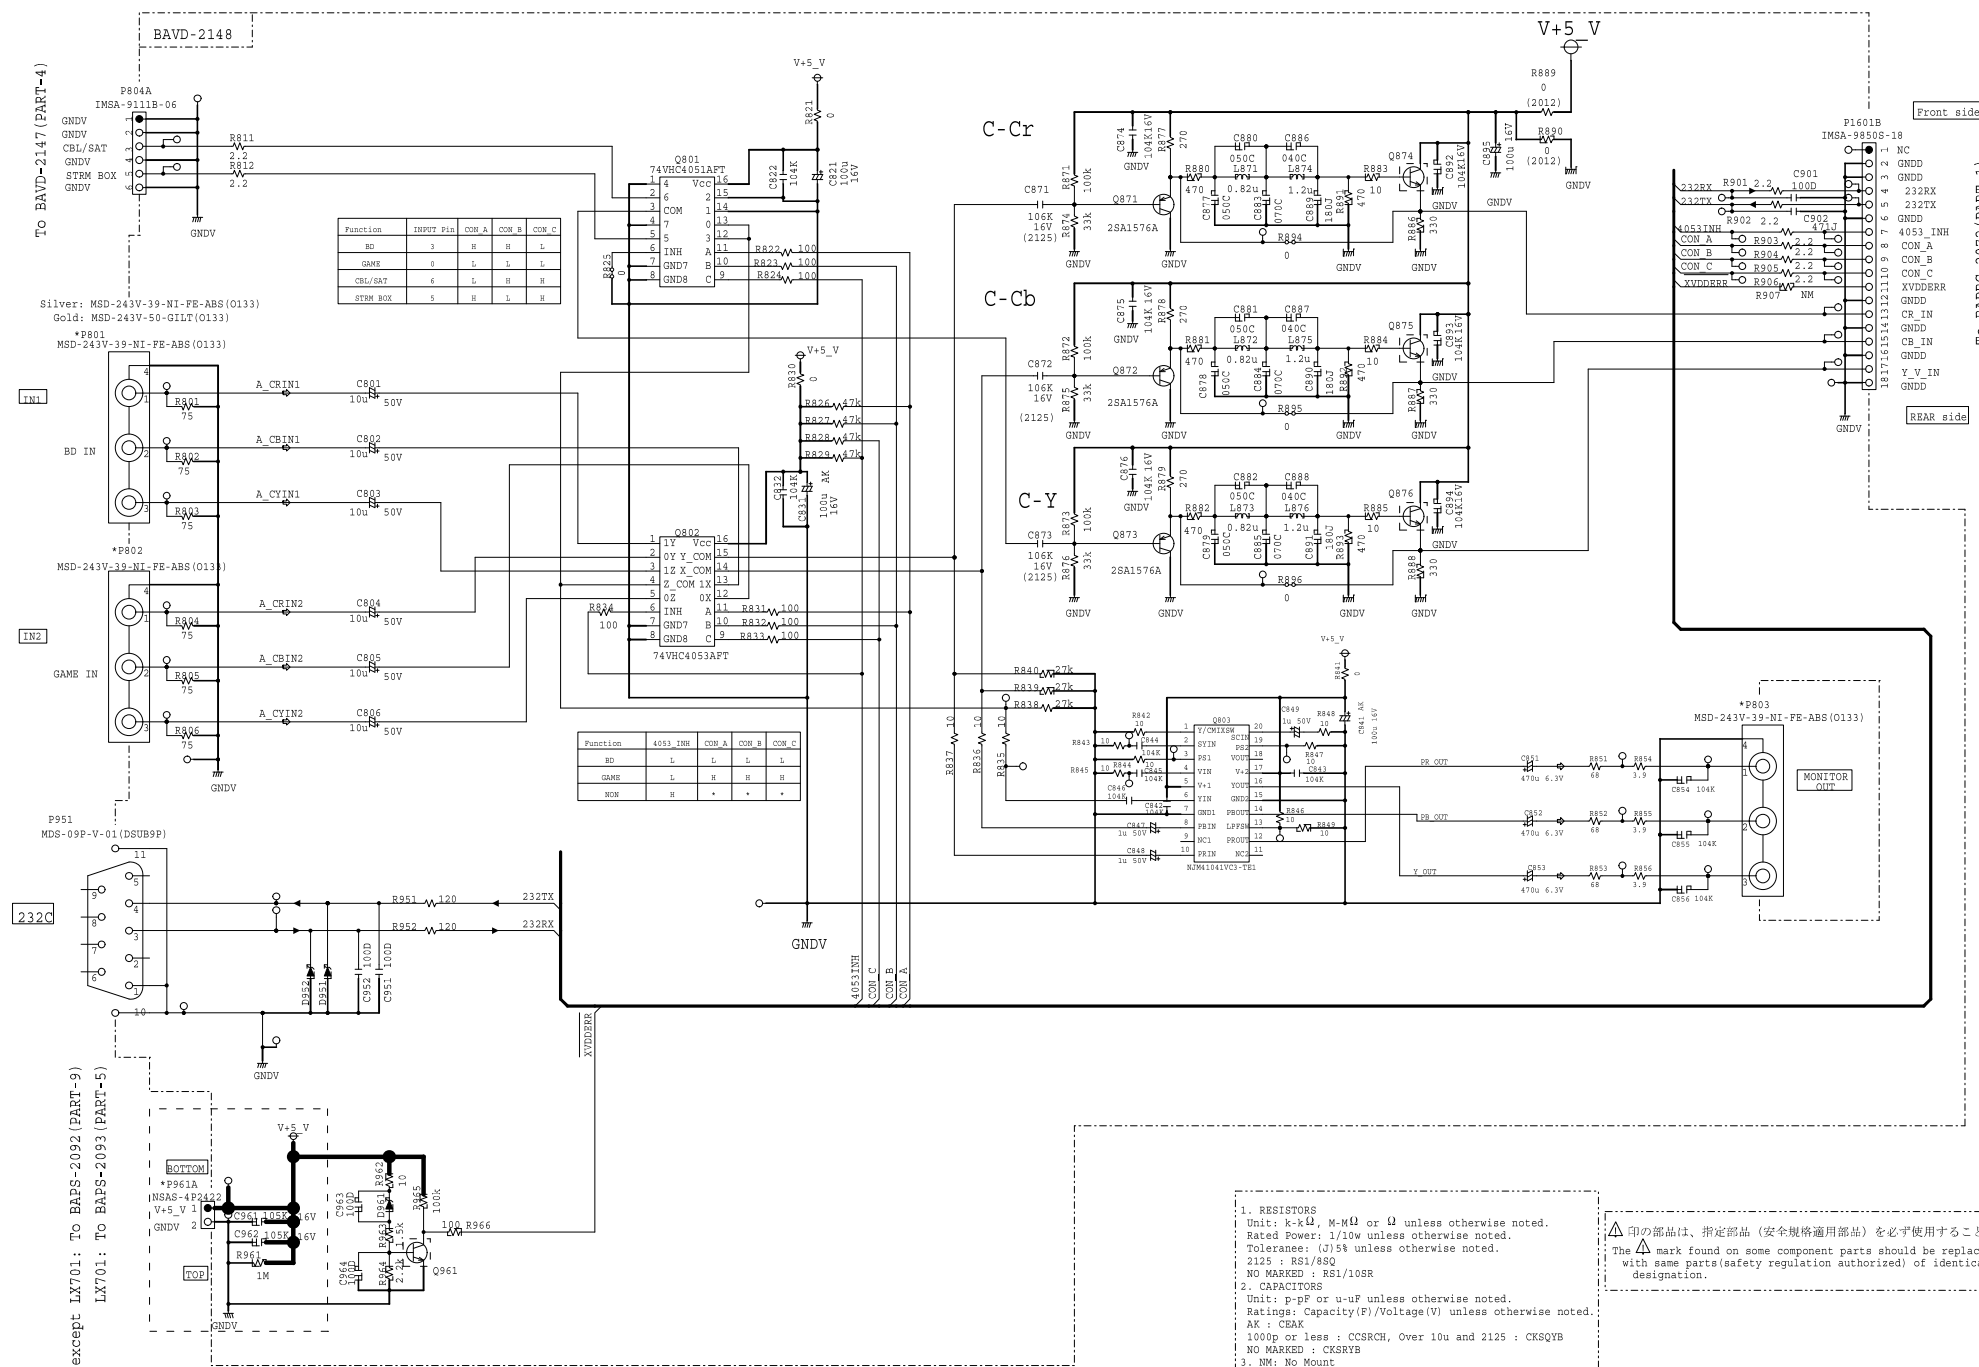

Schematic Diagram

MODEL No.SC-LX701/801/901,TX-RZ1100/3100,DRX-7/R1,PR-RZ5100,DCR-R1 SCHEMATIC DIAGRAM(PART-4) D-DAC BRIDGE SECTION

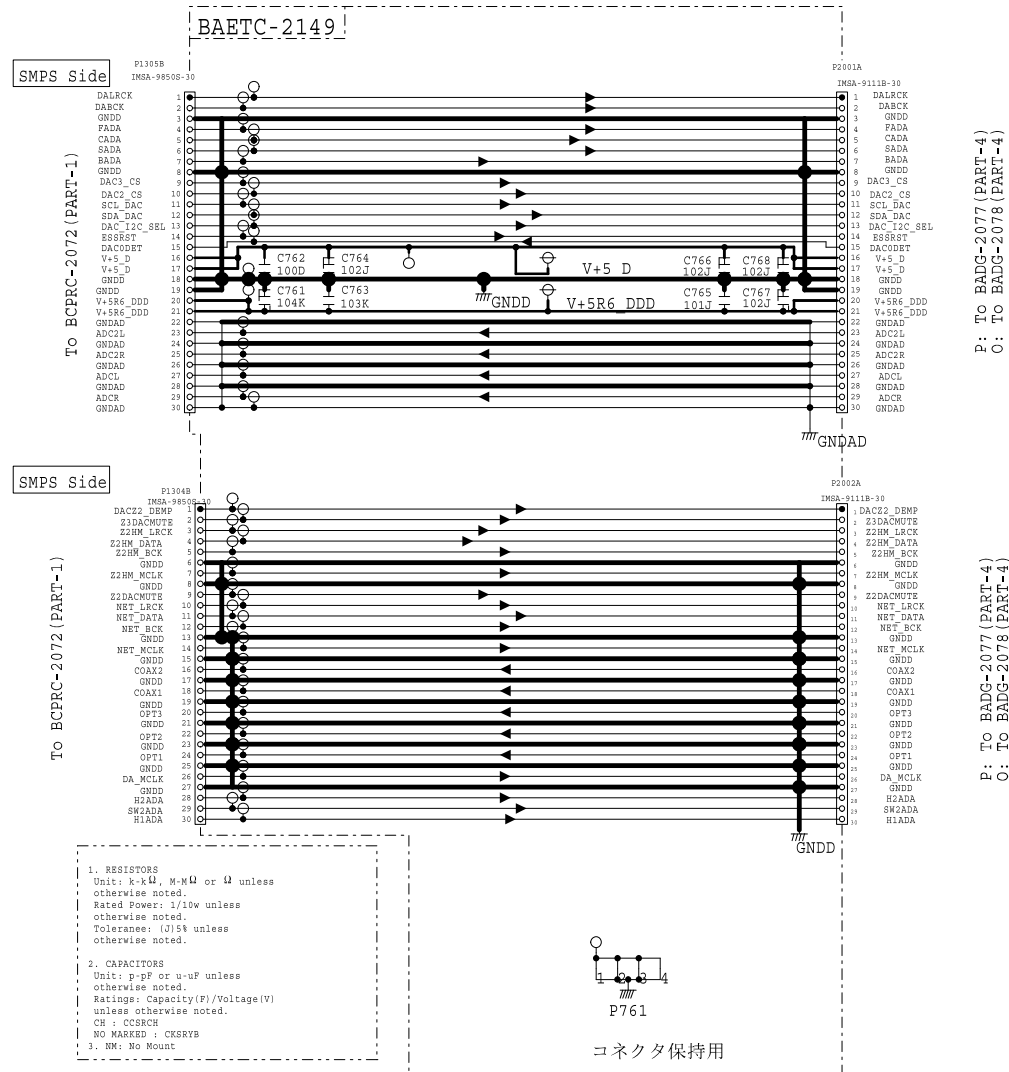

5	6
Schematic Diagram	

E

E



D

D

C

B

A

B


A

Schematic Diagram

MODEL No.TZ-RZ1100/3100,DRX-7/R1,PR-RZ5100,DRC-R1

SCHEMATIC DIAGRAM(PART-6) A-DAC BRIDGE_0 SECTION

To BADG-2078 (PART-3)

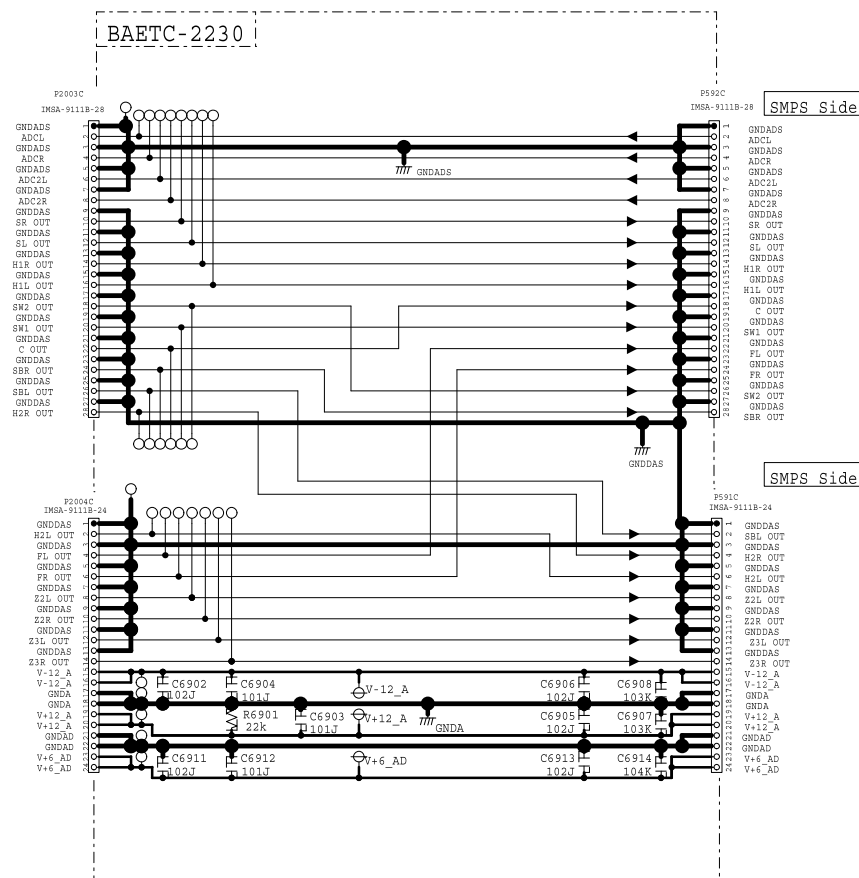

To BAASP-2080 (PART-4)


E



MODEL No.SC-LX801/901,TZ-RZ1100/3100,PR-RZ5100
SCHEMATIC DIAGRAM(PART-8) PRIMARY SHIELD SECTION

reference	1A	1B	1C	1D	1E	1F	1G	1H
*P5751	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V
*P5752	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V
*P5753	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V

reference	1J	1K	1L	1M	1N	1P	1Q	1R	1T	1W	1X	1Z
*P5751					TER21-0130V	TER21-0130V			TER21-0130V	TER21-0130V		
*P5752					TER21-0130V	TER21-0130V			TER21-0130V	TER21-0130V		
*P5753					TER21-0130V	TER21-0130V			TER21-0130V	TER21-0130V		TER21-0130V

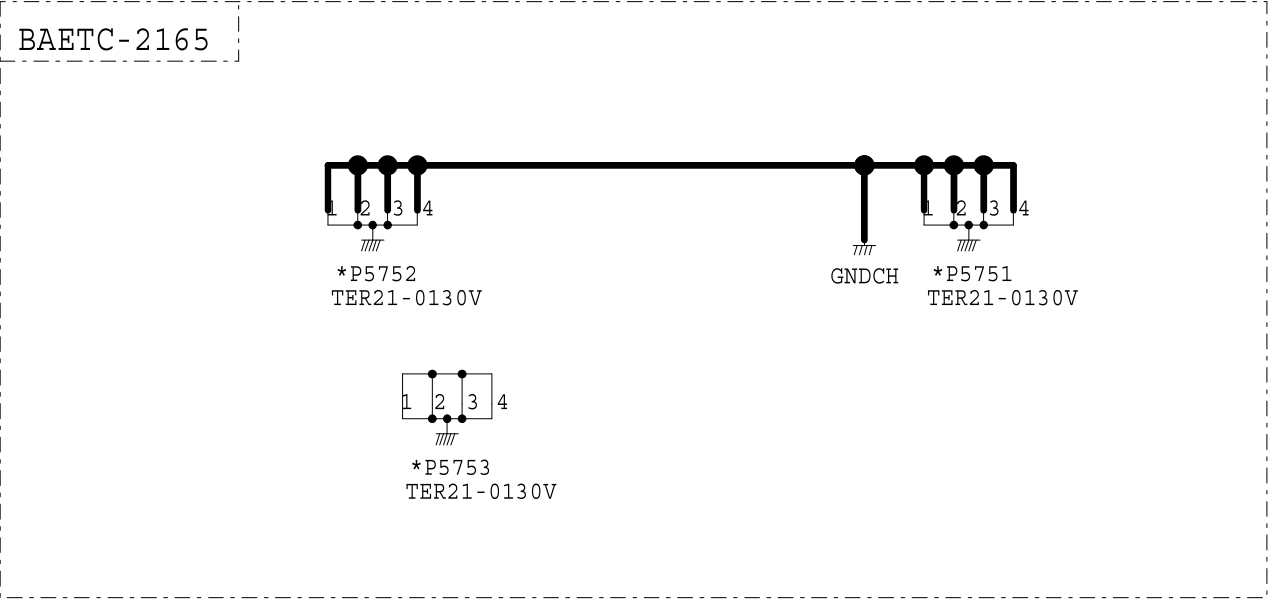


1A	SC-LX801 (B)MDC
1B	SC-LX801 (B)MGP
1T	SC-LX801 (B)MJJ
1C	SC-LX901 (B)MDC
1D	SC-LX901 (B)MGP
1D	SC-LX901 (S)MGP
1D	SC-LX901 (B)MHB
1W	SC-LX901 (B)MJJ
1E	TX-RZ1100 (B)MDC
1F	TX-RZ1100 (B)MGP
1F	TX-RZ1100 (S)MGP
1F	TX-RZ1100 (B)MHB
1F	TX-RZ1100 (B)MGR
1G	TX-RZ3100 (B)MDC
1H	TX-RZ3100 (B)MGP
1H	TX-RZ3100 (S)MGP
1H	TX-RZ3100 (B)MHB
1H	TX-RZ3100 (B)MGR
1N	PR-RZ5100 (B)MDC
1P	PR-RZ5100 (B)MGP
1P	PR-RZ5100 (B)MHB
1P	PR-RZ5100 (B)MGR

MODEL No. SC-LX801/901, TZ-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1

SCHEMATIC DIAGRAM(PART-8) A REG BRIDGE SECTION

TO BAPS-2092 (PART-9)

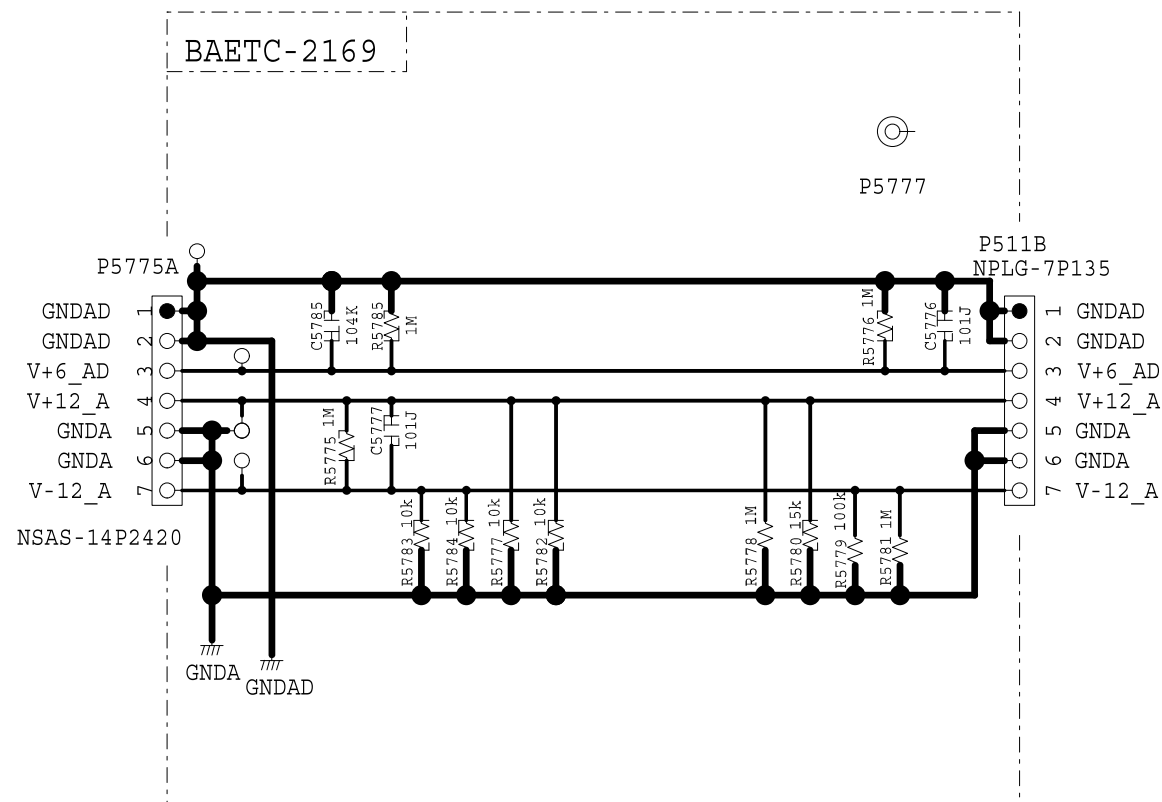

TO BAASP-2080 (PART-4)

1A	SC-LX801 (B) MDC
1B	SC-LX801 (B) MGP
1T	SC-LX801 (B) MJJ
1C	SC-LX901 (B) MDC
1D	SC-LX901 (B) MGP
1D	SC-LX901 (S) MGP
1D	SC-LX901 (B) MHB
1W	SC-LX901 (B) MJJ
1E	TX-RZ1100 (B) MDC
1F	TX-RZ1100 (B) MGP
1F	TX-RZ1100 (S) MGP
1F	TX-RZ1100 (B) MHB
1F	TX-RZ1100 (B) MGR
1G	TX-RZ3100 (B) MDC
1H	TX-RZ3100 (B) MGP
1H	TX-RZ3100 (S) MGP
1H	TX-RZ3100 (B) MHB
1H	TX-RZ3100 (B) MGR
1J	DRX-7 (B) MDD
1K	DRX-7 (B) MGA
1L	DRX-8 (B) MDD
1M	DRX-8 (B) MGR
1M	DRX-8 (B) MGA
1X	DRX-8 (B) MJJ
1N	PR-RZ5100 (B) MDC
1P	PR-RZ5100 (B) MGP
1P	PR-RZ5100 (B) MHB
1P	PR-RZ5100 (B) MGR
1Q	DRC-8 (B) MDD
1R	DRC-8 (B) MGR
1R	DRC-8 (B) MGA
1Z	DRC-8 (B) MJJ

Schematic Diagram

MODEL No.SC-LX801/901,TZ-RZ1100/3100,DRX-7/R1,PR-RZ5100,DRC-R1

SCHEMATIC DIAGRAM(PART-8) IR AMP FFC GUARD SECTION

BAETC-2170

PR-RZ5100,DRC-8=NM



*P6071

260261


CB-71683 (L=50)

1A SC-LX801(B)MDC
1B SC-LX801(B)MGP
1T SC-LX801(B)MJJ
1C SC-LX901(B)MDC
1D SC-LX901(B)MGP
1D SC-LX901(S)MGP
1D SC-LX901(B)MHB
1W SC-LX901(B)MJJ
1E TX-RZ1100(B)MDC
1F TX-RZ1100(B)MGP
1F TX-RZ1100(S)MGP
1F TX-RZ1100(B)MHB
1F TX-RZ1100(B)MGR
1G TX-RZ3100(B)MDC
1H TX-RZ3100(B)MGP
1H TX-RZ3100(S)MGP
1H TX-RZ3100(B)MHB
1H TX-RZ3100(B)MGR
1J DRX-7(B)MDD
1K DRX-7(B)MGA
1L DRX-8(B)MDD
1M DRX-8(B)MGR
1M DRX-8(B)MGA
1X DRX-8(B)MJJ
1N PR-RZ5100(B)MDC
1P PR-RZ5100(B)MGP
1P PR-RZ5100(B)MHB
1P PR-RZ5100(B)MGR
1Q DRC-8(B)MDD
1R DRC-8(B)MGR
1R DRC-8(B)MGA
1Z DRC-8(B)MJJ

reference	1A	1B	1C	1D	1E	1F	1G	1H
*P6071	CB-71683 (L=50)	CB-71683 (L=50)	CB-71683 (L=50)	CB-71683 (L=50)	CB-71683 (L=50)	CB-71683 (L=50)	CB-71683 (L=50)	CB-71683 (L=50)
reference	1J	1K	1L	1M	1N	1P	1Q	1R
*P6071	CB-71683 (L=50)	CB-71683 (L=50)	CB-71683 (L=50)	CB-71683 (L=50)	-	-	-	CB-71683 (L=50)

MODEL No.SC-LX801/901,TX-RZ-1100/3100,DRX-7/R1,PR-RZ5100,DRC-R1
SCHEMATIC DIAGRAM(PART-8) D-AUDIO BRIDGE SECTION

TO BAPRC-2072 (PART-1)

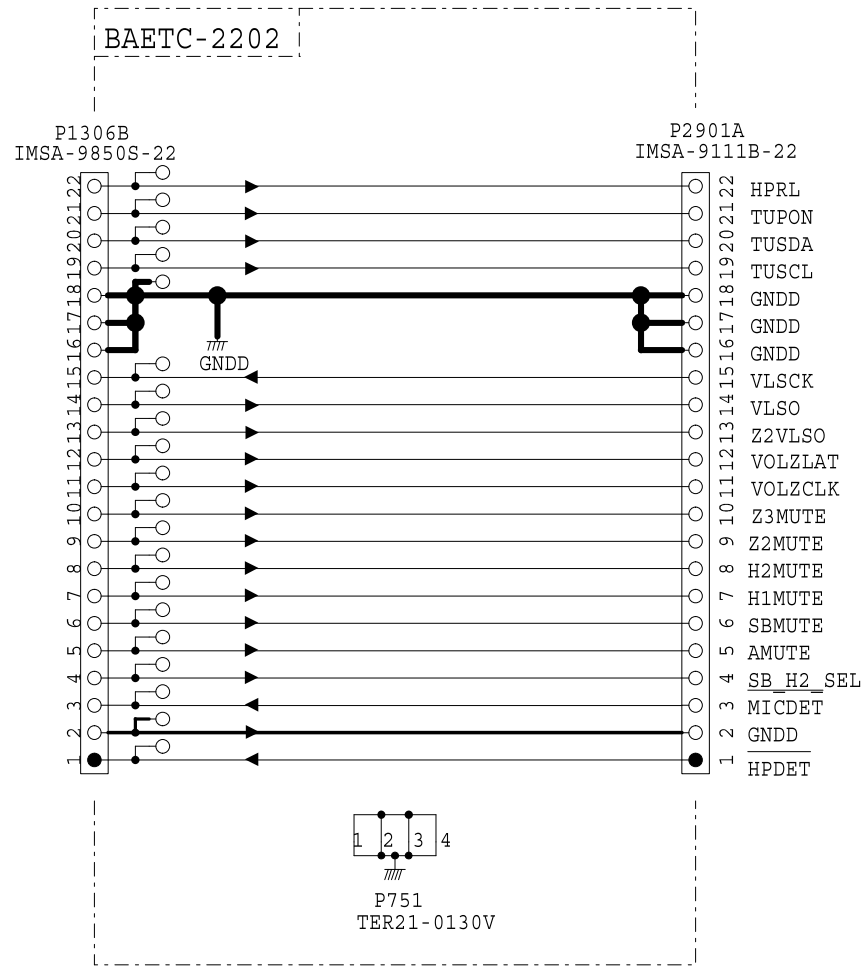

TO BAASP-2080 (PART-4)


1A SC-LX801(B)MDC
1B SC-LX801(B)MGP
1T SC-LX801(B)MJJ
1C SC-LX901(B)MDC
1D SC-LX901(B)MGP
1D SC-LX901(S)MGP
1D SC-LX901(B)MHB
1W SC-LX901(B)MJJ

Schematic Diagram

MODEL No.SC-LX801/901,TZ-RZ1100/3100,DRX-7/R1,PR-RZ5100,DRC-R1

SCHEMATIC DIAGRAM(PART-8) TUNER SECTION

reference	1A	1B	1C	1D	1E	1F	1G	1H	1I
*Q1	RZ5B801-0001E2	RZ5B801-0002E2	RZ5B801-0001E2	RZ5B801-0002E2	RZ5B801-0001E2	RZ5B801-0001E2	RZ5B801-0001E2	RZ5B801-0002E2	RZ5B801-0001E2
*P1	NTM-1PDSC437	NTM-1PDSC438	NTM-1PDSC437	NTM-1PDSC438	NTM-1PDSC437	NTM-1PDSC438	NTM-1PDSC437	NTM-1PDSC438	NTM-1PDSC437
reference	1K	1L	1M	1N	1P	1Q	1R	1T	1W
*Q1	RZ5B801-0002E2	RZ5B801-0001E2	RZ5B801-0002E2	RZ5B801-0001E2	RZ5B801-0002E2	RZ5B801-0001E2	RZ5B801-0002E2	RZ5B801-0001E2	RZ5B801-0001E2
*P1	NTM-1PDSC438	NTM-1PDSC437	NTM-1PDSC438	NTM-1PDSC437	NTM-1PDSC438	NTM-1PDSC437	NTM-1PDSC438	NTM-1PDSC437	NTM-1PDSC437
reference	1X	1Z							
*Q1	RZ5B801-0001E2	RZ5B801-0001E2							
*P1	NTM-1PDSC437	NTM-1PDSC437							

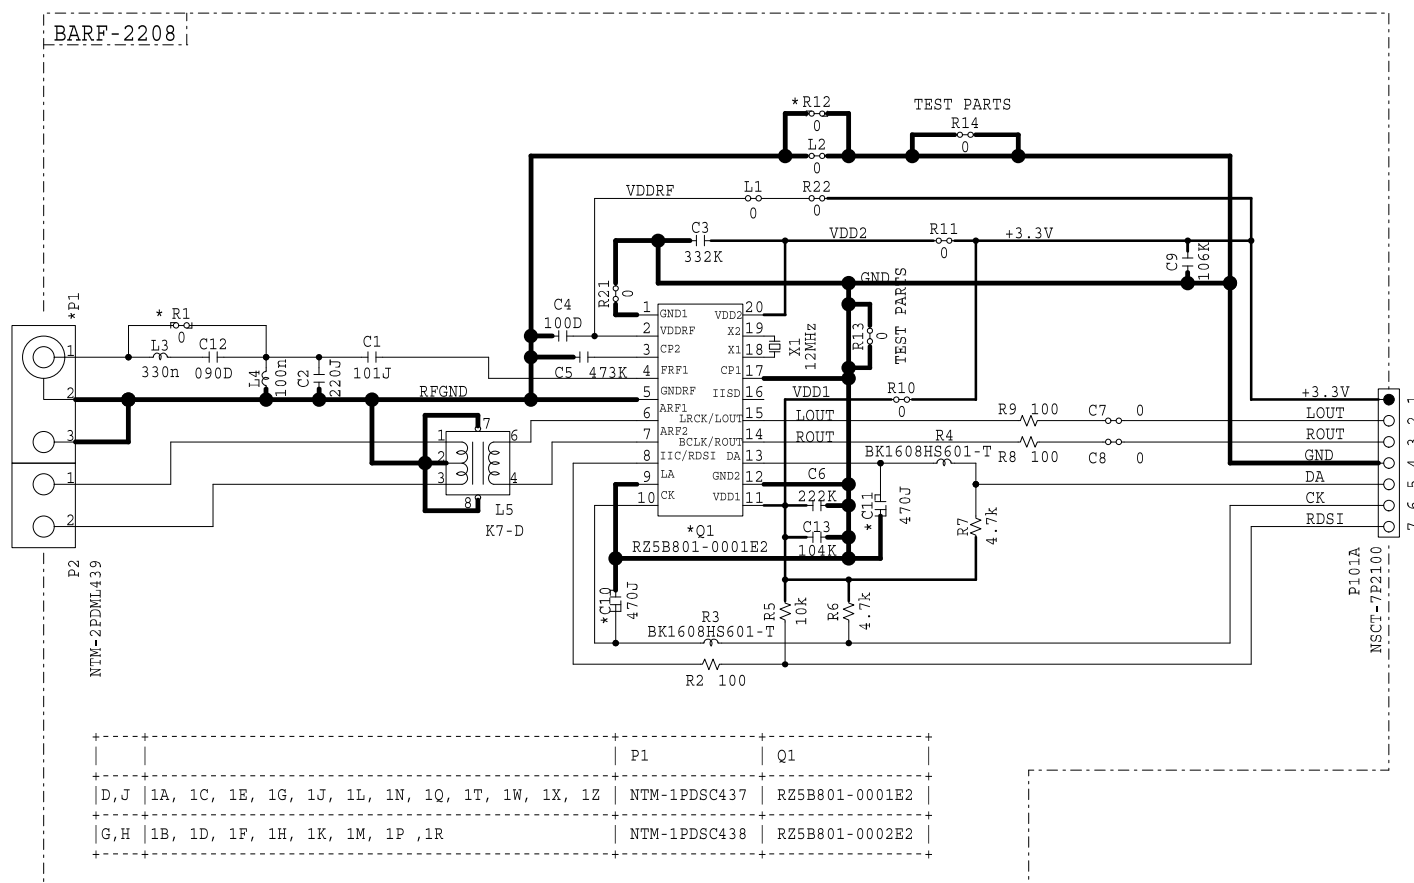

1A	SC-LX801(B)MDC
1B	SC-LX801(B)MGP
1T	SC-LX801(B)MJJ
1C	SC-LX901(B)MDC
1D	SC-LX901(B)MGP
1D	SC-LX901(S)MGP
1D	SC-LX901(B)MHB
1W	SC-LX901(B)MJJ
1E	TX-RZ1100 (B)MDC
1F	TX-RZ1100 (B)MGP
1F	TX-RZ1100 (S)MGP
1F	TX-RZ1100 (B)MHB
1F	TX-RZ1100 (B)MGR
1G	TX-RZ3100 (B)MDC
1H	TX-RZ3100 (B)MGP
1H	TX-RZ3100 (S)MGP
1H	TX-RZ3100 (B)MHB
1H	TX-RZ3100 (B)MGR
1J	DRX-7(B)MDD
1K	DRX-7(B)MGA
1L	DRX-8(B)MDD
1M	DRX-8(B)MGR
1M	DRX-8(B)MGA
1X	DRX-8(B)MJJ
1N	PR-RZ5100 (B)MDC
1P	PR-RZ5100 (B)MGP
1P	PR-RZ5100 (B)MHB
1P	PR-RZ5100 (B)MGR
1Q	DRC-8(B)MDD
1R	DRC-8(B)MGR
1R	DRC-8(B)MGA
1Z	DRC-8(B)MJJ

To BAASP-2080 (PART-4)


Schematic Diagram

MODEL No.SC-LX801/901/TX-RZ1100/3100/DRX-7/R1/PR-RZ5100/DCR-R1

SCHEMATIC DIAGRAM (PART-9) REG SECTION

FROM MAIN TRANS

FROM MAIN TRANS

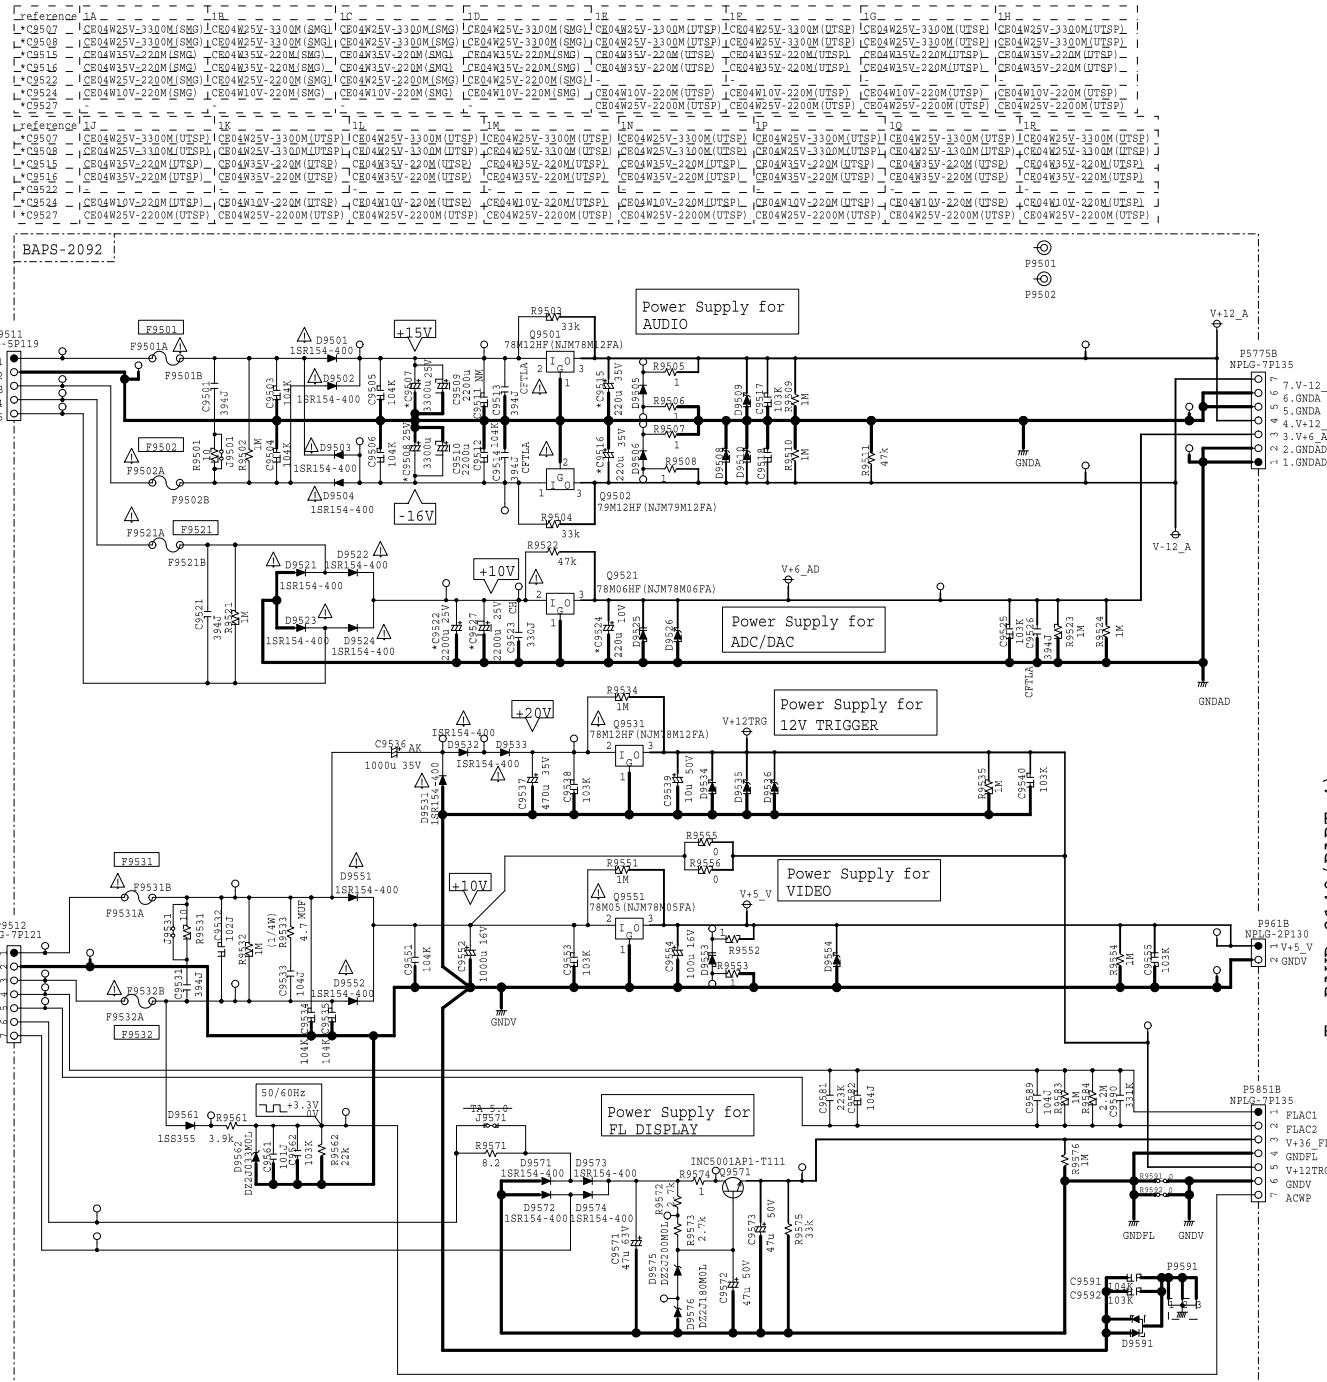

1. RESISTORS
Unit: k- Ω , M- Ω or Ω unless otherwise noted.
Rated Power: 1/16w unless otherwise noted.
Tolerance: (J) 5% unless otherwise noted.
MUF: RD1/4MUF
2. CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
CH: CCSCH, CPTLA: CPTLA
NP: CRAMP, AK: CEAK
NO MARKED: CKSRBY or CEAT
3. NM: No Mount

TO BAETC-2169 (PART-8)

THE COMPONENTS IDENTIFIED MARK Δ ARE CRITICAL FOR SAFETY. REPLACE ONLY WITH PART NUMBER SPECIFIED.
VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE. (NO INPUT SIGNAL)
ELECTROSTATIC CHARACTERISTICS ARE IN UFW.
ALL CAPACITORS ARE IN pF/50V UNLESS OTHERWISE NOTED.
EMI 330 $\rightarrow$ 33pF, 330 $\rightarrow$ 33pF, 331 $\rightarrow$ 33pF, 333 $\rightarrow$ 0.033uF
CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.


CAUTION
FOR CONTINUED PROTECTION AGAINST FIRE HAZARD,
REPLACE ONLY WITH FUSE OF SAME TYPE AND RATING INDICATED.
ATTENTION
APRÈS D'ASSURER UNE PROTECTION PERMANENTE CONTRE LES RISQUES D'INCENDIE,
REMPLACER UNIQUEMENT PAR UN FUSIBLE DE MÊME TYPE ET CALIBRATION COMME INDIQUE.
THIS SYMBOL LOCATED NEAR THE FUSE INDICATES THAT THE FUSE USED IS SLOW OPERATING TYPE
FOR CONTINUED PROTECTION AGAINST FIRE HAZARD, REPLACE WITH SAME TYPE FUSE.
RATING REFER TO THE MARKED ADJACENT TO THE SYMBOL.
CE SYMBOLE INDIQUE QUE LE FUSIBLE UTILISÉ EST À LENT, É POUR UNE PROTECTION PERMANENTE,
N'UTILISER QUE DES FUSIBLES DE MÊME TYPE.
CE CARACTÈRE EST INDICÉ LA OÙ LE PRÉSENT SYMBOLE EST POSÉ.

TO BAED-2148 (PART-4)

TO BAETC-2200 (PART-9)

MODEL No. SC-LX801/901/TX-RZ1100/3100/DRX-7/R1/PR-RZ5100/DRC-R1

SCHEMATIC DIAGRAM (PART-9) FRONT BRIDGE SECTION

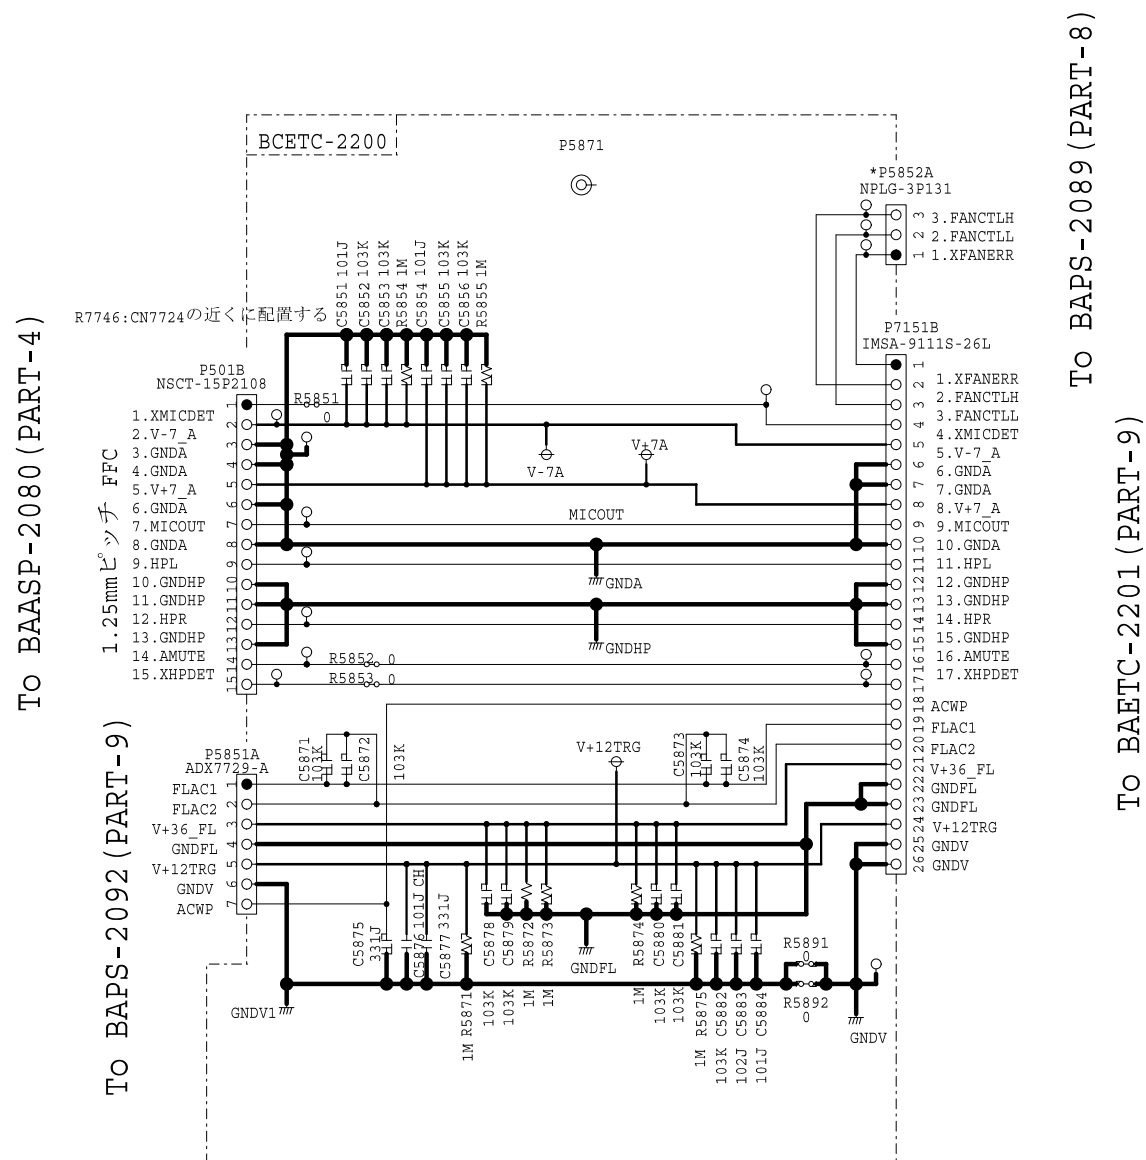


reference	1A	1B	1C	1D	1E	1F	1G	1H	1J	1K	1L	1M	1N	1P	1Q	1R
*P5852A	NPLG-3P131	NPLG-3P131	NPLG-3P131	NPLG-3P131	NPLG-3P131	NPLG-3P131	NPLG-3P131	NPLG-3P131	NPLG-3P131	NPLG-3P131	NPLG-3P131	NPLG-3P131	NPLG-3P131	-	-	-

Schematic Diagram

MODEL No.SC-LX801/901,TX-RZ1100/3100,DRX-7/R1,PR-RZ5100,DRC-R1 SCHEMATIC DIAGRAM (PART-9) SIDE BRIDGE SECTION

TO BAPRC-2072 (PART-1)

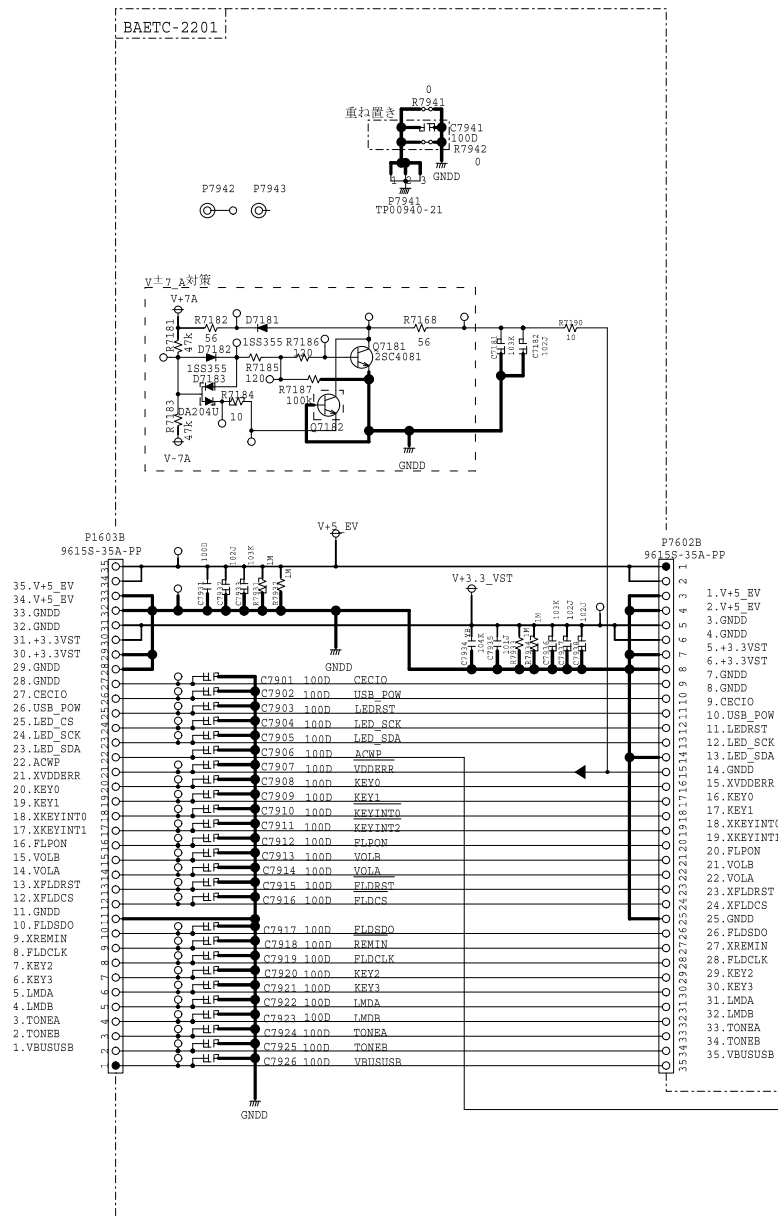


SC-LX801/901:To BADIS-2074 (PART-2)
TX-RZ1100/3100,PR-RZ5100:To BADIS-2075 (PART-2)
DRX-7/R1,DCR-R1:To BADIS-2076 (PART-2)

ボードイン線材の受け口 (ソケット)

TO BAETC-2163 (PART-8)

TO BAETC-2200 (PART-9)

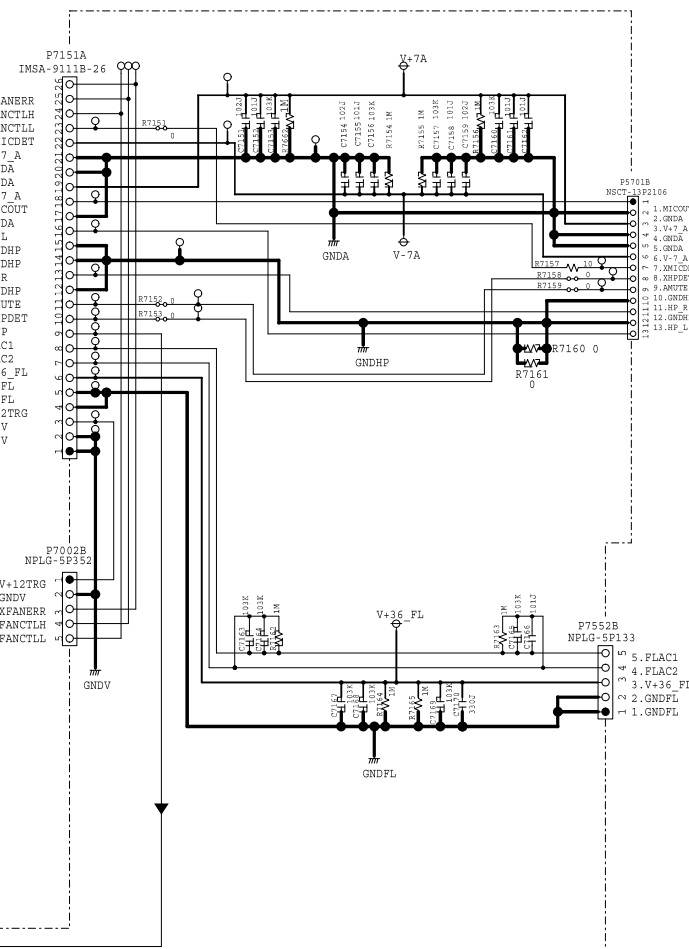

SC-LX801/901:To BADIS-2074 (PART-2)
TX-RZ1100/3100,PR-RZ5100:To BADIS-2075 (PART-2)
DRX-7/R1,DCR-R1:To BADIS-2076 (PART-2)

SC-LX801/901:To BAETC-2119 (PART-2)
DRX-7/R1,DCR-R1:To BAETC-2139 (PART-2)


Schematic Diagram

MODEL No.TX-RZ1100/3100,DRX-7/R1,PR-RZ5100,DRC-R1

SCHEMATIC DIAGRAM(PART-9) CONNECT_O SECTION

reference	1A	1B	1C	1D	1E	1F	1G	1H	1J	1K	1L	1M	1N	1P	1Q	1R
*C7851	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
*C7856	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
*R2853	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
*R2854	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
*R2855	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
*R2856	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
*R2857	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
*R2858	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
*R2859	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
*R2862	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
*R2863	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
*R2864	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
*R2865	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
*R2866	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
*R2867	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
*R2868	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
*R2869	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
*R2870	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
*R2871	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
*R2872	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
*R2873	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
*R2874	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
*R2875	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
*R2876	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
*R2877	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
*R2878	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
*R2879	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
*P1602C	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L
*P7851	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L

TO BAPRC-2072 (PART-1)

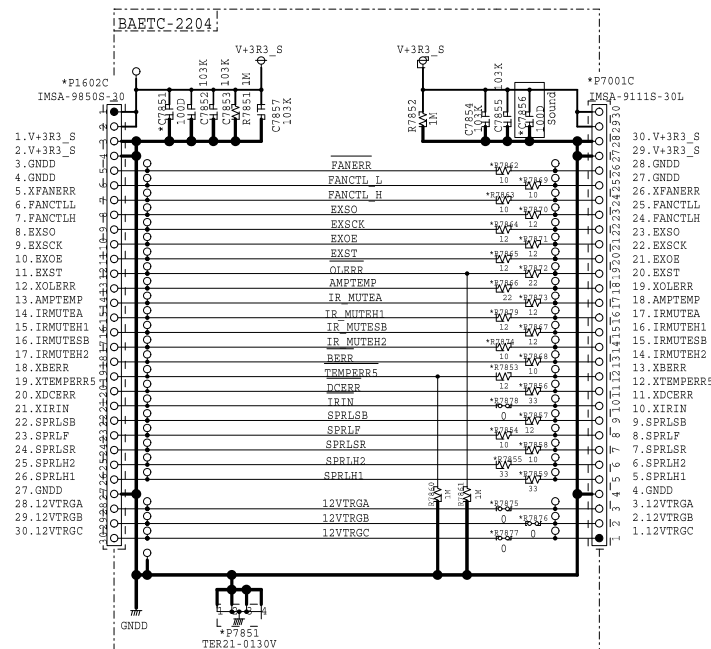


TO BAETC-2163 (PART-8)

Schematic Diagram

MODEL No. SC-LX701/801/901, TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1

SCHEMATIC DIAGRAM (PART-9) USB RECT M SECTION

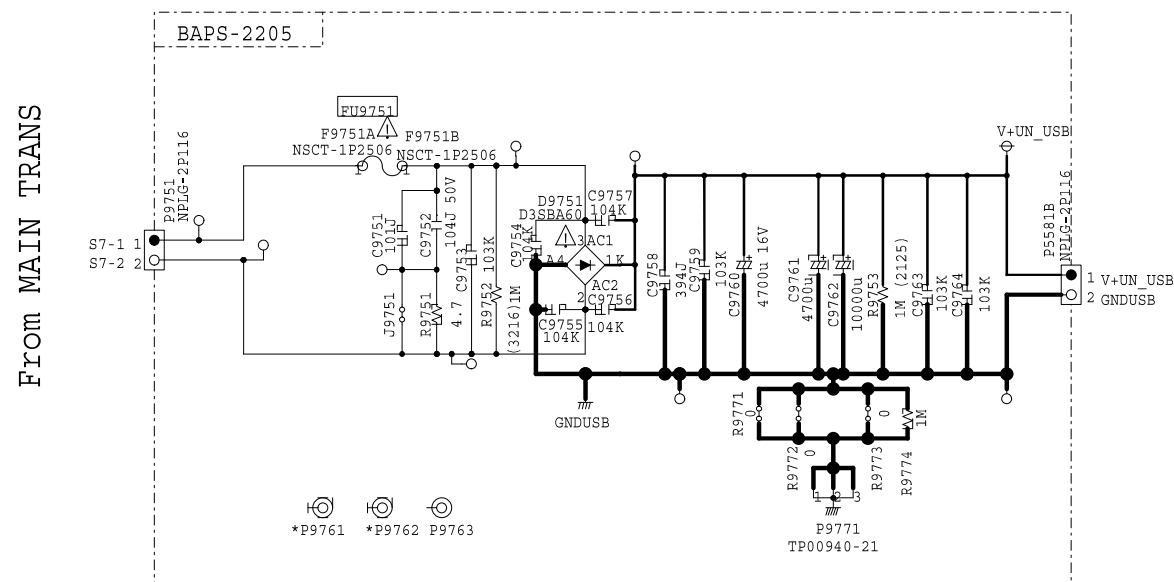

SC-LX801/901:To BAHDM-2086 (PART-6)
TX-RZ110/3100.DRX-7/R1,PR-RZ5100,DRC-R1:To BAHDM-2087 (PART-6)

Reference	1A	1B	1C	1D	1E	1F	1G	1H	1I	1J	1K	1L	1M	1N	1P	1Q	1R
*P9761	-	-	-	-	-	-	-	-	-	-	CB-71683 (L=50)	CB-71683 (L=50)	CB-71683 (L=50)	CB-71683 (L=50)	-	CB-71683 (L=50)	CB-71683 (L=50)
*P9762	-	-	-	-	-	-	-	-	-	-	CB-71683 (L=50)	CB-71683 (L=50)	CB-71683 (L=50)	-	-	CB-71683 (L=50)	CB-71683 (L=50)

THE COMPONENTS IDENTIFIED MARK Δ ARE CRITICAL FOR SAFETY, REPLACE ONLY WITH PART NUMBER SPECIFIED.
VOLTAGE (MEASURED WITH VOLT METER) IS DC VOLTAGE. (NO INPUT SIGNAL)
ELECTROLYTIC CAPACITORS (~~14~~) ARE IN uF/WV.
ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.
EX) 030 -> 3pF, 330 -> 33pF, 331 -> 330pF, 333 -> 0.033uF
CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

△印は火災、感電の危険に關与する部品の為、必ず指定部品を使用の事。

電圧表示は無信号時に測定した直流電圧を示す。

記入なき電解コンデンサの単位は $\mu\text{F}/\text{WV}$ である。

記入なきコンデンサの単位はpF/50WVである。

例) 030 $\rightarrow$ 3pF, 330 $\rightarrow$ 33pF, 331 $\rightarrow$ 330pF, 333 $\rightarrow$ 0.033uF


本配線図は基本配線図につき性能改善等により予告なく変更する事がある。

MODEL No.TX-RZ1100/3100,DRX-7/R1,PR-RZ5100,DRC-R1

SCHEMATIC DIAGRAM(PART-9) CONTROL_0 SECTION

reference	1A	1B	1C	1D	1E	1F	1G	1H	1I	1J	1K	1L	1M	1N	1P	1Q	1R
*L5821	-	-	-	-	-	-	-	-	-	BLM11A121S	BLM11A121S	BLM11A121S	BLM11A121S	-	-	BLM11A121S	BLM11A121S
*L5822	-	-	-	-	-	-	-	-	-	BLM11A121S	BLM11A121S	BLM11A121S	BLM11A121S	-	-	BLM11A121S	BLM11A121S
*L5823	-	-	-	-	-	BLM11A121S	BLM11A121S	BLM11A121S	BLM11A121S	BLM11A121S	BLM11A121S	BLM11A121S	BLM11A121S	BLM11A121S	BLM11A121S	BLM11A121S	BLM11A121S
*C5823	-	-	-	-	-	CK725B1H-103K	CK725B1H-103K	CK725B1H-103K	CK725B1H-103K	CK725B1H-103K	CK725B1H-103K	CK725B1H-103K	CK725B1H-103K	CK725B1H-103K	CK725B1H-103K	CK725B1H-103K	CK725B1H-103K
*C5824	-	-	-	-	-	-	-	-	-	CK725B1H-103K	CK725B1H-103K	CK725B1H-103K	CK725B1H-103K	-	-	CK725B1H-103K	CK725B1H-103K
*C5825	-	-	-	-	-	-	-	-	-	CK725B1H-103K	CK725B1H-103K	CK725B1H-103K	CK725B1H-103K	-	-	CK725B1H-103K	CK725B1H-103K
*P5821	-	-	-	-	-	-	-	-	-	HSJ1002-016010	HSJ1002-016010	HSJ1002-016010	HSJ1002-016010	-	-	HSJ1002-016010	HSJ1002-016010
*P5822	-	-	-	-	-	HSJ1002-016010	HSJ1002-016010	HSJ1002-016010	HSJ1002-016010	HSJ1002-016010	HSJ1002-016010	HSJ1002-016010	HSJ1002-016010	HSJ1002-016010	HSJ1002-016010	HSJ1002-016010	HSJ1002-016010
*P5823	-	-	-	-	-	-	-	-	-	HSJ1002-016010	HSJ1002-016010	HSJ1002-016010	HSJ1002-016010	-	-	HSJ1002-016010	HSJ1002-016010
*P7061C	-	-	-	-	-	NSCT-11P2191	NSCT-11P2191	NSCT-11P2191	NSCT-11P2191	NSCT-11P2191	NSCT-11P2191	NSCT-11P2191	NSCT-11P2191	NSCT-11P2191	NSCT-11P2191	NSCT-11P2191	NSCT-11P2191
*TP5821	-	-	-	-	-	CAD PART	CAD PART	CAD PART	CAD PART	CAD PART	CAD PART	CAD PART	CAD PART	CAD PART	CAD PART	CAD PART	CAD PART


TBAETC-2163 (PART-8)

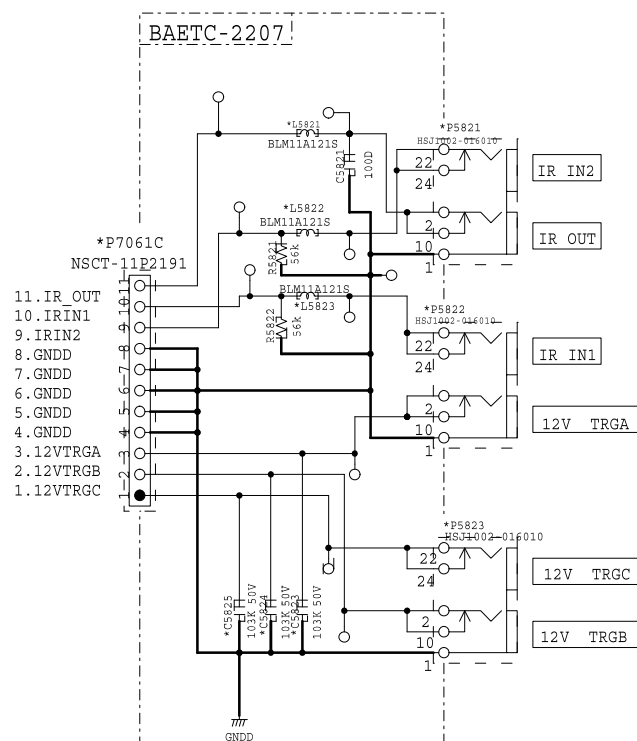

Model No.PR-RZ5100,DRC-R1

SCHEMATIC DIAGRAM(PART-11) BALANCE BRIDGE SECTION

To BAASP-2080 (PART-4)

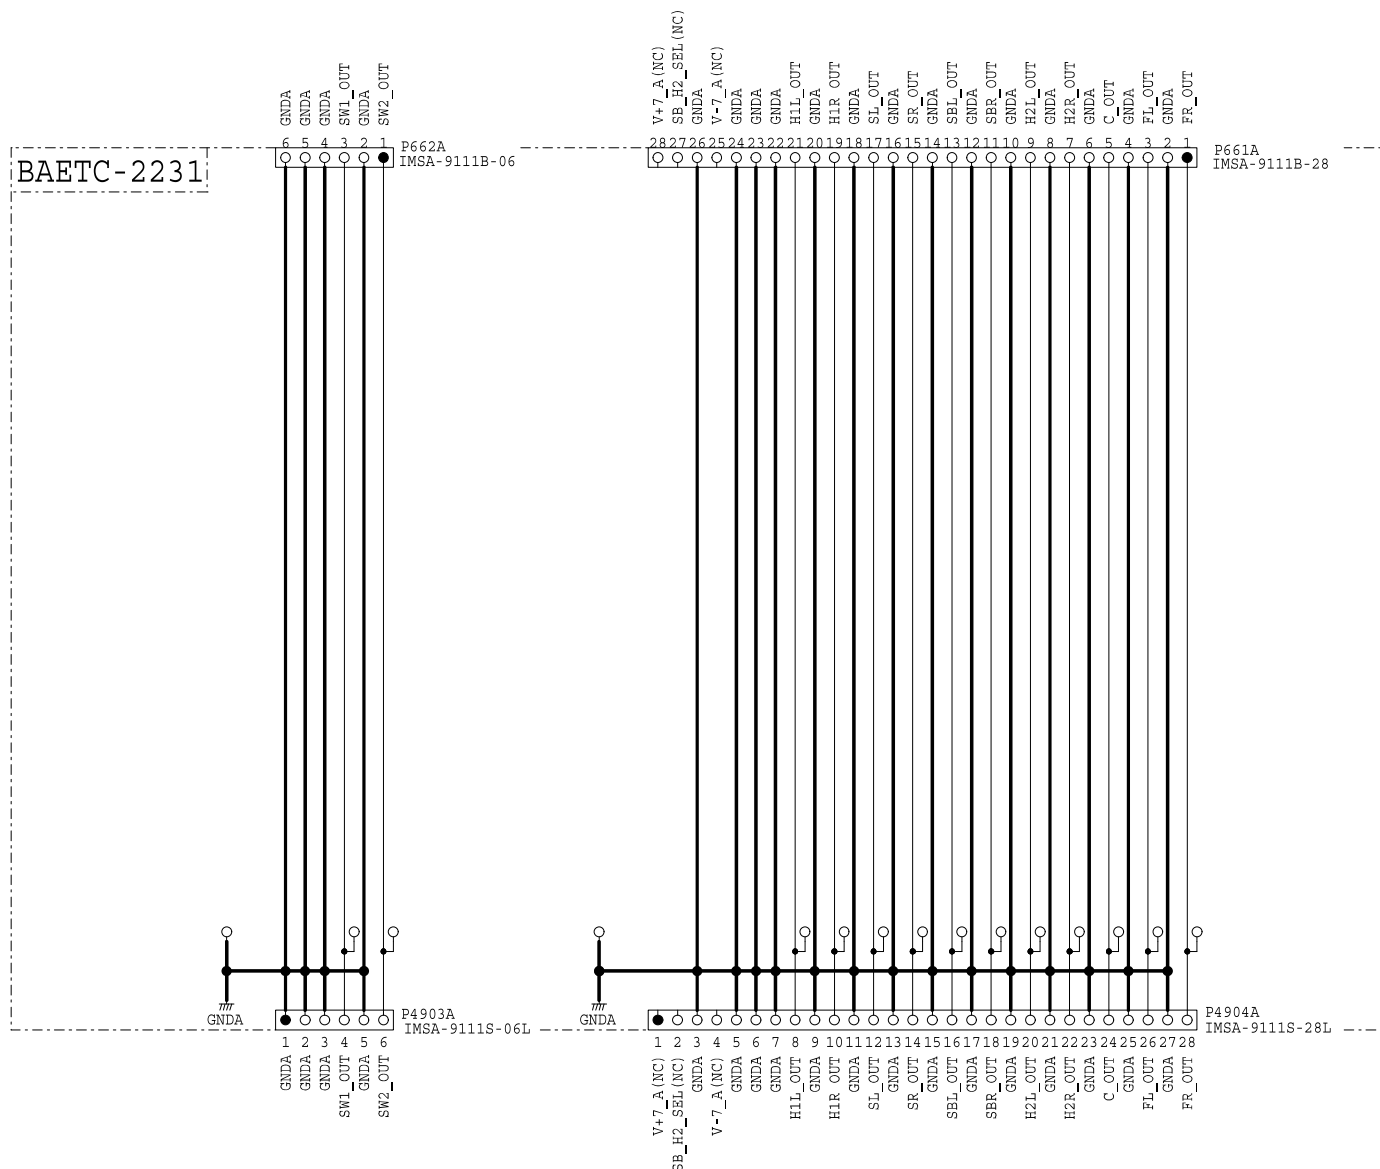

To BAAF-2098 (PART-11)

Model No. PR-RZ5100, DRC-R1

SCHEMATIC DIAGRAM (PART-11) BALANCE_STYL SECTION

BAETC-2233

P4951



CB-71683 (L=50)

P4952




CB-71683 (L=50)


Model No.PR-RZ5100,DRC-R1

SCHEMATIC DIAGRAM(PART-11) BALANCE_REG SECTION


TO MAIN TRANS

TO BAAF-2098 (PART-11)

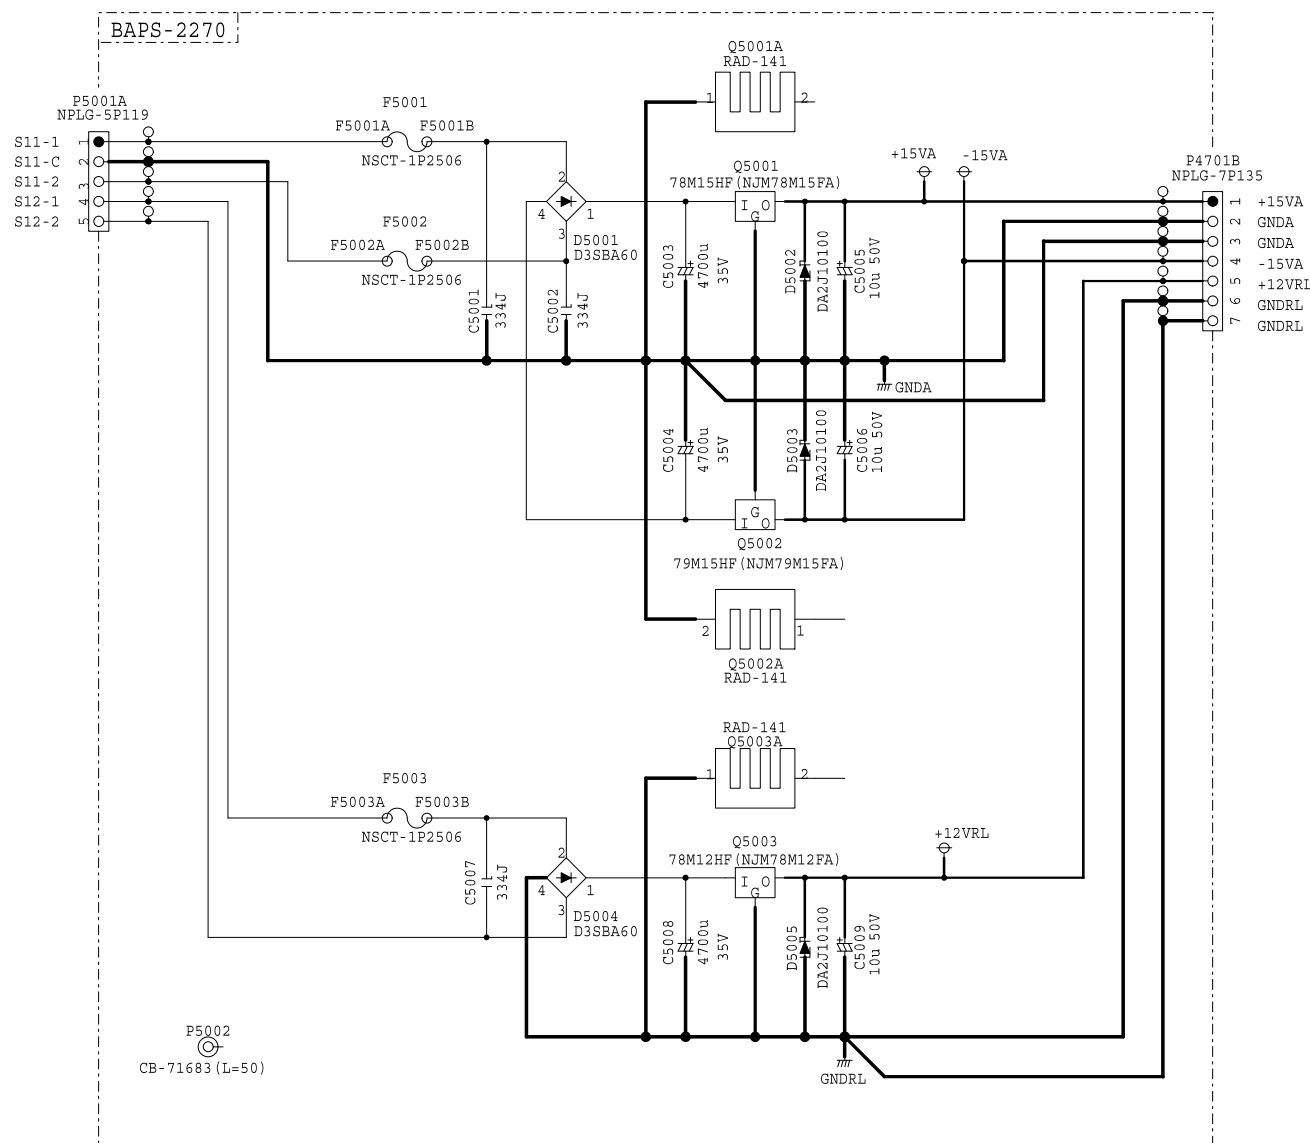


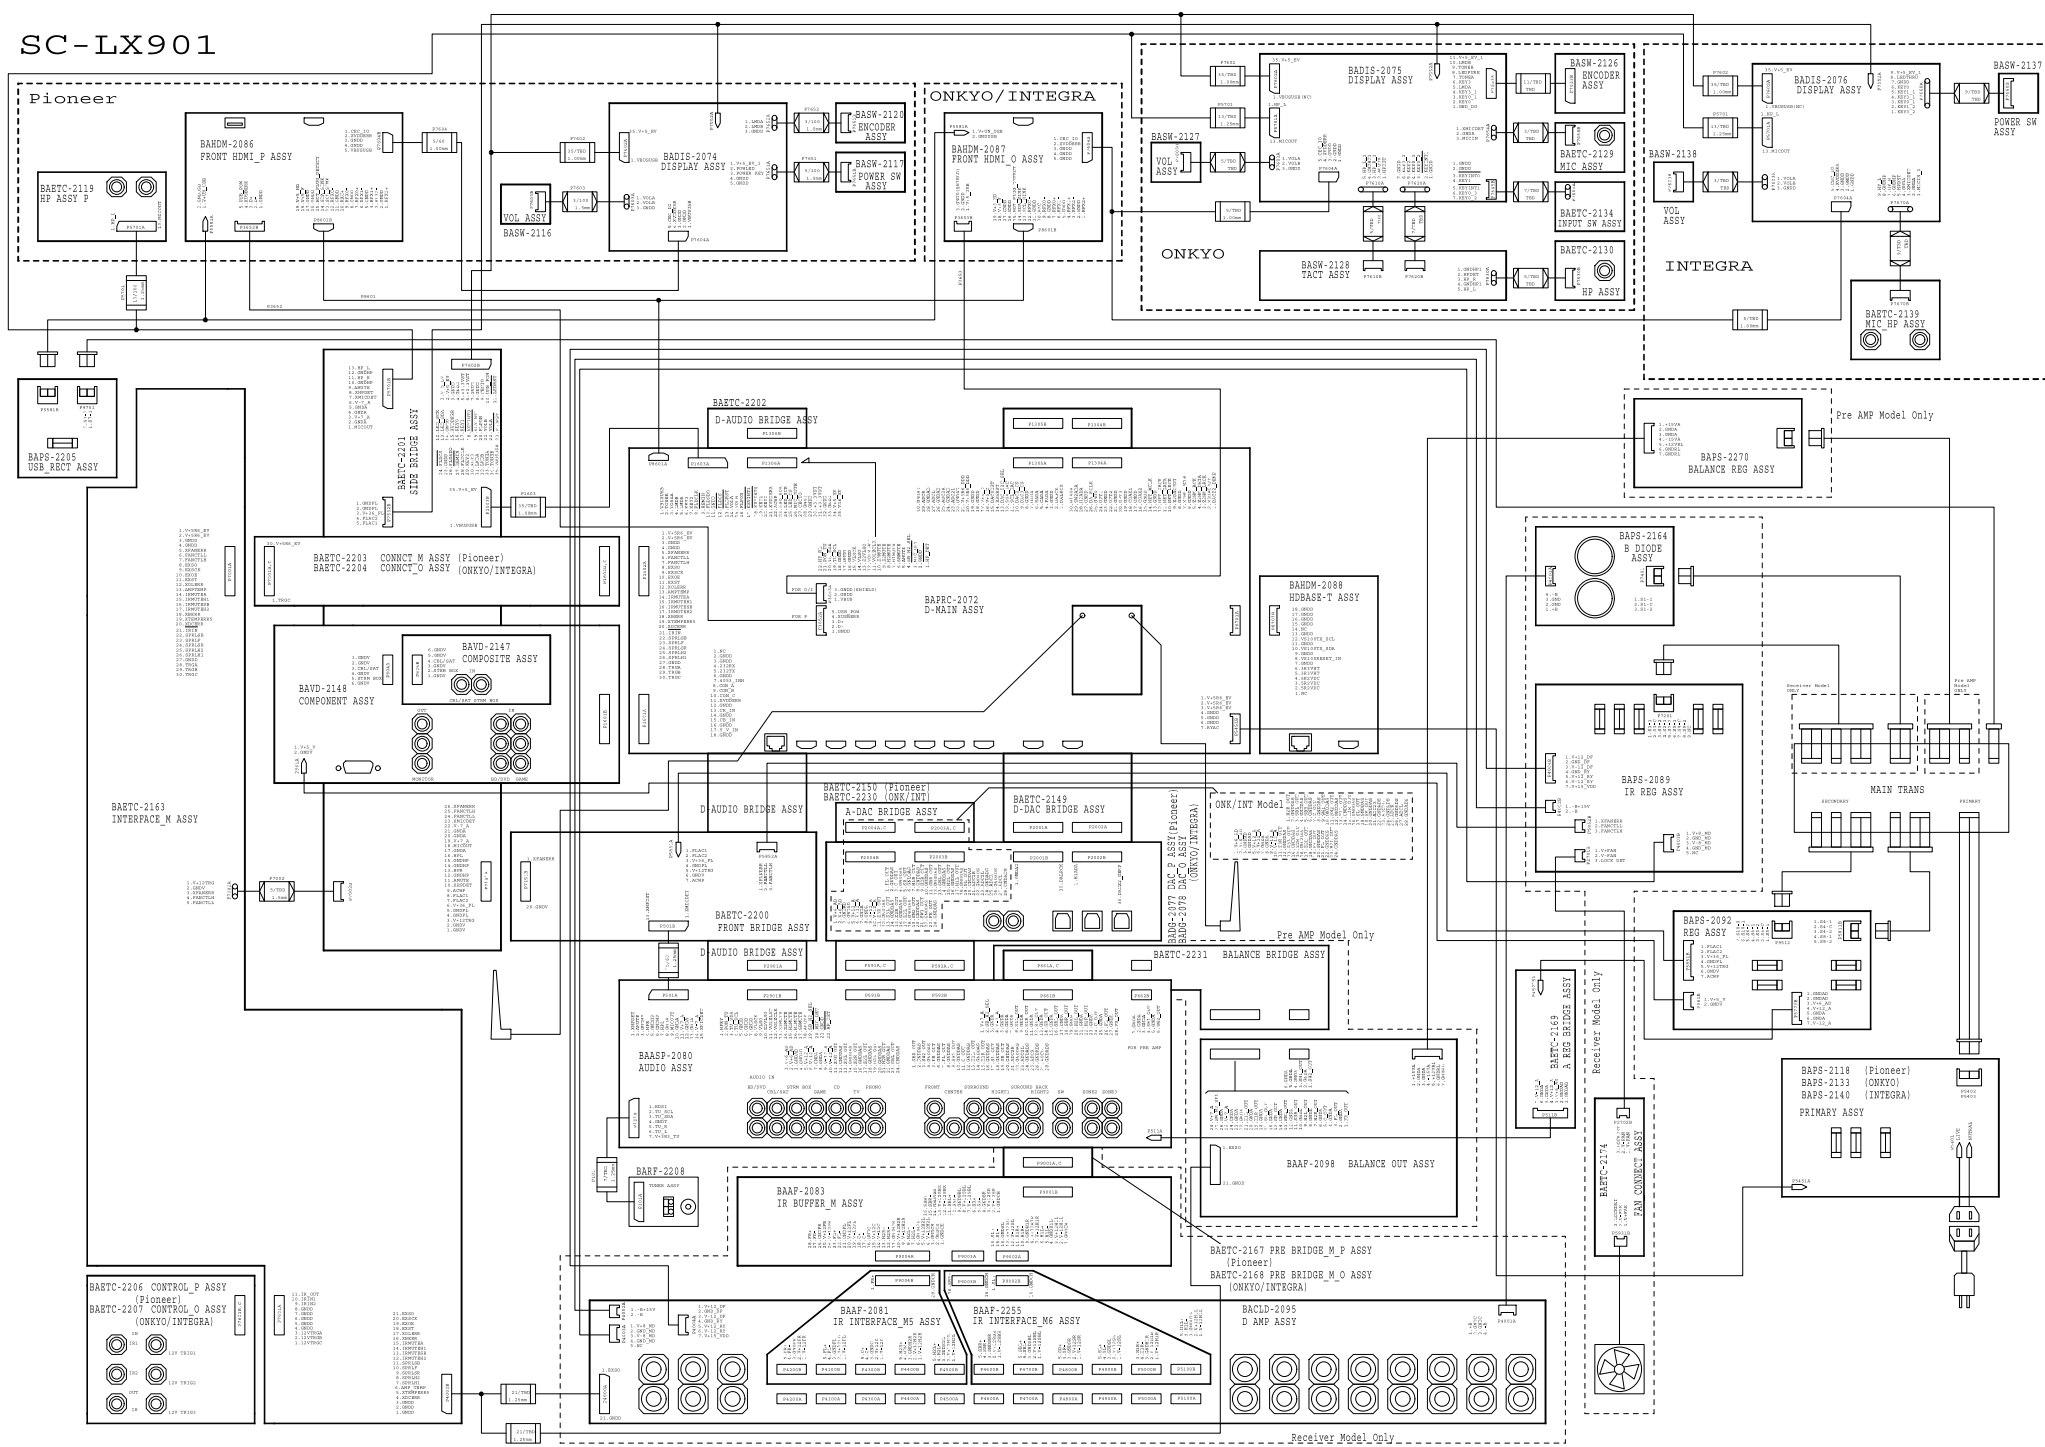

A6901 = A6901A + A6901B

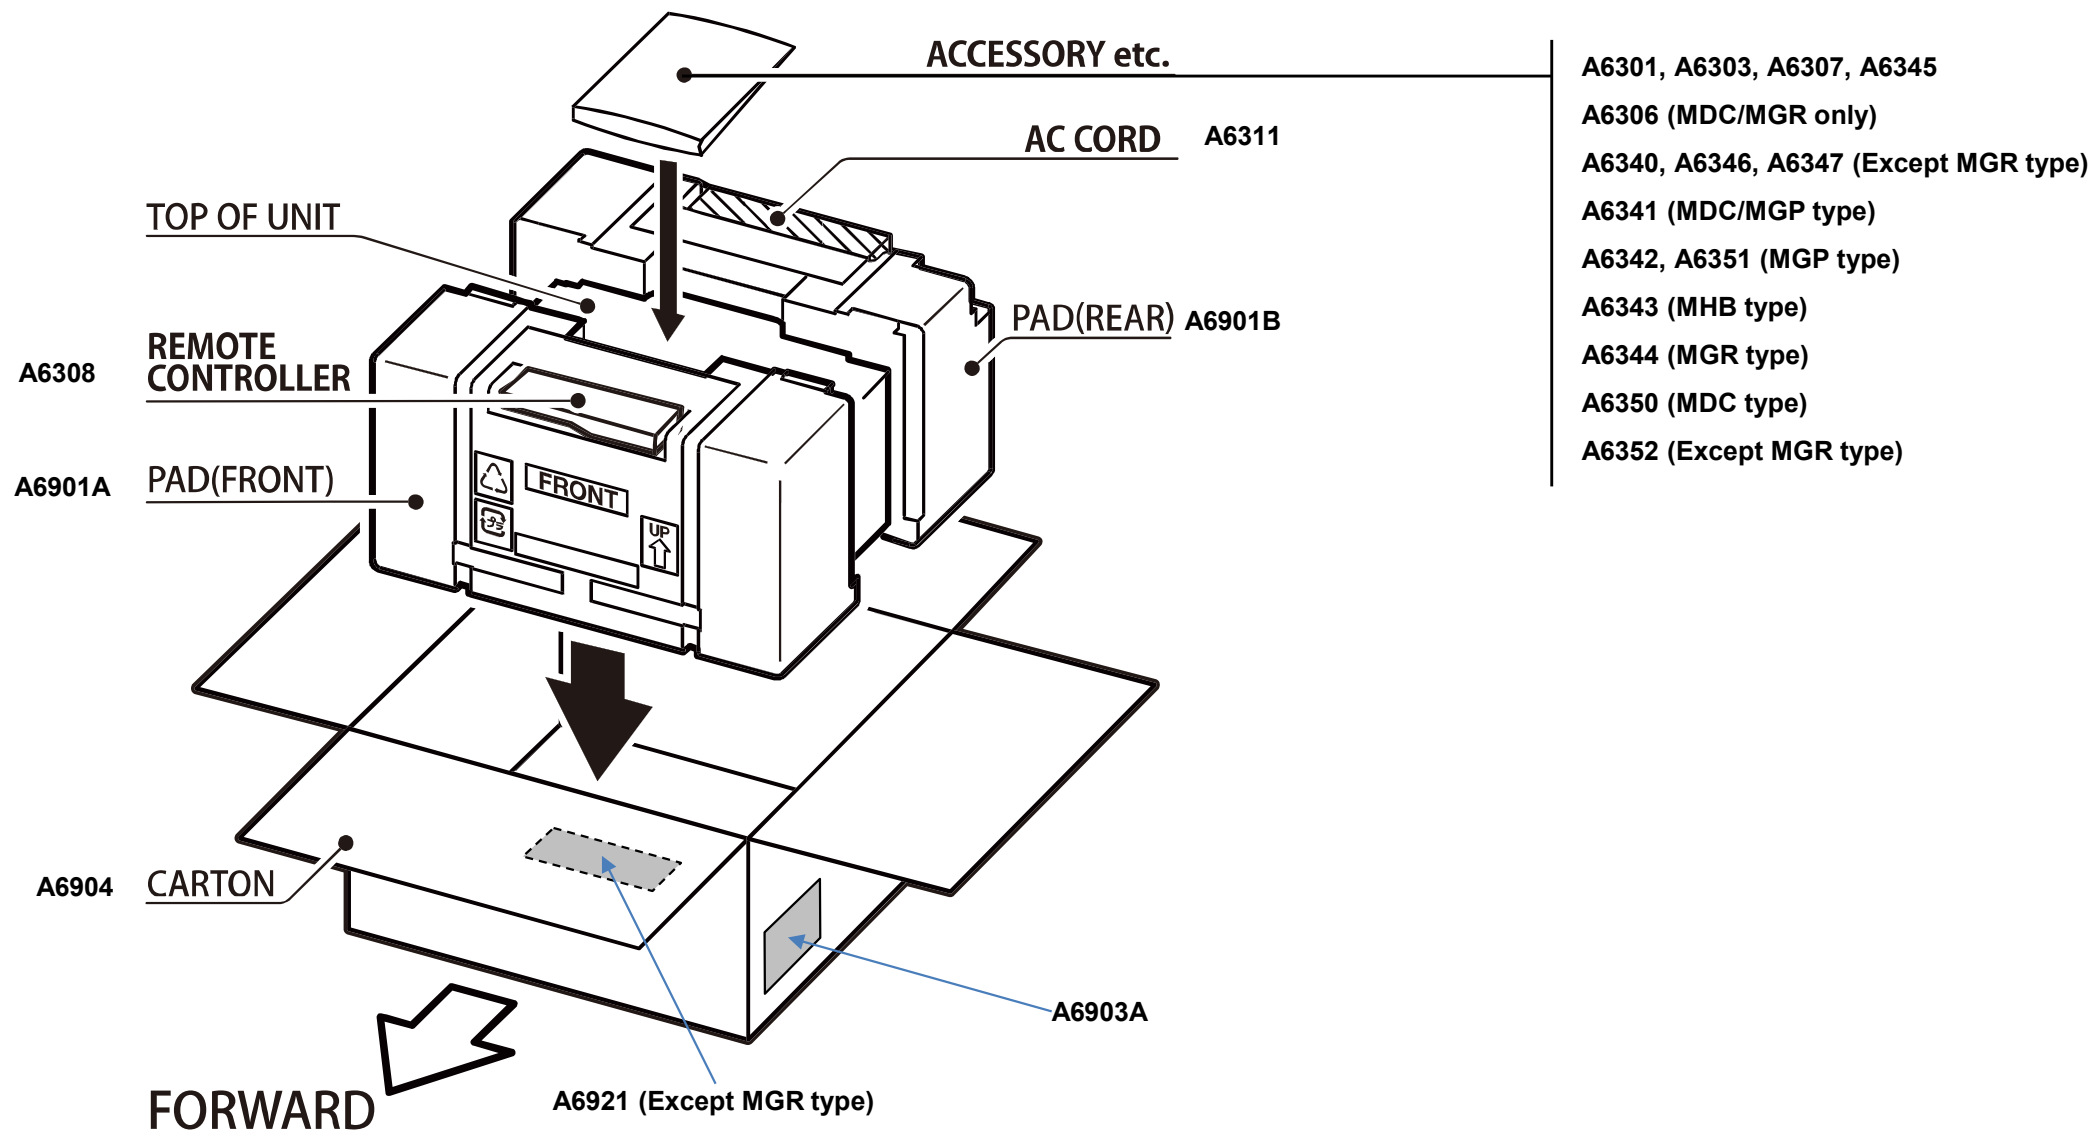


A2203

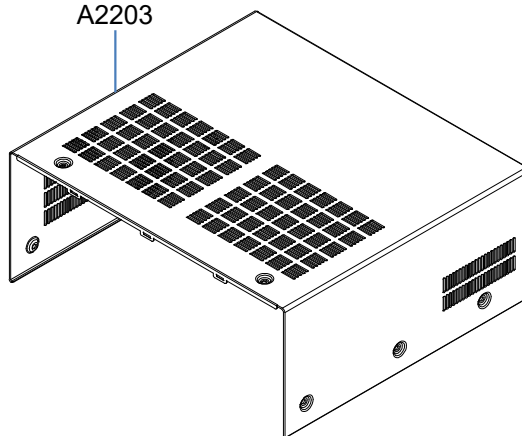

P3654A : WiFi/Bluetooth Module

* This module transmitter does not have RF shielding, therefore it will be equipped only the tested Audio system mentioning this document.
Additional test will be required if it will be equipped to the other devices

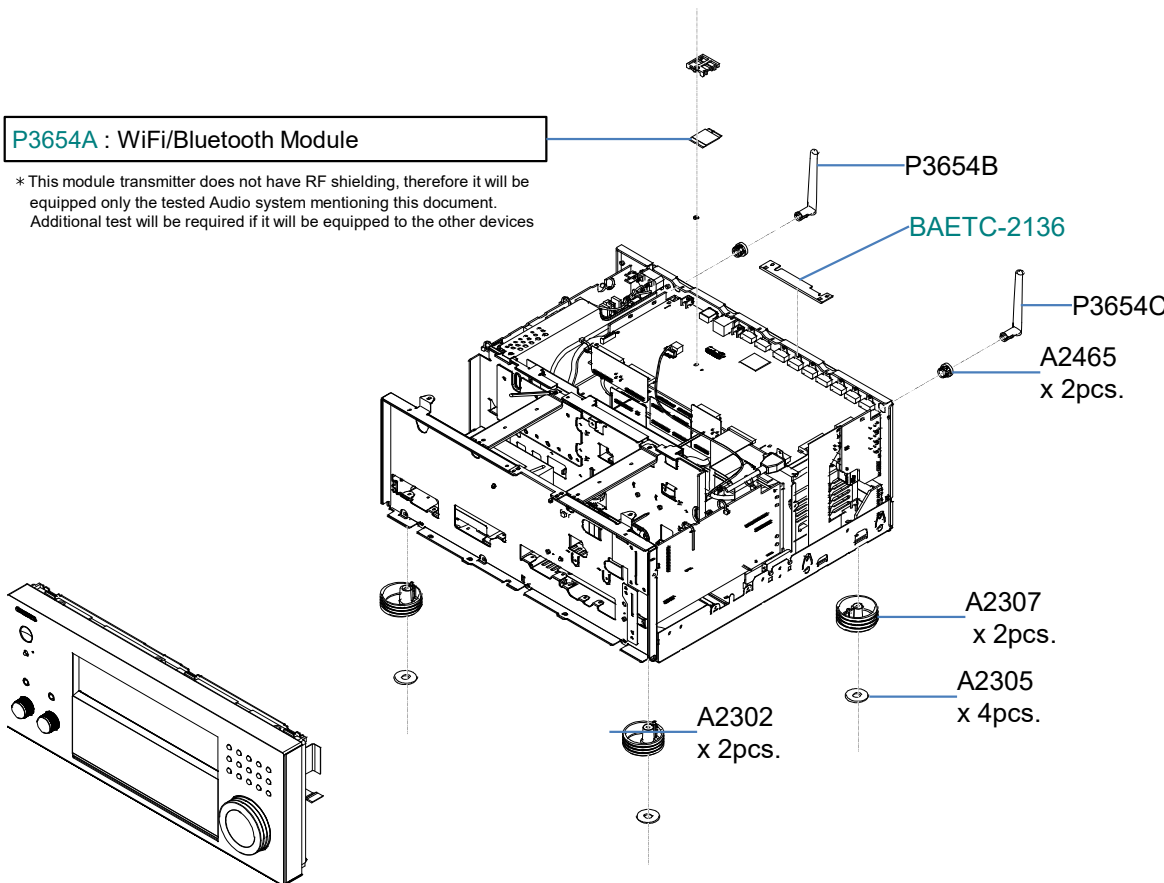

***WiFi & Bluetooth Module has already been certificated by FCC and IC.**

Information to the user.

Indicate "Contains FCC ID: TX2-RTL8821AE", "Contains IC: 6317A-RTL8821AE" and following information to the host device installed.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Describe the following sentence to a user's manual of the host device.

[For FCC]
FCC CAUTION

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment and meets the FCC radio frequency (RF) Exposure Guidelines in Supplement C to OET65. This equipment has very low levels of RF energy that it deemed to comply without maximum permissive exposure evaluation (MPE). But it is desirable that it should be installed and operated keeping the radiator at least 20cm or more away from person's body (excluding extremities: hands, wrists, feet and ankles).

[For IC]
CAN ICES-3 B/NMB-3 B

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.


Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts d'licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment and meets RSS-102 of the IC radio frequency (RF) Exposure rules. This equipment has very low levels of RF energy that it deemed to comply without maximum permissive exposure evaluation (MPE). But it is desirable that it should be installed and operated keeping the radiator at least 20cm or more away from person's body (excluding extremities: hands, wrists, feet and ankles).

Cet équipement est conforme aux limites d'exposition aux rayonnements énoncées pour un environnement non contrôlé et respecte les règles d'exposition aux fréquences radioélectriques (RF) CNR-102 de l'IC. Cet équipement émet une énergie RF très faible qui est considérée conforme sans évaluation de l'exposition maximale autorisée. Cependant, cet équipement doit être installé et utilisé en gardant une distance de 20 cm ou plus entre le dispositif rayonnant et le corps (à l'exception des extrémités : mains, poignets, pieds et chevilles).


Front1

Exploded View

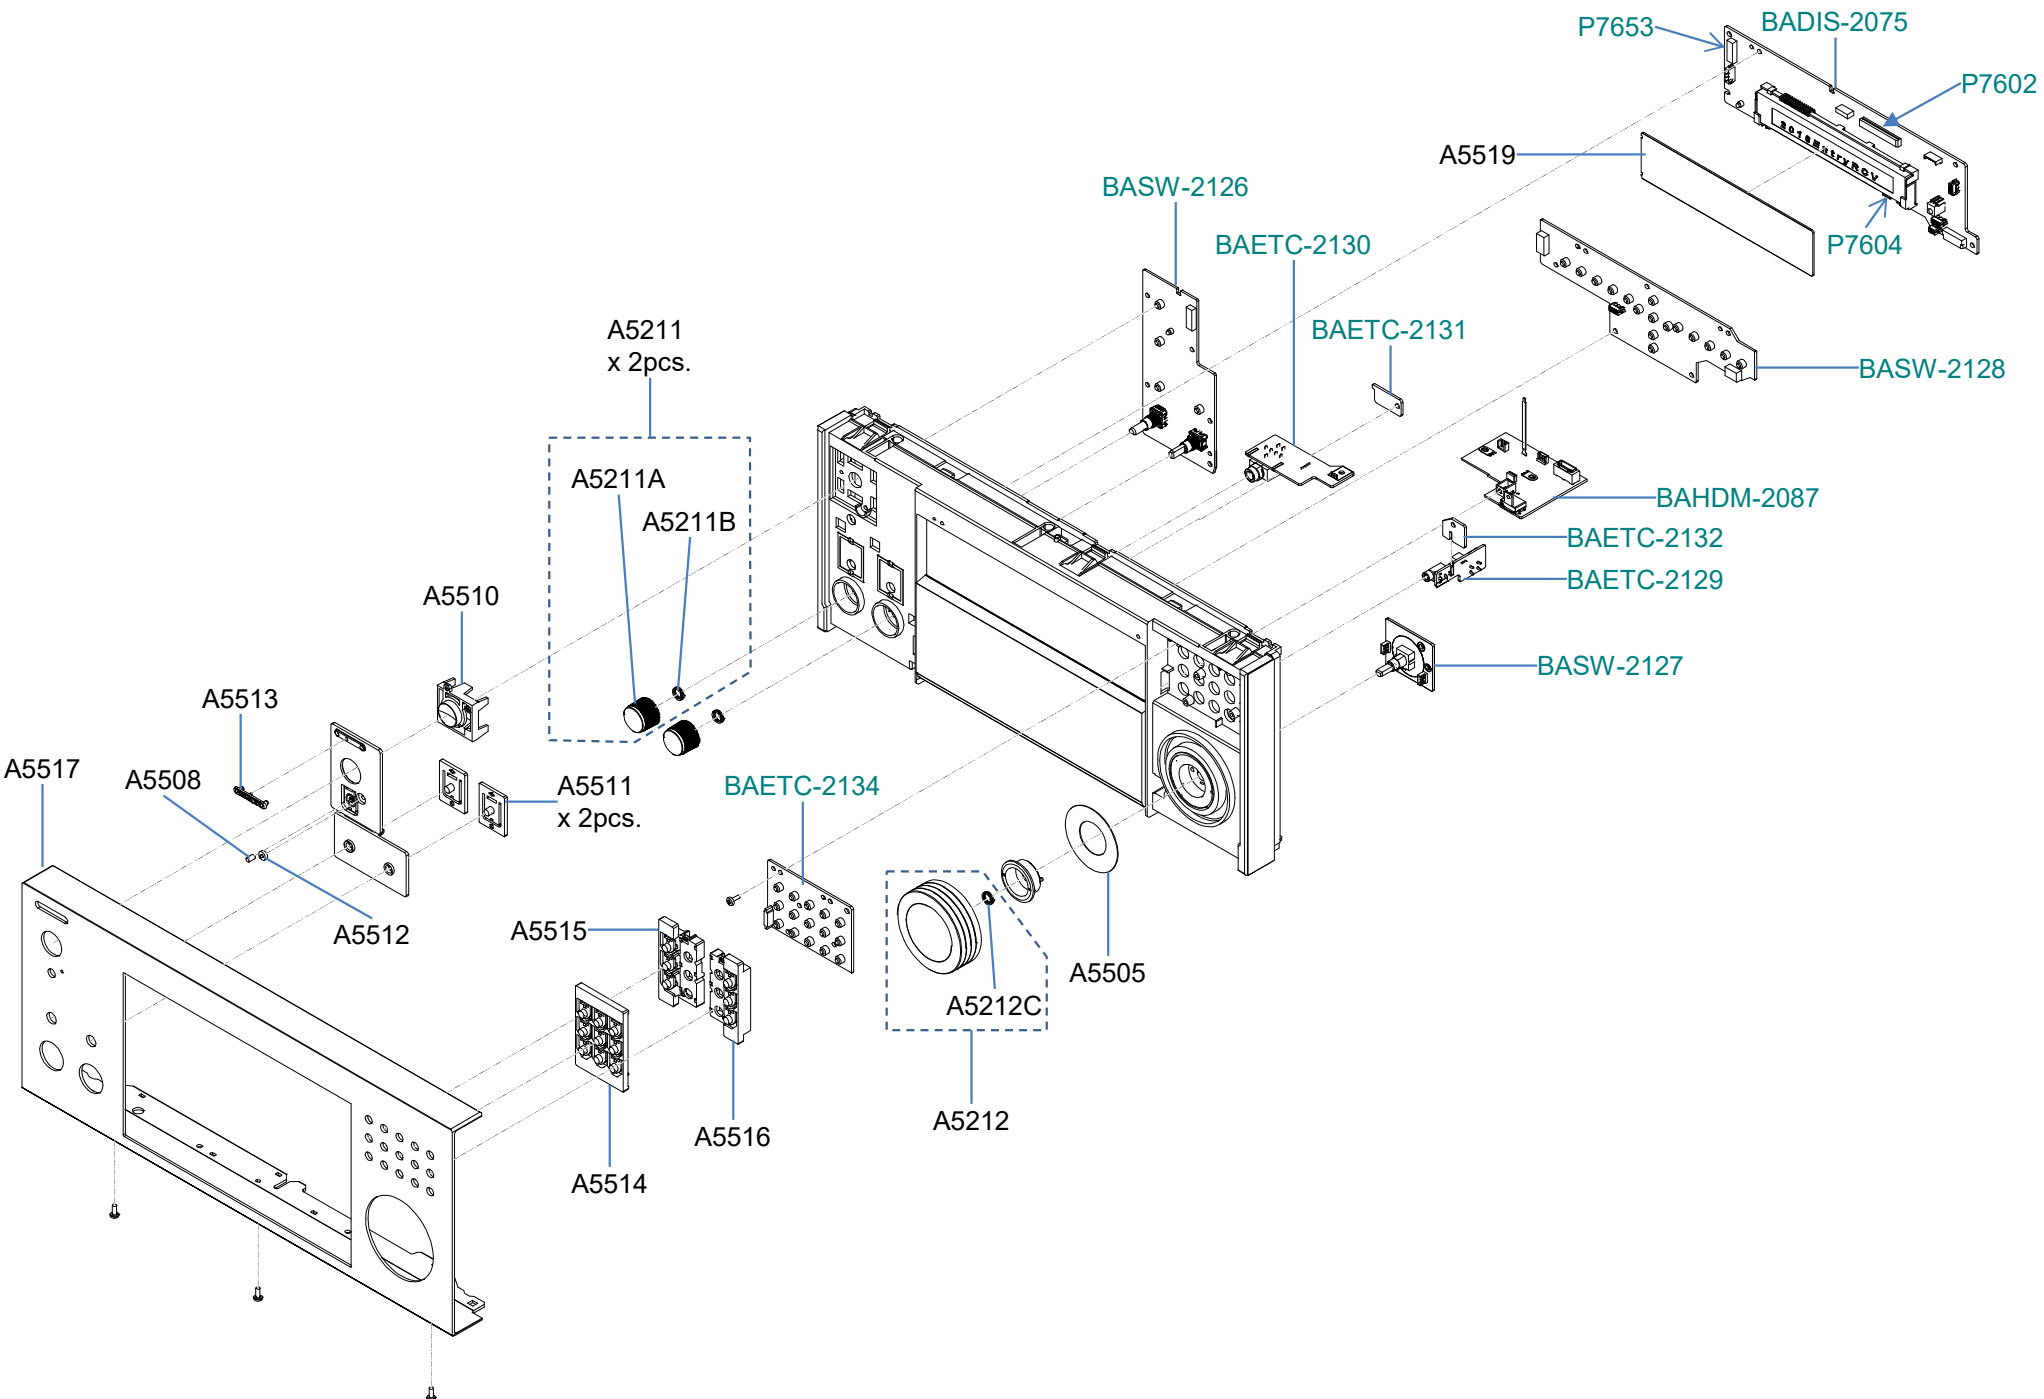

Front2


Exploded View

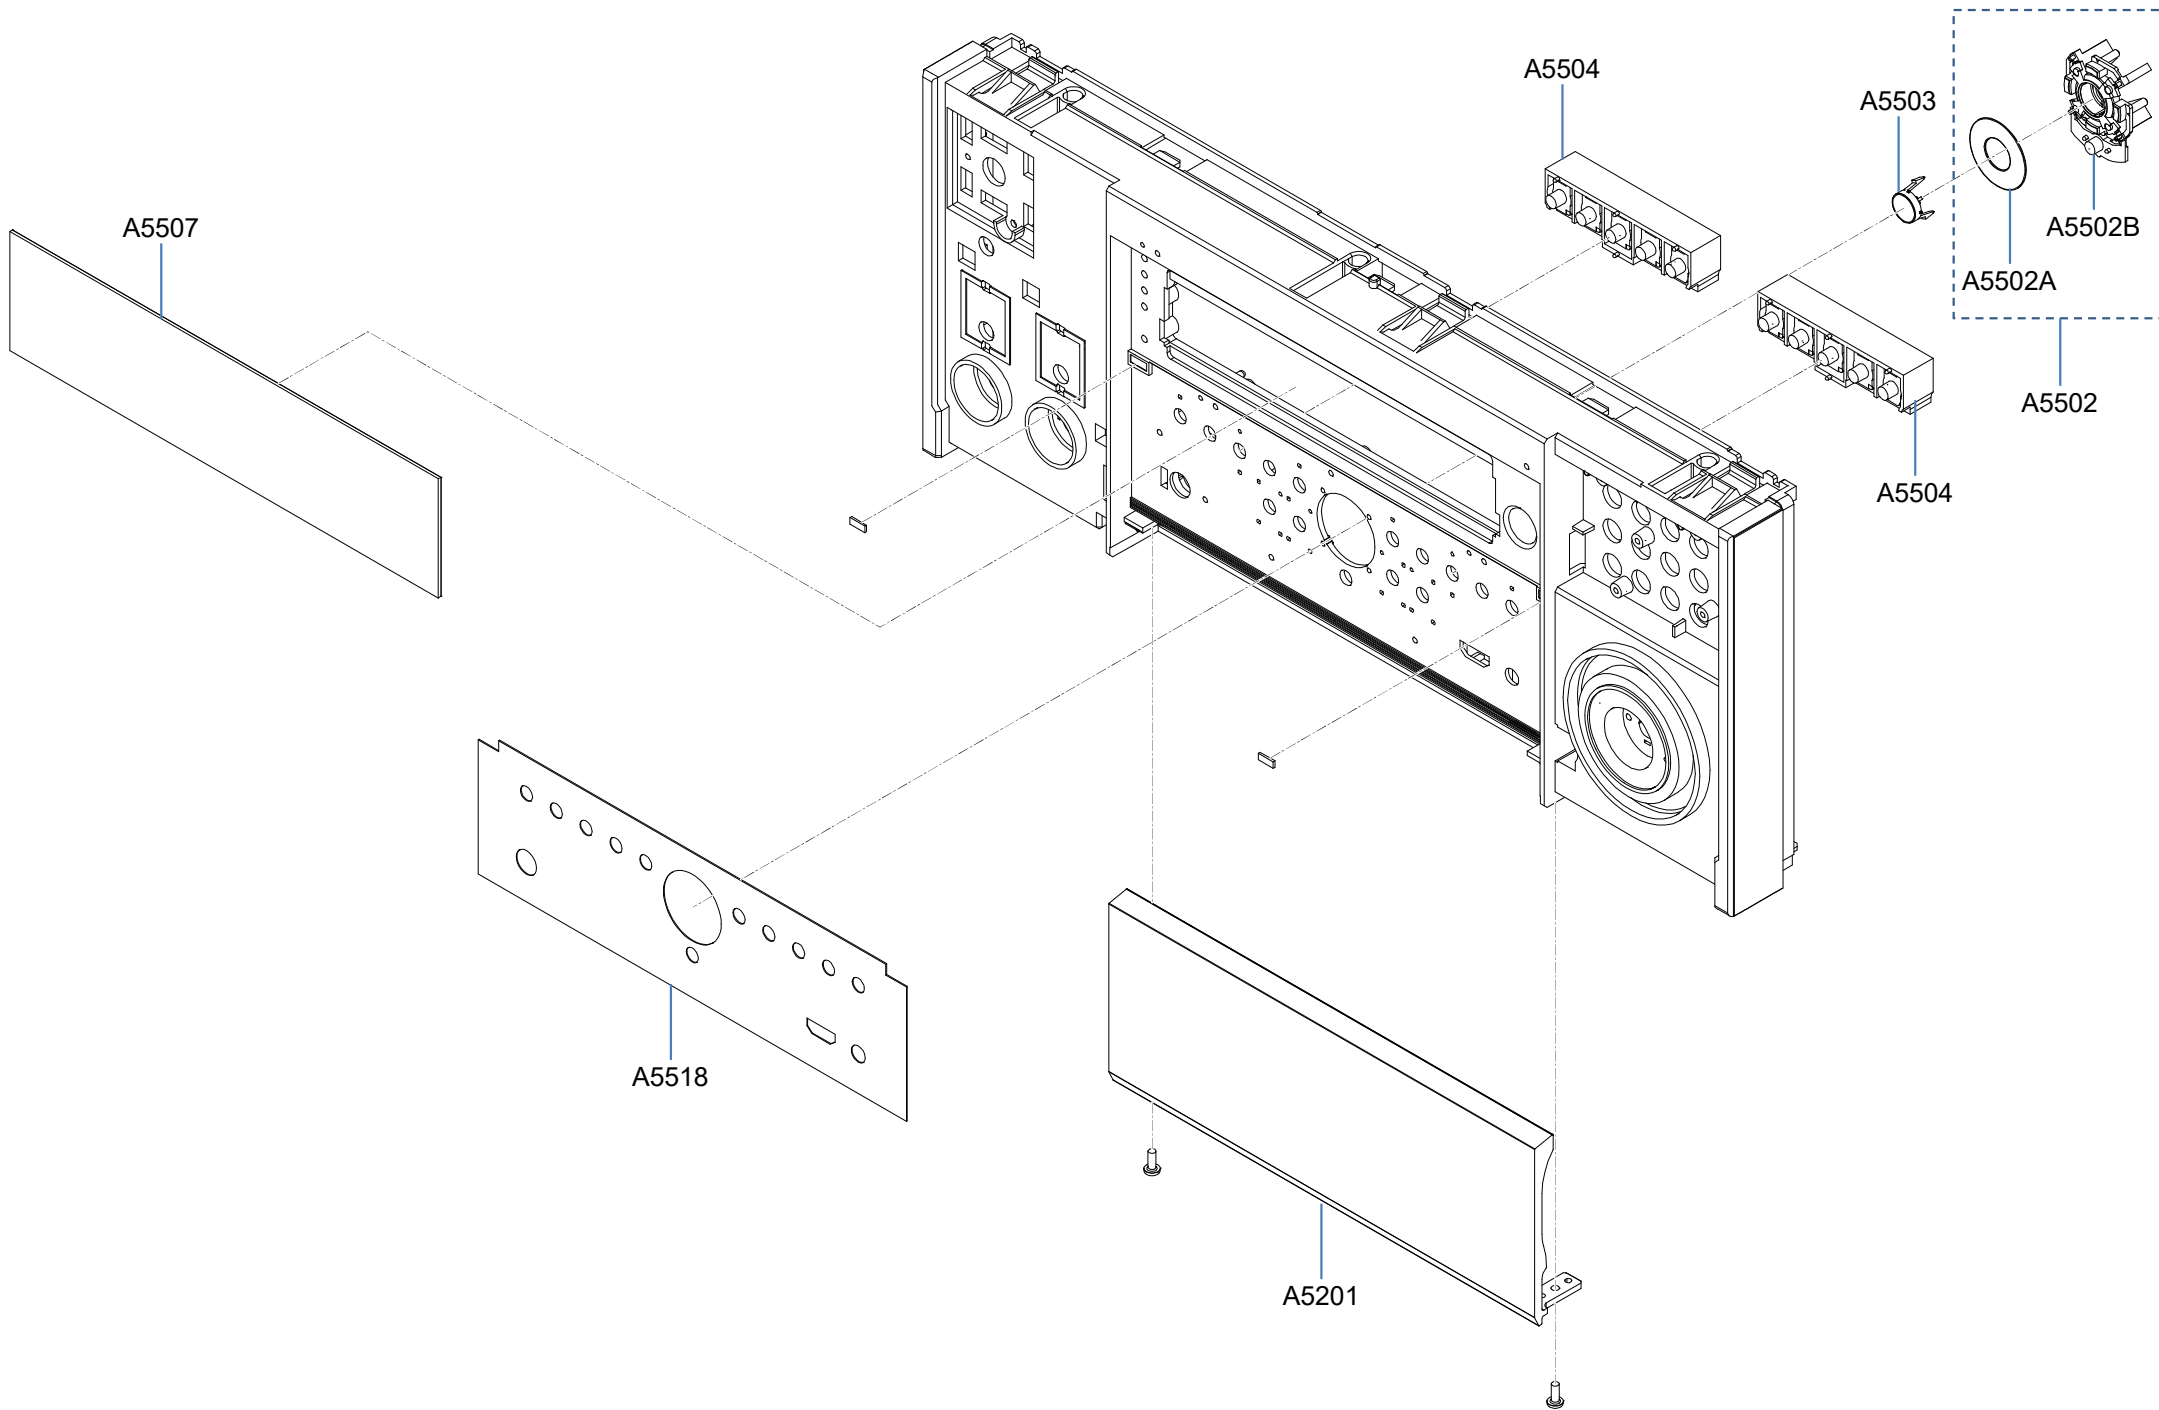


PR-RZ5100


Front3


Exploded View

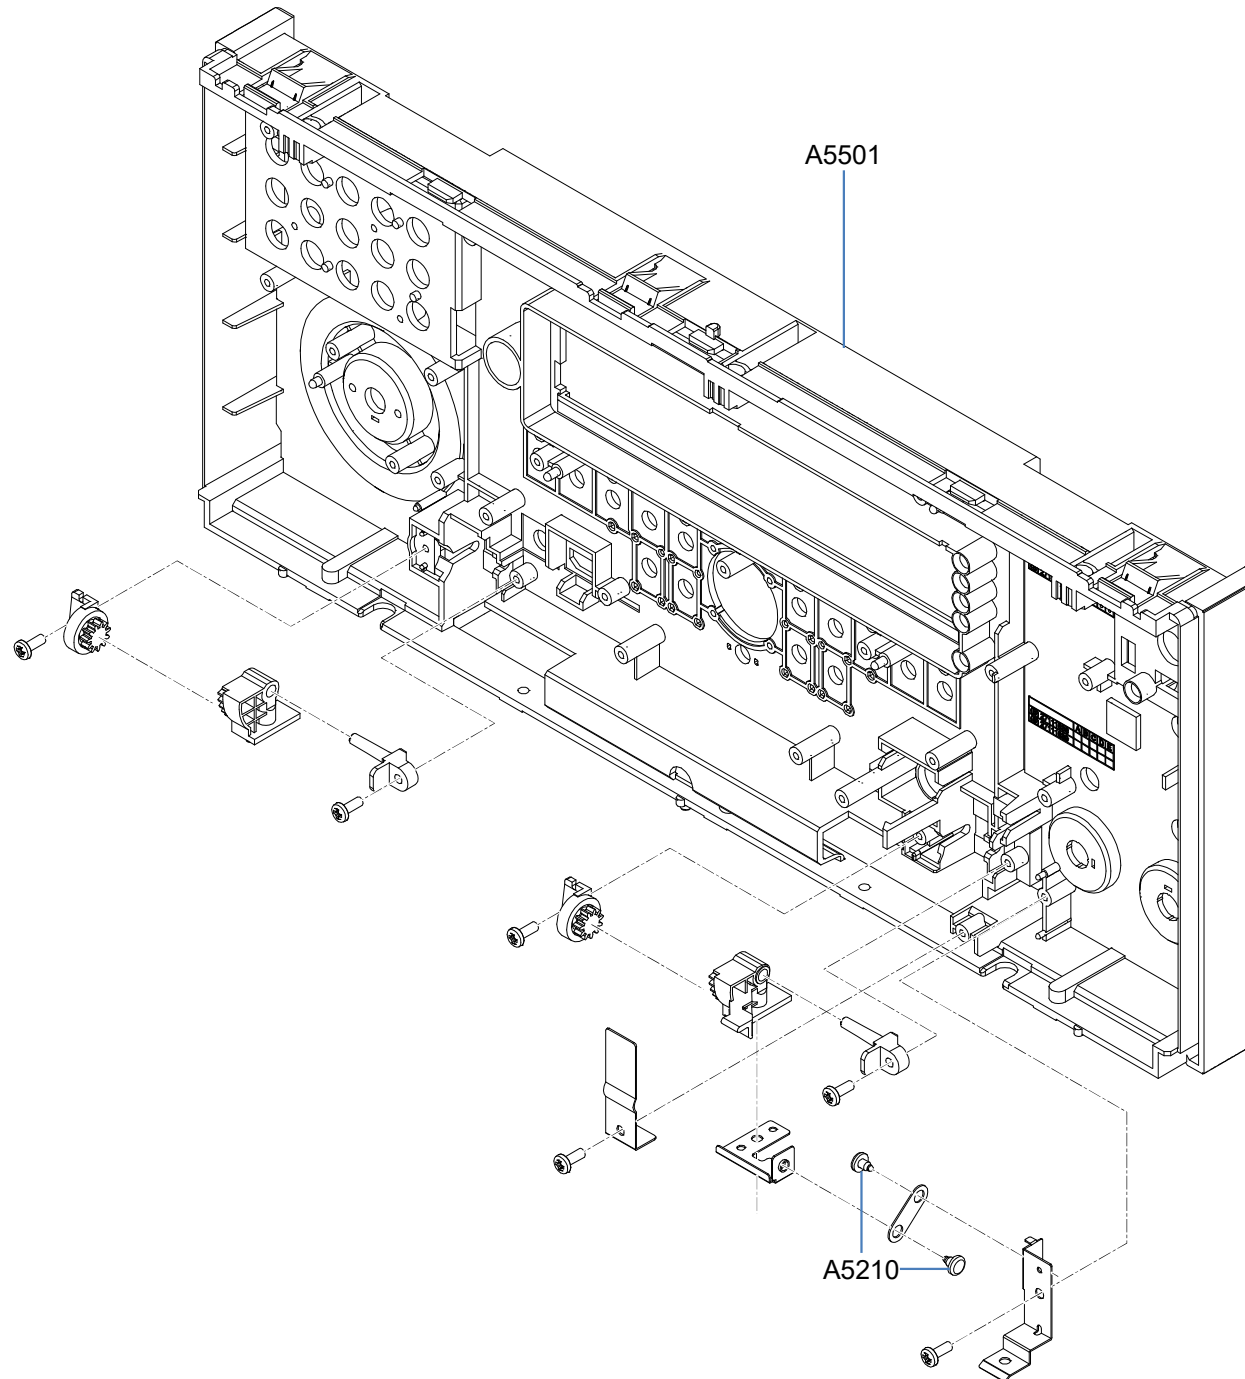



PR-RZ5100

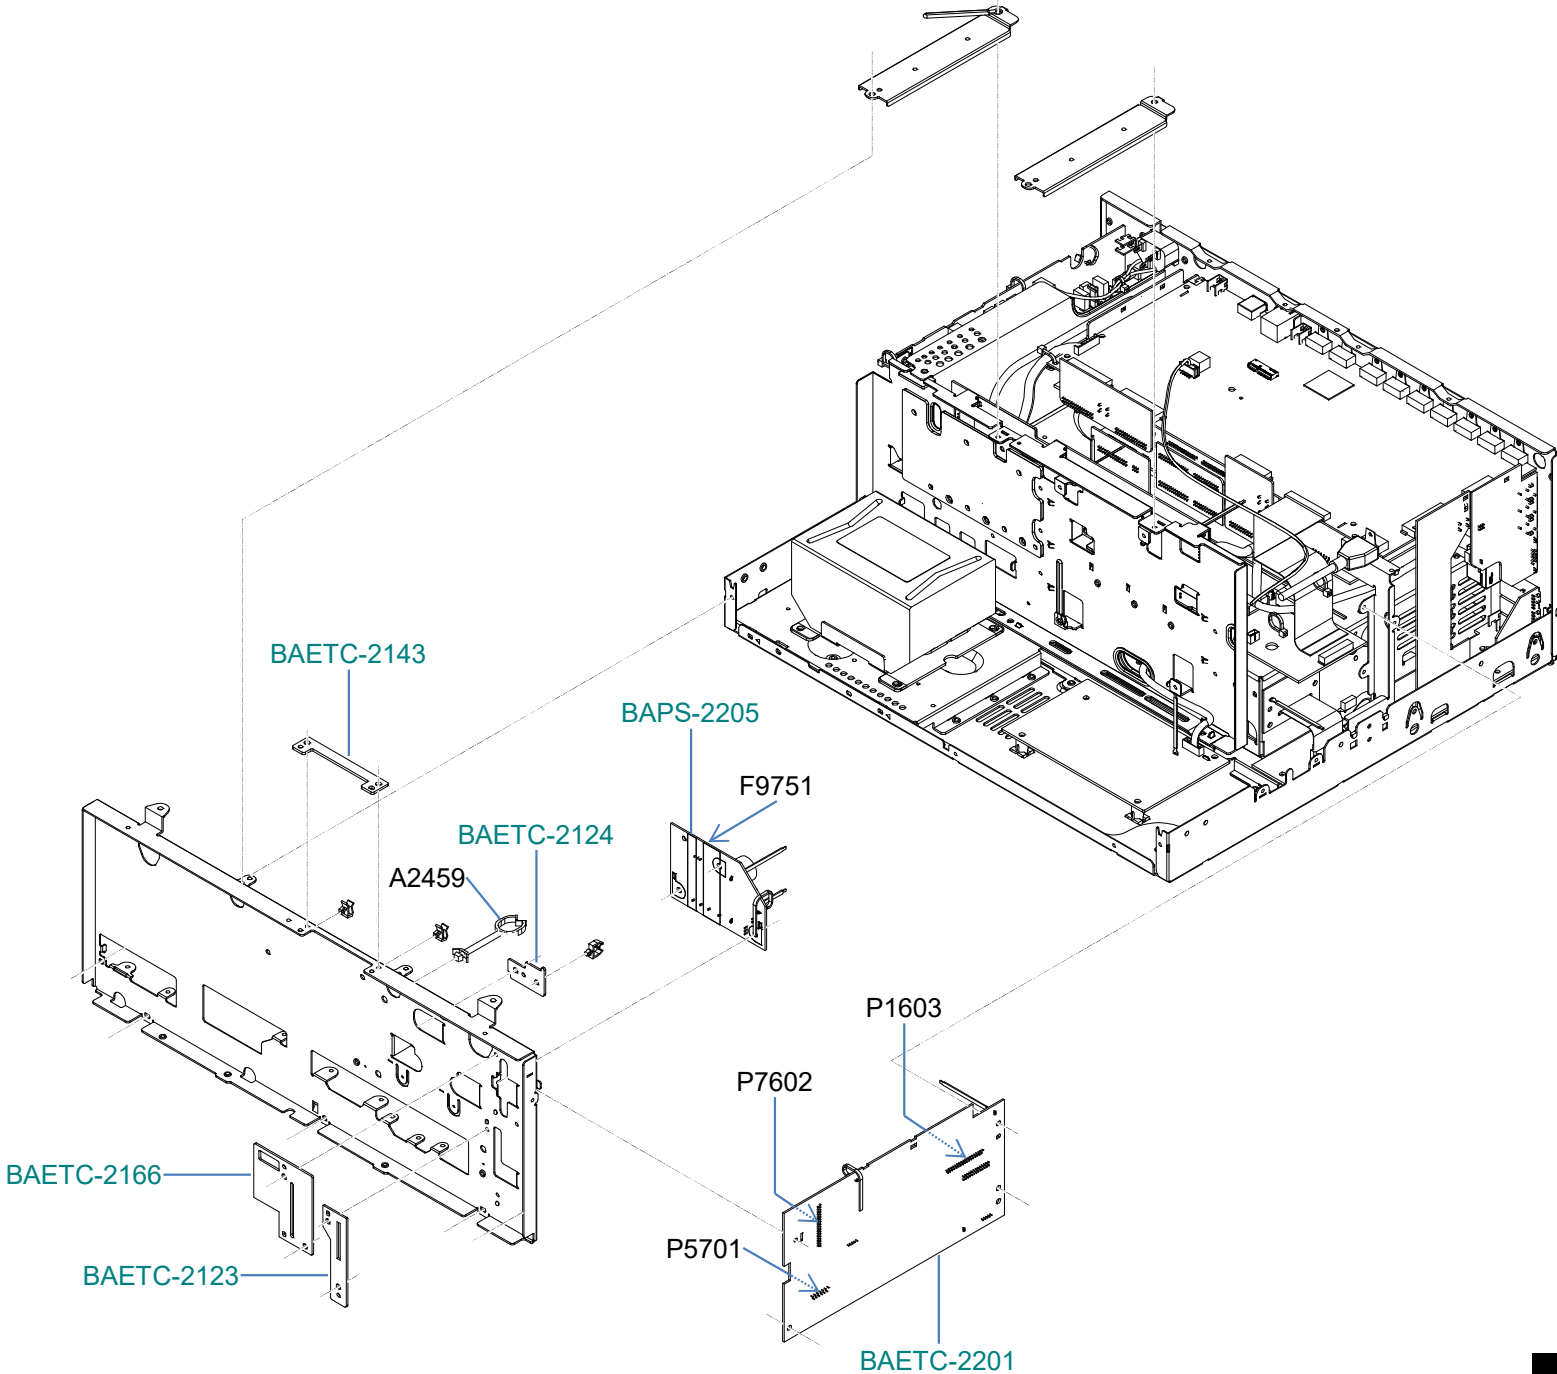

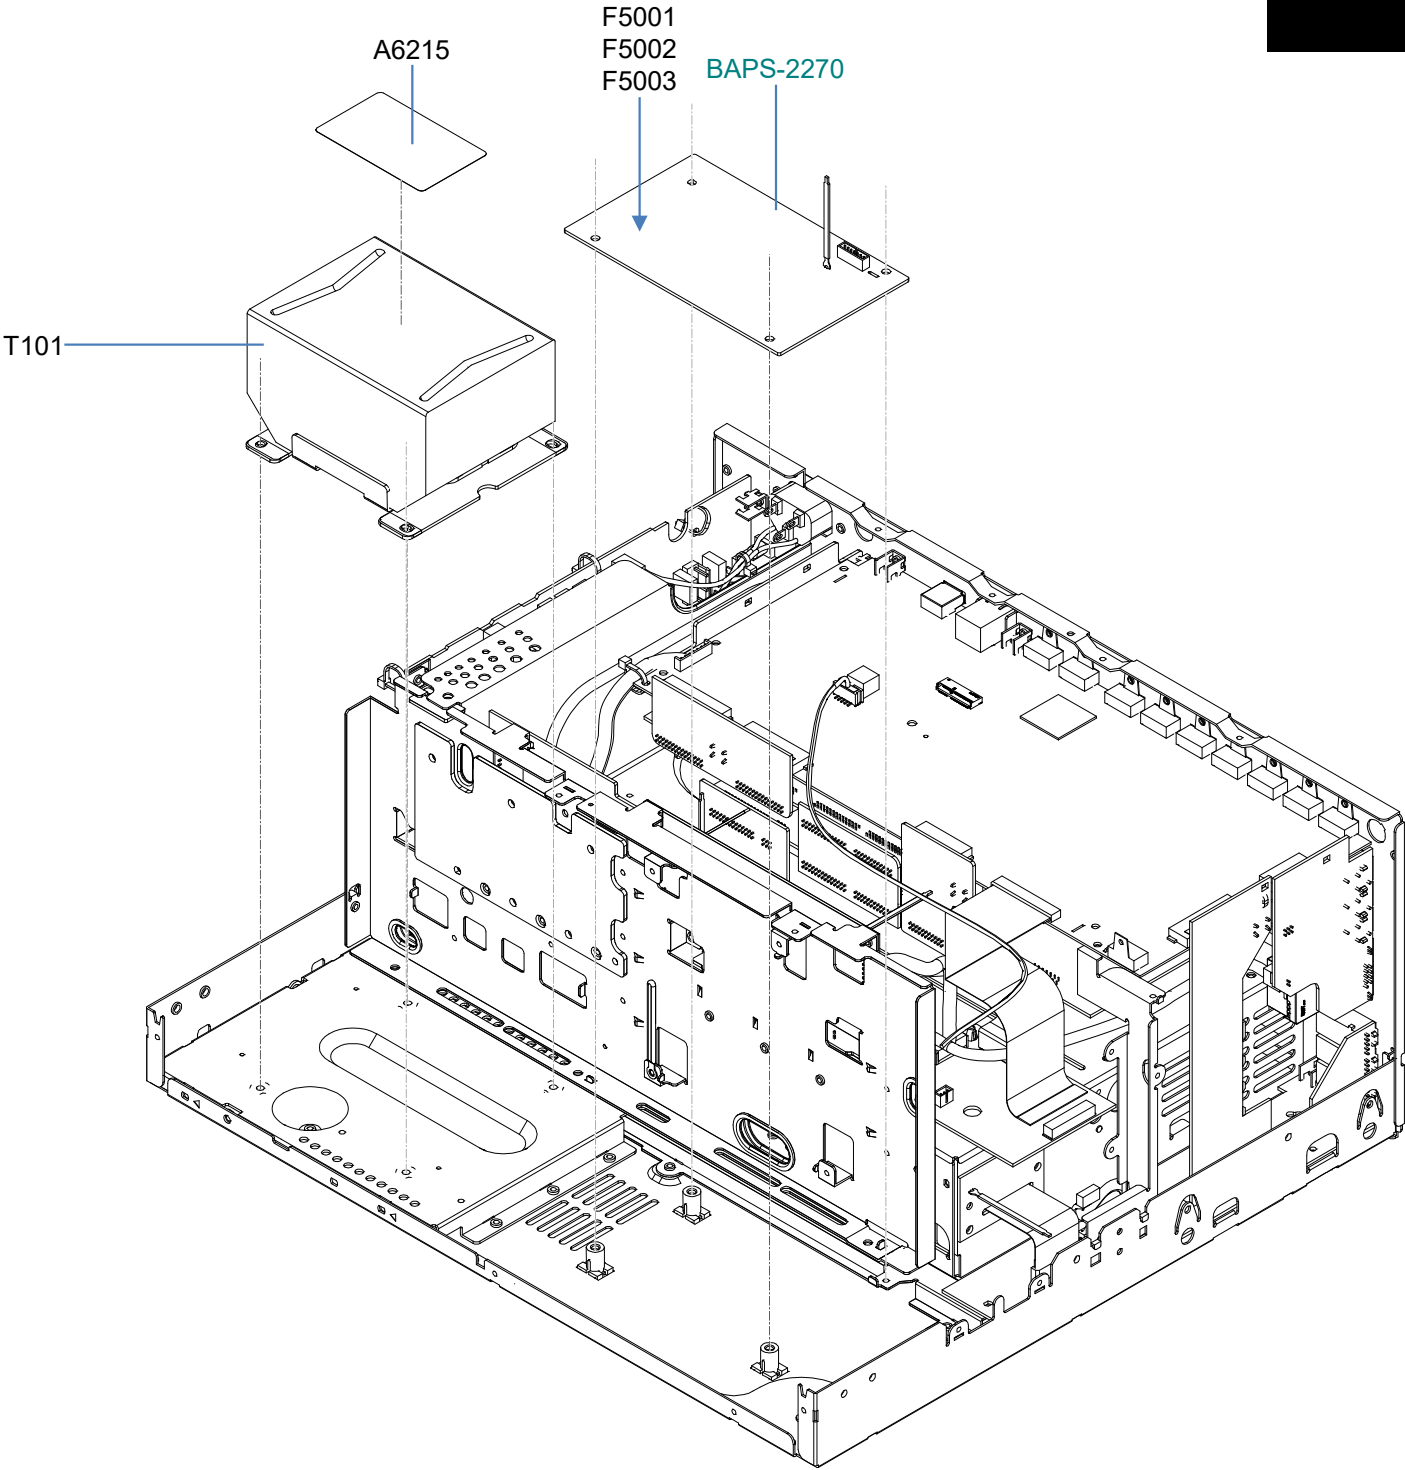

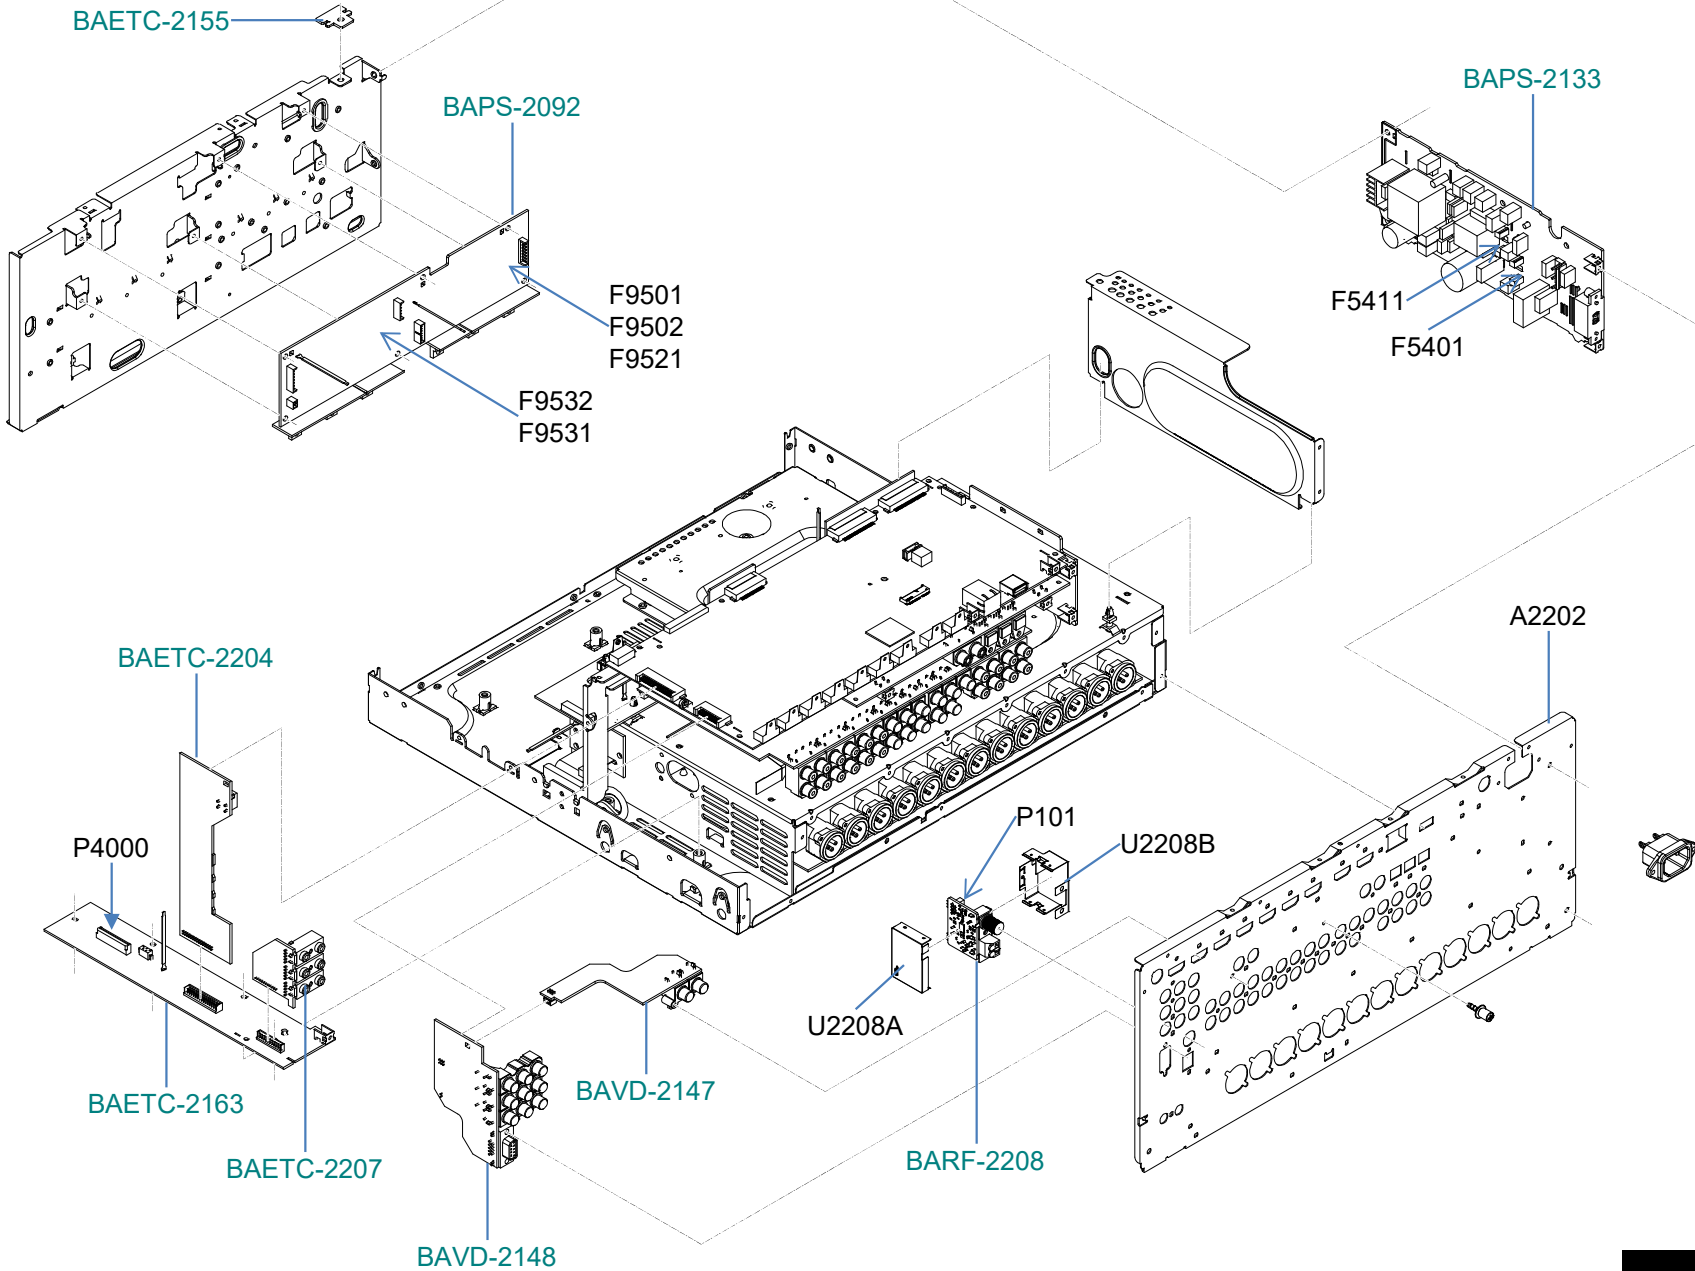

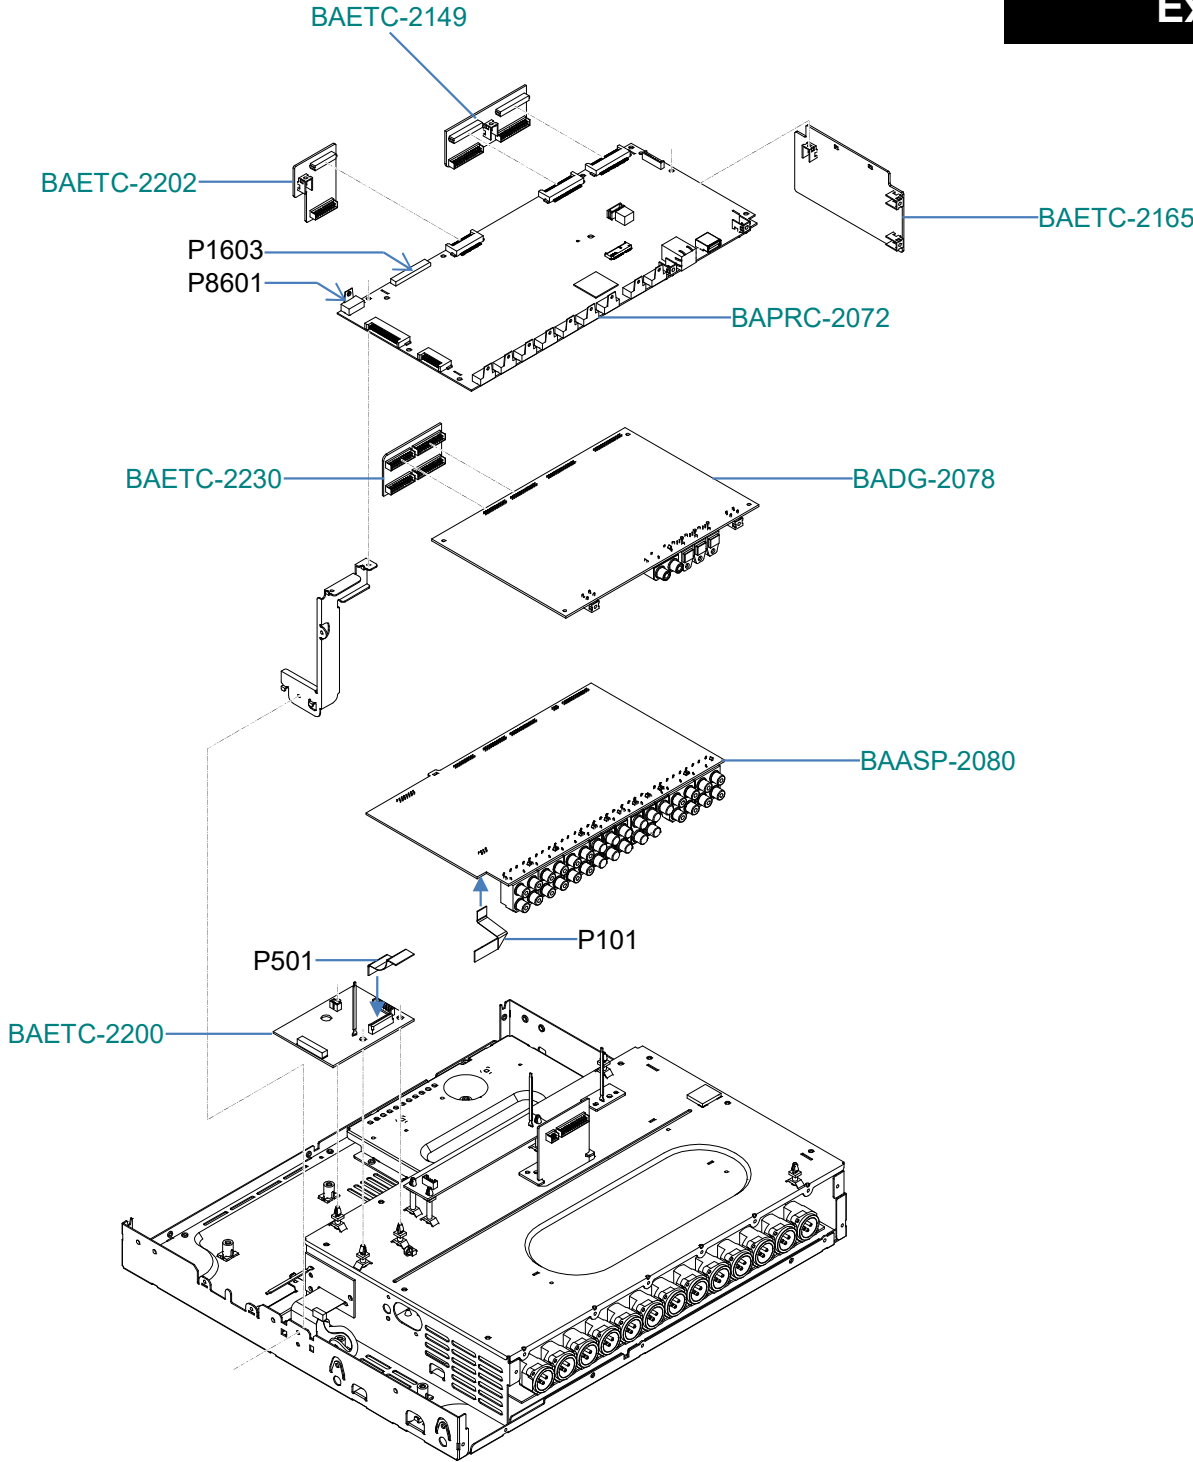

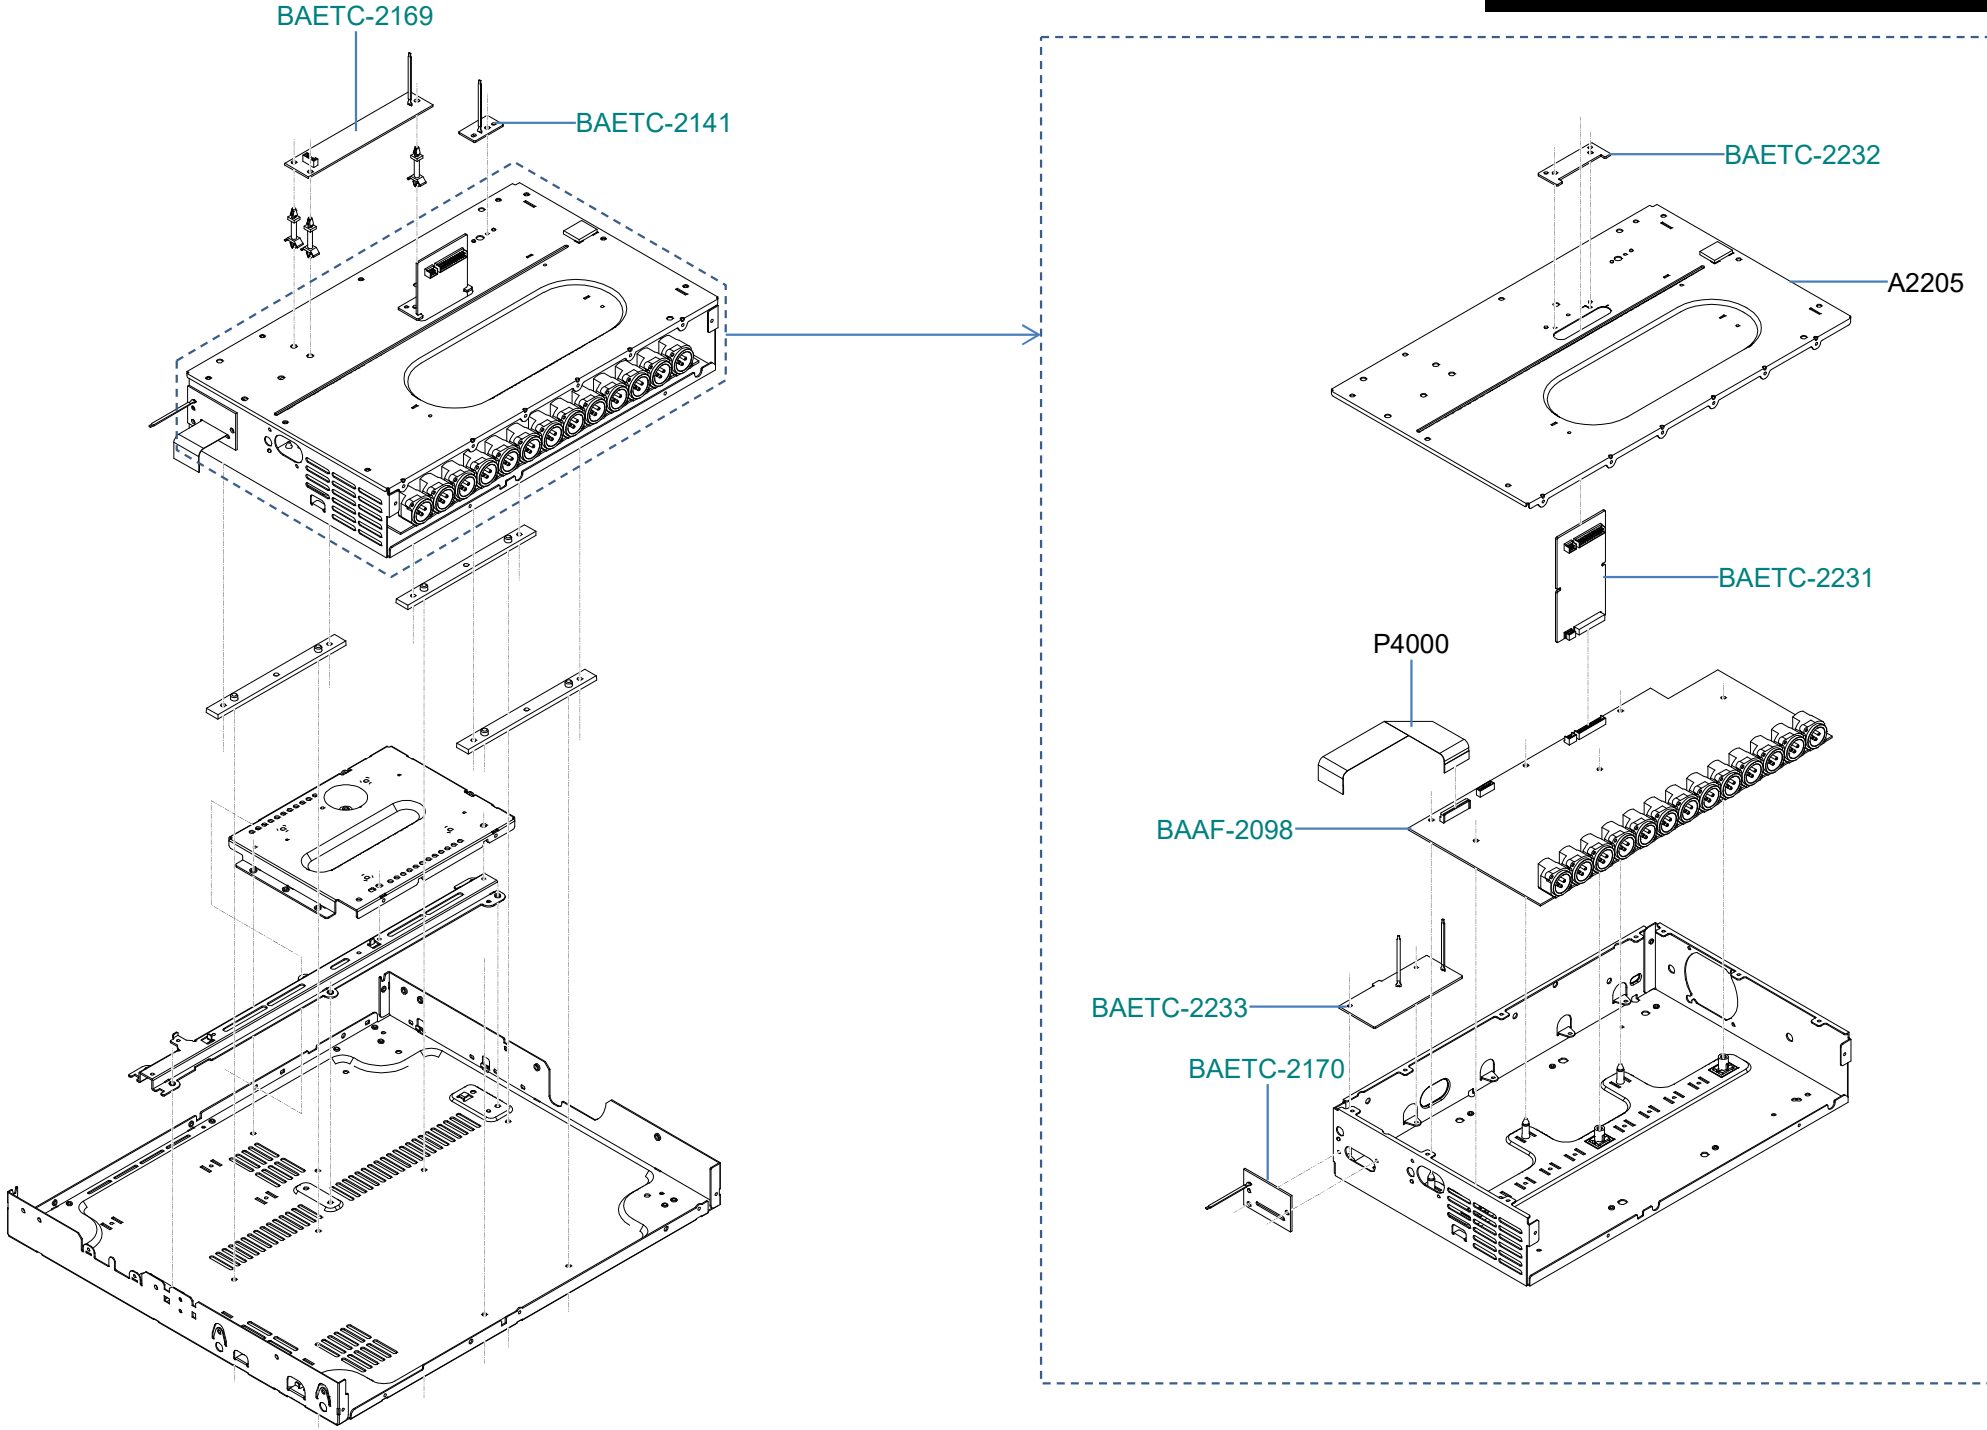

PR-RZ5100(B)MDC

<Note>

1. Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.
 2. The ! mark found on some component parts indicates the importance of the safety factor of the part.
- Therefore, when replacing, be sure to use parts of identical designation.

(B) : Black color model

<MDC> : 120V

Canadian/USA/(Mexico) model

: NSP

REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
[Cabinet, Chassis, Screws, Nuts]					
A2201	CHASSIS	(PR)AS	1	27100625	NSP
A2202	REAR PANEL	RZ5100MDC	1	27124787A	N
A2203	COVER	(B)5100 (Bent)	1	28210175	
A2203	COVER	(B)5100 (Not Bent)	1	28210175Z	
A2204	CHASSIS	(SUB)LX901	1	27100613A	NSP
A2205	COVER	(PRE)	1	28210178B	
A2209	BRACKET	(F)OI	1	27131166A	N NSP
A2211	TOP BEAM	85(MTL)	2	ANG7726-B	N NSP
A2215	BRACKET	(REG)	1	27131168A	NSP
A2232	BRACKET	(RIGHT)LX901	1	27131170	NSP
A2233	SHIELD PLATE	(PRIMARY)	1	27150545	NSP
A2234	HEAT SINK	(REG)	1	27160717	NSP
A2301	PCB MOLD(PP)	.	8	AMR2533-B	NSP
A2302	BOTTOM LEG	(FRONT)	2	27175477A	N
A2303	INSULATOR ICE(PLS)	.	3	AMR7523-A	NSP
A2305	CUSHION	(CORK)D25*9*T2	4	28141968	
A2306	PCB HOLDER	.	3	PNW2029-A	N NSP
A2307	BOTTOM LEG	(REAR)	2	27175478A	
A2412	MINI CLAMP	.	2	VEC1597-A	N NSP
A2413	HOLDER	KGLS-6S	5	27190011	NSP
A2416	HOLDER	KGLS-14S	3	27190164	NSP
A2454	CUSHION/T3	.	6	AEB7448-A	NSP
A2459	CORD CLAMPER/HL	.	1	AEC7653-A	N
A2465	BUSH/ANT	.	2	AMR7706-B	
A2468	CUSHION/T8	.	1	AEB7442-A	N NSP
A2469	HOLDER	(PLUG)	1	27191418A	NSP
A2470	CLIP	CS-1U	2	27255004	NSP
A2471	CLAMPER	YMC-10-0 V0	1	27301970	N NSP
A2472	RIVET	P4050	1	880057	N NSP
A2472or	RIVET	R4050B	(1)	880064	N NSP
A2474	HOLDER	(クランプ) UA-0	1	27190432	NSP
A2480	CUSHION	t13x20x20	1	28142016	N NSP
A2481	TAPE	TAPE(CLOTH-8U)	0.26	29110082	NSP
A2482	IB CUSHION	W15*3t TAPE	0.03	28141585A	NSP
A2483	CUSHION	(PORON)10*15*T1.5	2	28142018	N NSP
A2484	CUSHION	(FELT)170*10*T1.0	1	28142020	N NSP
A5201	DOOR	(B)	1	28148858	
A5202	HOLDER	(L)	1	27191411B	NSP
A5203	HOLDER	(R)	1	27191412A	NSP
A5204	SHAFT	.	2	27260383	NSP
A5205	DAMPER	(11.3)	2	27301969	NSP
A5206	RETAINER	(SPRING)	1	27142345A	NSP
A5207	RETAINER	(DOOR)	1	27142341	NSP
A5208	RETAINER	(LINK)	1	27142342	NSP

A5209	RETAINER	(ERH-L)	1	27142343	NSP
A5210	PLASTIC RIVET	P3035B	2	880016	
A5210or	RIVET	R3035B	(2)	880062	N NSP
A5211	KNOB	(TONE)(B)AS	2	28327232	
A5211A	KNOB	(TONE)(B)	{2}	28327211	N
A5211B	SPRING	.	{2}	27180575	
A5212	KNOB	(VOL)AS(B)	1	28327219	
A5212A	KNOB	(VOL)CAP(B)	{1}	28327221	N
A5212B	KNOB	(VOL)BASE	{1}	28327223	N
A5212C	SPRING	.	{1}	27180575	
A5213	CUSHION	(PORON)8*3*T1.5	3	28141969	NSP
A5214	SPACER	(PC)D7*d4*t0.25	1	27270575	NSP
A5501	FRONT BRACKET	810(B)	1	27111638	
A5502	KNOB	(CUR)AS BLACK	1	28326994C	
A5502A	KNOB	(CUR-BASE) BLK	{1}	28326986C	N
A5502B	KNOB	(CUR) BLK	{1}	28326988A	
A5503	KNOB	(ENTER) BLK	1	28326990	
A5504	KNOB	(5)(B)	2	28327225	
A5505	PLATE	(VOL)	1	27262931A	
A5506	HOLDER	(PLT)	1	27191413A	N NSP
A5507	CLEAR PLATE	TX-RZ810	1	28192475	
A5508	KNOB	(PURE)	1	28327208	N
A5509	GUIDE	(STBY)(B)	1	27268323	NSP
A5510	KNOB	(STBY)(B)	1	28327234	
A5511	KNOB	(1)(B)	2	28327209	
A5512	FACET	.	1	28198905	
A5513	BADGE	.	1	28135317	
A5514	KNOB	(INP-C)(B)	1	28327272A	N
A5515	KNOB	(INP-L)(B)	1	28327274A	N
A5516	KNOB	(INP-R)(B)	1	28327276A	N
A5517	FRONT PANEL	PRRZ5100(B)	1	27213857	N
A5518	PLATE	(DOOR)(B)US_TXRZ810	1	27262934A	
A5519	BACK PLATE	(B)	1	28133428	
A5520	IB CUSHION	W15*3t TAPE	0.01	28141585A	NSP
A5550	SCREW	3TTB+8B(3BC)	4	838430088GR	NSP
A5551	SCREW	3TTB+8B(3BC)	2	838430088GR	NSP
A5552	SCREW	3TTB+8B(3BC)	6	838430088GR	NSP
A5553	SCREW	3TTB+8B(3BC)	4	838430088GR	NSP
A5554	SCREW	3TTB+8B(3BC)	1	838430088GR	NSP
A5555	SCREW	3TTB+8B(3BC)	1	838430088GR	NSP
A5556	SCREW	3TTB+8B(3BC)	1	838430088GR	NSP
A5557	SCREW	3TTB+8B(3BC)	5	838430088GR	NSP
A5558	SCREW	3TTB+8B(3BC)	2	838430088GR	NSP
A5559	SCREW	3TTB+8B(3BC)	1	838430088GR	NSP
A5560	SCREW	3TTB+8B(3BC)	2	838430088GR	NSP
A5561	SCREW	3TTB+8B(3BC)	2	838430088GR	NSP
A5562	SCREW	3TTB+8B(3BC)	1	838430088GR	NSP
A5563	SCREW	3TTB+10B(3BC)	2	838430108GR	NSP
A5564	SCREW	3TTB+8B(3BC)	3	838430088GR	NSP
A5565	SCREW	3TTB+8B(3BC)	3	838430088GR	NSP
A5566	SCREW	3TTB+8B(3BC)	1	838430088GR	NSP
A5567	SCREW	3TTB+8B(3BC)	3	838430088GR	NSP
A6215	LABEL	PRE_ONKYO	1	29392653	N
A7913	SCREW	3TTB+6B(3BC)	6	838430068GR	NSP
A7914	SCREW	3TTB+6B(3BC)	4	838430068GR	NSP

A7916	SCREW	3TTB+6B(3BC)	2	838430068GR	NSP
A7918	SCREW	BBZ30P180FCC	3	838630188	NSP
A7919	SCREW	SCREW	9	801666	N NSP
A7920	SCREW	3TTB+6B(3BC)	1	838430068GR	NSP
A7924	SCREW	3TTB+6B(3BC)	1	838430068GR	NSP
A7926	SCREW	BBZ30P060FCC	6	838630068	N NSP
A7927	SCREW	BBZ30P060FCC	5	838630068	N NSP
A7929	SCREW	BMZ30P040FTB	9	82543004GR	NSP
A7930	SCREW	3TTB+8B(3BC)	2	838430088GR	NSP
A7932	SCREW	3TTB+8B(3BC)	1	838430088GR	NSP
A7933	SCREW	3TTB+8B(3BC)	3	838430088GR	NSP
A7934	SCREW	3TTB+8B(3BC)	2	838430088GR	NSP
A7935	SCREW	3TTB+8B(3BC)	11	838430088GR	NSP
A7936	SCREW	3TTB+8B(3BC)	2	838430088GR	NSP
A7937	SCREW	3TTB+8B(3BC)	3	838430088GR	NSP
A7939	SCREW	3TTB+8B(3BC)	2	838430088GR	NSP
A7940	SCREW	3TTB+6B(3BC)	4	838430068GR	NSP
A7941	SCREW	3TTB+8B(3BC)	3	838430088GR	NSP
A7942	SCREW	3TTB+8B(3BC)	4	838430088GR	NSP
A7943	SCREW	3TTB+8B(3BC)	6	838430088GR	NSP
A7945	SCREW	3TTB+8B(3BC)	26	838430088GR	NSP
A7946	SCREW	BPZ30P080FNI	6	838230080	NSP
A7947	SCREW	3TTB+8B(3CM)SR	1	801637	NSP
A7948	SCREW	BBZ30P180FCC	2	838630188	NSP
A7949	SCREW	3TTB+8B(3CM)SR	1	801637	NSP
A7950	SCREW	3TTB+6B(3BC)	2	838430068GR	NSP
A7951	SCREW	3TTB+8B(3CM)SR	3	801637	NSP
A7952	SCREW	3TTB+6B(3BC)	2	838430068GR	NSP
A7954	SCREW	3TTB+6B(3BC)	2	838430068GR	NSP
A7955	SCREW	3TTB+6B(3BC)	2	838430068GR	NSP
A7956	SCREW	3TTB+6B(3BC)	6	838430068GR	NSP
A7957	SCREW	3TTB+8B(3BC)	2	838430088GR	NSP
A7958	SCREW	3TTB+6B(3BC)	3	838430068GR	NSP
A7959	SCREW	SCREW 4X12(FE)	4	801660	NSP
A7960	WASHER	WH40FNI	1	87324009	N NSP
A7961	SCREW	3TTB+6B(3BC)	1	838430068GR	NSP
A7962	SCREW	3TTB+6B(3BC)	3	838430068GR	NSP
A7963	SCREW	BBZ30P180FCC	3	838630188	NSP
A7964	SCREW	3TTB+8B(3CM)SR	1	801637	NSP
A7965	SCREW	3TTB+6B(3BC)	2	838430068GR	NSP
A7966	SCREW	3TTB+6B(3BC)	2	838430068GR	NSP
A7967	SCREW	3TTB+6B(3BC)	1	838430068GR	NSP
A7968	SCREW	3TTB+8B(3CM)SR	1	801637	NSP
A7969	SCREW	3TTB+6B(3BC)	2	838430068GR	NSP
A7970	SCREW	3TTB+6B(3BC)	5	838430068GR	NSP
A7971	SCREW	3TTB+8B(3BC)	1	838430088GR	NSP
A7972	SCREW	3TTB+8B(3BC)	1	838430088GR	NSP
A7975	SCREW	3TTF+8B(BC)	2	835430088	N NSP
A7977	SCREW	3TTB+8B(3BC)	2	838430088GR	NSP
A7981	SCREW	3TTB+8B(3CM)SR	2	801637	NSP
A7982	SCREW	3TTB+8B(3CM)SR	2	801637	NSP
A7983	SCREW	3TTB+8B(3BC)	8	838430088GR	NSP
A7984	SCREW	3TTB+8B(3BC)	1	838430088GR	NSP
A7985	SCREW	BCZ40P060FTB	2	838440069GR	NSP
A7986	SCREW	BCZ40P060FTB	3	838440069GR	NSP

A7987	SCREW	BCZ40P060FTB	3	838440069GR	NSP
A7988	TERMINAL	ターミナル	1	25060151	NSP
A7990	BINDER(BK-1)	.	16	ZCA-BK1	NSP
A7996	SCREW	2B+5FN(3CM)	1	82512005	NSP
A7997	SCREW	3TTB+8B(3CM)SR	2	801637	NSP
A8000	WASHER	W3*10F(3BC)	1	87643010GR	NSP
A8002	SCREW	3TTB+8B(3CM)SR	4	801637	NSP
A8003	SCREW	BBZ30P060FCC	7	838630068	N NSP
A8004	SCREW	3TTB+8B(3CM)SR	2	801637	NSP
A8005	SCREW	3TTB+8B(3BC)	2	838430088GR	NSP
A8006	SCREW	3TTB+6B(3BC)	2	838430068GR	NSP
A8007	SCREW	3TTB+8B(3CM)SR	1	801637	NSP
[Transformers, Coils]					
T101	POWER TRANSFORMER	NPT-1680D	1	2302184	I, N
[Switches, Terminals, Wires]					
F5001	FUSE	1.25A-UL/T-233	1	252318GR	!
F5002	FUSE	1.25A-UL/T-233	1	252318GR	!
F5003	FUSE	1A-UL/T-233	1	252317GR	!
F5401	FUSE	1.6A-UL/T-233	1	252319GR	!
F5411	FUSE	215002.MXP	1	252400	!
F9501	FUSE	1.25A-UL/T-233	1	252318GR	!
F9502	FUSE	1.25A-UL/T-233	1	252318GR	!
F9521	FUSE	1.25A-UL/T-233	1	252318GR	!
F9531	FUSE	1.25A-UL/T-233	1	252318GR	!
F9532	FUSE	1.25A-UL/T-233	1	252318GR	!
F9751	FUSE	2A-UL/T-233	1	252320GR	!
P101	FLEXIBLE FLAT CABLE	NCFC7-070712	1	2047070712	
P1603	FLEXIBLE FLAT CABLE	NCFC5-351512	1	2045351512	
P3652	WIRE HARNESS ASSEMBLY	NSAS-8P2463	1	2009991599UL	NSP
P3654A	ASSEMBLED PWB	WCBN806L	1	24150135	
P3654B	WIFI BT ANTENNA	RFDPA870918EMLB302	1	2050102	
P3654C	WIFI BT ANTENNA	RFDPA870940EMLB303	1	2050103	
P4000	FLEXIBLE FLAT CABLE	NCFC7-211512	1	2047211512	
P4701	WIRE HARNESS ASSEMBLY	NSAS-14P2459	1	2009991595UL	NSP
P501	FLEXIBLE FLAT CABLE	ADD7725-A	1	204315043	
P5701	FLEXIBLE FLAT CABLE	NCFC7-131512	1	2047131512	
P7602	FLEXIBLE FLAT CABLE	NCFC4-35067	1	204435067	N
P7604	FLEXIBLE FLAT CABLE	NCFC4-05071	1	204405071	N
P7653	FLEXIBLE FLAT CABLE	NCFC4-11068	1	204411068	N
P8601	CORD ASSEMBLY	TYX1622-114047	1	2010519	
[Frontend, Units]					
U080	PARENT PC BOARD AS	BAPRC-2072-1Q-P	1	1B5142072-1Q100MDC	N Parent
BAPRC-2072 Processing circuit pc board AS		BAPRC-2072-1Q	1	1B5142072-1Q-C100MDC	N Child
U190	PARENT PC BOARD AS	BADIS-2075-1E-P	1	1B5142075-1E	N Parent
BADIS-2075 Display circuit pc board AS		BADIS-2075-1E	1	1B5142075-1E-C	Child
BAETC-2123Et cetra pc board AS		BAETC-2123-1E	1	1B5142123-1E-C	Child
BAETC-2124Et cetra pc board AS		BAETC-2124-1E	1	1B5142124-1E-C	Child
BASW-2126 Switch circuit pc board AS		BASW-2126-1E	1	1B5142126-1E-C	Child
BASW-2127 Switch circuit pc board AS		BASW-2127-1E	1	1B5142127-1E-C	Child
BASW-2128 Switch circuit pc board AS		BASW-2128-1E	1	1B5142128-1E-C	Child
BAETC-2129Et cetra pc board AS		BAETC-2129-1E	1	1B5142129-1E-C	Child
BAETC-2130Et cetra pc board AS		BAETC-2130-1E	1	1B5142130-1E-C	Child
BAETC-2131Et cetra pc board AS		BAETC-2131-1E	1	1B5142131-1E-C	Child
BAETC-2132Et cetra pc board AS		BAETC-2132-1E	1	1B5142132-1E-C	Child
BAPS-2133 Power supply circuit pc board AS		BAPS-2133-1E	1	1B5142133-1E-C	Child

BAETC-2134	Et cetra pc board AS	BAETC-2134-1E	1	1B5142134-1E-C	Child
BAETC-2136	Et cetra pc board AS	BAETC-2136-1E	1	1B5142136-1E-C	Child
BAETC-2141	Et cetra pc board AS	BAETC-2141-1E	1	1B5142141-1E-C	Child
BAETC-2143	Et cetra pc board AS	BAETC-2143-1E	1	1B5142143-1E-C	Child
BAETC-2155	Et cetra pc board AS	BAETC-2155-1E	1	1B5142155-1E-C	Child
U200	PARENT PC BOARD AS	BADG-2078-1J-P	1	1B5142078-1J	N Parent
BADG-2078	Digital circuit pc board AS	BADG-2078-1J	1	1B5142078-1J-C	N Child
U100	PARENT PC BOARD AS	BAASP-2080-1Q-P	1	1B5142080-1Q	N Parent
BAASP-2080	Audio signal processor circuit pc board AS	BAASP-2080-1Q	1	1B5142080-1Q-C	N Child
BAVD-2147	Video circuit pc board AS	BAVD-2147-1Q	1	1B5142147-1Q-C	N Child
BAVD-2148	Video circuit pc board AS	BAVD-2148-1Q	1	1B5142148-1Q-C	N Child
BAETC-2149	Et cetra pc board AS	BAETC-2149-1Q	1	1B5142149-1Q-C	N Child
U210	PARENT PC BOARD AS	BAHDM-2087-1A-P	1	1B5142087-1A	N Parent
BAHDM-2087	HDMI circuit pc board AS	BAHDM-2087-1A	1	1B5142087-1A-C	N Child
BAETC-2230	Et cetra pc board AS	BAETC-2230-1A	1	1B5142230-1A-C	N Child
U160	PARENT PC BOARD AS	BAPS-2089-1N-P	1	1B5142089-1N	N Parent
BAETC-2163	Et cetra pc board AS	BAETC-2163-1N	1	1B5142163-1N-C	N Child
BAETC-2165	Et cetra pc board AS	BAETC-2165-1N	1	1B5142165-1N-C	N Child
BAETC-2166	Et cetra pc board AS	BAETC-2166-1N	1	1B5142166-1N-C	N Child
BAETC-2169	Et cetra pc board AS	BAETC-2169-1N	1	1B5142169-1N-C	N Child
BAETC-2170	Et cetra pc board AS	BAETC-2170-1N	1	1B5142170-1N-C	N Child
BAETC-2202	Et cetra pc board AS	BAETC-2202-1N	1	1B5142202-1N-C	N Child
BARF-2208	Radio frequency circuit pc board AS	BARF-2208-1N	1	1B5142208-1N-C	N Child
U170	PARENT PC BOARD AS	BAPS-2092-1N-P	1	1B5142092-1N	N Parent
BAPS-2092	Power supply circuit pc board AS	BAPS-2092-1N	1	1B5142092-1N-C	N Child
BAETC-2200	Et cetra pc board AS	BAETC-2200-1N	1	1B5142200-1N-C	N Child
BAETC-2201	Et cetra pc board AS	BAETC-2201-1N	1	1B5142201-1N-C	N Child
BAETC-2204	Et cetra pc board AS	BAETC-2204-1N	1	1B5142204-1N-C	N Child
BAPS-2205	Power supply circuit pc board AS	BAPS-2205-1N	1	1B5142205-1N-C	N Child
BAETC-2207	Et cetra pc board AS	BAETC-2207-1N	1	1B5142207-1N-C	N Child
U240	PARENT PC BOARD AS	BAAF-2098-1A-P	1	1B5142098-1A	N Parent
BAAF-2098	Audio frequency circuit pc board AS	BAAF-2098-1A	1	1B5142098-1A-C	N Child
BAETC-2231	Et cetra pc board AS	BAETC-2231-1A	1	1B5142231-1A-C	N Child
BAETC-2232	Et cetra pc board AS	BAETC-2232-1A	1	1B5142232-1A-C	N Child
BAETC-2233	Et cetra pc board AS	BAETC-2233-1A	1	1B5142233-1A-C	N Child
BAPS-2270	Power supply circuit pc board AS	BAPS-2270-1A	1	1B5142270-1A-C	N Child
U2208A	SHIELD CASE	(TUNER-BTM)	1	27225207A	
U2208B	SHIELD CASE	(UPPER)	1	27225208	
[Packing]					
A6901	PAD	(AS)1100	1	29092773A	
A6901A	PAD	(F)1100	{1}	29092774A	N
A6901B	PAD	(R)1100	{1}	29092775	N
A6903A	UPC LABEL	PRRZ5100(B)MDC	1	29393300	N
A6904	CARTON	PRRZ5100DC	1	29055661	
A6905	PACKING SHEET	-	1	RHC1023-A	NSP
A6909	CUSHION	(EVA)20*40*77.5	2	28141973	NSP
A6910	POLYPROPYLENE TAPE	W50 SBT-70	1.8	29110200	NSP
A6913	TAPE	FIXLON #813N W12	0.1	29110230	N NSP
A6921	LABEL	(fwup-w0-dtsx)CNT_ONK	1	29393452	N
[Accessories]					
A6301	FM ANT AS	Type W	1	292191	
A6302	POLYETHYLENE BAG	-	1	AHG7117-A	NSP
A6303	MIC	KHM0018-010010	1	245051	
A6306	WARRANTY CARD	(ONKYO RZ-SERIES)	1	29365230A	N
A6307	ANTENNA COIL	AM LOOP-ANTENNA	1	232207	

A6307or	ANTENNA COIL	AM LOOP ANTENNA (S&O)	(1)	232216	
A6308	REMOTE CONTROL TRANSMITTER	RC-926R	1	24140926	
A6309	BATTERY	R6/AA(UM-3)	2	3010194	NSP
A6311	POWER SUPPLY CORD	ADG7118-A(122111/16)	1	253454VOL	!
A6340	INSTRUCTION MANUAL	En(PRRZ5100)_BAS	1	29402425	N
A6341	INSTRUCTION MANUAL	U2FrEs(PRRZ5100)_BAS	1	29402426	N
A6345	INSTRUCTION MANUAL	SAFETY_ONK_16HI_U3(EnFrE	1	29402488	
A6346	INSTRUCTION SHEET	(Google cast)	1	29355956	
A6347	INSTRUCTION SHEET	(internet radio-2016)	1	29355957	
A6350	SHEET	(FLYER-US AVR 2015)	1	29380164	
A6352	INSTRUCTION SHEET	(FWupdate-Fireconnect)	1	29355967	

BAAF-2098-1A

<Note>

1. Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.
2. The ! mark found on some component parts indicates the importance of the safety factor of the part.
- Therefore, when replacing, be sure to use parts of identical designation.

: NSP

REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
[Semi-conductors]					
D4001	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D4051	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D4101	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D4151	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D4201	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D4251	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D4301	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D4351	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D4401	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D4451	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D4501	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D4551	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D4601	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D5001	DIODE	D3SBA60	1	22380272F	
D5004	DIODE	D3SBA60	1	22380272F	
Q4001	HYBRID IC	NE5532APSR	1	22242283R2	NSP
Q4002	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4003	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4004	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4005	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4051	HYBRID IC	NE5532APSR	1	22242283R2	NSP
Q4052	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4053	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4054	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4055	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4101	HYBRID IC	NE5532APSR	1	22242283R2	NSP
Q4102	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4103	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4104	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP

Q4105	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4151	HYBRID IC	NE5532APSR	1	22242283R2	NSP
Q4152	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4153	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4154	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4155	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4201	HYBRID IC	NE5532APSR	1	22242283R2	NSP
Q4202	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4203	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4204	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4205	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4251	HYBRID IC	NE5532APSR	1	22242283R2	NSP
Q4252	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4253	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4254	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4255	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4301	HYBRID IC	NE5532APSR	1	22242283R2	NSP
Q4302	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4303	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4304	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4305	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4351	HYBRID IC	NE5532APSR	1	22242283R2	NSP
Q4352	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4353	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4354	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4355	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4401	HYBRID IC	NE5532APSR	1	22242283R2	NSP
Q4402	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4403	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4404	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4405	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4451	HYBRID IC	NE5532APSR	1	22242283R2	NSP
Q4452	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4453	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4454	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4455	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4501	HYBRID IC	NE5532APSR	1	22242283R2	NSP
Q4502	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4503	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4504	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4505	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4551	HYBRID IC	NE5532APSR	1	22242283R2	NSP
Q4552	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4553	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4554	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4555	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4601	HYBRID IC	NE5532APSR	1	22242283R2	NSP
Q4602	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4603	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4604	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4605	TRANSISTOR	RTAN430C-T112-1	1	2217780R2	NSP
Q4701	TRANSISTOR	KRC105S	1	2217290R2	NSP
Q4702	TRANSISTOR	KRC105S	1	2217290R2	NSP
Q4703	TRANSISTOR	KRC105S	1	2217290R2	NSP
Q4704	TRANSISTOR	KRC105S	1	2217290R2	NSP

Q4705	TRANSISTOR	KRC105S	1	2217290R2	NSP
Q4706	TRANSISTOR	KRC105S	1	2217290R2	NSP
Q4707	TRANSISTOR	KRC105S	1	2217290R2	NSP
Q4708	HYBRID IC	78M05HF(NJM78M05DL1A-TE	1	222780055R2JR	NSP
Q4709	HYBRID IC	BU4094BCFV	1	22242982R2	NSP
Q4710	TRANSISTOR	KRC105S	1	2217290R2	NSP
Q4711	TRANSISTOR	KRC105S	1	2217290R2	NSP
Q4712	TRANSISTOR	KRC105S	1	2217290R2	NSP
Q4713	TRANSISTOR	KRC105S	1	2217290R2	NSP
Q4714	TRANSISTOR	KRC105S	1	2217290R2	NSP
Q4715	TRANSISTOR	KRC105S	1	2217290R2	NSP
Q5001	HYBRID IC	78M15HF(NJM78M15FA)	1	222780155JRC	
Q5001A	HEAT SINK	RAD-141	1	27160472	NSP
Q5001B	SCREW	3P+10FN(3BC)	1	82143010GR	NSP
Q5002	HYBRID IC	79M15HF(NJM79M15FA)	1	222790155JRC	
Q5002A	HEAT SINK	RAD-141	1	27160472	NSP
Q5002B	SCREW	3P+10FN(3BC)	1	82143010GR	NSP
Q5003	HYBRID IC	78M12HF(NJM78M12FA)	1	222780125JRC	
Q5003A	HEAT SINK	RAD-141	1	27160472	NSP
Q5003B	SCREW	3P+10FN(3BC)	1	82143010GR	NSP
[Capacitors]					
C4001	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-220M(UTSP)	1	397552217T	
C4002	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-220M(UTSP)	1	397552217T	
C4003	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C4004	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-47M(UTSP)	1	397584707AT	
C4005	UTSJ C	CE04W50V-47M(UTSJ)	1	398084707BT	
C4006	UTSJ C	CE04W50V-47M(UTSJ)	1	398084707BT	
C4007	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J1	1	342102214R1	NSP
C4008	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J1	1	342102214R1	NSP
C4009	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C4010	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C4051	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-220M(UTSP)	1	397552217T	
C4052	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-220M(UTSP)	1	397552217T	
C4053	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C4054	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-47M(UTSP)	1	397584707AT	
C4055	UTSJ C	CE04W50V-47M(UTSJ)	1	398084707BT	
C4056	UTSJ C	CE04W50V-47M(UTSJ)	1	398084707BT	
C4057	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J1	1	342102214R1	NSP
C4058	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J1	1	342102214R1	NSP
C4059	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C4060	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C4101	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-220M(UTSP)	1	397552217T	
C4102	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-220M(UTSP)	1	397552217T	
C4103	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C4104	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-47M(UTSP)	1	397584707AT	
C4105	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-47M(UTSP)	1	397584707AT	
C4106	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-47M(UTSP)	1	397584707AT	
C4107	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J1	1	342102214R1	NSP
C4108	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J1	1	342102214R1	NSP
C4109	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C4110	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C4151	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-220M(UTSP)	1	397552217T	
C4152	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-220M(UTSP)	1	397552217T	
C4153	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C4154	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-47M(UTSP)	1	397584707AT	

C4410	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C4451	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-220M(UTSP)	1	397552217T	
C4452	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-220M(UTSP)	1	397552217T	
C4453	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C4454	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-47M(UTSP)	1	397584707AT	
C4455	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-47M(UTSP)	1	397584707AT	
C4456	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-47M(UTSP)	1	397584707AT	
C4457	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J1	1	342102214R1	NSP
C4458	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J1	1	342102214R1	NSP
C4459	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C4460	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C4501	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-220M(UTSP)	1	397552217T	
C4502	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-220M(UTSP)	1	397552217T	
C4503	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C4504	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-47M(UTSP)	1	397584707AT	
C4505	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-47M(UTSP)	1	397584707AT	
C4506	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-47M(UTSP)	1	397584707AT	
C4507	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J1	1	342102214R1	NSP
C4508	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J1	1	342102214R1	NSP
C4509	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C4510	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C4551	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-220M(UTSP)	1	397552217T	
C4552	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-220M(UTSP)	1	397552217T	
C4553	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C4554	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-47M(UTSP)	1	397584707AT	
C4555	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-47M(UTSP)	1	397584707AT	
C4556	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-47M(UTSP)	1	397584707AT	
C4557	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J1	1	342102214R1	NSP
C4558	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J1	1	342102214R1	NSP
C4559	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C4560	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C4601	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-220M(UTSP)	1	397552217T	
C4602	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-220M(UTSP)	1	397552217T	
C4603	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C4604	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-47M(UTSP)	1	397584707AT	
C4605	UTSJ C	CE04W50V-47M(UTSJ)	1	398084707BT	
C4606	UTSJ C	CE04W50V-47M(UTSJ)	1	398084707BT	
C4607	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J1	1	342102214R1	NSP
C4608	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J1	1	342102214R1	NSP
C4609	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C4610	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C4701	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C4702	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C4703	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C4704	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C4706	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4706or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4707	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C4708	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017AT	
C4711	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4711or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4712	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C5001	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V50V-334J	1	374723344T	NSP
C5002	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V50V-334J	1	374723344T	NSP
C5003	ELECTROLYTIC CAPACITOR	CE69W35V-4700M	1	3504477A	

C5004	ELECTROLYTIC CAPACITOR	CE69W35V-4700M	1	3504477A	
C5005	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007AT	
C5006	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007AT	
C5007	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V50V-334J	1	374723344T	NSP
C5008	ELECTROLYTIC CAPACITOR	CE69W35V-4700M	1	3504477A	
C5009	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007AT	
[Resistors]					
R4001	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R4002	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R4003	CHIP TYPE CARBON RESISTOR	RN72K1J-271JE	1	435032714R1	NSP
R4004	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R4005	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R4006	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R4007	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R4008	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R4009	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R4010	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R4011	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R4012	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R4013	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R4014	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R4015	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R4016	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R4017	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4018	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4019	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4020	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4051	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R4052	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R4053	CHIP TYPE CARBON RESISTOR	RN72K1J-271JE	1	435032714R1	NSP
R4054	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R4055	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R4056	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R4057	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R4058	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R4059	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R4060	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R4061	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R4062	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R4063	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R4064	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R4065	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R4066	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R4067	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4068	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4069	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4070	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4101	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R4102	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R4103	CHIP TYPE CARBON RESISTOR	RN72K1J-271JE	1	435032714R1	NSP
R4104	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R4105	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R4106	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R4107	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R4108	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP

R4708	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R4709	CHIP TYPE CARBON RESISTOR	RN72K2E-015JE	1	435220154R1	NSP
R4711	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4712	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4713	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4714	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4715	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4716	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R4717	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4718	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4719	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4720	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4721	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4722	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4723	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
[Switches, Terminals, Wires]					
F5001A	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F5001B	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F5002A	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F5002B	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F5003A	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F5003B	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
P240	PRINTED WIRING BOARD	BCAF-2098	{1}	25142098	N NSP
P240	PRINTED WIRING BOARD	BCAF-2098	1	25142098A	N NSP
P240	PRINTED WIRING BOARD	BCETC-2231	{1}	25142231	N NSP
P240	PRINTED WIRING BOARD	BCETC-2232	{1}	25142232	N NSP
P240	PRINTED WIRING BOARD	BCETC-2233	{1}	25142233	N NSP
P240	PRINTED WIRING BOARD	BCPS-2270	{1}	25142270	N NSP
P4000A	SOCKET	NSCT-21P2114	1	25052217	NSP
P4001	SOCKET	AC3MAH1-AU-B	1	25053530	NSP
P4051	SOCKET	AC3MAH1-AU-B	1	25053530	NSP
P4101	SOCKET	AC3MAH1-AU-B	1	25053530	NSP
P4151	SOCKET	AC3MAH1-AU-B	1	25053530	NSP
P4201	SOCKET	AC3MAH1-AU-B	1	25053530	NSP
P4251	SOCKET	AC3MAH1-AU-B	1	25053530	NSP
P4301	SOCKET	AC3MAH1-AU-B	1	25053530	NSP
P4351	SOCKET	AC3MAH1-AU-B	1	25053530	NSP
P4401	SOCKET	AC3MAH1-AU-B	1	25053530	NSP
P4451	SOCKET	AC3MAH1-AU-B	1	25053530	NSP
P4501	SOCKET	AC3MAH1-AU-B	1	25053530	NSP
P4551	SOCKET	AC3MAH1-AU-B	1	25053530	NSP
P4601	SOCKET	AC3MAH1-AU-B	1	25053530	NSP
P4701A	PLUG	NPLG-7P135	1	25055151	NSP
P4701B	PLUG	NPLG-7P135	1	25055151	NSP
P4903A	SOCKET	IMSA-9111S-06L	1	25053558	NSP
P4903B	PLUG	IMSA-9111B-06	1	25056733	NSP
P4904A	SOCKET	IMSA-9111S-28L	1	25053567	NSP
P4904B	PLUG	IMSA-9111B-28	1	25056742	NSP
P4951	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P4952	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P5001A	PLUG	NPLG-5P119	1	25055135	NSP
P5002	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P661A	PLUG	IMSA-9111B-28	1	25056742	NSP
P662A	PLUG	IMSA-9111B-06	1	25056733	NSP
RL4001	RELAY	NRL-2P2A-DC12-207	1	25065726	

RL4051	RELAY	NRL-2P2A-DC12-207	1	25065726	
RL4101	RELAY	NRL-2P2A-DC12-207	1	25065726	
RL4151	RELAY	NRL-2P2A-DC12-207	1	25065726	
RL4201	RELAY	NRL-2P2A-DC12-207	1	25065726	
RL4251	RELAY	NRL-2P2A-DC12-207	1	25065726	
RL4301	RELAY	NRL-2P2A-DC12-207	1	25065726	
RL4351	RELAY	NRL-2P2A-DC12-207	1	25065726	
RL4401	RELAY	NRL-2P2A-DC12-207	1	25065726	
RL4451	RELAY	NRL-2P2A-DC12-207	1	25065726	
RL4501	RELAY	NRL-2P2A-DC12-207	1	25065726	
RL4551	RELAY	NRL-2P2A-DC12-207	1	25065726	
RL4601	RELAY	NRL-2P2A-DC12-207	1	25065726	

BAASP-2080-1Q

<Note>

1. Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.
2. The ! mark found on some component parts indicates the importance of the safety factor of the part.
Therefore, when replacing, be sure to use parts of identical designation.

: NSP

REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
[Semi-conductors]					
D301	CHIP TYPE DIODE	DAN217U	1	223323R2	NSP
D321	CHIP TYPE DIODE	DAN217U	1	223323R2	NSP
D371	CHIP TYPE DIODE	DAN217U	1	223323R2	NSP
D511	ZENER DIODE	DZ2J075M0L	1	224760750R2	NSP
D512	ZENER DIODE	DZ2J075M0L	1	224760750R2	NSP
D532	ZENER DIODE	DZ2J039M0L	1	224760390R2	NSP
D551	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D571	CHIP TYPE DIODE	DAN217U	1	223323R2	NSP
Q101	HYBRID IC	NJM4585M	1	22242981R2	NSP
Q201	HYBRID IC	NJM4580V	1	22242130R2	NSP
Q203	TRANSISTOR	IMX25	1	2218600R2	NSP
Q204	TRANSISTOR	IMX25	1	2218600R2	NSP
Q231	HYBRID IC	NJM4580V	1	22242130R2	NSP
Q232	TRANSISTOR	IMX25	1	2218600R2	NSP
Q241	TRANSISTOR	IMX25	1	2218600R2	NSP
Q242	TRANSISTOR	IMX25	1	2218600R2	NSP
Q261	HYBRID IC	NJM4580V	1	22242130R2	NSP
Q263	TRANSISTOR	IMX25	1	2218600R2	NSP
Q264	TRANSISTOR	IMX25	1	2218600R2	NSP
Q281	HYBRID IC	NJM4580V	1	22242130R2	NSP
Q283	TRANSISTOR	IMX25	1	2218600R2	NSP
Q284	TRANSISTOR	IMX25	1	2218600R2	NSP
Q2951	HYBRID IC	NJM4580V	1	22242130R2	NSP
Q2952	HYBRID IC	NJM4580V	1	22242130R2	NSP
Q301	HYBRID IC	BD34704KS2	1	22242977R3	NSP
Q321	HYBRID IC	NJW1194	1	22242893R2	NSP
Q351	HYBRID IC	NJM4585M	1	22242981R2	NSP
Q371	HYBRID IC	NJW1194	1	22242893R2	NSP

Q431	HYBRID IC	NJM4585M	1	22242981R2	NSP
Q441	HYBRID IC	NJM4565M-D	1	22241383R2	NSP
Q471	HYBRID IC	NJM4580V	1	22242130R2	NSP
Q472	HYBRID IC	NJM4580V	1	22242130R2	NSP
Q511	TRANSISTOR	2SD2400A-D	1	2202734	
Q512	TRANSISTOR	2SB1569A-D	1	2202724	
Q541	TRANSISTOR	2SA1201-Y	1	2217554AR2	NSP
Q542	TRANSISTOR	2SC5712	1	2217310R2	NSP
Q543	TRANSISTOR	DTC143EUA	1	2218520R2	NSP
Q551	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q552	TRANSISTOR	DTC124EUA	1	2218510R2	NSP
Q571	HYBRID IC	BD34704KS2	1	22242977R3	NSP
Q601	HYBRID IC	NJM4580V	1	22242130R2	NSP
Q603	TRANSISTOR	IMX25	1	2218600R2	NSP
Q604	TRANSISTOR	IMX25	1	2218600R2	NSP
Q621	HYBRID IC	NJM4580V	1	22242130R2	NSP
Q623	TRANSISTOR	IMX25	1	2218600R2	NSP
Q624	TRANSISTOR	IMX25	1	2218600R2	NSP
Q671	TRANSISTOR	IMX25	1	2218600R2	NSP
Q681	TRANSISTOR	IMX25	1	2218600R2	NSP
Q801	HYBRID IC	74VHC4051AFT	1	22274051ER2TO	NSP
Q802	HYBRID IC	74VHC4053AFT	1	22274053ER2TO	NSP
Q803	HYBRID IC	NJM41041VC3-TE1	1	22242931R2	NSP
Q871	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q872	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q873	TRANSISTOR	2SA1576A	1	2218540R2	NSP
[Capacitors]					
C101	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J1	1	342102214R1	NSP
C102	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J1	1	342102214R1	NSP
C103	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C104	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C105	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-102J	1	373041024R2	NSP
C105or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-102J	(1)	376641024R2	N NSP
C106	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-102J	1	373041024R2	NSP
C106or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-102J	(1)	376641024R2	N NSP
C107	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF332JE	1	376593324T	NSP
C108	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF332JE	1	376593324T	NSP
C109	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF123JE	1	376591234T	NSP
C110	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF123JE	1	376591234T	NSP
C115	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-220M(UTSP)	1	397532217ST	N
C116	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-220M(UTSP)	1	397532217ST	N
C117	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C118	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C119	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-472J	1	373044724R2	NSP
C119or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-472J	(1)	376644724R2	NSP
C120	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-472J	1	373044724R2	NSP
C120or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-472J	(1)	376644724R2	NSP
C121	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-220M(UTSP)	1	397532217ST	N
C122	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-220M(UTSP)	1	397532217ST	N
C123	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C123or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C124	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C124or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C129	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C129or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP

C133	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C133or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C134	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C134or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C135	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C136	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C139	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C140	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C143	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-271J	1	3400044R1	NSP
C144	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-271J	1	3400044R1	NSP
C145	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C146	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C153	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-271J	1	3400044R1	NSP
C154	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-271J	1	3400044R1	NSP
C155	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C156	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C163	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-271J	1	3400044R1	NSP
C164	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-271J	1	3400044R1	NSP
C165	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C166	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C173	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-151J	1	3400046R1	NSP
C174	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-151J	1	3400046R1	NSP
C175	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C176	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C183	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-271J	1	3400044R1	NSP
C184	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-271J	1	3400044R1	NSP
C185	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C186	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C203	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C204	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C205	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	NSP
C206	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	NSP
C209	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C210	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C211	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C211or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C212	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C212or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C232	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C233	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	NSP
C235	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C236	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C236or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C237	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C237or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C241	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C241or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C242	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C242or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C245	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-331J	1	373023314R2	NSP
C245or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-331J	(1)	376623314R2	NSP
C246	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-331J	1	373023314R2	NSP
C246or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-331J	(1)	376623314R2	NSP
C263	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C264	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N

C265	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	NSP
C266	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	NSP
C269	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C270	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C271	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C271or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C272	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C272or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C283	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C284	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C285	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	NSP
C286	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	NSP
C289	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C290	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C291	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C291or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C292	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C292or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C2955	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2956	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2957	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C2957or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C2958	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C2958or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C301	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C302	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C303	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C303or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C304	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C304or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C321	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C322	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C323	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C324	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C325	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-332K1	1	332103325R1	NSP
C326	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-332K1	1	332103325R1	NSP
C327	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C328	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C329	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-4.7M(UTSP)	1	397580477ST	N
C330	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-4.7M(UTSP)	1	397580477ST	N
C331	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C337	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C338	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C341	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C341or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C342	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C342or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C353	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C354	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C355	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C355or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C356	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C356or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C371	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C372	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N

C373	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C374	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C375	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-332K1	1	332103325R1	NSP
C376	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-332K1	1	332103325R1	NSP
C377	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C378	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C379	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-4.7M(UTSP)	1	397580477ST	N
C380	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-4.7M(UTSP)	1	397580477ST	N
C381	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C387	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C388	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C391	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C391or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C392	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C392or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C431	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C432	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C435	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C435or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C436	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C436or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C441	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-1M(UTSP)	1	397580107ST	N
C442	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-1M(UTSP)	1	397580107ST	N
C449	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W16V-470M(UTSP)	1	397544717T	
C450	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W16V-470M(UTSP)	1	397544717T	
C453	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W16V-100M(UTSP)	1	397541017ST	N
C454	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W16V-100M(UTSP)	1	397541017ST	N
C455	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C455or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C456	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C456or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C475	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C476	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C477	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C477or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C478	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C478or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C481	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W16V-100M(UTSP)	1	397541017ST	N
C482	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W16V-100M(UTSP)	1	397541017ST	N
C492	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D1	1	342101002R1	NSP
C493	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D1	1	342101002R1	NSP
C501	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C502	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C519	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-2.2M(UTSP)	1	397580227ST	N
C520	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-2.2M(UTSP)	1	397580227ST	N
C529	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C530	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C543	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W16V-100M(UTSP)	1	397541017ST	N
C545	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C546	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C547	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C547or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C551	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W16V-100M(UTSP)	1	397541017ST	N
C552	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W16V-100M(UTSP)	1	397541017ST	N
C571	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N

C572	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C575	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C575or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C576	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C576or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C581	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C582	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C583	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C584	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C585	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C586	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C603	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C604	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C605	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	NSP
C606	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	NSP
C609	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C610	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C611	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C611or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C612	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C612or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C623	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C624	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C625	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	NSP
C626	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	NSP
C629	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C630	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C631	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C631or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C632	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C632or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C641	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C642	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C643	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C643or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C644	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C644or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C671	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C672	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C675	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J1	1	342104714R1	NSP
C676	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J1	1	342104714R1	NSP
C681	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C682	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C685	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J1	1	342104714R1	NSP
C686	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J1	1	342104714R1	NSP
C701	SMG C	CE04W50V-10M(SMG)	1	395081007ST	
C702	SMG C	CE04W50V-10M(SMG)	1	395081007ST	
C801	SMG C	CE04W50V-10M(SMG)	1	395081007ST	
C802	SMG C	CE04W50V-10M(SMG)	1	395081007ST	
C803	SMG C	CE04W50V-10M(SMG)	1	395081007ST	
C804	SMG C	CE04W50V-10M(SMG)	1	395081007ST	
C805	SMG C	CE04W50V-10M(SMG)	1	395081007ST	
C806	SMG C	CE04W50V-10M(SMG)	1	395081007ST	
C821	SMG C	CE04W16V-100M(SMG)	1	395041017ST	
C822	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP

C831	SMG C	CE04W16V-100M(SMG)	1	395041017ST	
C832	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C841	SMG C	CE04W16V-100M(SMG)	1	395041017ST	
C842	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K1	1	332101035R1	NSP
C843	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C846	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C847	SMG C	CE04W50V-1M(SMG)	1	395080107ST	
C848	SMG C	CE04W50V-1M(SMG)	1	395080107ST	
C849	SMG C	CE04W50V-1M(SMG)	1	395080107ST	
C851	SMG C	CE04W6.3V-470M(SMG)	1	395024717T	
C852	SMG C	CE04W6.3V-470M(SMG)	1	395024717T	
C853	SMG C	CE04W6.3V-470M(SMG)	1	395024717T	
C871	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C872	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C873	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C874	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C875	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C876	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C895	SMG C	CE04W16V-100M(SMG)	1	395041017ST	
C901	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D1	1	342101002R1	NSP
C902	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J1	1	342104714R1	NSP
C951	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D1	1	342101002R1	NSP
C952	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D1	1	342101002R1	NSP
[Resistors]					
R101	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R102	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R103	CHIP TYPE CARBON RESISTOR	RN72K1J-563JE	1	435035634R1	NSP
R104	CHIP TYPE CARBON RESISTOR	RN72K1J-563JE	1	435035634R1	NSP
R105	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R106	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R107	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R108	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R109	CHIP TYPE CARBON RESISTOR	RN72K1J-274JE	1	435032744R1	NSP
R110	CHIP TYPE CARBON RESISTOR	RN72K1J-274JE	1	435032744R1	NSP
R111	CHIP TYPE CARBON RESISTOR	RN72K1J-561JE	1	435035614R1	NSP
R112	CHIP TYPE CARBON RESISTOR	RN72K1J-561JE	1	435035614R1	NSP
R113	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R114	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R115	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R116	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R117	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R118	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R121	C-METAL R	RN72K2B-100JE2	1	435111004R1	NSP
R122	C-METAL R	RN72K2B-100JE2	1	435111004R1	NSP
R131	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R132	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R133	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R134	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R139	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP
R140	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP
R141	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R142	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R143	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R144	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R151	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP

R2930	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2931	CHIP TYPE CARBON RESISTOR	RN72K1J-562JE	1	435035624R1	NSP
R2932	CHIP TYPE CARBON RESISTOR	RN72K1J-562JE	1	435035624R1	NSP
R2933	CHIP TYPE CARBON RESISTOR	RN72K1J-563JE	1	435035634R1	NSP
R2934	CHIP TYPE CARBON RESISTOR	RN72K1J-563JE	1	435035634R1	NSP
R2935	CHIP TYPE CARBON RESISTOR	RN72K1J-563JE	1	435035634R1	NSP
R2936	CHIP TYPE CARBON RESISTOR	RN72K1J-563JE	1	435035634R1	NSP
R294	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R295	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R2951	CHIP TYPE CARBON RESISTOR	RN72K1J-682JE	1	435036824R1	NSP
R2952	CHIP TYPE CARBON RESISTOR	RN72K1J-682JE	1	435036824R1	NSP
R2955	CHIP TYPE CARBON RESISTOR	RN72K1J-392JE	1	435033924R1	NSP
R2956	CHIP TYPE CARBON RESISTOR	RN72K1J-392JE	1	435033924R1	NSP
R2957	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2958	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2959	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R296	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R2960	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R2961	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R2962	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R2963	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R2964	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R2965	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R2966	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R2969	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R297	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R2970	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R2971	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
R2971or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
R2972	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
R2972or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
R298	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R2981	CHIP TYPE CARBON RESISTOR	RN72K1J-821JE	1	435038214R1	NSP
R2982	CHIP TYPE CARBON RESISTOR	RN72K1J-821JE	1	435038214R1	NSP
R299	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R2991	CHIP TYPE CARBON RESISTOR	RN72K1J-821JE	1	435038214R1	NSP
R2992	CHIP TYPE CARBON RESISTOR	RN72K1J-821JE	1	435038214R1	NSP
R300	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R301	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R302	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R303	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R304	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R305	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R306	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R307	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R311	CHIP TYPE CARBON RESISTOR	RN72K1J-270JE	1	435032704R1	NSP
R312	CHIP TYPE CARBON RESISTOR	RN72K1J-270JE	1	435032704R1	NSP
R313	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R314	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R315	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R316	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R321	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R322	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R323	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R324	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP

R424	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R427	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R428	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R431	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R432	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R433	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R434	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R435	CHIP TYPE CARBON RESISTOR	RN72K1J-822JE	1	435038224R1	NSP
R436	CHIP TYPE CARBON RESISTOR	RN72K1J-822JE	1	435038224R1	NSP
R437	CHIP TYPE CARBON RESISTOR	RN72K1J-822JE	1	435038224R1	NSP
R438	CHIP TYPE CARBON RESISTOR	RN72K1J-822JE	1	435038224R1	NSP
R441	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R442	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R445	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R446	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R447	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R448	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R449	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R450	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R451	CHIP TYPE CARBON RESISTOR	RN72K1J-562JE	1	435035624R1	NSP
R452	CHIP TYPE CARBON RESISTOR	RN72K1J-562JE	1	435035624R1	NSP
R453	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R454	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R455	CHIP TYPE CARBON RESISTOR	RN72K2E-180JE	1	435221804R1	NSP
R456	CHIP TYPE CARBON RESISTOR	RN72K2E-180JE	1	435221804R1	NSP
R459	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R460	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R465	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R466	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R471	CHIP TYPE CARBON RESISTOR	RN72K1J-682JE	1	435036824R1	NSP
R472	CHIP TYPE CARBON RESISTOR	RN72K1J-682JE	1	435036824R1	NSP
R475	CHIP TYPE CARBON RESISTOR	RN72K1J-392JE	1	435033924R1	NSP
R476	CHIP TYPE CARBON RESISTOR	RN72K1J-392JE	1	435033924R1	NSP
R477	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R478	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R479	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R480	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R481	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R482	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R483	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R484	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R485	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R486	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R489	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R490	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R496	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R497	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R501	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R502	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R503	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R505	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R506	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R507	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R511	CHIP TYPE CARBON RESISTOR	RN72K1J-392JE	1	435033924R1	NSP
R512	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP

R513	CHIP TYPE CARBON RESISTOR	RN72K1J-392JE	1	435033924R1	NSP
R514	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R515	C-METAL R	RN72K2B-475JE2	1	435114754R1	NSP
R516	C-METAL R	RN72K2B-182JE2	1	435111824R1	NSP
R517	CHIP TYPE CARBON RESISTOR	RN72K1J-512JE	1	435035124R1	NSP
R518	CHIP TYPE CARBON RESISTOR	RN72K1J-512JE	1	435035124R1	NSP
R519	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R520	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R522	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R531	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R532	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R541	CHIP TYPE CARBON RESISTOR	RN72K1J-022JE	1	435030224R1	NSP
R542	CHIP TYPE CARBON RESISTOR	RN72K1J-022JE	1	435030224R1	NSP
R543	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R544	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R545	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R546	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R547	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R550	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R551	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R552	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R553	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R556	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R557	CHIP TYPE CARBON RESISTOR	RN72K1J-153JE	1	435031534R1	NSP
R561	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R562	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R573	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R574	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R575	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R576	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R577	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R581	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R582	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R583	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R584	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R585	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R586	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R587	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R588	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R589	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R590	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R591	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R601	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R602	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R603	CHIP TYPE CARBON RESISTOR	RN72K1J-271JE	1	435032714R1	NSP
R604	CHIP TYPE CARBON RESISTOR	RN72K1J-271JE	1	435032714R1	NSP
R607	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R608	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R609	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R610	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R6101	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R6102	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R6103	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R6104	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R6107	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP

R833	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R834	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R835	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP
R836	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP
R837	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP
R838	CHIP TYPE CARBON RESISTOR	RN72K1J-273JE	1	435032734R1	NSP
R841	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R842	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R844	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R846	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R847	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R848	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R851	CHIP TYPE CARBON RESISTOR	RN72K1J-680FE	1	435036802R1	NSP
R852	CHIP TYPE CARBON RESISTOR	RN72K1J-680FE	1	435036802R1	NSP
R853	CHIP TYPE CARBON RESISTOR	RN72K1J-680FE	1	435036802R1	NSP
R854	CHIP TYPE CARBON RESISTOR	RN72K1J-039JE	1	435030394R1	NSP
R855	CHIP TYPE CARBON RESISTOR	RN72K1J-039JE	1	435030394R1	NSP
R856	CHIP TYPE CARBON RESISTOR	RN72K1J-039JE	1	435030394R1	NSP
R871	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R872	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R873	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R874	CHIP TYPE CARBON RESISTOR	RN72K1J-333JE	1	435033334R1	NSP
R875	CHIP TYPE CARBON RESISTOR	RN72K1J-333JE	1	435033334R1	NSP
R876	CHIP TYPE CARBON RESISTOR	RN72K1J-333JE	1	435033334R1	NSP
R877	CHIP TYPE CARBON RESISTOR	RN72K1J-271JE	1	435032714R1	NSP
R878	CHIP TYPE CARBON RESISTOR	RN72K1J-271JE	1	435032714R1	NSP
R879	CHIP TYPE CARBON RESISTOR	RN72K1J-271JE	1	435032714R1	NSP
R889	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R894	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R895	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R896	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R901	CHIP TYPE CARBON RESISTOR	RN72K1J-022JE	1	435030224R1	NSP
R902	CHIP TYPE CARBON RESISTOR	RN72K1J-022JE	1	435030224R1	NSP
R903	CHIP TYPE CARBON RESISTOR	RN72K1J-022JE	1	435030224R1	NSP
R904	CHIP TYPE CARBON RESISTOR	RN72K1J-022JE	1	435030224R1	NSP
R905	CHIP TYPE CARBON RESISTOR	RN72K1J-022JE	1	435030224R1	NSP
R906	CHIP TYPE CARBON RESISTOR	RN72K1J-022JE	1	435030224R1	NSP
R951	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R952	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
[Switches, Terminals, Wires]					
P100	PRINTED WIRING BOARD	BCASP-2080	{1}	25142080	N NSP
P100	PRINTED WIRING BOARD	BCASP-2080	1	25142080A	N NSP
P100	PRINTED WIRING BOARD	BCVD-2147	{1}	25142147	N NSP
P100	PRINTED WIRING BOARD	BCVD-2148	{1}	25142148	N NSP
P100	PRINTED WIRING BOARD	BCETC-2149	{1}	25142149	N NSP
P100	PRINTED WIRING BOARD	BCETC-2150	{1}	25142150	N NSP
P101B	SOCKET	NSCT-7P2100	1	25052203	NSP
P111	PIN JACK	RCA-207AG-01	1	25046060	
P1304B	SOCKET	IMSA-9850S-30	1	25053215	NSP
P1305B	SOCKET	IMSA-9850S-30	1	25053215	NSP
P131	PIN JACK	RCA-232G-00-02	1	25046061	
P141	PIN JACK	RCA-421EG-00-11	1	25046063	
P1601B	SOCKET	IMSA-9850S-18	1	25053209	NSP
P161	PIN JACK	RCA-421EG-00-11	1	25046063	
P181	PIN JACK	RCA-232G-00-02	1	25046061	

P2001A	PLUG	IMSA-9111B-30	1	25056700	NSP
P2002A	PLUG	IMSA-9111B-30	1	25056700	NSP
P201	PIN JACK	RCA-232G-00-02	1	25046061	
P231	PIN JACK	NPJ-1PDB804	1	25046076	
P241	PIN JACK	RCA-232G-00-06	1	25046062	
P261	PIN JACK	RCA-421EG-00-11	1	25046063	
P2901B	SOCKET	IMSA-9111S-22L	1	25053565	NSP
P501A	SOCKET	IMSA-9607S-15F	1	25053582	NSP
P511A	WIRE HARNESS ASSEMBLY	NSAS-14P2417	1	2009991553UL	NSP
P591B	SOCKET	IMSA-9111S-24L	1	25053259	NSP
P592B	SOCKET	IMSA-9111S-28L	1	25053567	NSP
P601	PIN JACK	RCA-421EG-00-11	1	25046063	
P661B	SOCKET	IMSA-9111S-28L	1	25053567	NSP
P662B	SOCKET	IMSA-9111S-06L	1	25053558	NSP
P671	PIN JACK	RCA-421EG-00-11	1	25046063	
P701	PIN JACK	MSP-2510V-25-GILT-ABS(O13	1	25046050	
P702	PIN JACK	MSP-2510V-25-GILT-ABS(O13	1	25046050	
P761	TRM(SCREW)	TER21-0130V	1	25060533	NSP
P801	PIN JACK	MSD-243V-50-GILT(O133)	1	25046045	
P802	PIN JACK	MSD-243V-50-GILT(O133)	1	25046045	
P803	PIN JACK	MSD-243V-50-GILT(O133)	1	25046045	
P804A	PLUG	IMSA-9111B-06	1	25056733	NSP
P804B	SOCKET	IMSA-9111S-06L	1	25053558	NSP
P951	SOCKET	MDS-09P-V-01(DSUB9P)	1	25053363	NSP
P961A	WIRE HARNESS ASSEMBLY	NSAS-4P2421	1	2009991557UL	NSP
RL551	RELAY	NRL-2P2A-DC24-208	1	25065728	

BADG-2078-1J

<Note>

1. Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.
 2. The ! mark found on some component parts indicates the importance of the importance of the safety factor of the part.
- Therefore, when replacing, be sure to use parts of identical designation.

: NSP

REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
[Semi-conductors]					
D2004	PHOTO COUPLER	JSR1165-001recieving	1	24120143	
D2005	PHOTO COUPLER	JSR1165-001recieving	1	24120143	
D2006	PHOTO COUPLER	JSR1165-001recieving	1	24120143	
Q2001	HYBRID IC	NE5532APSR	1	22242283R2	NSP
Q2003	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2004	HYBRID IC	AK4458VN	1	22242927R2	NSP
Q2005	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2006	HYBRID IC	AK4458VN	1	22242927R2	NSP
Q2007	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2008	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2016	HYBRID IC	AK4490EQ	1	22242907R2	NSP
Q2018	HYBRID IC	NJM2881F33	1	22242520R2	NSP
Q2019	HYBRID IC	TC7SH32FU	1	22243127R2	NSP
Q2020	HYBRID IC	TC74VHC32FK	1	22243048R2	NSP

Q2021	HYBRID IC	NE5532APSR	1	22242283R2	NSP
Q2022	HYBRID IC	NE5532APSR	1	22242283R2	NSP
Q2023	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2024	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2025	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2026	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2027	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2028	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2029	HYBRID IC	TC74VHC32FK	1	22243048R2	NSP
Q2030	HYBRID IC	TC7SH32FU	1	22243127R2	NSP
Q2031	HYBRID IC	TC7WU04FU(TE12L_F)	1	22240935R2	NSP
Q2032	HYBRID IC	TC7WU04FU(TE12L_F)	1	22240935R2	NSP
Q2041	HYBRID IC	NE5532APSR	1	22242283R2	NSP
Q2042	HYBRID IC	NE5532APSR	1	22242283R2	NSP
Q2043	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2044	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2045	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2046	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2047	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2048	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2073	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2093	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2157	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2177	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2178	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2197	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2198	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2200	HYBRID IC	TC7SH08FU	1	22241830R2TO	NSP
Q2407	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2428	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2448	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2527	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2547	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2751	HYBRID IC	NJM2845DL1-05	1	22243042R2	NSP
Q2752	HYBRID IC	S-1172B33-E6T1G	1	22243037R2	NSP
Q2753	HYBRID IC	S-1172B33-E6T1G	1	22243037R2	NSP
Q2754	HYBRID IC	NJM2872BF33	1	22243041R2	NSP
Q2801	HYBRID IC	AK4388ET-E2	1	22242519R2	NSP
Q2831	HYBRID IC	NJM4585M	1	22242981R2	NSP
Q2851	HYBRID IC	AK4388ET-E2	1	22242519R2	NSP
Q2881	HYBRID IC	NJM4585M	1	22242981R2	NSP
[Transformers, Coils]					
L2001	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	NSP
L2002	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	NSP
L2003	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	NSP
L2004	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	NSP
L2005	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	NSP
L2011	CORE	BLM111A121S	1	2350050R1	NSP
L2012	CORE	BLM111A121S	1	2350050R1	NSP
L2013	CORE	BLM111A121S	1	2350050R1	NSP
L2014	CORE	BLM111A121S	1	2350050R1	NSP
L2015	CORE	BLM111A121S	1	2350050R1	NSP
L2801	CORE	BLM111A121S	1	2350050R1	NSP
L2851	CORE	BLM111A121S	1	2350050R1	NSP
[Capacitors]					

C2001	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2002	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2003	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2004	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2005	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2006	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2007	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2008	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2009	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2010	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2011	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2012	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2013	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2014	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2015	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2016	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2017	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2018	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2019	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2020	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2021	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF122JE	1	376591224T	NSP
C2022	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF122JE	1	376591224T	NSP
C2023	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF122JE	1	376591224T	NSP
C2024	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF122JE	1	376591224T	NSP
C2025	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF122JE	1	376591224T	NSP
C2026	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF122JE	1	376591224T	NSP
C2027	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF122JE	1	376591224T	NSP
C2028	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF122JE	1	376591224T	NSP
C2029	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C2030	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C2031	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C2032	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C2033	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2034	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2035	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C2036	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C2037	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C2038	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C2039	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-220M(UTSP)	1	397532217ST	N
C2040	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-220M(UTSP)	1	397532217ST	N
C2041	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2042	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2043	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2044	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2045	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2046	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2047	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2048	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2049	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C2050	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C2051	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C2052	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C2053	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2054	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2055	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N

C2056	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C2057	CHIP TYPE PLASTIC FILM CAPACITOR	63MU101KZ12012	1	376991015R2	NSP
C2059	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C2060	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C2061	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2062	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2063	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2064	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2065	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2066	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2067	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2068	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2069	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C2070	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2071	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2072	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2073	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF122JE	1	376591224T	NSP
C2074	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2075	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2076	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2077	CHIP TYPE PLASTIC FILM CAPACITOR	63MU331KZ12012	1	376993315R2	NSP
C2078	CHIP TYPE PLASTIC FILM CAPACITOR	63MU103KZ12012	1	376991035R2	NSP
C2079	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2080	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2081	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2081or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2082	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2082or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2083	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2083or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2084	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2084or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2085	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2085or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2086	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2086or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2087	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2087or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2088	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2088or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2089	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2090	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2092	CHIP TYPE PLASTIC FILM CAPACITOR	50MU331KY11608	1	376923315R2	NSP
C2093	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2094	CHIP TYPE PLASTIC FILM CAPACITOR	63MU331KZ12012	1	376993315R2	NSP
C2098	CHIP TYPE PLASTIC FILM CAPACITOR	63MU331KZ12012	1	376993315R2	NSP
C2101	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-471J	1	373024714R2	NSP
C2101or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-471J	(1)	376624714R2	NSP
C2102	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-471J	1	373024714R2	NSP
C2102or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-471J	(1)	376624714R2	NSP
C2103	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-471J	1	373024714R2	NSP
C2103or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-471J	(1)	376624714R2	NSP
C2104	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-471J	1	373024714R2	NSP
C2104or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-471J	(1)	376624714R2	NSP
C2105	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-471J	1	373024714R2	NSP

C2105or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-471J	(1)	376624714R2	NSP
C2106	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-471J	1	373024714R2	NSP
C2106or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-471J	(1)	376624714R2	NSP
C2107	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-471J	1	373024714R2	NSP
C2107or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-471J	(1)	376624714R2	NSP
C2108	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-471J	1	373024714R2	NSP
C2108or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-471J	(1)	376624714R2	NSP
C2109	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2110	CHIP TYPE PLASTIC FILM CAPACITOR	63MU331KZ12012	1	376993315R2	NSP
C2111	CHIP TYPE PLASTIC FILM CAPACITOR	63MU331KZ12012	1	376993315R2	NSP
C2112	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C2113	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2114	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2115	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2116	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2117	CHIP TYPE PLASTIC FILM CAPACITOR	63MU331KZ12012	1	376993315R2	NSP
C2119	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2120	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-220M(UTSP)	1	397532217ST	N
C2121	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C2121or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C2122	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C2122or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C2123	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C2123or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C2124	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C2124or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C2125	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C2125or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C2126	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C2126or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C2127	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C2127or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C2128	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C2128or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C2129	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-220M(UTSP)	1	397532217ST	N
C2130	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2131	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K1	1	332121045R1	NSP
C2132	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C2133	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2133or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2134	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C2135	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2136	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2141	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2141or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2142	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2142or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2143	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2143or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2144	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2144or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2145	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2145or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2146	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2146or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP

C2147	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2147or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2148	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2148or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2149	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C2150	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K1	1	332121045R1	NSP
C2151	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2152	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2153	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-471J	1	373024714R2	NSP
C2153or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-471J	(1)	376624714R2	NSP
C2154	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2155	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2156	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2157	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2158	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2159	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2160	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2161	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2162	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2163	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2164	CHIP TYPE PLASTIC FILM CAPACITOR	63MU101KZ12012	1	376991015R2	NSP
C2165	CHIP TYPE PLASTIC FILM CAPACITOR	63MU331KZ12012	1	376993315R2	NSP
C2166	CHIP TYPE PLASTIC FILM CAPACITOR	63MU101KZ12012	1	376991015R2	NSP
C2170	CHIP TYPE PLASTIC FILM CAPACITOR	63MU101KZ12012	1	376991015R2	NSP
C2171	CHIP TYPE PLASTIC FILM CAPACITOR	63MU101KZ12012	1	376991015R2	NSP
C2172	CHIP TYPE PLASTIC FILM CAPACITOR	63MU101KZ12012	1	376991015R2	NSP
C2173	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C2173or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C2175	CHIP TYPE PLASTIC FILM CAPACITOR	63MU101KZ12012	1	376991015R2	NSP
C2176	CHIP TYPE PLASTIC FILM CAPACITOR	63MU101KZ12012	1	376991015R2	NSP
C2177	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTE122JE	1	376591224T	NSP
C2178	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTE122JE	1	376591224T	NSP
C2179	CHIP TYPE PLASTIC FILM CAPACITOR	63MU101KZ12012	1	376991015R2	NSP
C2180	CHIP TYPE PLASTIC FILM CAPACITOR	63MU331KZ12012	1	376993315R2	NSP
C2181	CHIP TYPE PLASTIC FILM CAPACITOR	63MU331KZ12012	1	376993315R2	NSP
C2182	CHIP TYPE PLASTIC FILM CAPACITOR	63MU331KZ12012	1	376993315R2	NSP
C2193	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2193or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2197	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2198	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2200	SMG C	CE04W16V-1000M(SMG)	1	395041027S	
C2201	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C2205	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-220M(UTSP)	1	397532217ST	N
C2207	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J	1	3400037R1	NSP
C2211	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D1	1	342101002R1	NSP
C2213	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C2216	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C2217	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2218	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2221	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C2224	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C2226	CHIP TYPE PLASTIC FILM CAPACITOR	63MU103KZ12012	1	376991035R2	NSP
C2227	CHIP TYPE PLASTIC FILM CAPACITOR	35MU104KZ22012	1	3769A1045R2	NSP
C2228	CHIP TYPE PLASTIC FILM CAPACITOR	63MU103KZ12012	1	376991035R2	NSP
C2229	CHIP TYPE PLASTIC FILM CAPACITOR	35MU104KZ22012	1	3769A1045R2	NSP

C2230	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-104K	1	332241045R1	NSP
C2231	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J1	1	342103314R1	NSP
C2234	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-104K	1	332241045R1	NSP
C2235	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J1	1	342103314R1	NSP
C2237	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2237or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2238	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2238or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2240	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-220M(UTSP)	1	397532217ST	N
C2241	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-104K	1	332241045R1	NSP
C2242	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K	1	332241035R1	NSP
C2243	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-104K	1	332241045R1	NSP
C2244	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C2245	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C2246	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C2257	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-471J	1	373024714R2	NSP
C2257or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-471J	(1)	376624714R2	NSP
C2258	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-471J	1	373024714R2	NSP
C2258or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-471J	(1)	376624714R2	NSP
C2277	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C2277or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C2278	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C2278or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C2297	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2297or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2298	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2298or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2401	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2402	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2403	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2404	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2408	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2428	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF122JE	1	376591224T	NSP
C2448	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2468	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2488	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2488or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2507	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2508	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-471J	1	373024714R2	NSP
C2508or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-471J	(1)	376624714R2	NSP
C2527	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF122JE	1	376591224T	NSP
C2528	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C2528or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C2547	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2548	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2548or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2567	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2587	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2587or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2607	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-471J	1	373024714R2	NSP
C2607or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-471J	(1)	376624714R2	NSP
C2627	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C2627or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C2647	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2647or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP

C2742	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C2742or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C2743	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2744	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2745	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
C2747	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-104K	1	332241045R1	NSP
C2749	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C2749or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C2751	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-220M(UTSP)	1	397532217ST	N
C2755	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C2755or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C2756	CAPACITOR	NOJA156M010	1	3000134R2	NSP
C2760	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C2764	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C2780	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-104K	1	332241045R1	NSP
C2782	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2804	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C2804or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C2806	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C2809	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-331J	1	373023314R2	NSP
C2809or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-331J	(1)	376623314R2	NSP
C2811	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2815	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K	1	332241035R1	NSP
C2816	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-104K	1	332241045R1	NSP
C2817	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J	1	3400042R1	NSP
C2831	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C2832	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C2833	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J1	1	342104714R1	NSP
C2834	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J1	1	342104714R1	NSP
C2835	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-391J1	1	342103914R1	NSP
C2836	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-391J1	1	342103914R1	NSP
C2837	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C2837or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C2838	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C2838or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C2839	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C2840	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C2849	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	NSP
C2850	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-104K	1	332241045R1	NSP
C2854	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C2854or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C2856	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C2859	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-331J	1	373023314R2	NSP
C2859or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-331J	(1)	376623314R2	NSP
C2861	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2865	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K	1	332241035R1	NSP
C2866	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-104K	1	332241045R1	NSP
C2867	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J	1	3400042R1	NSP
C2881	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C2882	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C2883	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J1	1	342104714R1	NSP
C2884	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J1	1	342104714R1	NSP
C2885	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-391J1	1	342103914R1	NSP
C2886	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-391J1	1	342103914R1	NSP
C2887	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP

C2887or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C2888	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C2888or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C2889	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C2890	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
[Resistors]					
R2001	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2002	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2003	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2004	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2005	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2006	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2007	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2008	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2009	CHIP TYPE CARBON RESISTOR	RN72K2E-220JE	1	435222204R1	NSP
R2010	CHIP TYPE CARBON RESISTOR	RN72K2E-220JE	1	435222204R1	NSP
R2011	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R2012	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R2013	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R2014	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R2015	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R2016	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R2017	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R2018	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R2019	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R2020	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R2021	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2022	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2023	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2024	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2025	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2026	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2027	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2028	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2029	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R2030	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R2031	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R2032	CHIP TYPE CARBON RESISTOR	RN72K2E-220JE	1	435222204R1	NSP
R2033	CHIP TYPE CARBON RESISTOR	RN72K2E-220JE	1	435222204R1	NSP
R2034	CHIP TYPE CARBON RESISTOR	RN72K2E-220JE	1	435222204R1	NSP
R2035	CHIP TYPE CARBON RESISTOR	RN72K2E-220JE	1	435222204R1	NSP
R2036	CHIP TYPE CARBON RESISTOR	RN72K2E-220JE	1	435222204R1	NSP
R2037	CHIP TYPE CARBON RESISTOR	RN72K2E-220JE	1	435222204R1	NSP
R2038	CHIP TYPE CARBON RESISTOR	RN72K2E-220JE	1	435222204R1	NSP
R2039	CHIP TYPE CARBON RESISTOR	RN72K2E-220JE	1	435222204R1	NSP
R2041	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2042	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2043	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2044	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2045	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2046	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2047	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2048	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2053	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2054	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP

R2055	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R2061	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2062	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2063	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2064	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2065	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2066	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2067	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2068	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2071	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R2072	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R2073	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2074	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R2075	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R2076	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R2077	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2078	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2079	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R2080	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R2081	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R2082	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R2083	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R2084	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R2085	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R2086	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R2087	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R2088	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R2089	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R2090	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R2091	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R2092	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R2093	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2094	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R2095	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R2096	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R2097	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R2098	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2099	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R2100	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R2101	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R2102	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R2103	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R2104	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R2105	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R2106	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R2107	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R2108	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R2109	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R2113	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2117	C-METAL R	RN72K2B-225JE2	1	435112254R1	NSP
R2118	C-METAL R	RN72K2B-225JE2	1	435112254R1	NSP
R2119	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R2120	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R2121	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R2122	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP

R2357	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R2358	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R2361	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2362	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2363	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2364	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2365	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2366	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2367	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2368	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2373	CHIP TYPE CARBON RESISTOR	RN72K1J-681JE	1	435036814R1	NSP
R2377	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2378	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2381	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2382	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2383	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2384	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2385	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2386	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2387	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2388	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2397	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2401	CHIP TYPE CARBON RESISTOR	RN72K2E-220JE	1	435222204R1	NSP
R2402	CHIP TYPE CARBON RESISTOR	RN72K2E-220JE	1	435222204R1	NSP
R2403	CHIP TYPE CARBON RESISTOR	RN72K2E-220JE	1	435222204R1	NSP
R2404	CHIP TYPE CARBON RESISTOR	RN72K2E-220JE	1	435222204R1	NSP
R2407	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R2408	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2410	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R2411	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R2412	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R2413	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2414	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R2415	C-METAL R	RN72K1J-100JE0	1	435011004R1	NSP
R2416	C-METAL R	RN72K1J-100JE0	1	435011004R1	NSP
R2417	CHIP TYPE CARBON RESISTOR	RN72K1J-682JE	1	435036824R1	NSP
R2418	CHIP TYPE CARBON RESISTOR	RN72K1J-682JE	1	435036824R1	NSP
R2419	C-METAL R	RN72K1J-100JE0	1	435011004R1	NSP
R2420	C-METAL R	RN72K1J-100JE0	1	435011004R1	NSP
R2421	C-METAL R	RN72K1J-100JE0	1	435011004R1	NSP
R2422	C-METAL R	RN72K1J-100JE0	1	435011004R1	NSP
R2423	C-METAL R	RN72K1J-100JE0	1	435011004R1	NSP
R2424	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R2425	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R2426	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R2427	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R2428	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2430	C-METAL R	RN72K1J-100JE0	1	435011004R1	NSP
R2431	C-METAL R	RN72K1J-100JE0	1	435011004R1	NSP
R2432	C-METAL R	RN72K1J-100JE0	1	435011004R1	NSP
R2433	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2434	C-METAL R	RN72K1J-100JE0	1	435011004R1	NSP
R2435	C-METAL R	RN72K1J-100JE0	1	435011004R1	NSP
R2436	C-METAL R	RN72K1J-100JE0	1	435011004R1	NSP
R2437	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP

R2493	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R2494	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R2495	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R2496	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R2498	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2499	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2500	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2501	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2502	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R2503	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2504	CHIP TYPE CARBON RESISTOR	RN72K1J-750JE	1	435037504R1	NSP
R2505	CHIP TYPE CARBON RESISTOR	RN72K1J-750JE	1	435037504R1	NSP
R2506	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R2507	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2508	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R2509	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R2510	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R2511	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R2512	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R2513	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R2514	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R2515	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R2516	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R2517	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2518	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2519	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R2520	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R2521	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R2522	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R2523	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R2524	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R2525	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2526	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2527	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2528	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R2529	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2530	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R2531	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R2532	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2537	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2538	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2547	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2548	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R2567	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2568	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R2587	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R2588	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R2607	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R2608	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R2627	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R2628	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2647	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R2648	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2667	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R2668	CHIP TYPE CARBON RESISTOR	RN72K1J-682JE	1	435036824R1	NSP

R2687	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R2688	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R2707	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R2708	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R2727	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2728	CHIP TYPE CARBON RESISTOR	RN72K1J-681JE	1	435036814R1	NSP
R2741	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R2742	C-METAL R	RN72K2B-242JE2	1	435112424R1	NSP
R2743	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R2744	CHIP TYPE CARBON RESISTOR	RN72K1J-242JE	1	435032424R1	NSP
R2747	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2752	CHIP TYPE CARBON RESISTOR	RN72K1J-184JE	1	435031844R1	NSP
R2753	CHIP TYPE CARBON RESISTOR	RN72K2E-010JE	1	435220104R1	NSP
R2754	C-METAL R	RN72K2B-154JE2	1	435111544R1	NSP
R2755	C-METAL R	RN72K1J-100JE0	1	435011004R1	NSP
R2757	CHIP TYPE CARBON RESISTOR	RN72K2E-010JE	1	435220104R1	NSP
R2759	C-METAL R	RN72K1J-100JE0	1	435011004R1	NSP
R2760	C-METAL R	RN72K2B-184JE2	1	435111844R1	NSP
R2761	C-METAL R	RN72K1J-100JE0	1	435011004R1	NSP
R2767	CHIP TYPE CARBON RESISTOR	RN72K1J-682JE	1	435036824R1	NSP
R2768	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2771	C-METAL R	RN72K2B-154JE2	1	435111544R1	NSP
R2787	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R2788	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2801	C-METAL R	RN72K1J-220JE0	1	435012204R1	NSP
R2802	C-METAL R	RN72K1J-221JE0	1	435012214R1	NSP
R2803	C-METAL R	RN72K1J-221JE0	1	435012214R1	NSP
R2804	C-METAL R	RN72K1J-221JE0	1	435012214R1	NSP
R2805	C-METAL R	RN72K1J-221JE0	1	435012214R1	NSP
R2806	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2807	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R2808	C-METAL R	RN72K1J-473JE0	1	435014734R1	NSP
R2809	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2810	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2827	CHIP TYPE CARBON RESISTOR	RN72K1J-681JE	1	435036814R1	NSP
R2831	C-METAL R	RN72K2B-100JE2	1	435111004R1	NSP
R2832	C-METAL R	RN72K2B-100JE2	1	435111004R1	NSP
R2833	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R2834	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R2835	CHIP TYPE CARBON RESISTOR	RN72K1J-302JE	1	435033024R1	NSP
R2836	CHIP TYPE CARBON RESISTOR	RN72K1J-302JE	1	435033024R1	NSP
R2837	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R2838	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R2839	CHIP TYPE CARBON RESISTOR	RN72K1J-392JE	1	435033924R1	NSP
R2840	CHIP TYPE CARBON RESISTOR	RN72K1J-392JE	1	435033924R1	NSP
R2841	CHIP TYPE CARBON RESISTOR	RN72K1J-272JE	1	435032724R1	NSP
R2842	CHIP TYPE CARBON RESISTOR	RN72K1J-272JE	1	435032724R1	NSP
R2843	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R2844	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R2845	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R2846	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R2852	C-METAL R	RN72K1J-221JE0	1	435012214R1	NSP
R2853	C-METAL R	RN72K1J-221JE0	1	435012214R1	NSP
R2854	C-METAL R	RN72K1J-221JE0	1	435012214R1	NSP
R2855	C-METAL R	RN72K1J-221JE0	1	435012214R1	NSP

R2856	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2857	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R2858	C-METAL R	RN72K1J-473JE0	1	435014734R1	NSP
R2859	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2860	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2862	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2867	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2881	C-METAL R	RN72K2B-100JE2	1	435111004R1	NSP
R2882	C-METAL R	RN72K2B-100JE2	1	435111004R1	NSP
R2883	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R2884	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R2885	CHIP TYPE CARBON RESISTOR	RN72K1J-302JE	1	435033024R1	NSP
R2886	CHIP TYPE CARBON RESISTOR	RN72K1J-302JE	1	435033024R1	NSP
R2887	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R2888	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R2889	CHIP TYPE CARBON RESISTOR	RN72K1J-392JE	1	435033924R1	NSP
R2890	CHIP TYPE CARBON RESISTOR	RN72K1J-392JE	1	435033924R1	NSP
R2891	CHIP TYPE CARBON RESISTOR	RN72K1J-272JE	1	435032724R1	NSP
R2892	CHIP TYPE CARBON RESISTOR	RN72K1J-272JE	1	435032724R1	NSP
R2893	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R2894	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R2895	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R2896	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R2902	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2903	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2911	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2912	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2913	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2914	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2915	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2916	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2917	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2918	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2919	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2920	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2921	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2951	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2952	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2953	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2954	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2955	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2956	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2957	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2958	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2959	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2960	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
[Switches, Terminals, Wires]					
P200	PRINTED WIRING BOARD	BCDG-2078	1	25142078A	N NSP
P2003D	SOCKET	IMSA-9111S-28L	1	25053567	NSP
P2004D	SOCKET	IMSA-9111S-24L	1	25053259	NSP
P2006	SOCKET	IMSA-9111S-30L	1	25056701	NSP
P2007	SOCKET	IMSA-9111S-30L	1	25056701	NSP
P2008	TRM(SCREW)	TER21-0130V	1	25060533	NSP
P2009	TRM(SCREW)	TER21-0130V	1	25060533	NSP
P200A	PRINTED WIRING BOARD	BCDG-2078	{1}	25142078	N NSP

P2201	PIN JACK	NPJ-2PDO803	1	25046075
-------	----------	-------------	---	----------

BADIS-2075-1E

<Note>

1. Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.
2. The ! mark found on some component parts indicates the importance of the safety factor of the part.
Therefore, when replacing, be sure to use parts of identical designation.

: NSP

REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
[Semi-conductors]					
D5411	DIODE	D2SB60A	1	22380366F	
D5412	DIODE	SARS01	1	22380397	
D5413	DIODE	SARS01	1	22380397	
D5414	DIODE	SJPL-D2	1	22380398R2	NSP
D5415	ZENER DIODE	KDZ36B	1	224990585R2	NSP
D5451	DIODE	FMEN-220A	1	22380396	
D5451A	HEAT SINK	ANH7224-A	1	27160701	NSP
D5451B	SCREW	3TTB+8B(3BC)	1	838430088GR	NSP
D5481	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D5482	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D7501	ZENER DIODE	DZ2J051M0L	1	224760510R2	NSP
D7502	ZENER DIODE	DZ2J051M0L	1	224760510R2	NSP
D7503	ZENER DIODE	DZ2J051M0L	1	224760510R2	NSP
D7506	LED	HLMP-Y701	1	225528	
D7507	ZENER DIODE	DZ2J075M0L	1	224760750R2	NSP
D7508	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D7751	LED	SCB3318E-D2	1	225487	
D7751A	HOLDER	(LED-LH5-2)	1	27191336	N NSP
Q5411	HYBRID IC	STR2A153	1	22242995	
Q5412	PHOTO COUPLER	TLP781(GR)	1	24120175	
Q5451	HYBRID IC	NJM1431AF	1	22242979R2	NSP
Q5481	TRANSISTOR	2SD2704K	1	2218130R2	NSP
Q7501	HYBRID IC	NJM4580M-D	1	22241448R2	NSP
Q7502	TRANSISTOR	DTC124EUA	1	2218510R2	NSP
Q7509	TRANSISTOR	DTA124EUA	1	2218450R2	NSP
Q7510	TRANSISTOR	DTC124EUA	1	2218510R2	NSP
Q7511	TRANSISTOR	DTC143EUA	1	2218520R2	NSP
Q7512	REMOTE SENSOR	IRM-3638M3S28	1	24130026	N
Q7513	TRANSISTOR	INA5001AP1-T111	1	2218030R2	N NSP
Q7514	TRANSISTOR	DTC124EUA	1	2218510R2	NSP
Q7515	TRANSISTOR	2SC2712-GR	1	2213145R2	NSP
Q7516	TRANSISTOR	2SC2712-GR	1	2213145R2	NSP
Q7517	FLUORESCENT TUBE	016MT096GINYK	1	212285A	
Q7517A	HOLDER	(FL)	1	27191414	NSP
Q7751	TRANSISTOR	DTC143EUA	1	2218520R2	NSP
[Transformers, Coils]					
L5401	CHOKE COIL	PFC2225C	1	231490	
L5411	LINE FILTER	HF2318-A213Y0R8-01	1	231492	
L5451	CHOKE COIL	RP1315BNP-100M	1	231466M100	

L7501	CORE	BKP2125HS101-T	1	2350048R1	NSP
L7502	CORE	BLM11P300SPT	1	2350049R1	NSP
L7503	CHOKE COIL	LBC2518T2R2M	1	231364M022R2	NSP
L7504	CHOKE COIL	LBC2518T2R2M	1	231364M022R2	NSP
T5411	POWER TRANSFORMER	ATK7006-A	1	2302140	!
[Capacitors]					
C5403	CERAMIC CAPACITOR	DE2F3KY103MA4BM02	1	3300083	
C5411	IS TYPE CAPACITOR	LE104-MX-C3.5	1	3800049S	!
C5412	ELECTROLYTIC CAPACITOR	CE69W400V-100M(KMM)	1	3504524	
C5413	ELECTROLYTIC CAPACITOR	CE04W50V-22M(LXZ)	1	3500248T	N
C5414	FILM C	ECQE6222KF	1	3700116	
C5415	CHIP TYPE CERAMIC CAPACITOR	GRM188R72A153KAC4D	1	3300084R1	NSP
C5421	IS TYPE CAPACITOR	DE1E3KX152MB5BA01	1	3300062S	!
C5422	IS TYPE CAPACITOR	DE1E3KX152MB5BA01	1	3300062S	!
C5451	ELECTROLYTIC CAPACITOR	CE04W10V-4700M(LXZ)	1	3500247S	
C5453	PW TYPE ELECTROLYTIC CAPACITOR	CE04W10V-470M(PW)	1	393734717T	
C5454	CHIP TYPE CERAMIC CAPACITOR	GRM31A7U3A470JW31D	1	3400039R1	NSP
C5455	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-330J	1	3400035R1	NSP
C5458	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C5459	CHIP TYPE PLASTIC FILM CAPACITOR	35MU104KZ22012	1	3769A1045R2	NSP
C5701	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-223K	1	332242235R1	NSP
C5704	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K	1	332241035R1	NSP
C5705	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J1	1	342103314R1	NSP
C5720	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-102J1	1	342101024R1	NSP
C5722	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF102JE	1	376591024T	NSP
C5723	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF102JE	1	376591024T	NSP
C7501	CHIP TYPE CERAMIC CAPACITOR	GMK316BJ106KLMB	1	3300079R1	NSP
C7502	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J	1	3400037R1	N NSP
C7504	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J	1	3400034R1	N NSP
C7505	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-330J1	1	342103304R1	NSP
C7506	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-330J1	1	342103304R1	NSP
C7507	ELECTROLYTIC CAPACITOR	CE04W50V-10M	1	355781009T	
C7508	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C7509	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C7512	ELECTROLYTIC CAPACITOR	CE04W16V-100M	1	355741019T	
C7513	ELECTROLYTIC CAPACITOR	CE04W16V-100M	1	355741019T	
C7514	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-470J1	1	342104704R1	NSP
C7520	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K	1	332241035R1	NSP
C7521	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	N NSP
C7524	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K	1	332241035R1	NSP
C7533	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K1	1	332101035R1	NSP
C7534	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K1	1	332101035R1	NSP
C7535	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K1	1	332101035R1	NSP
C7536	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K1	1	332101035R1	NSP
C7537	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K1	1	332101035R1	NSP
C7538	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K1	1	332101035R1	NSP
C7539	ELECTROLYTIC CAPACITOR	CE04W16V-10M(S)	1	353741009T	
C7540	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-102J1	1	342101024R1	NSP
C7542	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-223K1	1	332102235R1	NSP
C7543	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-223K1	1	332102235R1	NSP
C7544	ELECTROLYTIC CAPACITOR	CE04W16V-47M(S)	1	353744709T	
C7545	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-223K1	1	332102235R1	NSP
C7546	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C7547	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C7548	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP

C7549	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C7550	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C7551	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C7552	CHIP TYPE CERAMIC CAPACITOR	CK725F1E-104Z1	1	332161040R1	NSP
C7553	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-223K1	1	332102235R1	NSP
C7554	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-223K1	1	332102235R1	NSP
C7645	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-822K	1	332248225R1	NSP
C7646	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-822K	1	332248225R1	NSP
C7740	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K1	1	332101025R1	NSP
[Resistors]					
R5411	C-METAL R	MCR18EZPJ105	1	4300040R1	NSP
R5412	C-METAL R	MCR18EZPJ105	1	4300040R1	NSP
R5413	C-METAL R	MCR18EZPJ105	1	4300040R1	NSP
R5414	RESISTOR	ERG1DJ154P	1	4000283F	
R5415	METAL OXIDE FILM RESISTOR	ERG1SJ680P	1	4400045	
R5416	METAL RESISTOR	ERX1SJR68H	1	4500343	
R5418	C-METAL R	RN72K2B-120JE2	1	435111204R1	NSP
R5419	C-METAL R	RN72K2B-102JE2	1	435111024R1	NSP
R5451	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R5453	CHIP TYPE CARBON RESISTOR	RN72K1J-390JE	1	435033904R1	NSP
R5454	CHIP TYPE CARBON RESISTOR	RN72K1J-181JE	1	435031814R1	NSP
R5457	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R5458	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R5459	CHIP TYPE CARBON RESISTOR	RN72K1J-302FE	1	435033022R1	NSP
R5460	CHIP TYPE CARBON RESISTOR	RN72K1J-752FE	1	435037522R1	NSP
R5461	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R5462	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R5463	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R5464	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R5465	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R5482	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R5483	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R5484	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R5701	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R5720	C-METAL R	RN72K2B-120JE2	1	435111204R1	NSP
R5721	C-METAL R	RN72K2B-120JE2	1	435111204R1	NSP
R5722	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R5723	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R5724	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R5725	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7501	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R7502	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R7503	C-METAL R	RN72K2B-330JE2	1	435113304R1	N NSP
R7504	CHIP TYPE CARBON RESISTOR	RN72K1J-682JE	1	435036824R1	NSP
R7505	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R7506	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R7507	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R7508	CHIP TYPE CARBON RESISTOR	RN72K1J-432JE	1	435034324R1	NSP
R7509	CHIP TYPE CARBON RESISTOR	RN72K1J-333JE	1	435033334R1	NSP
R7510	CHIP TYPE CARBON RESISTOR	RN72K1J-561JE	1	435035614R1	NSP
R7511	CHIP TYPE CARBON RESISTOR	RN72K1J-432JE	1	435034324R1	NSP
R7512	CHIP TYPE CARBON RESISTOR	RN72K1J-333JE	1	435033334R1	NSP
R7513	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R7515	CHIP TYPE CARBON RESISTOR	RN72K1J-122JE	1	435031224R1	NSP
R7516	C-METAL R	RN72K2B-330JE2	1	435113304R1	N NSP

R7517	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7518	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7519	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R7520	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R7521	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R7522	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R7523	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R7524	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R7529	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R7536	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7537	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7538	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7539	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7543	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R7544	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R7545	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R7546	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R7547	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R7548	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R7549	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7550	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7551	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R7552	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R7553	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R7554	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R7555	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R7556	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R7557	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R7558	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R7559	CHIP TYPE CARBON RESISTOR	RN72K2E-221JE	1	435222214R1	NSP
R7560	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R7561	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R7562	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R7563	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R7564	NON-FLAMMABLE CARBON FILM RESISTOR R25J-10		1	415471004T	
R7565	CHIP TYPE CARBON RESISTOR	RN72K1J-393JE	1	435033934R1	NSP
R7566	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R7567	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R7568	NON-FLAMMABLE CARBON FILM RESISTOR R25J-10		1	415471004T	
R7569	CHIP TYPE CARBON RESISTOR	RN72K1J-393JE	1	435033934R1	NSP
R7570	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R7571	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R7572	CHIP TYPE CARBON RESISTOR	RN72K1J-393JE	1	435033934R1	NSP
R7573	CHIP TYPE CARBON RESISTOR	RN72K2E-221JE	1	435222214R1	NSP
R7574	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R7575	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R7576	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R7577	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R7578	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7581	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R7601	CHIP TYPE CARBON RESISTOR	RN72K1J-271JE	1	435032714R1	NSP
R7603	CHIP TYPE CARBON RESISTOR	RN72K1J-471JE	1	435034714R1	NSP
R7604	CHIP TYPE CARBON RESISTOR	RN72K1J-561JE	1	435035614R1	NSP
R7605	CHIP TYPE CARBON RESISTOR	RN72K1J-821JE	1	435038214R1	NSP
R7606	CHIP TYPE CARBON RESISTOR	RN72K1J-122JE	1	435031224R1	NSP

R7607	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R7608	CHIP TYPE CARBON RESISTOR	RN72K1J-392JE	1	435033924R1	NSP
R7609	CHIP TYPE CARBON RESISTOR	RN72K1J-123JE	1	435031234R1	NSP
R7611	CHIP TYPE CARBON RESISTOR	RN72K1J-271JE	1	435032714R1	NSP
R7612	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R7613	CHIP TYPE CARBON RESISTOR	RN72K1J-471JE	1	435034714R1	NSP
R7614	CHIP TYPE CARBON RESISTOR	RN72K1J-561JE	1	435035614R1	NSP
R7615	CHIP TYPE CARBON RESISTOR	RN72K1J-821JE	1	435038214R1	NSP
R7616	CHIP TYPE CARBON RESISTOR	RN72K1J-122JE	1	435031224R1	NSP
R7617	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R7618	CHIP TYPE CARBON RESISTOR	RN72K1J-392JE	1	435033924R1	NSP
R7619	CHIP TYPE CARBON RESISTOR	RN72K1J-123JE	1	435031234R1	NSP
R7621	CHIP TYPE CARBON RESISTOR	RN72K1J-271JE	1	435032714R1	NSP
R7622	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R7623	CHIP TYPE CARBON RESISTOR	RN72K1J-471JE	1	435034714R1	NSP
R7624	CHIP TYPE CARBON RESISTOR	RN72K1J-561JE	1	435035614R1	NSP
R7625	CHIP TYPE CARBON RESISTOR	RN72K1J-821JE	1	435038214R1	NSP
R7626	CHIP TYPE CARBON RESISTOR	RN72K1J-122JE	1	435031224R1	NSP
R7627	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R7628	CHIP TYPE CARBON RESISTOR	RN72K1J-392JE	1	435033924R1	NSP
R7629	CHIP TYPE CARBON RESISTOR	RN72K1J-123JE	1	435031234R1	NSP
R7631	CHIP TYPE CARBON RESISTOR	RN72K1J-271JE	1	435032714R1	NSP
R7632	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R7633	CHIP TYPE CARBON RESISTOR	RN72K1J-471JE	1	435034714R1	NSP
R7634	CHIP TYPE CARBON RESISTOR	RN72K1J-561JE	1	435035614R1	NSP
R7635	CHIP TYPE CARBON RESISTOR	RN72K1J-821JE	1	435038214R1	NSP
R7645	C-METAL R	RN72K2B-120JE2	1	435111204R1	NSP
R7646	C-METAL R	RN72K2B-120JE2	1	435111204R1	NSP
R7751	CHIP TYPE CARBON RESISTOR	RN72K1J-392JE	1	435033924R1	NSP
[Switches, Terminals, Wires]					
F5401A	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F5401B	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F5411A	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F5411B	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
P190	PRINTED WIRING BOARD	BCDIS-2075	{1}	25142075	NSP
P190	PRINTED WIRING BOARD	BCETO-2123	{1}	25142123	N NSP
P190	PRINTED WIRING BOARD	BCETC-2124	{1}	25142124	N NSP
P190	PRINTED WIRING BOARD	BCSW-2126	{1}	25142126	N NSP
P190	PRINTED WIRING BOARD	BCSW-2127	{1}	25142127	N NSP
P190	PRINTED WIRING BOARD	BCSW-2128	{1}	25142128	N NSP
P190	PRINTED WIRING BOARD	BCETC-2129	{1}	25142129	N NSP
P190	PRINTED WIRING BOARD	BCETC-2130	{1}	25142130	N NSP
P190	PRINTED WIRING BOARD	BCETC-2131	{1}	25142131	N NSP
P190	PRINTED WIRING BOARD	BCETC-2132	{1}	25142132	N NSP
P190	PRINTED WIRING BOARD	BCPS-2133	{1}	25142133	N NSP
P190	PRINTED WIRING BOARD	BCETC-2134	{1}	25142134	N NSP
P190	PRINTED WIRING BOARD	BCETC-2136	{1}	25142136	N NSP
P190	PRINTED WIRING BOARD	BCETC-2141	{1}	25142141	N NSP
P190	PRINTED WIRING BOARD	BCETC-2143	{1}	25142143	N NSP
P190	PRINTED WIRING BOARD	BCETC-2155	{1}	25142155	N NSP
P5401	WIRE HARNESS ASSEMBLY	ADX7513-A	1	2009991520UL	NSP
P5402	PLUG	NPLG-2P631	1	25055675	NSP
P5451A	WIRE HARNESS ASSEMBLY	ADX7812-A	1	2009991534UL	NSP
P5452	TRM(SCREW)	TER21-0130V	1	25060533	NSP
P5453	TRM(SCREW)	TER21-0130V	1	25060533	NSP

P5454	TRM(EARTH)	TP00940-21	1	25065732T	NSP
P5455	TRM(EARTH)	TP00940-21	1	25065732T	NSP
P5701	TERMINAL	NTM-1P233(M1969)	1	25060302	NSP
P5701A	SOCKET	NSCT-13P2143	1	25052246	N NSP
P5702	ST JACK	MSJ-035-12APCAG	1	25046035	
P5720	ST JACK	MSJ-064-05A SR	1	25045783	
P5721	TRM (SCREW)	TP00370-21	1	25065668T	NSP
P5901	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P7552A	WIRE HARNESS ASSEMBLY	NSAS-10P2458	1	2009991594UL	N NSP
P7602A	SOCKET	9615S-35C-PP	1	25053323	NSP
P7603	WIRE HARNESS ASSEMBLY	NSAS-3P2095	1	2009991284UL	NSP
P7603A	WIRE HOL	CHD-1.5-3	1	25053535	N NSP
P7603B	PLUG	NPLG-3P131	1	25055147	NSP
P7604A	SOCKET	NSCT-5P2396	1	25052499	NSP
P7605	WIRE HARNESS ASSEMBLY	NSAS-7P2125	1	2009991314UL	NSP
P7605A	WIRE HOL	CHD-1.5-7	1	25053537	N NSP
P7605B	PLUG	NPLG-7P135	1	25055151	NSP
P7610	WIRE HARNESS ASSEMBLY	NSAS-5P2109	1	2009991298UL	NSP
P7610A	WIRE HOL	CHD-1.5-5	1	25053536	N NSP
P7610B	PLUG	NPLG-5P352	1	25055369	NSP
P7620	WIRE HARNESS ASSEMBLY	NSAS-7P2125	1	2009991314UL	NSP
P7620A	WIRE HOL	CHD-1.5-7	1	25053537	N NSP
P7620B	PLUG	NPLG-7P354	1	25055371	NSP
P7630	WIRE HARNESS ASSEMBLY	NSAS-5P2109	1	2009991298UL	NSP
P7630A	WIRE HOL	CHD-1.5-5	1	25053536	NSP
P7630B	PLUG	NPLG-5P133	1	25055149	NSP
P7653A	SOCKET	NSCT-11P2429	1	25052532	NSP
P7653B	SOCKET	NSCT-11P2429	1	25052532	NSP
P7654	WIRE HARNESS ASSEMBLY	NSAS-3P2093	1	2009991282UL	NSP
P7654A	WIRE HOL	CHD-1.5-3	1	25053535	N NSP
P7654B	PLUG	NPLG-3P131	1	25055147	NSP
RL5401	RELAY	NRL-1P10A-DC5-207	1	25065731	
S7601	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7602	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7603	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7604	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7605	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7606	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7607	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7608	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7609	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7610	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7611	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7612	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7613	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7614	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7615	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7616	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7617	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7618	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7619	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7620	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7621	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7622	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7623	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP

S7624	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7625	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7626	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7627	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7628	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7629	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7630	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7631	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7632	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7634	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7635	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7636	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7740	ROTARY ENCODER	XREB125(9X11.5)PVB30FINB1	1	25065737	N
S7770	ROTARY ENCODER	EC12E2425WITH WASHER	1	25065655W	
S7774	ROTARY ENCODER	XREB125(9X11.5)PVB30FINB1	1	25065737	N

BAHDM-2087-1A

<Note>

1. Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.
 2. The ! mark found on some component parts indicates the importance of the safety factor of the part.
- Therefore, when replacing, be sure to use parts of identical designation.

: NSP

REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
[Semi-conductors]					
D5561	ZENER DIODE	DZ2J056M0L	1	224760560R2	NSP
Q5501	HYBRID IC	PCA9517DGKR	1	22243011R2	NSP
Q5562	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q5581	HYBRID IC	BD9329EFJ	1	22242985R2	NSP
[Transformers, Coils]					
L5581	CORE	BKP2125HS101-T	1	2350048R1	NSP
L5582	CORE	BKP2125HS101-T	1	2350048R1	NSP
L5583	CHOKE COIL	#B966AS-100M	1	231493M100R2	NSP
[Capacitors]					
C5501	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J0	1	342033314R1	NSP
C5516	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C5517	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K1	1	332101035R1	NSP
C5518	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J1	1	342103314R1	NSP
C5527	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J0	1	342033314R1	NSP
C5529	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J0	1	342033314R1	NSP
C5581	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D1	1	342101002R1	NSP
C5582	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	NSP
C5583	ELECTROLYTIC CAPACITOR	CE04W16V-56M(LXY)	1	3500244T	NSP
C5584	CHIP TYPE CERAMIC CAPACITOR	GMK316BJ106KLMB	1	3300079R1	NSP
C5585	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-390J1	1	342103904R1	NSP
C5588	CHIP TYPE CERAMIC CAPACITOR	GMK316BJ106KLMB	1	3300079R1	NSP
C5589	CHIP TYPE CERAMIC CAPACITOR	GMK316BJ106KLMB	1	3300079R1	NSP
C5590	CAPACITOR	NOJA226M006R	1	3000131R2	NSP
C5590or	CAPACITOR	NMCA0J226MTRF	(1)	3000136R2	N NSP
C5591	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J1	1	342102214R1	NSP

C5593	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C5594	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C5597	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-222J1	1	342102224R1	NSP
[Resistors]					
R5503	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R5504	C-METAL R	RN72K1J-000JE0 SIMUKE	1	435010004R1 SIMUKE	NSP
R5506	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R5507	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R5512	C-METAL R	RN72K1J-000JE0 SIMUKE	1	435010004R1 SIMUKE	NSP
R5513	C-METAL R	RN72K1J-105JE0	1	435011054R1	NSP
R5566	C-METAL R	RN72K1J-100JE0	1	435011004R1	NSP
R5567	C-METAL R	RN72K1J-152JE0	1	435011524R1	NSP
R5568	C-METAL R	RN72K1J-222JE0	1	435012224R1	NSP
R5569	C-METAL R	RN72K1J-104JE0	1	435011044R1	NSP
R5570	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R5581	C-METAL R	KTR18EZPJ05	1	435231054R1	NSP
R5582	C-METAL R	RN72K1J-822FE0	1	435018222R1	NSP
R5583	C-METAL R	RN72K1J-221FE0	1	435012212R1	NSP
R5584	C-METAL R	RN72K1J-182FE0	1	435011822R1	NSP
R5589	CHIP TYPE CARBON RESISTOR	RN72K1J-113JE	1	435031134R1	NSP
R5591	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R5592	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R5593	C-METAL R	RN72K1J-102JE0	1	435011024R1	NSP
[Switches, Terminals, Wires]					
P2003C	PLUG	IMSA-9111B-28	1	25056742	NSP
P2004C	PLUG	IMSA-9111B-24	1	25056625	NSP
P210	PRINTED WIRING BOARD	BCHDM-2087	{1}	25142087	NSP
P210	PRINTED WIRING BOARD	BCHDM-2087	1	25142087A	N NSP
P210	PRINTED WIRING BOARD	BCETC-2230	{1}	25142230	N NSP
P3652B	PLUG	NPLG-3P916	1	25055963R2	NSP
P5501	SOCKET	HD043-F19G1BY-A	1	25053585R3	NSP
P5503	TRM(EARTH)	TP00940-21	1	25065732T	NSP
P5506	TRM(EARTH)	TP00940-21	1	25065732T	NSP
P5508	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P5509	TERMINAL	NTM-1P233(M1969)	1	25060302	NSP
P5581A	WIRE HARNESS ASSEMBLY	NSAS-4P2415	1	2009991551UL	NSP
P591C	PLUG	IMSA-9111B-24	1	25056625	NSP
P592C	PLUG	IMSA-9111B-28	1	25056742	NSP
P7604B	SOCKET	NSCT-5P2468	1	25052571R2	NSP
P8601B	SOCKET	TCX3255-611187	1	25053413R3	NSP

BAPRC-2072-1Q

<Note>

1. Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.
 2. The ! mark found on some component parts indicates the importance of the safety factor of the part.
- Therefore, when replacing, be sure to use parts of identical designation.

: NSP

REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
[Semi-conductors]					

D1001	DIODE	CUS357	1	223320R2	NSP
D1601	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D1602	ESD	IMSA-6802-01Y901 1608SIZE	1	4000255AR1	NSP
D3000	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D3001	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D3002	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D3003	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D3004	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D3005	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D3006	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D3007	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D8301	ZENER DIODE	DZ2J036M0L	1	224760360R2	NSP
D8902	DIODE	RBR3MM30ATR	1	22380401R2	NSP
D8903	DIODE	RBR3MM30ATR	1	22380401R2	NSP
Q1001	HYBRID IC	S-1333A33-M5T1U3	1	22242934R2	NSP
Q1002	HYBRID IC	S-1333A33-M5T1U3	1	22242934R2	NSP
Q1003	HYBRID IC	PCM9211PTR	1	22242703R2	NSP
Q1005	HYBRID IC	PCM9211PTR	1	22242703R2	NSP
Q1007	HYBRID IC	74VHC4040FT	1	22274040E1R2TO	NSP
Q1008	HYBRID IC	TC7WH241FU(TE12L_F)	1	22242076R2TO	NSP
Q1090	HYBRID IC	MM3464A50NRE	1	22243073R2	NSP
Q1092	HYBRID IC	74VHC157FT	1	22274157ER2TO	NSP
Q1097	HYBRID IC	74VHC541FT	1	22274541E1R2TO	NSP
Q1099	TRANSISTOR	KRC404E	1	2216450R2	NSP
Q1102	HYBRID IC	74VHC157FT	1	22274157ER2TO	NSP
Q1103	HYBRID IC	74VHC157FT	1	22274157ER2TO	NSP
Q1301	HYBRID IC	D808K013DPTP456	1	22243009R3	NSP
Q1302	HYBRID IC	S-13A1A13-U5T1U3	1	22242848R2	NSP
Q1305	HYBRID IC	M12L64164A-5TG2Y	1	22243019R3	NSP
Q1306	HYBRID IC	EN25QH16-104HIP	1	222W0130R2	NSP
Q1306or	HYBRID IC	EN25QH16A-104HIP	(1)	222W0130AR2	NSP
Q1307	HYBRID IC	S-13A1A33-U5T1U3	1	22242844R2	NSP
Q1308	HYBRID IC	TC7MBL3245SFT	1	22242539R2TO	NSP
Q1309	HYBRID IC	74LCX125FT	1	22274125BR2TO	NSP
Q1310	TRANSISTOR	KRC104S	1	2216210R2	NSP
Q1601	TRANSISTOR	KRA302E	1	2218360R2	NSP
Q1602	HYBRID IC	M95640-WMN6TP	1	22242643R2	NSP
Q1603	TRANSISTOR	KRA302E	1	2218360R2	NSP
Q1604	TRANSISTOR	KRA302E	1	2218360R2	NSP
Q1605	TRANSISTOR	KRA302E	1	2218360R2	NSP
Q1606	TRANSISTOR	KRC404E	1	2216450R2	NSP
Q1607	TRANSISTOR	KRC404E	1	2216450R2	NSP
Q1608	TRANSISTOR	KRC404E	1	2216450R2	NSP
Q1609	TRANSISTOR	KRA302E	1	2218360R2	NSP
Q1610	HYBRID IC	MPD70F3477AGJA-GAE-G	1	222W0117R3	NSP
Q1611	TRANSISTOR	KRC404E	1	2216450R2	NSP
Q1612	HYBRID IC	TC7WBL3305CFK	1	22242965R2	NSP
Q1613	HYBRID IC	BU7262SFVM	1	22242983R2	NSP
Q1614	TRANSISTOR	2SC2712-GR	1	2213145R2	NSP
Q1615	TRANSISTOR	KRC404E	1	2216450R2	NSP
Q1616	HYBRID IC	PST894A270UR	1	22243198R2	NSP
Q1617	TRANSISTOR	KRA302E	1	2218360R2	NSP
Q1618	HYBRID IC	74VHCT08AFT	1	22274008G1R2TO	NSP
Q1619	TRANSISTOR	KRC404E	1	2216450R2	NSP
Q1620	HYBRID IC	74VHCT541AFT	1	22274541GR2TO	NSP

Q1621	HYBRID IC	ICL3221ECVZ	1	22242268R2	NSP
Q1622	HYBRID IC	TC7WH241FU(TE12L_F)	1	22242076R2TO	NSP
Q1623	HYBRID IC	74VHC541FT	1	22274541E1R2TO	NSP
Q1624	HYBRID IC	BU2090F-E2	1	22242686R2	NSP
Q1625	HYBRID IC	S-80848CNCMC-B89T2G	1	22243004R2	NSP
Q1630	TRANSISTOR	KRA302E	1	2218360R2	NSP
Q1631	TRANSISTOR	KRC404E	1	2216450R2	NSP
Q3001	HYBRID IC	AM3354BZCZ80	1	22243021R3	NSP
Q3002	HYBRID IC	TC58NVG1S3HTA00B4H	1	222W0155R3	NSP
Q3003	HYBRID IC	NT5CC128M16IP-DI	1	22243076R3	NSP
Q3006	HYBRID IC	PST894A160UR	1	22243226R2	NSP
Q3007	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q3041	HYBRID IC	W25Q32FVSSIG	1	222W0135R2	NSP
Q3044	HYBRID IC	ADSP-21489KSWZ-4B	1	22242846R3	NSP
Q3046	HYBRID IC	A3V56S40GTP-50	1	22243236R2	N NSP
Q3048	HYBRID IC	TC7MBL3245SFT	1	22242539R2TO	NSP
Q3050	TRANSISTOR	KRC104S	1	2216210R2	NSP
Q3120	HYBRID IC	74LCX125FT	1	22274125BR2TO	NSP
Q3121	HYBRID IC	74LCX125FT	1	22274125BR2TO	NSP
Q3201	HYBRID IC	MF1337S3959	1	22242820R2	NSP
Q3401	HYBRID IC	W25Q32FVSSIG	1	222W0135R2	NSP
Q3403	HYBRID IC	TC7WHJ04FU(TE12L)	1	22242231R2	NSP
Q3404	HYBRID IC	ADSP-21489KSWZ-4B	1	22242846R3	NSP
Q3406	HYBRID IC	A3V56S40GTP-50	1	22243236R2	N NSP
Q3408	HYBRID IC	TC7MBL3245SFT	1	22242539R2TO	NSP
Q3410	TRANSISTOR	KRC104S	1	2216210R2	NSP
Q3601	HYBRID IC	FP6861C-B1AS5CT	1	22242840R2	NSP
Q3651	HYBRID IC	KSZ8091RNB	1	22243023R2	NSP
Q3652	HYBRID IC	SN74AUP1T17DCKR	1	222740170R2	NSP
Q3653	HYBRID IC	SN74AUP1T17DCKR	1	222740170R2	NSP
Q3654	HYBRID IC	TC74VCX125FT	1	22274125DR2TO	NSP
Q3667	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q3901	HYBRID IC	TPS65910A31A1RSLR	1	22243022R2	NSP
Q7017	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q7018	HYBRID IC	S-1333A33-M5T1U3	1	22242934R2	NSP
Q8000	HYBRID IC	MN864788	1	22242929R3	NSP
Q8001	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8002	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8003	HYBRID IC	74LCX125FT	1	22274125BR2TO	NSP
Q8006	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8007	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8008	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8009	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8010	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8011	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8114	HYBRID IC	74LCX125FT	1	22274125BR2TO	NSP
Q8202	HYBRID IC	ADV7180KCP32Z-RL	1	22242763R2	NSP
Q8202or	HYBRID IC	ADV7180KCP32Z	(1)	22242763R3	NSP
Q8203	HYBRID IC	MM3411A18URE	1	22243075R2	NSP
Q8205	HYBRID IC	MM3411A18URE	1	22243075R2	NSP
Q8300	HYBRID IC	S-13A1A13-U5T1U3	1	22242848R2	NSP
Q8302	HYBRID IC	SI9573CTUC	1	22242762R3	NSP
Q8303	TRANSISTOR	2SA1162-GR	1	2214375R2	NSP
Q8307	HYBRID IC	MM3411A13URE	1	22243074R2	NSP
Q8401	HYBRID IC	MN864787	1	22242944R3	NSP

Q8402	HYBRID IC	MX25L6433FM2I-08G	1	222W0156R2	NSP
Q8402or	HYBRID IC	IS25LP064A-JBLE	(1)	222W0160R2	NSP
Q8701	HYBRID IC	TMPM361F10FG	1	222W0115R3	NSP
Q8702	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8703	TRANSISTOR	RE1C001UNTCL	1	2218160R2	NSP
Q8704	TRANSISTOR	KRA302E	1	2218360R2	NSP
Q8705	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8706	HYBRID IC	74LCX125FT	1	22274125BR2TO	NSP
Q8707	TRANSISTOR	KRA302E	1	2218360R2	NSP
Q8708	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8709	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8710	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8711	TRANSISTOR	KRA302E	1	2218360R2	NSP
Q8712	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8713	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8714	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8715	TRANSISTOR	KRA302E	1	2218360R2	NSP
Q8716	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8725	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8727	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8729	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8730	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8731	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8732	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8733	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8901	HYBRID IC	MM3464A50NRE	1	22243073R2	NSP
Q8902	HYBRID IC	TPS65251RHAR	1	22243010R2	NSP
Q8903	HYBRID IC	S-13A1A11-U5T1U3	1	22242847R2	NSP
Q8904	HYBRID IC	S-13A1A11-U5T1U3	1	22242847R2	NSP
Q8905	HYBRID IC	S-13A1A33-U5T1U3	1	22242844R2	NSP
Q8921	HYBRID IC	FR9888CSPCTR	1	22242839R2	NSP
Q8965	HYBRID IC	MM3464A50NRE	1	22243073R2	NSP
X1001	CRYSTAL	NZ2520SD(22.5792MHz)	1	3010548R2	NSP
X1002	CRYSTAL	NZ2520SD(24.576MHz)	1	3010542R2	NSP
X1301	CRYSTAL	HC-49S 9C24.0000M	1	3010515R2	NSP
X1601	CRYSTAL	CSTCR4M00G53-R0	1	3010536R2	NSP
X3001	CRYSTAL	HC-49S 9C24.0000M	1	3010515R2	NSP
X3002	CRYSTAL	FC-135 -32.768K	1	3010532R2	NSP
X3401	CRYSTAL	HC-49S 9C25.0000M	1	3010517R2	NSP
X3651	CRYSTAL	HC-49S 9C25.0000M	1	3010517R2	NSP
X8031	CRYSTAL	HC-49S 9C27.0000M	1	3010518R2	NSP
X8201	CRYSTAL	HC-49S 9C28.6363M	1	3010519R2	NSP
X8301	CRYSTAL	HC-49S 9C27.0000M	1	3010518R2	NSP
X8400	CRYSTAL	HC-49S 9C27.0000M	1	3010518R2	NSP
X8701	CERAMIC RESONATOR	CSTCE8M00G55-R0	1	3010416R2	NSP
[Transformers, Coils]					
L1001	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L1002	C-METAL R	RN72K1J-000JE0 SIMUKE	1	435010004R1 SIMUKE	NSP
L1003	C-METAL R	RN72K1J-000JE0 SIMUKE	1	435010004R1 SIMUKE	NSP
L1004	C-METAL R	RN72K1J-000JE0 SIMUKE	1	435010004R1 SIMUKE	NSP
L1005	C-METAL R	RN72K1J-000JE0 SIMUKE	1	435010004R1 SIMUKE	NSP
L1006	C-METAL R	RN72K1J-000JE0 SIMUKE	1	435010004R1 SIMUKE	NSP
L1007	C-METAL R	RN72K1J-000JE0 SIMUKE	1	435010004R1 SIMUKE	NSP
L1008	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	NSP
L1009	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	NSP

L1010	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L1011	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	NSP
L1012	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	NSP
L1013	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	NSP
L1014	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
L1015	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
L1016	CORE	BLM18PG121SN1D	1	2350006R1	NSP
L1017	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
L1021	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
L1022	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	NSP
L1024	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
L1027	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
L1029	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
L1303	CORE	BLM18PG121SN1D	1	2350006R1	NSP
L1304	CORE	BLM18PG181SN1D	1	2350005R1	NSP
L1305	CORE	BLM18PG121SN1D	1	2350006R1	NSP
L1306	CORE	BLM18PG181SN1D	1	2350005R1	NSP
L1307	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L1309	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
L1601	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L1602	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L1603	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L1604	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L3001	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L3042	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
L3043	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
L3045	CORE	BLM18PG121SN1D	1	2350006R1	NSP
L3046	CORE	BLM18PG121SN1D	1	2350006R1	NSP
L3047	CORE	BLM18PG121SN1D	1	2350006R1	NSP
L3048	CORE	BLM18PG121SN1D	1	2350006R1	NSP
L3049	CORE	BLM18PG181SN1D	1	2350005R1	NSP
L3121	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L3122	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L3201	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
L3202	CORE	BK1005LL241-T	1	2350032R1	NSP
L3401	CORE	BLM18PG121SN1D	1	2350006R1	NSP
L3402	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
L3403	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
L3405	CORE	BLM18PG121SN1D	1	2350006R1	NSP
L3406	CORE	BLM18PG121SN1D	1	2350006R1	NSP
L3407	CORE	BLM18PG121SN1D	1	2350006R1	NSP
L3408	CORE	BLM18PG121SN1D	1	2350006R1	NSP
L3409	CORE	BLM18PG181SN1D	1	2350005R1	NSP
L3601	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L3602	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
L3611	CORE	MCF12102G900-T	1	2350041R2	NSP
L3613	CORE	MCF20104G900-T	1	2350040R2	NSP
L3651	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L3652	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L3655	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L3656	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L3661	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L3901	CHOKE COIL	NRS4018T2R2MDGJ	1	231494R2	NSP
L3902	CHOKE COIL	NRS4018T2R2MDGJ	1	231494R2	NSP
L3903	CHOKE COIL	NRS4018T2R2MDGJ	1	231494R2	NSP

L3904	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L3905	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L3906	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L3907	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L3909	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L3910	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L3911	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8000	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8001	CORE	EXC24CH900U	1	2350039R2	NSP
L8002	CORE	EXC24CH900U	1	2350039R2	NSP
L8003	CORE	EXC24CH900U	1	2350039R2	NSP
L8004	CORE	EXC24CH900U	1	2350039R2	NSP
L8005	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8006	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8007	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8008	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8009	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8010	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8011	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8012	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8013	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8014	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8015	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8016	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8017	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8018	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8021	CORE	EXC24CH900U	1	2350039R2	NSP
L8022	CORE	EXC24CH900U	1	2350039R2	NSP
L8023	CORE	EXC24CH900U	1	2350039R2	NSP
L8024	CORE	EXC24CH900U	1	2350039R2	NSP
L8202	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8205	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8207	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8210	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8300	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8302	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8303	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8304	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8305	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8306	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8307	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8308	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8400	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8401	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8402	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8403	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8404	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8405	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8406	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8407	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8408	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8409	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8410	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8411	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8412	CORE	BLM15PX121SN1D	1	2350034R1	NSP

L8413	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8415	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8416	C-METAL R	RN72K1J-000JE0 SIMUKE	1	435010004R1 SIMUKE	NSP
L8417	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8418	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8702	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8703	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8901	CORE	BKP2125HS101-T	1	2350048R1	NSP
L8902	CORE	BKP2125HS101-T	1	2350048R1	NSP
L8903	CORE	BKP2125HS101-T	1	2350048R1	NSP
L8904	CORE	BKP2125HS101-T	1	2350048R1	NSP
L8905	CORE	BKP2125HS101-T	1	2350048R1	NSP
L8906	CORE	BKP2125HS101-T	1	2350048R1	NSP
L8909	CORE	BKP2125HS101-T	1	2350048R1	NSP
L8910	CORE	BKP2125HS101-T	1	2350048R1	NSP
L8911	CORE	BKP2125HS101-T	1	2350048R1	NSP
L8921	CHOKE COIL	BLM21PG221SN1	1	230949R2	NSP
L8925	COIL	ATH7108-A-TFB	1	231509R2	NSP
L8926	COIL	ATH7110-A-TFB	1	231511R2	NSP
L8927	COIL	ATH7109-A-TFB	1	231510R2	NSP
L8928	COIL	ATH7109-A-TFB	1	231510R2	NSP
[Capacitors]					
C1000	CHIP ELECT C	CECS4V-220M	1	3986G2217R2	NSP
C1001	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1002	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1005	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1006	CHIP ELECT C	CE32W4V-150M(OS)	1	3500253R2	NSP
C1011	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1014	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1015	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1018	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1019	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1020	CHIP ELECT C	CE32W4V-150M(OS)	1	3500253R2	NSP
C1021	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-472K0	1	332034725R1	NSP
C1022	CHIP ELECT C	CE32W16V-47M(EC-PC)	1	3500238R2	NSP
C1023	CHIP ELECT C	CECS16V-100M	1	398641017R2	NSP
C1025	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-223K0	1	332032235R1	NSP
C1026	CHIP TYPE CERAMIC CAPACITOR	CK725B1E-473K0	1	332024735R1	NSP
C1027	CHIP ELECT C	CECS4V-220M	1	3986G2217R2	NSP
C1033	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1037	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1040	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-472K0	1	332034725R1	NSP
C1041	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1042	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1044	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1062	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-223K0	1	332032235R1	NSP
C1063	CHIP TYPE CERAMIC CAPACITOR	CK725B1E-473K0	1	332024735R1	NSP
C1068	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1069	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1071	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1072	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1073	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1074	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1075	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1091	CHIP TYPE CERAMIC CAPACITOR	CK725BOJ-226M	1	332092267R2	NSP

C1350	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C1351	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1352	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-150J0	1	342031504R1	NSP
C1353	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-180J0	1	342031804R1	NSP
C1354	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1355	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1356	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1357	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1358	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1359	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1360	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1366	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1367	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1368	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C1369	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1370	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1371	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1372	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1373	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1374	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1375	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1376	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1377	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1378	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1379	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J0	1	342032214R1	NSP
C1380	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1381	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1382	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C1383	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C1384	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1385	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1386	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C1389	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-182J	1	373041824R2	NSP
C1389or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-182J	(1)	376641824R2	N NSP
C1390	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-222J	1	373042224R2	NSP
C1390or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-222J	(1)	376642224R2	N NSP
C1391	CAPACITOR	NOJA226M006R	1	3000131R2	NSP
C1391or	CAPACITOR	NMCA0J226MTRF	(1)	3000136R2	N NSP
C1601	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1602	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1603	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1604	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1605	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1606	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1607	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-224K	1	332242245R1	NSP
C1608	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1609	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-224K	1	332242245R1	NSP
C1610	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1611	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-224K	1	332242245R1	NSP
C1612	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1613	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-224K	1	332242245R1	NSP
C1614	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1615	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1616	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1617	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP

C1618	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1619	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1620	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-475K1	1	332134755R1	NSP
C1621	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1623	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1624	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1626	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1627	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1628	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1629	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1630	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C1631	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-470J0	1	342034704R1	NSP
C1632	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-470J0	1	342034704R1	NSP
C1633	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1635	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-224K	1	332242245R1	NSP
C1636	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1637	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1638	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1641	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1642	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1643	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1644	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1645	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C1646	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1647	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1648	CHIP TYPE CERAMIC CAPACITOR	CK725B1E-153K0	1	332021535R1	NSP
C1649	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K1	1	332101035R1	NSP
C1650	CHIP ELECT C	CECS4V-220M	1	3986G2217R2	NSP
C1651	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C1652	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C1653	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1655	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1656	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1657	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1658	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1659	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1660	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-224K	1	332242245R1	NSP
C1661	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1666	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J0	1	342032214R1	NSP
C1668	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J0	1	342032214R1	NSP
C1669	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-220J0	1	342032204R1	NSP
C3001	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3002	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3003	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3004	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C3005	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-270J0	1	342032704R1	NSP
C3006	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-270J0	1	342032704R1	NSP
C3007	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-270J0	1	342032704R1	NSP
C3008	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-270J0	1	342032704R1	NSP
C3009	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C3010	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3011	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C3012	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3013	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C3014	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP

C3086	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3087	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3088	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C3089	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3090	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C3091	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3092	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C3093	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C3094	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3095	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3096	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3097	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3098	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3099	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3100	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3101	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3102	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3103	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3104	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3105	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3106	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3107	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3108	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3109	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3110	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3111	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C3112	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3113	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3114	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3115	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3116	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3117	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3118	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3119	CAPACITOR	NOJA226M006R	1	3000131R2	NSP
C3119or	CAPACITOR	NMCA0J226MTRF	(1)	3000136R2	N NSP
C3130	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3131	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3201	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3202	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3218	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C3219	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C3387	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3388	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3389	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3390	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3391	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3392	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3393	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3394	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3395	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3396	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3397	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3398	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3399	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3400	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP

C3401	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3402	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J0	1	342031014R1	NSP
C3403	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3404	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J0	1	342031014R1	NSP
C3405	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3406	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3407	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3408	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3409	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3410	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3411	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3412	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3413	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-150J0	1	342031504R1	NSP
C3414	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-150J0	1	342031504R1	NSP
C3415	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J0	1	342033314R1	NSP
C3416	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3417	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3418	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3419	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3420	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3421	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3422	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3423	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3424	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J0	1	342032214R1	NSP
C3425	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3426	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J0	1	342032214R1	NSP
C3427	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3428	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3429	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3430	CAPACITOR	NOJA226M006R	1	3000131R2	NSP
C3430or	CAPACITOR	NMCA0J226MTRF	(1)	3000136R2	NSP
C3431	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C3432	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C3433	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3434	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3435	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3436	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3437	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3438	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3439	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3440	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3441	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3442	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3443	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3444	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3445	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3446	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3447	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3448	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J0	1	342031014R1	NSP
C3449	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3450	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C3457	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3458	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3459	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3460	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP

C3461	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3462	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3466	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3471	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C3472	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C3473	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J0	1	342032214R1	NSP
C3601	CHIP TYPE CERAMIC CAPACITOR	CK725BOJ-226M	1	332092267R2	NSP
C3602	CHIP TYPE CERAMIC CAPACITOR	CK725BOJ-226M	1	332092267R2	NSP
C3603	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C3608	CAPACITOR	NOSC107M006R0150	1	3000133R2	NSP
C3610	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100J0	1	342031004R1	NSP
C3651	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-330J0	1	342033304R1	NSP
C3652	CHIP TYPE CERAMIC CAPACITOR	CK725BOJ-226M	1	332092267R2	NSP
C3654	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3655	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3656	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3657	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3658	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J	1	3400042R1	NSP
C3659	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3661	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C3662	CHIP TYPE CERAMIC CAPACITOR	CK725BOJ-226M	1	332092267R2	NSP
C3663	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-225K1	1	332132255R1	NSP
C3666	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-150J0	1	342031504R1	NSP
C3667	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-180J0	1	342031804R1	NSP
C3668	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3669	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3670	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3674	C-METAL R	RN72K1J-000JE0 SIMUKE	1	435010004R1 SIMUKE	NSP
C3684	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3685	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3686	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3687	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C3689	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-223K0	1	332032235R1	NSP
C3690	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J0	1	342032214R1	NSP
C3691	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-220J0	1	342032204R1	NSP
C3800	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3801	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3802	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3803	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3804	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3805	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3806	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3807	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C3808	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C3809	CAPACITOR	NOJA226M006R	1	3000131R2	NSP
C3809or	CAPACITOR	NMCA0J226MTRF	(1)	3000136R2	NSP
C3810	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J1	1	342102214R1	NSP
C3811	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J0	1	342032214R1	NSP
C3901	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-475K1	1	332134755R1	NSP
C3902	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-225K1	1	332132255R1	NSP
C3903	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-225K1	1	332132255R1	NSP
C3904	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3905	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-475K1	1	332134755R1	NSP
C3906	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-225K1	1	332132255R1	NSP
C3907	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-225K1	1	332132255R1	NSP

C3963	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3964	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3965	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3966	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3967	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3968	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3969	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3970	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3971	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3972	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J0	1	342031014R1	NSP
C3973	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J0	1	342031014R1	NSP
C3974	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J0	1	342031014R1	NSP
C3975	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3976	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3977	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3978	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3979	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3980	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3981	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3982	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3983	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3984	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3985	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3986	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3987	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3988	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3989	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3990	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3991	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3992	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3993	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3994	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J0	1	342031014R1	NSP
C3995	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3996	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3997	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3998	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3999	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C7038	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C7039	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8000	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8001	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8004	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8005	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8007	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
C8008	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
C8009	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8010	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C8012	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8013	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8014	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8015	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8016	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8017	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8018	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8020	CAPACITOR	NOJA226M006R	1	3000131R2	NSP

C8020or	CAPACITOR	NMCA0J226MTRF	(1)	3000136R2	N NSP
C8021	C-METAL R	RN72K1J-000JE0 SIMUKE	1	435010004R1 SIMUKE	NSP
C8022	C-METAL R	RN72K1J-000JE0 SIMUKE	1	435010004R1 SIMUKE	NSP
C8023	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C8024	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C8025	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C8027	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C8028	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8030	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8031	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8032	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8033	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8034	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8035	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8036	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8037	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8038	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8039	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8040	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8041	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8042	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8043	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8044	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8045	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8046	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8047	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8048	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8051	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8052	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8053	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8054	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8055	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8056	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8057	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8060	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8061	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8063	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8064	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8071	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8072	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8073	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8074	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8075	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8077	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8078	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8079	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8091	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8092	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8094	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J0	1	342031014R1	NSP
C8095	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100J0	1	342031004R1	NSP
C8096	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-120J0	1	342031204R1	NSP
C8113	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8206	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8207	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8208	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP

C8210	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8211	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8219	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8220	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8221	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8222	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8223	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8224	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8225	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8229	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8230	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8231	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8232	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8236	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-150J0	1	342031504R1	NSP
C8237	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-120J0	1	342031204R1	NSP
C8239	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8240	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-683K0	1	332016835R1	NSP
C8241	CHIP TYPE CERAMIC CAPACITOR	CK725B1E-153K0	1	332021535R1	NSP
C8255	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8257	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8260	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8261	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8301	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8303	CHIP TYPE CERAMIC CAPACITOR	CK725BOJ-226M	1	332092267R2	NSP
C8304	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-220J0	1	342032204R1	NSP
C8305	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J0	1	342032214R1	NSP
C8306	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8307	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J0	1	342031014R1	NSP
C8308	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8309	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8310	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8311	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8312	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8313	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8314	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8315	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J0	1	342031014R1	NSP
C8316	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8317	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8318	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8319	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8320	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8321	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-090D0	1	342030902R1	NSP
C8322	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J0	1	342032214R1	NSP
C8323	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8324	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8325	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-090D0	1	342030902R1	NSP
C8326	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8327	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J0	1	342034714R1	NSP
C8328	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8329	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8330	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8331	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8332	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C8333	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8334	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP

C8335	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J0	1	342034714R1	NSP
C8336	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8338	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8339	C-METAL R	RN72K1J-000JE0 SIMUKE	1	435010004R1 SIMUKE	NSP
C8340	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8341	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J0	1	342031014R1	NSP
C8342	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8343	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8344	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8345	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8349	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C8353	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8354	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C8356	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8358	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8359	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8360	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8361	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8362	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8363	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-470J0	1	342034704R1	NSP
C8365	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C8366	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8367	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8368	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8369	C-METAL R	RN72K1J-000JE0 SIMUKE	1	435010004R1 SIMUKE	NSP
C8384	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8388	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J0	1	342032214R1	NSP
C8401	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8402	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8403	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C8404	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J0	1	342034714R1	NSP
C8405	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8406	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8407	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8408	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8409	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8410	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8411	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8412	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8413	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8414	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8415	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8416	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8417	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8418	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8419	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8420	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8421	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8422	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8423	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8424	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8425	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8426	CHIP TYPE PLASTIC FILM CAPACITOR	50MU103KY11608	1	376921035R2	NSP
C8427	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8428	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP

C8430	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8431	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8432	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8433	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8434	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8435	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8436	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8437	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8438	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8439	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8440	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8441	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8442	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8443	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8444	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8445	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8449	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8450	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8451	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8452	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8453	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8454	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8455	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8456	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8457	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8460	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-120J0	1	342031204R1	NSP
C8461	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-150J0	1	342031504R1	NSP
C8463	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J0	1	342031014R1	NSP
C8468	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-220J0	1	342032204R1	NSP
C8470	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8472	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8473	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8474	C-METAL R	RN72K1J-000JE0 SIMUKE	1	435010004R1 SIMUKE	NSP
C8475	C-METAL R	RN72K1J-000JE0 SIMUKE	1	435010004R1 SIMUKE	NSP
C8476	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C8477	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C8478	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C8483	C-METAL R	RN72K1J-000JE0 SIMUKE	1	435010004R1 SIMUKE	NSP
C8484	C-METAL R	RN72K1J-000JE0 SIMUKE	1	435010004R1 SIMUKE	NSP
C8485	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8486	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C8487	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C8488	CAPACITOR	NOJA226M006R	1	3000131R2	NSP
C8488or	CAPACITOR	NMCA0J226MTRF	(1)	3000136R2	N NSP
C8489	CAPACITOR	NOJA226M006R	1	3000131R2	NSP
C8489or	CAPACITOR	NMCA0J226MTRF	(1)	3000136R2	N NSP
C8611	C-METAL R	RN72K1J-000JE0 SIMUKE	1	435010004R1 SIMUKE	NSP
C8612	C-METAL R	RN72K1J-000JE0 SIMUKE	1	435010004R1 SIMUKE	NSP
C8621	C-METAL R	RN72K1J-000JE0 SIMUKE	1	435010004R1 SIMUKE	NSP
C8622	C-METAL R	RN72K1J-000JE0 SIMUKE	1	435010004R1 SIMUKE	NSP
C8631	C-METAL R	RN72K1J-000JE0 SIMUKE	1	435010004R1 SIMUKE	NSP
C8632	C-METAL R	RN72K1J-000JE0 SIMUKE	1	435010004R1 SIMUKE	NSP
C8661	C-METAL R	RN72K1J-000JE0 SIMUKE	1	435010004R1 SIMUKE	NSP
C8662	C-METAL R	RN72K1J-000JE0 SIMUKE	1	435010004R1 SIMUKE	NSP
C8700	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP

C8701	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8702	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8703	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8704	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8705	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C8706	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8707	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8709	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8710	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8713	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8890	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C8891	CHIP TYPE CERAMIC CAPACITOR	CK725BOJ-226M	1	332092267R2	NSP
C8901	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8905	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D1	1	342101002R1	NSP
C8906	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-680J0	1	342036804R1	NSP
C8907	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-473K1	1	332104735R1	NSP
C8908	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-473K1	1	332104735R1	NSP
C8909	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-473K1	1	332104735R1	NSP
C8910	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8911	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8912	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-040C0	1	342030401R1	NSP
C8913	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-050C0	1	342030501R1	NSP
C8921	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8922	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8923	CHIP TYPE CERAMIC CAPACITOR	CK725B1E-106K	1	332221065R2	NSP
C8924	CHIP TYPE CERAMIC CAPACITOR	CK725B1E-106K	1	332221065R2	NSP
C8925	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8927	CHIP TYPE CERAMIC CAPACITOR	CK725BOJ-226M	1	332092267R2	NSP
C8931	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-330J0	1	342033304R1	NSP
C8932	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-270J0	1	342032704R1	NSP
C8936	SMG C	CE04W16V-1000M(SMG)	1	395041027S	NSP
C8937	SMG C	CE04W16V-1000M(SMG)	1	395041027S	NSP
C8939	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8940	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-223K0	1	332032235R1	NSP
C8941	CHIP TYPE CERAMIC CAPACITOR	CK725B1E-473K0	1	332024735R1	NSP
C8942	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8943	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-102J1	1	342101024R1	NSP
C8945	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D0	1	342031002R1	NSP
C8946	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D0	1	342031002R1	NSP
C8947	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8949	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8950	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8952	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8959	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-222J1	1	342102224R1	NSP
C8960	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-222J1	1	342102224R1	NSP
C8961	CHIP TYPE CERAMIC CAPACITOR	CK725B1E-106K	1	332221065R2	NSP
C8962	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C8963	CHIP ELECT C	CECS4V-220M	1	3986G2217R2	NSP
C8964	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C8965	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C8970	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-330J0	1	342033304R1	NSP
C8971	CHIP TYPE CERAMIC CAPACITOR	GMK316BJ106KLMB	1	3300079R1	NSP
C8972	CHIP TYPE CERAMIC CAPACITOR	GMK316BJ106KLMB	1	3300079R1	NSP
C8973	CHIP TYPE CERAMIC CAPACITOR	GMK316BJ106KLMB	1	3300079R1	NSP
C8975	CHIP TYPE CERAMIC CAPACITOR	GMK316BJ106KLMB	1	3300079R1	NSP

C8976	CHIP TYPE CERAMIC CAPACITOR	GMK316BJ106KLMB	1	3300079R1	NSP
C8979	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-330J	1	3400035R1	NSP
C8981	CHIP TYPE PLASTIC FILM CAPACITOR	35MU104KZ22012	1	3769A1045R2	NSP
C8983	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-330J	1	3400035R1	NSP
C8984	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-470J0	1	342034704R1	NSP
C8989	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-101J	1	373041014R2	NSP
C8989or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-101J	(1)	376641014R2	N NSP
C8991	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C8994	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C8995	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C8996	CHIP TYPE CERAMIC CAPACITOR	CK725B0J-226M	1	332092267R2	NSP
C8997	CHIP ELECT C	CECS16V-100M	1	398641017R2	NSP
C8999	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
[Resistors]					
R1001	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1002	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1003	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1006	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R1007	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1008	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R1010	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1011	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1012	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1013	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1014	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1015	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1016	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1017	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R1019	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1020	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1021	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R1022	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1023	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1024	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R1025	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1026	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1029	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R1031	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1032	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1034	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1035	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1037	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1039	CHIP TYPE CARBON RESISTOR	RN72K1J-330JE	1	435033304R1	NSP
R1041	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1042	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1043	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1044	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1046	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1047	CHIP TYPE CARBON RESISTOR	RN72K1J-681JE	1	435036814R1	NSP
R1049	CHIP RESISTOR NETWORK	YCN104-103-JK	1	43464C10304R1	NSP
R1050	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1051	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R1052	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R1053	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R1054	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP

R1144	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1145	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1147	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1149	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1150	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1151	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R1152	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R1153	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R1154	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R1155	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1156	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1158	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1159	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1160	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1161	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1162	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1163	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1164	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1165	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1166	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1167	CHIP RESISTOR NETWORK	YCN104-470-JK	1	43464C47004R1	NSP
R1168	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1169	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1170	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1171	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1173	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1174	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R1176	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R1177	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R1179	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1180	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1181	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1182	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1183	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1184	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R1186	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1187	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1188	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1189	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R1190	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R1208	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1210	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1211	CHIP RESISTOR NETWORK	MNR04MRAPJ470	1	43464747004R2	NSP
R1211or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R1212	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1213	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1214	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1218	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R1220	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R1222	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R1224	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R1301	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1302	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1303	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1304	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP

R1412	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1413	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1414	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1417	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R1417or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R1418	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R1418or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R1419	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1420	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R1421	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R1422	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R1423	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R1424	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R1425	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1426	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1429	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1430	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1431	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1432	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1433	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1434	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1435	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R1445	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R1447	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R1448	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1453	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1454	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1455	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R1456	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R1601	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R1602	CHIP RESISTOR NETWORK	MNR04MRAPJ470	1	43464747004R2	NSP
R1602or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R1603	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1604	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1605	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R1606	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R1607	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R1608	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R1609	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R1610	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1611	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1612	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1613	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1614	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1615	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1616	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1617	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1618	CHIP RESISTOR NETWORK	MNR04MRAPJ472	1	43464747204R2	NSP
R1618or	CHIP RESISTOR NETWORK	YCN104-472-JK	(1)	43464C47204R1	NSP
R1619	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1620	CHIP RESISTOR NETWORK	MNR04MRAPJ221	1	43464722104R2	NSP
R1620or	CHIP RESISTOR NETWORK	YCN104-221-JK	(1)	43464C22104R1	NSP
R1621	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1622	CHIP RESISTOR NETWORK	MNR04MRAPJ221	1	43464722104R2	NSP
R1622or	CHIP RESISTOR NETWORK	YCN104-221-JK	(1)	43464C22104R1	NSP

R1623	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1624	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R1625	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1626	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1627	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R1628	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1629	CHIP RESISTOR NETWORK	MNR04MRAPJ221	1	43464722104R2	NSP
R1629or	CHIP RESISTOR NETWORK	YCN104-221-JK	(1)	43464C22104R1	NSP
R1630	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1631	CHIP RESISTOR NETWORK	MNR04MRAPJ221	1	43464722104R2	NSP
R1631or	CHIP RESISTOR NETWORK	YCN104-221-JK	(1)	43464C22104R1	NSP
R1632	CHIP RESISTOR NETWORK	MNR04MRAPJ221	1	43464722104R2	NSP
R1632or	CHIP RESISTOR NETWORK	YCN104-221-JK	(1)	43464C22104R1	NSP
R1633	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1634	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R1635	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R1636	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R1637	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R1638	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R1639	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R1640	CHIP RESISTOR NETWORK	MNR04MRAPJ221	1	43464722104R2	NSP
R1640or	CHIP RESISTOR NETWORK	YCN104-221-JK	(1)	43464C22104R1	NSP
R1642	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1644	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1646	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1647	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1648	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1649	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R1650	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1651	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R1652	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R1653	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R1654	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R1657	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R1658	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1659	CHIP RESISTOR NETWORK	MNR04MRAPJ221	1	43464722104R2	NSP
R1659or	CHIP RESISTOR NETWORK	YCN104-221-JK	(1)	43464C22104R1	NSP
R1661	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1662	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R1663	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1664	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1665	CHIP RESISTOR NETWORK	MNR04MRAPJ470	1	43464747004R2	NSP
R1665or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R1666	CHIP RESISTOR NETWORK	MNR04MRAPJ221	1	43464722104R2	NSP
R1666or	CHIP RESISTOR NETWORK	YCN104-221-JK	(1)	43464C22104R1	NSP
R1667	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1668	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1669	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R1670	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1671	CHIP RESISTOR NETWORK	MNR04MRAPJ470	1	43464747004R2	NSP
R1671or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R1672	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1673	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1674	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1675	CHIP RESISTOR NETWORK	MNR04MRAPJ221	1	43464722104R2	NSP

R1675or	CHIP RESISTOR NETWORK	YCN104-221-JK	(1)	43464C22104R1	NSP
R1676	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1677	CHIP RESISTOR NETWORK	MNR04MRAPJ221	1	43464722104R2	NSP
R1677or	CHIP RESISTOR NETWORK	YCN104-221-JK	(1)	43464C22104R1	NSP
R1678	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R1679	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R1680	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1681	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1682	CHIP TYPE CARBON RESISTOR	RN72K1J-273JE	1	435032734R1	NSP
R1683	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1684	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1685	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1686	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1687	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1688	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R1689	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R1690	CHIP RESISTOR NETWORK	MNR04MRAPJ221	1	43464722104R2	NSP
R1690or	CHIP RESISTOR NETWORK	YCN104-221-JK	(1)	43464C22104R1	NSP
R1691	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1692	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1693	CHIP RESISTOR NETWORK	MNR04MRAPJ221	1	43464722104R2	NSP
R1693or	CHIP RESISTOR NETWORK	YCN104-221-JK	(1)	43464C22104R1	NSP
R1694	CHIP RESISTOR NETWORK	MNR04MRAPJ470	1	43464747004R2	NSP
R1694or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R1695	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1696	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1697	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1698	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1699	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1700	CHIP RESISTOR NETWORK	MNR04MRAPJ470	1	43464747004R2	NSP
R1700or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R1701	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1702	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1703	CHIP RESISTOR NETWORK	MNR04MRAPJ103	1	43464710304R2	NSP
R1703or	CHIP RESISTOR NETWORK	YCN104-103-JK	(1)	43464C10304R1	NSP
R1704	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1705	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1706	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1707	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1708	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1709	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1710	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1711	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1712	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1716	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R1717	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R1718	CHIP RESISTOR NETWORK	MNR04MRAPJ221	1	43464722104R2	NSP
R1718or	CHIP RESISTOR NETWORK	YCN104-221-JK	(1)	43464C22104R1	NSP
R1719	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1720	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1721	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R1722	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R1723	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1724	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1725	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP

R1839	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1840	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1841	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1842	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1843	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1844	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1845	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1846	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1847	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1848	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1849	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1850	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1851	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1852	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1853	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R1854	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R1859	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1860	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R1861	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1862	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R1867	CHIP TYPE CARBON RESISTOR	RN72K1J-273JE	1	435032734R1	NSP
R1868	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1869	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R1870	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R1871	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R1872	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R1873	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R3009	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R3010	CHIP TYPE CARBON RESISTOR	RN72K1J-475JE	1	435034754R1	NSP
R3011	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R3012	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R3013	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R3014	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R3015	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R3016	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R3017	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R3018	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R3019	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R3020	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3021	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3022	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3023	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3028	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3029	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R3030	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R3031	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R3032	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3033	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3034	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3035	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R3036	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3037	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3038	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3039	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3040	CHIP TYPE CARBON RESISTOR	MCR03EZPF49R9(49.9_1%)	1	4100037R2	NSP

R3041	CHIP TYPE CARBON RESISTOR	RN72K1J-271FE	1	435032712R1	NSP
R3042	CHIP TYPE CARBON RESISTOR	RN72K1J-222FE	1	435032222R1	NSP
R3043	CHIP TYPE CARBON RESISTOR	RN72K1J-103FE	1	435031032R1	NSP
R3044	CHIP TYPE CARBON RESISTOR	RN72K1J-103FE	1	435031032R1	NSP
R3045	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R3046	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R3072	CHIP TYPE CARBON RESISTOR	RN72K1J-682JE	1	435036824R1	NSP
R3073	CHIP TYPE CARBON RESISTOR	RN72K1J-682JE	1	435036824R1	NSP
R3074	CHIP TYPE CARBON RESISTOR	RN72K1J-393JE	1	435033934R1	NSP
R3075	CHIP TYPE CARBON RESISTOR	RN72K1J-393JE	1	435033934R1	NSP
R3077	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R3078	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R3079	CHIP TYPE CARBON RESISTOR	RN72K1J-475JE	1	435034754R1	NSP
R3080	CHIP TYPE CARBON RESISTOR	RN72K1J-475JE	1	435034754R1	NSP
R3081	CHIP RESISTOR NETWORK	YCN104-470-JK	1	43464C47004R1	NSP
R3082	CHIP RESISTOR NETWORK	YCN104-470-JK	1	43464C47004R1	NSP
R3083	CHIP RESISTOR NETWORK	YCN104-470-JK	1	43464C47004R1	NSP
R3100	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3101	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3102	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3103	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3104	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3105	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R3106	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3107	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3108	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3109	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3111	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3112	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R3113	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R3114	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3115	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3115or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3116	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3116or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3119	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3120	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R3121	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R3122	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R3123	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R3124	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R3125	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R3126	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3127	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3128	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3129	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R3130	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3131	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R3132	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R3133	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3134	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R3135	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3136	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3137	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3138	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP

R3139	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3140	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3141	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3142	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3143	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3144	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3145	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3145or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3146	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3146or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3149	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3150	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R3152	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3153	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3153or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3154	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3154or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3155	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3155or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3156	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3156or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3157	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3158	CHIP TYPE CARBON RESISTOR	RN72K1J-103FE	1	435031032R1	NSP
R3159	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3160	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3161	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3162	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3163	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3165	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3166	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3167	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3168	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3169	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3170	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3171	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3172	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R3201	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3202	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3203	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3204	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3205	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3206	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3207	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3208	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3209	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3210	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3211	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3212	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3213	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3214	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3215	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3220	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3221	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R3222	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R3223	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP

R3331	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R3332	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3333	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3334	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3335	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3336	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3337	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3338	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3339	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3340	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3341	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3342	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3343	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3344	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3345	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R3346	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3347	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3348	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3349	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R3350	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R3351	CHIP RESISTOR NETWORK	YCN104-103-JK	1	43464C10304R1	NSP
R3352	CHIP RESISTOR NETWORK	YCN104-103-JK	1	43464C10304R1	NSP
R3353	CHIP RESISTOR NETWORK	RM7LJ220X04	1	43484722004R2	NSP
R3353or	CHIP RESISTOR NETWORK	YCN104-220-JK	(1)	43464C22004R1	NSP
R3354	CHIP RESISTOR NETWORK	RM7LJ220X04	1	43484722004R2	NSP
R3354or	CHIP RESISTOR NETWORK	YCN104-220-JK	(1)	43464C22004R1	NSP
R3355	CHIP RESISTOR NETWORK	RM7LJ220X04	1	43484722004R2	NSP
R3355or	CHIP RESISTOR NETWORK	YCN104-220-JK	(1)	43464C22004R1	NSP
R3356	CHIP RESISTOR NETWORK	RM7LJ220X04	1	43484722004R2	NSP
R3356or	CHIP RESISTOR NETWORK	YCN104-220-JK	(1)	43464C22004R1	NSP
R3357	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3358	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3360	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R3361	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3366	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R3367	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3369	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R3373	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R3376	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R3398	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3399	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3400	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3401	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3402	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3403	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R3404	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3405	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3406	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3407	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3408	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3409	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3410	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3413	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3414	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3416	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP

R3417	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3418	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3419	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3420	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3421	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R3424	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R3425	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3429	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3429or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3430	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3430or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3433	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3435	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R3436	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R3437	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R3438	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R3439	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R3440	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R3441	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3442	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R3443	CHIP TYPE CARBON RESISTOR	RN72K1J-821JE	1	435038214R1	NSP
R3444	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R3445	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3446	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R3447	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R3448	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3450	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R3452	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3453	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3455	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R3456	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3458	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3459	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3460	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3467	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3469	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3476	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R3477	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3477or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3478	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3478or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3484	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3485	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R3486	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R3488	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3494	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3494or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3495	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3495or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3496	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3496or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3497	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3497or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3498	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3499	CHIP TYPE CARBON RESISTOR	RN72K1J-103FE	1	435031032R1	NSP

R8014	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R8015	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8016	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R8017	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8018	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R8019	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8020	CHIP RESISTOR NETWORK	MNR04MRAPJ222	1	43464722204R2	NSP
R8020or	CHIP RESISTOR NETWORK	YCN104-222-JK	(1)	43464C22204R1	NSP
R8021	CHIP TYPE CARBON RESISTOR	RN72K1J-182JE	1	435031824R1	NSP
R8022	CHIP TYPE CARBON RESISTOR	RN72K1J-182JE	1	435031824R1	NSP
R8023	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8024	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8025	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R8026	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R8027	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R8028	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8029	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8030	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8031	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8032	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8033	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R8034	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8035	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R8036	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8039	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8040	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8041	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8042	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8043	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8044	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8045	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8046	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8047	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8048	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8049	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8050	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8051	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8052	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8053	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8054	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8055	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8056	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8057	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8058	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8059	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8075	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8204	CHIP TYPE CARBON RESISTOR	RN72K1J-330JE	1	435033304R1	NSP
R8208	CHIP TYPE CARBON RESISTOR	RN72K1J-561JE	1	435035614R1	NSP
R8209	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R8215	CHIP TYPE CARBON RESISTOR	RN72K1J-561JE	1	435035614R1	NSP
R8218	CHIP TYPE CARBON RESISTOR	RN72K1J-561JE	1	435035614R1	NSP
R8220	CHIP TYPE CARBON RESISTOR	RN72K1J-471JE	1	435034714R1	NSP
R8221	CHIP TYPE CARBON RESISTOR	RN72K1J-471JE	1	435034714R1	NSP
R8223	CHIP TYPE CARBON RESISTOR	RN72K1J-471JE	1	435034714R1	NSP
R8225	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP

R8226	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R8228	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R8237	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R8238	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R8240	CHIP TYPE CARBON RESISTOR	RN72K1J-681JE	1	435036814R1	NSP
R8243	CHIP TYPE CARBON RESISTOR	RN72K1J-681JE	1	435036814R1	NSP
R8244	CHIP TYPE CARBON RESISTOR	RN72K1J-330JE	1	435033304R1	NSP
R8300	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R8301	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R8302	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8303	CHIP TYPE CARBON RESISTOR	RN72K1J-562JE	1	435035624R1	NSP
R8304	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R8306	CHIP TYPE CARBON RESISTOR	RN72K1J-562JE	1	435035624R1	NSP
R8307	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R8308	CHIP TYPE CARBON RESISTOR	RN72K1J-562JE	1	435035624R1	NSP
R8312	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8317	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8318	CHIP RESISTOR NETWORK	MNR04MRAPJ222	1	43464722204R2	NSP
R8318or	CHIP RESISTOR NETWORK	YCN104-222-JK	(1)	43464C22204R1	NSP
R8319	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8320	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8321	CHIP TYPE CARBON RESISTOR	RN72K1J-330JE	1	435033304R1	NSP
R8322	CHIP TYPE CARBON RESISTOR	RN72K1J-330JE	1	435033304R1	NSP
R8323	CHIP TYPE CARBON RESISTOR	RN72K1J-330JE	1	435033304R1	NSP
R8324	CHIP TYPE CARBON RESISTOR	RN72K1J-330JE	1	435033304R1	NSP
R8325	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R8327	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8328	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8329	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8330	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8331	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8332	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8333	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8334	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R8335	CHIP TYPE CARBON RESISTOR	RN72K1J-330JE	1	435033304R1	NSP
R8336	CHIP TYPE CARBON RESISTOR	RN72K1J-330JE	1	435033304R1	NSP
R8337	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8338	CHIP TYPE CARBON RESISTOR	RN72K1J-330JE	1	435033304R1	NSP
R8339	CHIP TYPE CARBON RESISTOR	RN72K1J-330JE	1	435033304R1	NSP
R8340	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8341	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8342	CHIP RESISTOR NETWORK	MNR04MRAPJ220	1	43464722004R2	NSP
R8342or	CHIP RESISTOR NETWORK	YCN104-220-JK	(1)	43464C22004R1	NSP
R8343	CHIP RESISTOR NETWORK	MNR04MRAPJ220	1	43464722004R2	NSP
R8343or	CHIP RESISTOR NETWORK	YCN104-220-JK	(1)	43464C22004R1	NSP
R8344	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8345	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8346	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R8347	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8348	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8350	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8353	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8354	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8355	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8356	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP

R8357	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R8358	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R8359	CHIP TYPE CARBON RESISTOR	RN72K1J-124JE	1	435031244R1	NSP
R8361	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8362	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8363	CHIP RESISTOR NETWORK	MNR04MRAPJ330	1	43464733004R2	NSP
R8363or	CHIP RESISTOR NETWORK	YCN104-330-JK	(1)	43464C33004R1	NSP
R8365	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8372	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8373	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8374	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8386	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R8400	CHIP RESISTOR NETWORK	MNR04MRAPJ103	1	43464710304R2	NSP
R8400or	CHIP RESISTOR NETWORK	YCN104-103-JK	(1)	43464C10304R1	NSP
R8401	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8402	CHIP RESISTOR NETWORK	MNR04MRAPJ470	1	43464747004R2	NSP
R8402or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R8403	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8404	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8405	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8406	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R8407	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8408	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8409	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8410	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8411	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8412	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8413	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8414	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8415	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8416	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R8417	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R8418	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8419	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8420	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8421	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8422	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R8423	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R8424	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R8425	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8426	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8427	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8428	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8429	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8430	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8431	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8432	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8433	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8434	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8435	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8436	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8437	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8438	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R8439	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R8440	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP

R8441	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R8442	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R8443	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R8444	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R8445	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R8446	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R8447	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R8448	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8449	CHIP TYPE CARBON RESISTOR	RN72K1J-182JE	1	435031824R1	NSP
R8450	CHIP TYPE CARBON RESISTOR	RN72K1J-182JE	1	435031824R1	NSP
R8451	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R8452	CHIP TYPE CARBON RESISTOR	RN72K1J-103FE	1	435031032R1	NSP
R8453	CHIP TYPE CARBON RESISTOR	RN72K1J-223FE	1	435032232R1	NSP
R8458	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8459	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R8461	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R8462	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8463	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8464	CHIP RESISTOR NETWORK	MNR04MRAPJ680	1	43464768004R2	NSP
R8464or	CHIP RESISTOR NETWORK	YCN104-680-JK	(1)	43464C68004R1	NSP
R8465	CHIP RESISTOR NETWORK	MNR04MRAPJ101	1	43464710104R2	NSP
R8465or	CHIP RESISTOR NETWORK	YCN104-101-JK	(1)	43464C10104R1	NSP
R8466	CHIP RESISTOR NETWORK	YCN104-220-JK	1	43464C22004R1	NSP
R8467	CHIP RESISTOR NETWORK	YCN104-220-JK	1	43464C22004R1	NSP
R8468	CHIP RESISTOR NETWORK	YCN104-220-JK	1	43464C22004R1	NSP
R8469	CHIP RESISTOR NETWORK	YCN104-220-JK	1	43464C22004R1	NSP
R8470	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8471	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R8472	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R8473	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R8474	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R8475	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R8476	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8477	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8478	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8479	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8480	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8481	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8600	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R8603	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R8604	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R8605	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8606	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R8613	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8614	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8615	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8623	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8624	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8625	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8633	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8634	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8635	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8645	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8663	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8664	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP

R8665	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8702	CHIP RESISTOR NETWORK	MNR04MRAPJ221	1	43464722104R2	NSP
R8702or	CHIP RESISTOR NETWORK	YCN104-221-JK	(1)	43464C22104R1	NSP
R8703	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8704	CHIP RESISTOR NETWORK	YCN104-103-JK	1	43464C10304R1	NSP
R8705	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8707	CHIP RESISTOR NETWORK	MNR04MRAPJ103	1	43464710304R2	NSP
R8707or	CHIP RESISTOR NETWORK	YCN104-103-JK	(1)	43464C10304R1	NSP
R8709	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8710	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R8711	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8712	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8713	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R8715	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8716	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R8717	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R8718	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R8719	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R8720	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8721	CHIP RESISTOR NETWORK	MNR04MRAPJ470	1	43464747004R2	NSP
R8721or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R8723	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R8724	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8725	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8726	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8727	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R8728	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8729	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R8730	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8731	CHIP RESISTOR NETWORK	MNR04MRAPJ103	1	43464710304R2	NSP
R8731or	CHIP RESISTOR NETWORK	YCN104-103-JK	(1)	43464C10304R1	NSP
R8732	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R8733	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R8734	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8735	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R8736	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R8737	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R8738	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8739	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R8740	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8741	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R8742	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8743	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8744	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8745	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8746	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8747	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8748	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8749	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8750	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8751	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8752	CHIP RESISTOR NETWORK	MNR04MRAPJ101	1	43464710104R2	NSP
R8752or	CHIP RESISTOR NETWORK	YCN104-101-JK	(1)	43464C10104R1	NSP
R8753	CHIP RESISTOR NETWORK	MNR04MRAPJ470	1	43464747004R2	NSP
R8753or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP

R8838	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R8839	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R8851	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8852	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8853	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8854	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8855	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8856	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8857	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8858	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8859	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8860	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8861	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8862	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8863	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8864	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8865	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8866	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8867	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8868	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8869	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8870	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8871	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8872	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8873	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8874	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8875	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8876	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8877	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8878	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8879	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8880	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8881	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8882	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8883	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8884	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8885	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8900	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R8901	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8902	CHIP TYPE CARBON RESISTOR	RN72K1J-153JE	1	435031534R1	NSP
R8903	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R8904	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R8905	CHIP TYPE CARBON RESISTOR	RN72K1J-154JE	1	435031544R1	NSP
R8906	CHIP TYPE CARBON RESISTOR	RN72K1J-154JE	1	435031544R1	NSP
R8907	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8908	CHIP TYPE CARBON RESISTOR	RN72K1J-273JE	1	435032734R1	NSP
R8911	CHIP TYPE CARBON RESISTOR	RN72K1J-823FE	1	435038232R1	NSP
R8912	CHIP TYPE CARBON RESISTOR	RN72K1J-153FE	1	435031532R1	NSP
R8913	CHIP TYPE CARBON RESISTOR	RN72K1J-473FE	1	435034732R1	NSP
R8914	CHIP TYPE CARBON RESISTOR	RN72K1J-273FE	1	435032732R1	NSP
R8915	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R8916	CHIP TYPE CARBON RESISTOR	RN72K1J-473FE	1	435034732R1	NSP
R8917	CHIP TYPE CARBON RESISTOR	RN72K1J-473FE	1	435034732R1	NSP
R8918	CHIP TYPE CARBON RESISTOR	RN72K1J-332FE	1	435033322R1	NSP
R8920	CHIP TYPE CARBON RESISTOR	RN72K1J-103FE	1	435031032R1	NSP

R8921	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R8922	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8923	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R8924	CHIP TYPE CARBON RESISTOR	RN72K1J-682FE	1	435036822R1	NSP
R8925	CHIP TYPE CARBON RESISTOR	RN72K1J-332FE	1	435033322R1	NSP
R8926	CHIP TYPE CARBON RESISTOR	RN72K1J-103FE	1	435031032R1	NSP
R8927	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R8928	C-METAL R	RN72K2B-475JE2	1	435114754R1	NSP
R8930	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R8931	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R8932	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R8933	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R8934	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R8935	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R8936	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R8938	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8939	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R8941	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8942	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8945	C-METAL R	RN72K1J-000JE0 SIMUKE	1	435010004R1 SIMUKE	NSP
R8946	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8947	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8950	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8951	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8952	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8961	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R8962	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R8982	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R8983	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R8987	CHIP TYPE CARBON RESISTOR	RN72K2E-105JE	1	435221054R1	NSP
[Switches, Terminals, Wires]					
P010	PRINTED WIRING BOARD	BCPRC-2072	{1}	25142072	NSP
P080	PRINTED WIRING BOARD	BCPRC-2072	1	25142072B	NSP
P1001	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P1001A	TRM-423(SCREW)	NEJITANSI ST3	1	25060495	NSP
P1301	SOCKET	NSCT-8P2471	1	25052574R2	NSP
P1303	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P1304A	PLUG	IMSA-9850B-30Y	1	25056329R2	NSP
P1305A	PLUG	IMSA-9850B-30Y	1	25056329R2	NSP
P1306A	PLUG(B to B)	IMSA-9850B-22Y	1	25056206R2	NSP
P1601A	PLUG(B to B)	IMSA-9850B-18Y	1	25056204R2	NSP
P1602A	PLUG	IMSA-9850B-30Y	1	25056329R2	NSP
P1603A	SOCKET	35FMN-SMT-A-TF	1	25052852R2	NSP
P1604	SOCKET	NSCT-9P2472	1	25052575R2	NSP
P1605	SOCKET	NSCT-9P2472	1	25052575R2	NSP
P3016A	TRM-423(SCREW)	NEJITANSI ST3	1	25060495	NSP
P3042	SOCKET	NSCT-8P2471	1	25052574R2	NSP
P3201	SOCKET	NSCT-9P2472	1	25052575R2	NSP
P3601	SOCKET	UJA01SB4090-72R	1	25053533R2	NSP
P3610	SOCKET	NSCT-8P2471	1	25052574R2	NSP
P3651	SOCKET	29-01000PH53-1	1	25053526R3	NSP
P3652A	PLUG	NPLG-5P918	1	25055965R2	NSP
P3654	SOCKET	APCI0085-P012A	1	25053616R2	NSP
P3658	TERMINAL	APCI0213-K001G	1	25060548R2	NSP
P5451B	PLUG	NPLG-7P121	1	25055137	NSP

P8001	SOCKET	51U019S-3HFDN-BD-SM	1	25053549R3	NSP
P8021	SOCKET	51U019S-3HFDN-BD-SM	1	25053549R3	NSP
P8104	SOCKET	NSCT-8P2471	1	25052574R2	NSP
P8601A	SOCKET	51U019S-3HFDN-BD-SM	1	25053549R3	NSP
P8611	SOCKET	51U019S-3HFDN-BD-SM	1	25053549R3	NSP
P8621	SOCKET	51U019S-3HFDN-BD-SM	1	25053549R3	NSP
P8631	SOCKET	51U019S-3HFDN-BD-SM	1	25053549R3	NSP
P8641	SOCKET	51U019S-3HFDN-BD-SM	1	25053549R3	NSP
P8651	SOCKET	51U019S-3HFDN-BD-SM	1	25053549R3	NSP
P8661	SOCKET	51U019S-3HFDN-BD-SM	1	25053549R3	NSP
P8671	SOCKET	51U019S-3HFDN-BD-SM	1	25053549R3	NSP
P8702	SOCKET	NSCT-9P2472	1	25052575R2	NSP
P8900	PLUG	NPLG-2P915	1	25055962R2	NSP

BAPS-2089-1N

<Note>

1. Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.
2. The ! mark found on some component parts indicates the importance of the safety factor of the part.
Therefore, when replacing, be sure to use parts of identical designation.

: NSP

REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
[Semi-conductors]					
D7062	CHIP TYPE DIODE	DAN202U	1	223322R2	N NSP
D7063	CHIP TYPE DIODE	RB501VM-40	1	223324R2	N NSP
Q1	HYBRID IC	RZ5B801-0001E2	1	22242835R2	NSP
Q7063	TRANSISTOR	DTA124EUA	1	2218450R2	N NSP
Q7064	TRANSISTOR	DTC124EUA	1	2218510R2	N NSP
Q7081	TRANSISTOR	KTA1040D	1	2218210R2	NSP
Q7082	TRANSISTOR	2SA1162-GR	1	2214375R2	NSP
Q7083	TRANSISTOR	2SA1162-GR	1	2214375R2	NSP
Q7084	TRANSISTOR	2SC2712-GR	1	2213145R2	NSP
X1	CRYSTAL	HC-49S 9B12.000MHz	1	3010533	
[Transformers, Coils]					
L1	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
L2	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
L3	RF COIL	SDCL1608CR33JTDF	1	233557R1	NSP
L4	RF COIL	SDCL1608CR10JTDF	1	233556R1	NSP
L5	ANTENNA COIL	K7-D	1	232212	
[Capacitors]					
C1	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C12	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-090D1	1	342100902R1	NSP
C13	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K1	1	332121045R1	NSP
C2	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-220J1	1	342102204R1	NSP
C3	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-332K1	1	332103325R1	NSP
C4	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D1	1	342101002R1	NSP
C5	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-473K1	1	332104735R1	NSP
C6	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-222K1	1	332102225R1	NSP
C7	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
C7006	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J	1	3400034R1	N NSP

C7061	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K	1	332241035R1	N	NSP
C7062	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	N	NSP
C7064	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-153K1	1	332101535R1		NSP
C8	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1		NSP
C9	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2		NSP
[Resistors]						
R10	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1		NSP
R11	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1		NSP
R13	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1		NSP
R14	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1		NSP
R2	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1		NSP
R21	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1		NSP
R22	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1		NSP
R3	EMI SUPPRESSION FILTER	BK1608HS601-T	1	230984R1		NSP
R4	EMI SUPPRESSION FILTER	BK1608HS601-T	1	230984R1		NSP
R5	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1		NSP
R5778	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R5779	C-METAL R	RN72K2B-104JE2	1	435111044R1	N	NSP
R5781	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R6	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1		NSP
R7	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1		NSP
R7001	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7002	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7003	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7004	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7005	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7006	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7007	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7008	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7009	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7010	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7011	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7012	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7013	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7014	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7015	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7016	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7017	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7018	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7019	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1		NSP
R7020	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1		NSP
R7021	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1		NSP
R7022	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1		NSP
R7023	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1		NSP
R7024	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1		NSP
R7025	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1		NSP
R7026	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1		NSP
R7027	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1		NSP
R7028	CHIP TYPE CARBON RESISTOR	RN72K2E-105JE	1	435221054R1		NSP
R7061	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1		NSP
R7062	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1		NSP
R7068	CHIP TYPE CARBON RESISTOR	RN72K1J-622JE	1	435036224R1		NSP
R7070	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1		NSP
R7071	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1		NSP
R7081	CHIP TYPE CARBON RESISTOR	RN72K1J-180JE	1	435031804R1		NSP

R7082	CHIP TYPE CARBON RESISTOR	RN72K1J-180JE	1	435031804R1	NSP
R7083	CHIP TYPE CARBON RESISTOR	RN72K1J-180JE	1	435031804R1	NSP
R7084	CHIP TYPE CARBON RESISTOR	RN72K1J-180JE	1	435031804R1	NSP
R7085	CHIP TYPE CARBON RESISTOR	RN72K1J-333JE	1	435033334R1	NSP
R7086	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R7087	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R7088	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R9	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
[Switches, Terminals, Wires]					
P1	TERMINAL	NTM-1PDSC437	1	25060515	
P101A	SOCKET	NSCT-7P2100	1	25052203	NSP
P1306B	SOCKET	IMSA-9850S-22	1	25053211	NSP
P160	PRINTED WIRING BOARD	BCPS-2089	{1}	25142089	NSP
P160	PRINTED WIRING BOARD	BCPS-2089	1	25142089A	N NSP
P160	PRINTED WIRING BOARD	BCETC-2163	{1}	25142163	N NSP
P160	PRINTED WIRING BOARD	BCPS-2164	{1}	25142164	N NSP
P160	PRINTED WIRING BOARD	BCETC-2165	{1}	25142165	N NSP
P160	PRINTED WIRING BOARD	BCETC-2166	{1}	25142166	NSP
P160	PRINTED WIRING BOARD	BCETC-2167	{1}	25142167	N NSP
P160	PRINTED WIRING BOARD	BCETC-2168	{1}	25142168	N NSP
P160	PRINTED WIRING BOARD	BCETC-2169	{1}	25142169	N NSP
P160	PRINTED WIRING BOARD	BCETC-2170	{1}	25142170	NSP
P160	PRINTED WIRING BOARD	BCETC-2171	{1}	25142171	N NSP
P160	PRINTED WIRING BOARD	BCETC-2174	{1}	25142174	N NSP
P160	PRINTED WIRING BOARD	BCETC-2202	{1}	25142202	N NSP
P160	PRINTED WIRING BOARD	BCRF-2208	{1}	25142208	NSP
P2	TERMINAL	NTM-2PDML439	1	25060517	
P2901A	PLUG	IMSA-9111B-22	1	25056740	N NSP
P4000B	SOCKET	NSCT-21P2114	1	25052217	NSP
P511B	PLUG	NPLG-7P135	1	25055151	NSP
P5751	TRM(SCREW)	TER21-0130V	1	25060533	NSP
P5752	TRM(SCREW)	TER21-0130V	1	25060533	NSP
P5753	TRM(SCREW)	TER21-0130V	1	25060533	NSP
P5775A	WIRE HARNESS ASSEMBLY	NSAS-14P2420	1	2009991556UL	N NSP
P5777	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P7001A	PLUG	IMSA-9111B-30	1	25056700	NSP
P7002	WIRE HARNESS ASSEMBLY	NSAS-5P2109	1	2009991298UL	NSP
P7002A	WIRE HOL	CHD-1.5-5	1	25053536	N NSP
P7003	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P7031	TRM(EARTH)	TP00940-21	1	25065732T	N NSP
P7032	TRM(EARTH)	TP00940-21	1	25065732T	N NSP
P7033	TRM(EARTH)	TP00940-21	1	25065732T	N NSP
P7034	TRM(EARTH)	TP00940-21	1	25065732T	N NSP
P7036	TRM(SCREW)	TER21-0130V	1	25060533	N NSP
P7061A	PLUG	NPLG-11P0966	1	25056016	NSP
P751	TRM(SCREW)	TER21-0130V	1	25060533	N NSP

BAPS-2092-1N

<Note>

1. Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.
2. The ! mark found on some component parts indicates the importance of the safety factor of the part.

Therefore, when replacing, be sure to use parts of identical designation.

: NSP

REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
[Semi-conductors]					
D7181	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D7182	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D9501	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9502	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9503	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9504	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9505	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D9506	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D9521	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9522	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9523	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9524	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9531	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9532	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9533	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9551	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9552	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9561	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D9562	ZENER DIODE	DZ2J033M0L	1	224760330R2	NSP
D9571	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9572	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9573	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9574	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9575	ZENER DIODE	DZ2J200M0L	1	224762000R2	NSP
D9576	ZENER DIODE	DZ2J180M0L	1	224761800R2	NSP
D9751	DIODE	D3SBA60	1	22380272F	
Q7181	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q9501	HYBRID IC	78M12HF(NJM78M12FA)	1	222780125JRC	
Q9502	HYBRID IC	79M12HF(NJM79M12FA)	1	222790125JRC	
Q9521	HYBRID IC	78M06HF(NJM78M06FA)	1	222780065JRC	
Q9531	HYBRID IC	78M12HF(NJM78M12FA)	1	222780125JRC	
Q9551	HYBRID IC	78M05(NJM78M05FA)	1	222780055JRC	
Q9571	TRANSISTOR	INC5001AP1-T111	1	2218100R2	N NSP
[Transformers, Coils]					
L5823	CORE	BLM11A121S	1	2350050R1	NSP
[Capacitors]					
C5823	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K	1	332241035R1	NSP
C5876	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C5877	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J1	1	342103314R1	NSP
C7166	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C7170	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-330J1	1	342103304R1	NSP
C7851	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D1	1	342101002R1	NSP
C7856	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D1	1	342101002R1	NSP
C7931	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D1	1	342101002R1	NSP
C7934	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-104K	1	332241045R1	NSP
C9501	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V50V-394J	1	374723944T	NSP
C9507	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-3300M(UTSP)	1	397553327S	N
C9508	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-3300M(UTSP)	1	397553327S	N

C9513	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V50V-394J	1	374723944T	NSP
C9514	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V50V-394J	1	374723944T	NSP
C9515	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W35V-220M(UTSP)	1	397562217T	
C9516	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W35V-220M(UTSP)	1	397562217T	
C9521	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V50V-394J	1	374723944T	NSP
C9523	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-330J1	1	342103304R1	NSP
C9524	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-220M(UTSP)	1	397532217AT	N
C9526	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V50V-394J	1	374723944T	NSP
C9527	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-2200M(UTSP)	1	397552227S	N
C9531	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V50V-394J	1	374723944T	NSP
C9533	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V50V-104J	1	374721044T	NSP
C9536	SMG C	CE04W35V-1000M(SMG)	1	395061027S	N
C9537	SMG C	CE04W35V-470M(SMG)	1	395064717S	N
C9539	SMG C	CE04W50V-10M(SMG)	1	395081007T	
C9551	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C9552	SMG C	CE04W16V-1000M(SMG)	1	395041027S	N
C9554	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C9561	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C9562	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K1	1	332101035R1	NSP
C9571	SMG C	CE04W63V-47M(SMG)	1	395074707T	N
C9572	SMG C	CE04W50V-47M(SMG)	1	395084707T	
C9573	SMG C	CE04W50V-47M(SMG)	1	395084707T	
C9581	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-223K1	1	332102235R1	NSP
C9589	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V50V-104J	1	374721044T	NSP
C9590	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	N NSP
C9752	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V50V-104J	1	374721044T	NSP
C9760	SMG C	CE04W16V-4700M(SMG)	1	395044727S	N
[Resistors]					
R5851	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R5852	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R5853	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R5872	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R7151	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7152	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7153	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7157	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R7158	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7159	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7163	CHIP TYPE CARBON RESISTOR	RN72K2E-105JE	1	435221054R1	NSP
R7164	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R7165	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R7168	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R7181	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R7182	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R7183	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R7185	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R7186	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R7187	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R7190	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R7853	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP
R7854	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R7855	CHIP TYPE CARBON RESISTOR	RN72K1J-330JE	1	435033304R1	NSP
R7856	CHIP TYPE CARBON RESISTOR	RN72K1J-330JE	1	435033304R1	NSP
R7857	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP
R7858	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP

R7859	CHIP TYPE CARBON RESISTOR	RN72K1J-330JE	1	435033304R1	NSP
R7862	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R7863	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R7864	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP
R7865	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP
R7866	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R7867	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP
R7868	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R7869	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R7870	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP
R7871	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP
R7872	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R7873	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP
R7874	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R7875	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7876	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7877	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7878	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7879	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP
R7932	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R7933	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R7941	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7942	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R9502	CHIP TYPE CARBON RESISTOR	RN72K2E-105JE	1	435221054R1	NSP
R9505	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R9506	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R9507	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R9508	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R9509	CHIP TYPE CARBON RESISTOR	RN72K2E-105JE	1	435221054R1	NSP
R9510	CHIP TYPE CARBON RESISTOR	RN72K2E-105JE	1	435221054R1	NSP
R9511	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R9522	C-METAL R	RN72K2B-473JE2	1	435114734R1	N NSP
R9524	C-METAL R	RN72K2B-105JE2	1	435111054R1	N NSP
R9533	NON-FLAMMABLE CARBON FILM RESISTOR	R25J-4.7	1	415470474T	
R9554	CHIP TYPE CARBON RESISTOR	RN72K2E-105JE	1	435221054R1	NSP
R9561	CHIP TYPE CARBON RESISTOR	RN72K1J-392JE	1	435033924R1	NSP
R9562	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R9571	METAL RESISTOR	RNU1/2WCJ-8.2	1	453530824T	NSP
R9572	CHIP TYPE CARBON RESISTOR	RN72K1J-272JE	1	435032724R1	NSP
R9573	CHIP TYPE CARBON RESISTOR	RN72K1J-272JE	1	435032724R1	NSP
R9574	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R9575	CHIP TYPE CARBON RESISTOR	RN72K1J-333JE	1	435033334R1	NSP
R9576	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R9752	CHIP TYPE CARBON RESISTOR	RN72K2E-105JE	1	435221054R1	NSP
R9753	C-METAL R	RN72K2B-105JE2	1	435111054R1	N NSP
R9771	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R9772	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R9773	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
[Switches, Terminals, Wires]					
F9501A	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F9501B	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F9502A	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F9502B	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F9521A	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F9521B	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP

F9531A	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F9531B	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F9532A	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F9532B	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F9751A	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F9751B	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
P1602C	SOCKET	IMSA-9850S-30	1	25053215	NSP
P1603B	SOCKET	9615S-35A-PP	1	25053313	NSP
P170	PRINTED WIRING BOARD	BCPS-2092	{1}	25142092	N NSP
P170	PRINTED WIRING BOARD	BCPS-2092	1	25142092A	N NSP
P170	PRINTED WIRING BOARD	BCETC-2200	{1}	25142200	N NSP
P170	PRINTED WIRING BOARD	BCETC-2201	{1}	25142201	N NSP
P170	PRINTED WIRING BOARD	BCETC-2203	{1}	25142203	N NSP
P170	PRINTED WIRING BOARD	BCETC-2204	{1}	25142204	N NSP
P170	PRINTED WIRING BOARD	BCPS-2205	{1}	25142205	N NSP
P170	PRINTED WIRING BOARD	BCETC-2206	{1}	25142206	N NSP
P170	PRINTED WIRING BOARD	BCETC-2207	{1}	25142207	N NSP
P501B	SOCKET	NSCT-15P2108	1	25052211	NSP
P5581B	PLUG	NPLG-2P116	1	25055132	NSP
P5701B	SOCKET	NSCT-13P2106	1	25052209	NSP
P5775B	PLUG	NPLG-7P135	1	25055151	NSP
P5822	ST JACK	HSJ1002-016010	1	25046044	
P5851A	WIRE HARNESS ASSEMBLY	ADX7729-A	1	2009991542UL	NSP
P5851B	PLUG	NPLG-7P135	1	25055151	NSP
P5871	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P7001C	SOCKET	IMSA-9111S-30L	1	25056701	NSP
P7002B	PLUG	NPLG-5P352	1	25055369	NSP
P7061C	SOCKET	NSCT-11P2191	1	25052294	NSP
P7151A	PLUG	IMSA-9111B-26	1	25056741	NSP
P7151B	SOCKET	IMSA-9111S-26L	1	25053566	N NSP
P7552B	PLUG	NPLG-5P133	1	25055149	NSP
P7602B	SOCKET	9615S-35A-PP	1	25053313	NSP
P7851	TRM(SCREW)	TER21-0130V	1	25060533	NSP
P7941	TRM(EARTH)	TP00940-21	1	25065732T	NSP
P7942	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P7943	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P9501	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P9502	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P9511	PLUG	NPLG-5P119	1	25055135	NSP
P9512	PLUG	NPLG-7P121	1	25055137	NSP
P961B	PLUG	NPLG-2P130	1	25055146	NSP
P9751	PLUG	NPLG-2P116	1	25055132	NSP
P9763	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P9771	TRM(EARTH)	TP00940-21	1	25065732T	NSP