

Service Manual


Speaker System

SB-HD505

Hi-Fi Speaker System

Colour

(M) Wood GrainType

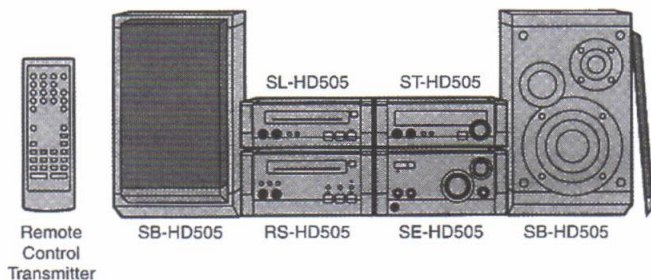

Remote Control Transmitter

SB-HD505

RS-HD505

SE-HD505

SB-HD505

■ SPECIFICATIONS

Type	2 way ,2 speaker system
Speaker	Woofers: 12 cm cone type Tweeter: 2,5 cm semi-Dome
Impedance	6 Ω
Input power	High 30 W (MUSIC) 15 W (DIN) Low 60 W (MUSIC) 30 W (DIN)
Output sound pressure level	90 dB/W (1.0 m)
Cross over frequency	5,5 kHz
Frequency range	55Hz - 50kHz (-16 dB) 65Hz - 46kHz (-10 dB)
Dimensions (W x H x D)	175 x 287 x 225 mm
Weight	3,7 kg

Notes:

Specifications are subject to change without notice.
Weight and dimensions are approximate.

■ ESPECIFICACIONES

Tipo	Sistema con 2 vías, 2 altavoces
Altavoces	Graves: 12 cm tipo cónico Agudos: 6 cm tipo semi-cúpula
Impedancia	6 Ω
Capacidad de potencia	High 30 W (MUSIC) 15 W (DIN) Low 60 W (MUSIC) 30 W (DIN)
Nivel de presión acústica de salida	90 dB/W (1.0 m)
Frecuencia de cruce	5,5 kHz
Respuesta de frecuencias	50Hz - 50kHz (-16 dB) 65Hz - 46kHz (-10 dB)
Dimensiones (W x H x D)	175 x 287 x 225 mm
Peso	3,7 kg

Nota:

Estas especificaciones están sujetas a cualquier cambio.
Peso y dimensiones son aproximados.

■ SPECIFICATIONS

Type	2-voies , 2-haut-parleurs
Haut-parleurs	Graves: 12 cm type a cone Aguis: 6 cm type a semi-dome
Impédance	6 Ω
Entrée maximale	High 30 W (MUSIC) 15 W (DIN) Low 60 W (MUSIC) 30 W (DIN)
Niveau de pression sonore de sortie	90 dB/W (1.0 m)
Fréquence de commutation	5,5 kHz
Gamme de fréquences	55Hz - 50kHz (-16 dB) 65Hz - 46kHz (-10 dB)
Dimensions (W x H x D)	175 x 287 x 225 mm
Poids	3,7 kg

Notes:

Sujet à changement sans preavis.
Poids et dimensions sont approximatifs.

⚠ WARNING

This service information is designed for experience repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Technics[®]

© 1999 Matsushita Electric España, S.A.
All rights reserved. Unauthorized copying and distribution is a violation of law.

Replacement Parts List

- Notes 1. Part numbers are indicated on most mechanical parts. Please use this part number for parts orders.
 2. MAES indicates parts that are supplied by MAES.
- Nota 1. El código está indicado en la mayoría de las piezas. Por favor use este código para sus pedidos.
 2. La indicación MAES significa recambios suministrados a través de MAES.

Ref. No.	Part No.	Part Name & Description	Remarks	Ref. No.	Part No.	Part Name & Description	Remarks
		SPEAKER (S)		4	RKTPHD505	BASS REFLEX ASS'Y	[MAES]
SP1	EAST16KH01A6	SPEAKER(TWEETER)	[MAES]	5	XTNP42+20FG	SCREW TERMINAL ASS'Y	[MAES]
SP2	EAST12PL14A6	SPEAKER(WOOFER)	[MAES]	6	SNES4+16FN	SCREW TWEETER	[MAES]
		CABINET PARTS		7	RMQ0855	TWEETER GASKET	[MAES]
1	RYK0882B-M	CABINET ASS'Y (L)	[MAES]	8	RMQ0684A	WOOFER GASKET	[MAES]
1	RYK0882C-M	CABINET ASS'Y (R)	[MAES]	9	SNES4+20S	SCREW WOOFER	[MAES]
1-1	RKA0072-K	LEG	[MAES]			PACKING PARTS	
1-2	REJ0133-1	TERMINAL ASS'Y	[MAES]	P1	RPG4226	CARTON BOX	[MAES]
1-3	SHG8G9044	NET HOLDER	[MAES]	P2	RPN1183A	PAD UP	[MAES]
2	RYBP0205B	NET FRAME	[MAES]	P2	RPN1183B	PAD BOTTOM	[MAES]
3	RGKP1114-S	ORNAMENT WOOFER(L)	[MAES]	P3	SPH8G415	SHEET	[MAES]
3	RGKP1114A-S	ORNAMENT WOOFER(R)	[MAES]				

Schematic Diagram



Cabinet Parts Location

