


23	C375-378	OPEN				330P
24	C379-380	OPEN				0.022
25	C383-386	OPEN				2200P
26	C120	OPEN				0.01
27	C310	OPEN				0.1/25
28	R403-404	OPEN				2.2
29	PJ103	LB40103				LB200227
30	PJ104	OPEN				LB200229

POWER TRANS	
U	XF362
C	XF363
R	XF364
A, B	XF365
G	XF366

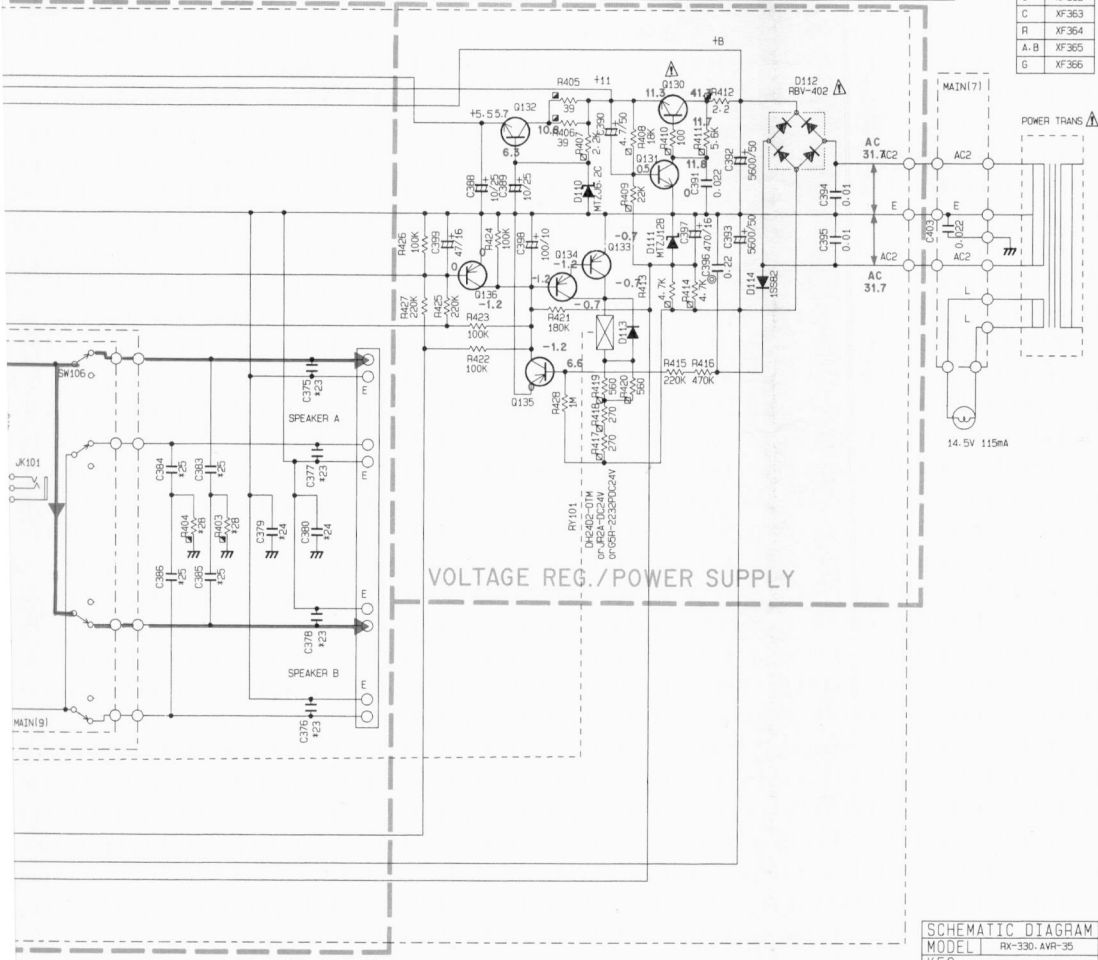

VOLTAGE REG./POWER SUPPLY



SCHEMATIC DIAGRAM
 MODEL RX-330-AVP-35
 REC-

CAUTION





- Components having special characteristics are marked Δ and must be replaced with parts having specifications equal to those originally installed.
- The Voltages are measured at FM reception mode.
 The Voltages () are at AM reception mode.
- All voltages are measured with a 10M Ω /V DC electric volt meter.
- Schematic diagram is subject to change without notice.

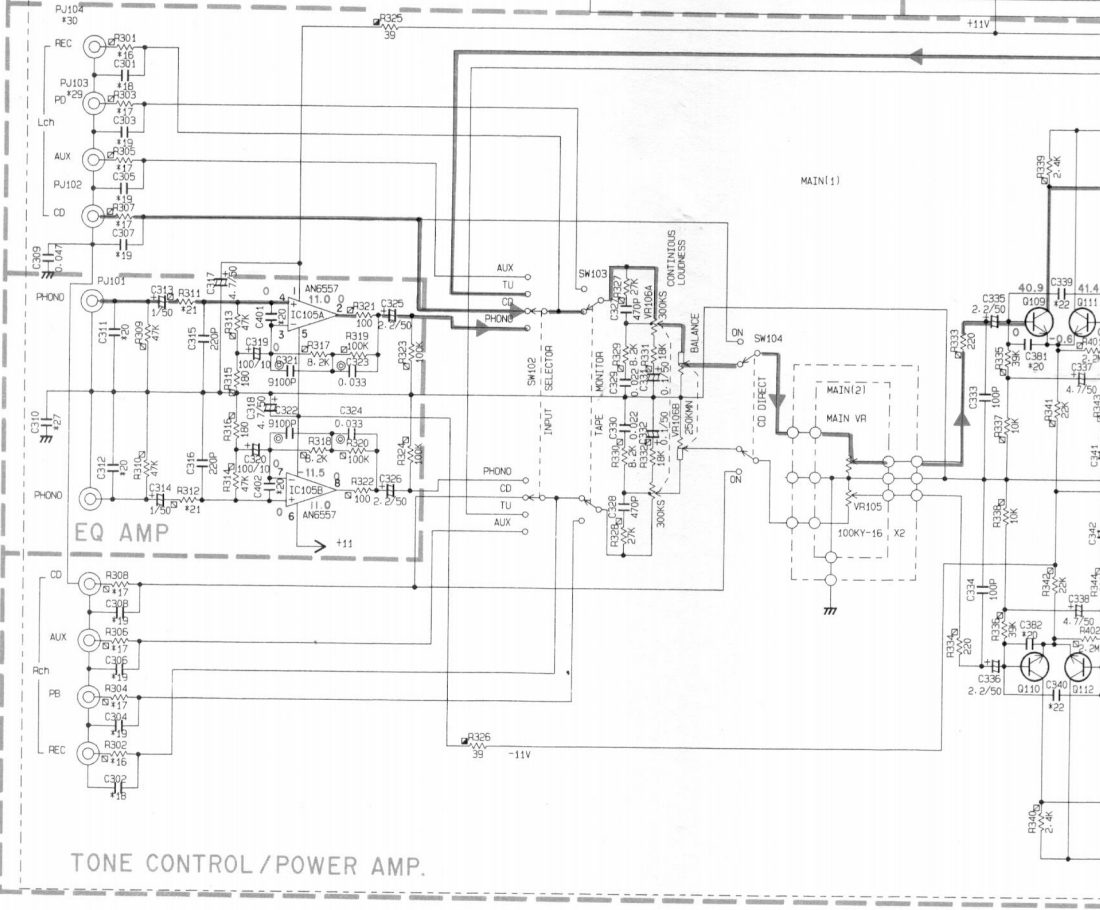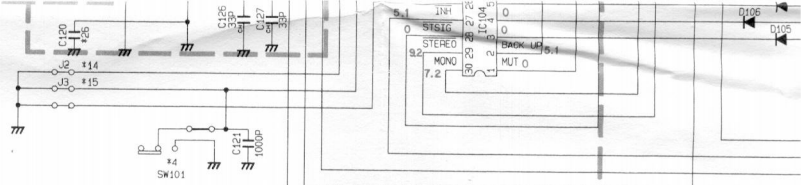


TUNING CONTROL



MIN CONNECTION DIAGRAM OF TRANSISTORS, DIODE AND ICS.

4933S (O, R)	2SC1809 (M, N, P)	2SD438 (E, F)	2SA1264	2SD1913 (R, S)	1SS82	RBV-402	AN6557
4970 (GR, BL)	2SC1923 (R, O, Y)		2SC3181		1SS133		
41115 (E, F)	2SC2060				MTZ6.2C		
41310 (R, S, T)	2SC2240 (GR, BL)						
4560 (E, F)	2SC2603 (E, F)						
4535 (A, B, C)	2SC3312 (R, S, T)						
41740S (S, R)	2SD400						

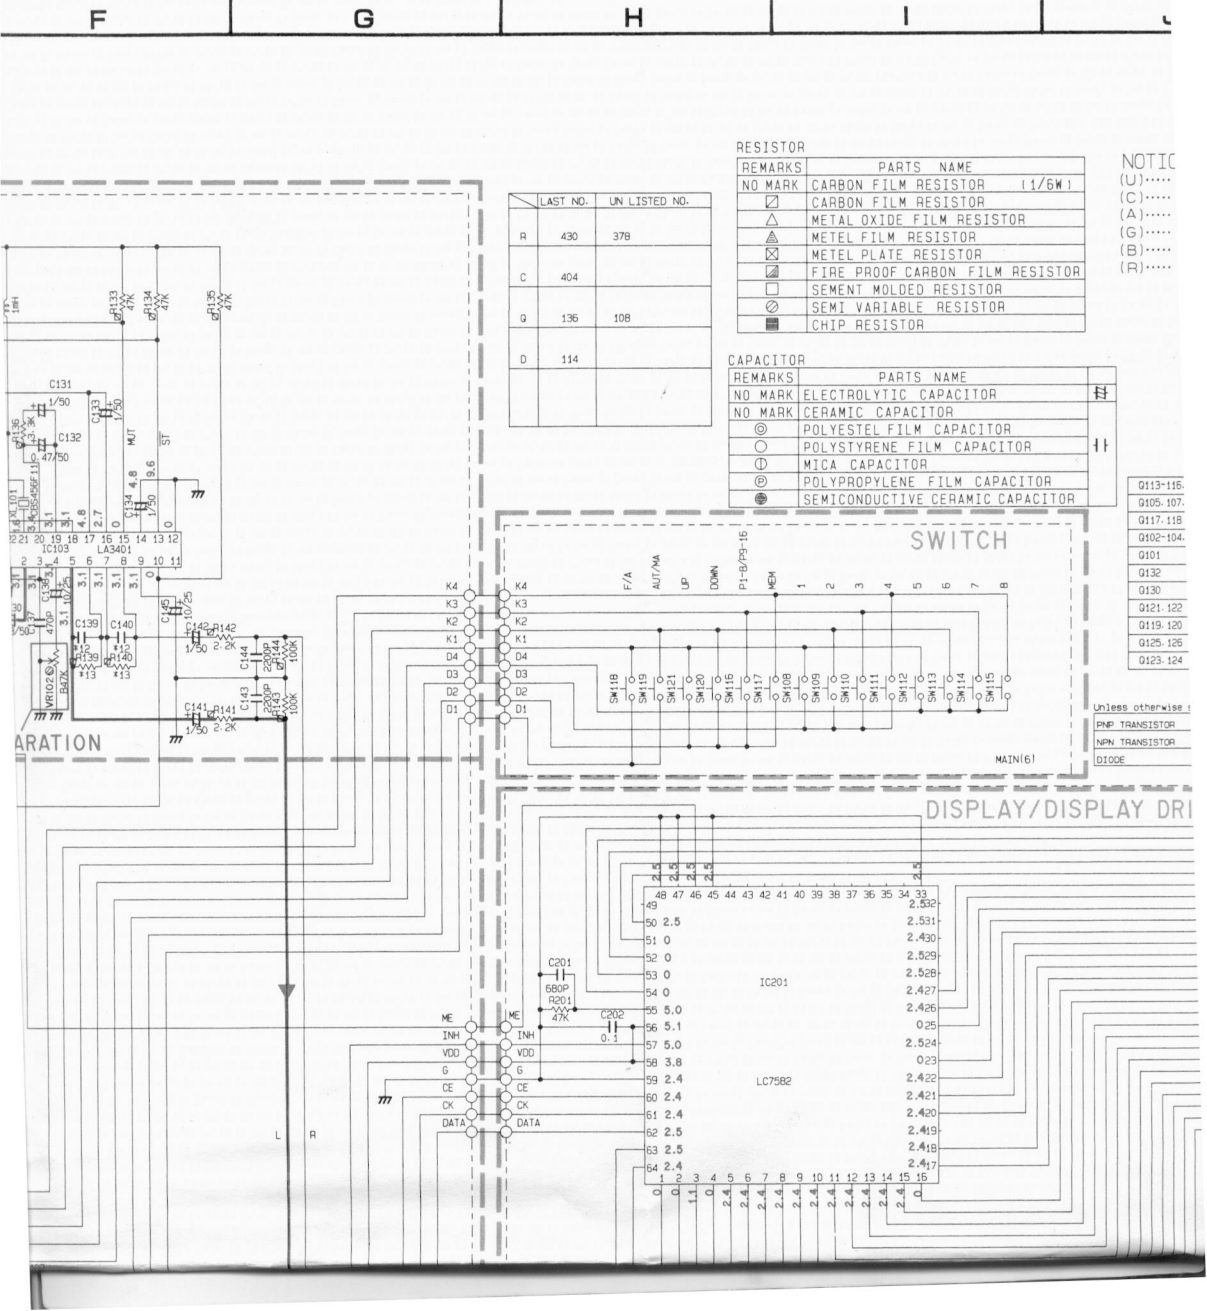

RESISTOR

REMARKS	PARTS NAME	
NO MARK	CARBON FILM RESISTOR	(1/6W)
<input checked="" type="checkbox"/>	CARBON FILM RESISTOR	
<input checked="" type="checkbox"/>	METAL OXIDE FILM RESISTOR	
<input checked="" type="checkbox"/>	METEL FILM RESISTOR	
<input checked="" type="checkbox"/>	METEL PLATE RESISTOR	
<input checked="" type="checkbox"/>	FIRE PROOF CARBON FILM RESISTOR	
<input type="checkbox"/>	SEMENT MOLDED RESISTOR	
<input checked="" type="checkbox"/>	SEMI VARIABLE RESISTOR	
<input checked="" type="checkbox"/>	CHIP RESISTOR	

CAPACITOR

REMARKS	PARTS NAME	
NO MARK	ELECTROLYTIC CAPACITOR	#
NO MARK	CERAMIC CAPACITOR	
<input checked="" type="checkbox"/>	POLYESTER FILM CAPACITOR	
<input type="checkbox"/>	POLYSTYRENE FILM CAPACITOR	
<input type="checkbox"/>	MICA CAPACITOR	
<input type="checkbox"/>	POLYPROPYLENE FILM CAPACITOR	
<input checked="" type="checkbox"/>	SEMICONDUCTIVE CERAMIC CAPACITOR	

	LAST NO.	UN LISTED NO.
R	430	378
C	404	
G	135	108
D	114	

NOTICE


- (U).....
- (C).....
- (A).....
- (B).....
- (G).....
- (R).....

- 0113-116
- 0105-107
- 0117-118
- 1002-104
- 0101
- 0132
- 0130
- 0121-122
- 0119-120
- 0125-125
- 0123-124

Unless otherwise:
 PNP TRANSISTOR
 NPN TRANSISTOR
 DIODE

NOTICE


- (U)..... U.S.A model
- (C)..... Canadian model
- (A)..... Australian model
- (G)..... European model
- (B)..... British model
- (R)..... General model

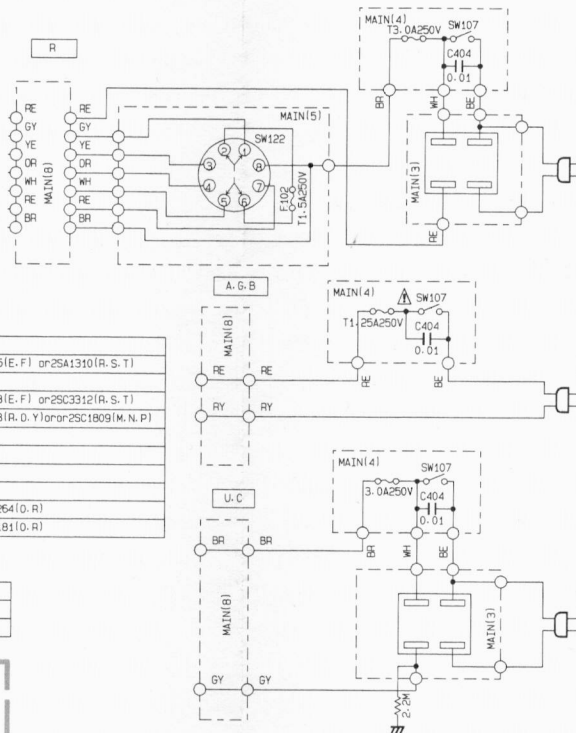

Q113-116, 127-128	2SA970 (GR, BL)
Q105, 107, 133-136	2SA933S (Q, R) or 2SA1115 (E, F) or 2SA1310 (R, S, T)
Q117-118	2SC2240 (GR, BL)
Q102-104, 106-109-112-129-131	2SC1740S (S, R) or 2SC2603 (E, F) or 2SC3312 (R, S, T)
Q101	2SC535 (A, B, C) or 2SC1923 (R, D, Y) or or 2SC1809 (M, N, P)
Q132	2SC2060 or 2SD0400
Q130	2SD1913 (R, S)
Q121-122	2SB660 (E, F)
Q119-120	2SD438 (E, F)
Q125-126	2SA1490 (D, P, Y) or 2SA1264 (D, R)
Q123-124	2SC3854 (D, P, Y) or 2SC3181 (D, R)

otherwise specified

TRANSISTOR	
TRANSISTOR	ISS133

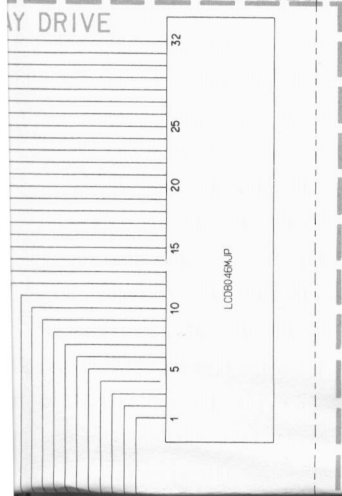

#		U.C	R	A.B	G
1	R101	OPEN			220K
2	R102	OPEN			100K
3	PK101	TFFG1U117A			TFFG3E132A
4	SW101	OPEN	VAS4530	OPEN	
5	C109	3.3/50	1/50		
6	R113	15K	47K		
7	C110	100P			OPEN
8	J1	SHORT			OPEN
9	R138	OPEN			4.7K
10	T103	OPEN			11.4KHZ
11	R137	10K			22K
12	C139-140	Ⓞ 1100P		▷ D 680P/100	▷ P 390P/100
13	R139-140	68K			120K
14	J2	SHORT	OPEN		
15	J3	OPEN	OPEN	SHORT	
16	R301-302	SHORT			4.7K
17	R303-308	SHORT			2-2K
18	C301-302	OPEN			100P
19	C303-308	OPEN			390P
20	C11, 12, 40, 402, 381, 382	OPEN			220P
21	R311-312	150			2-2K