

SERVICE MANUAL

FM/BT/CD/MP3/USB/AUX/AUDIO-IN

MODELO: MC-100UBM



MATESTAR DIGITAL DEVICE LTD.

PERFORMANCE SPECIFICATIONS

Date : 2013-8-20

Model MC-100UBM

Description : FM /BLUETOOTH
CD/MP3/USB/AUX/AUDIO IN
Micro Component System

Page : Total 5 Pages

GENERAL TEST CONDITION

Output Load : 6 Ohm non-reactive

Reference Output : 500 mW

Input Signal Source : 75 ohm dummy for FM

Modulation : 22.5 KHz Deviation 1 KHz for FM
75KHz Modulation for FM MPX

Remarks : AC 120V 60Hz

(MATESTAR)

PREP/ Wang Daibin

(MATESTAR)

APPROVED BY: Darren Wong

PERFORMANCE SPECIFICATIONS

MODEL NO : MC-100UBM

Frequency Modulation (FM) Section

Test Item			Unit	Normal	Limit	#1	#2
F01	Tuning Range TP:87.5MHz	LOW	MHz	87.5	+/-0.1		
		High	MHz	108	+/-0.1		
F02	Sensitivity TP:90.1MHz at 30dB S/N TP:98.1MHz (Mono) TP:106.1MHz	90.1MHz	dB/uv	20	$\cong$ 28		
		98.1MHz	dB/uv	20	$\cong$ 28		
		106.1MHz	dB/uv	20	$\cong$ 28		
F03	3 dB Limit Sens TP:98.1MHz	98.1MHz	dB	18	$\cong$ 27		
F04	Stereo Threshold TP:98.1MHz	98.1MHz	dB	26	$\cong$ 32		
F05	Overload TP:98.1MHz	98.1MHz	dB		> =110		
F06	Audio Response -6dB TP:98.1MHz	98.1MHz	Hz/KHz	60/4K5	150/3K5		
F07	Separation (1K) TP:98.1MHz	98.1MHz	dB	30	$\cong$ 20		
F08	Total Harmonic Distortion (60dB) Mono Re Max Power	22.5KHz	%	1	$\cong$ 3		
		75KHz	%	10	$\cong$ 20		
F09	Signal to Noise Ratio (Input 60dB) TP:98.1MHz	98.1MHz	dB	50	$\cong$ 45		
		STEREO	dB	45	$\cong$ 40		
F10	Auto Search Threshold TP:98.1MHz	98.1MHz	dB	27	$\cong$ 35		
F11	Mod. Hum (AC) TP:98.1MHz	98.1MHz	dB	45	$\cong$ 40		
F12	Min. Volume Hum & Noise		mV	0.7	$\cong$ 2		

PERFORMANCE SPECIFICATIONS

MODEL NO : MC-100UBM

CDDA Section

Test Items		Unit	Normal	Limit	#1	#2
C01	10% Dist. Output Power (1kHz, 0dB)	W	50	≥ 46		
C02	Frequency Response (40Hz -16kHz/1kHz, 0dB)	dB	+/-4	+7/-10		
C03	De-emphasis Response (40Hz -16kHz/1kHz, 0dB)	dB	+/-3	+/-4		
C04	Channel Balance (1kHz, 0dB)	dB	1	≤ 3		
C05	Channel Separation (1kHz, 0dB)	dB	45	≥ 35		
C06	T.H.D. +Noise (1kHz, 0dB)	%	1	≤ 3		
C07	S/N Ratio (1kHz, 0dB)	dB	60	≥ 50		
C08	Flat (Bass off)	100Hz	dB			
		10KHz	dB			
	Classic (Bass off)	100Hz	dB			
		10KHz	dB			
	Jazz (Bass off)	100Hz	dB			
		10KHz	dB			
	Pop (Bass off)	100Hz	dB			
		10KHz	dB			
	Rock (Bass off)	100Hz	dB			
		10KHz	dB			
C09	BASS ON TCD-785	100Hz	dB			
C10	Max. Hum "SONY YEDS7 NO23"	mV	4	≤ 7		
C11	Hum at Min Vol "SONY YEDS7 NO23"	mV	1	≤ 2		

* With external 20kHz L.P.F. Test Disc "CBS SONY YEDS7"

PERFORMANCE SPECIFICATIONS

MODEL NO : MC-100UBM


CD/MP3 Section

Test Items			Unit	Normal	Limit	#1	#2
M01	Frequency Response MCD-RF561C	100Hz(T404)	dB	+3	-3		
	Ref. To 1KHz 0dB (TN:T402)	10KHz(T405)	dB	+3	-3		
		20KHz(T406)	dB	+3	-3		
M02	S/N Ratio (MCD-RF561C T402 to T407)	1KHz	dB	60	≧ 50		
M03	Seperation (MCD-RF561C T408 L/ T410 R)	1KHz	dB	45	≧ 35		
M04	Total H.D. (MCD-RF561C T402)	1KHz(0dB)	%	1	≧ 3		
M05	Total H.D. (MCD-F561A T421)	1KHz(-10dB)	%	1	≧ 3		
M06	Channel Unbalance (MCD-RF561C T402)	1KHz	dB		≧ 3		
M07	O/P Power at 10% THD (MCD-RF561C T402)	1KHz	W	50	≧ 46		
M08	Min Volume Noise (SP OUT) T407	MCD-RF561C	mV		≧ 3.5		
M09	Max. Volume Noise(Bass OFF) T407	MCD-RF561C	mV		≧ 6		
M10	Bitrate Support format (8~320 kbps & VBR) (Support)	MCD-RF561C	TN.	T101,T201,T301,T401,T501,T601,T701 ,T801,T901			
M11	Sampling Rate format 32/44.1/48KHz	MCD-RF561C	TN.	T101,T201,T301,T401,T501,T601,T701 , T801,T901			
	16/22.05/24KHz	MCD-RF561E					
	8/11.025/13KHz	MCD-RF561H					
M12	Maximum Folder (Support)			99			
M13	Maximum Files For Each Folder (Support)			999			
M14	All Total Files (Support)			999			

PERFORMANCE SPECIFICATIONS

MODEL NO : MC-100UBM

USB/AUX/AUDIO IN/BT							
Test Items			Unit	Normal	Limit	#1	#2
U01	Frequency Response (USB Copy From MCD-RF561C) Ref. To 1KHz 0dB	100Hz(T404)	dB	+3	-3		
		10KHz(T405)	dB	+3	-3		
		20KHz(T406)	dB	+3	-3		
U02	Signal to Noise Ratio (Unweighted)	1KHz	dB	60	≥ 40		
U03	Channel Seperation	1KHz	dB	45	≥ 35		
U04	Total Harmonic Distortion (Copy TCD-782)	1KHz(0dB)	%	2	≤ 5		
U05	Total Harmonic Distortion (Copy TCD-782)	1KHz(-10dB)	%	1	≤ 3		
U06	Channel Unbalance (Copy TCD-782)	1KHz	dB	0.5	≤ 3		
U07	Output Power at 10% THD (Copy T112)	1KHz	W	50	≥ 46		
U08	Min Volume Noise (SP OUT) (USB Copy)	TCD-782	mV		≤ 3.5		
U09	Max. Volume Noise (Bass Off) (USB Copy)	TCD-782	mV		≤ 6		
U10	Maximum Folder (Support)			99			
U11	Maximum Files For Each Folder (Support)			999			
U12	All Total Files (Support)			999			
AUX	Output Power at 10% THD (IMP: 47K S/I: 1 KHz 500mV)		W	50	≥ 46		
AUDIO	Output Power at 10% THD (IMP: 47K S/I: 1 KHz 500mV)		W	50	≥ 46		
BT	Output Power at 10% THD(Ref. To 1KHz 0dB)		W	50	≥ 46		

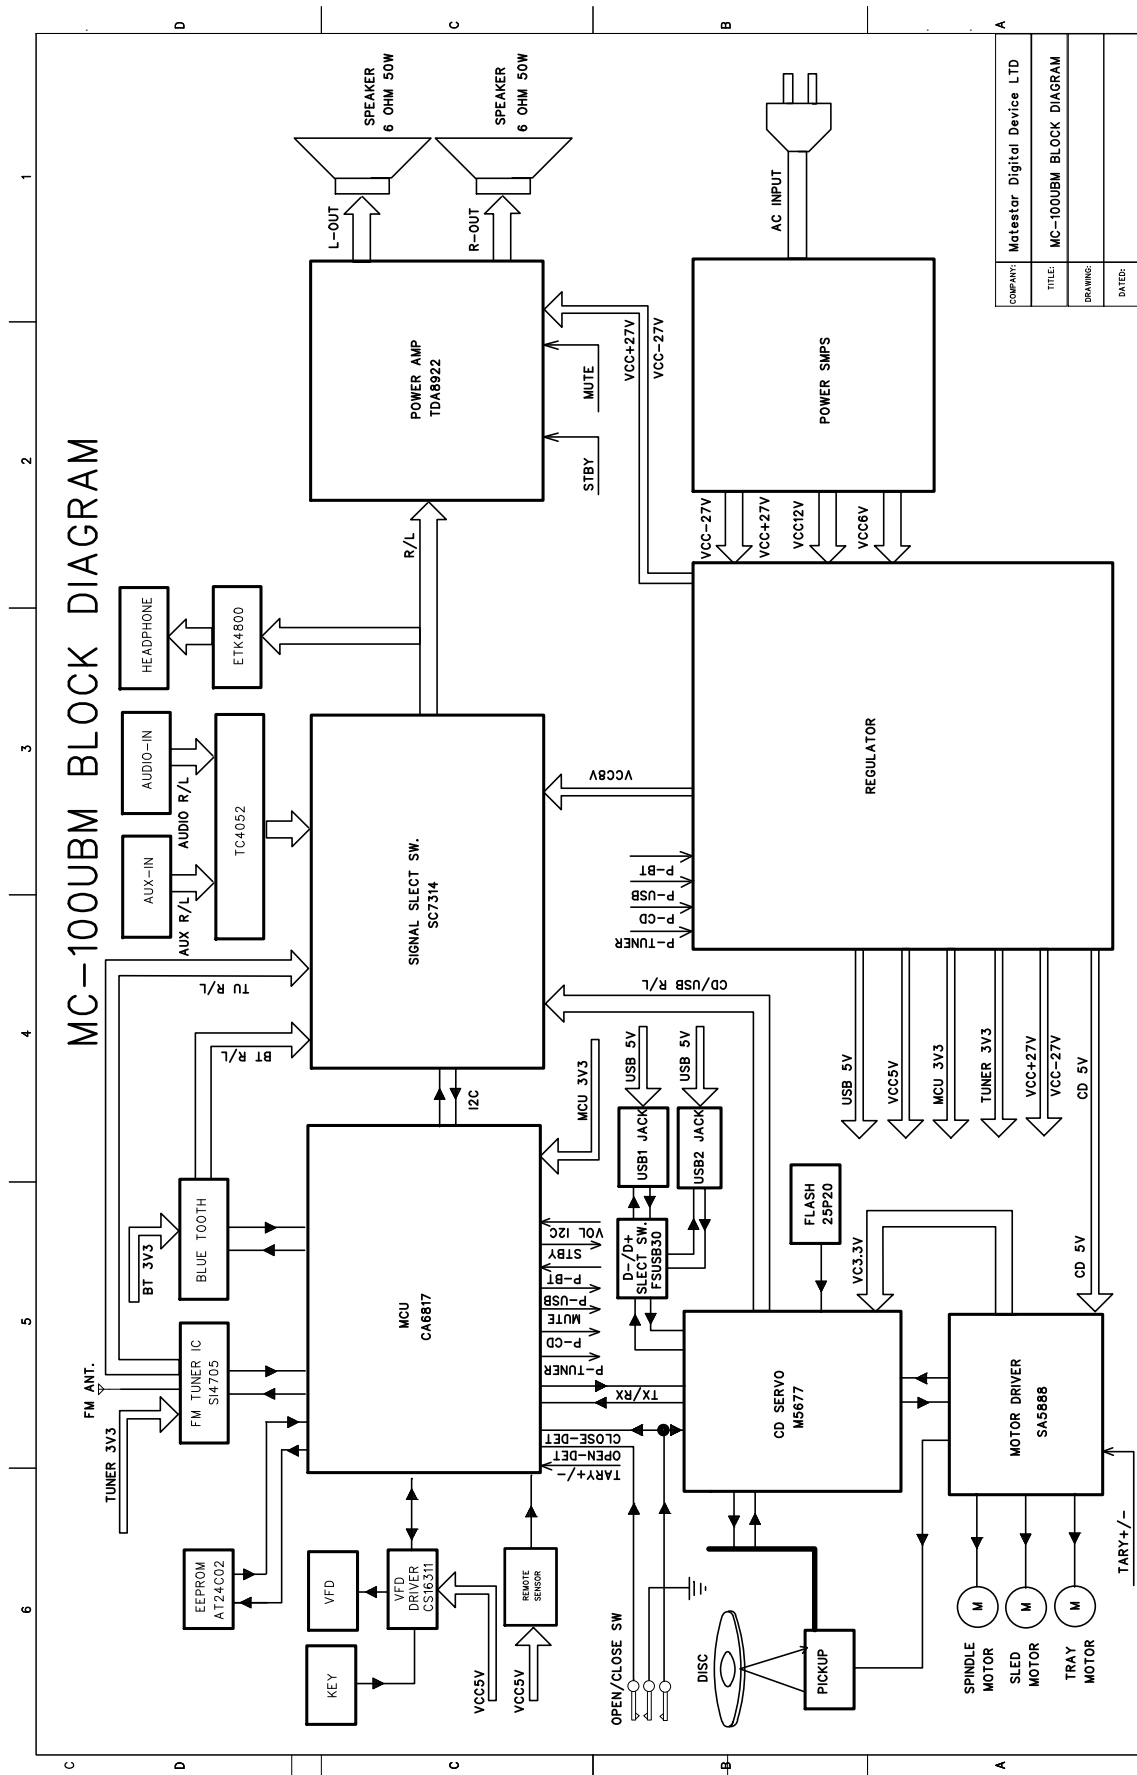

REVISION RECORD	
LTR	ECO NO:
APPROVED:	DATE:

1

2

3

4

5



6

D

C

B

A

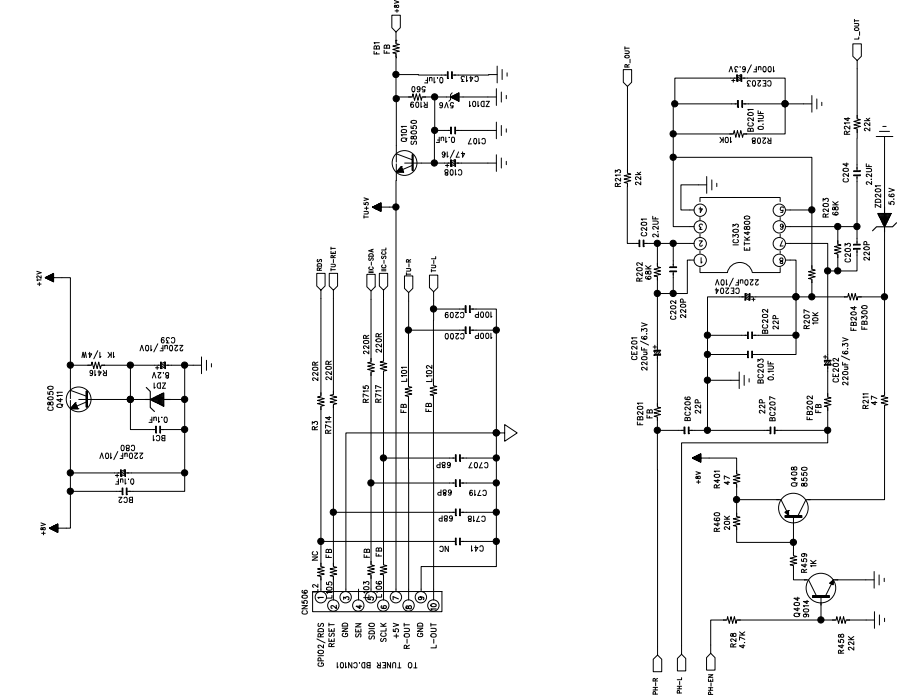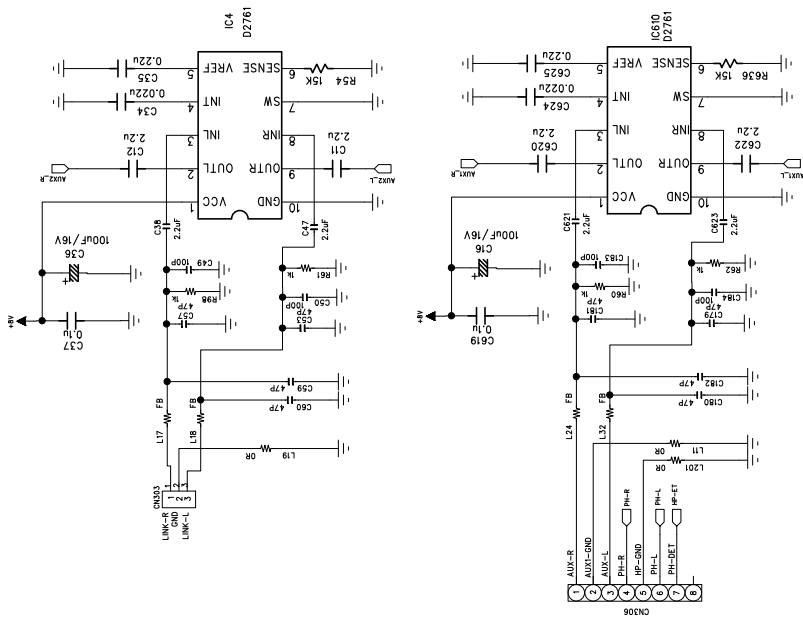


COMPANY: Matestar Digital Device Ltd.


TITLE: GD550BT MAIN BD.


DRAWN:	DATED:
CHECKED:	DATED:
QUALITY CONTROL:	DATED:
RELEASED:	DATED:

CODE:	SIZE:	DRAWING NO:	REV:

SCALE:	SHEET:	OF

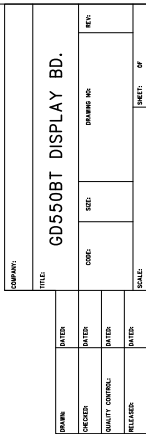

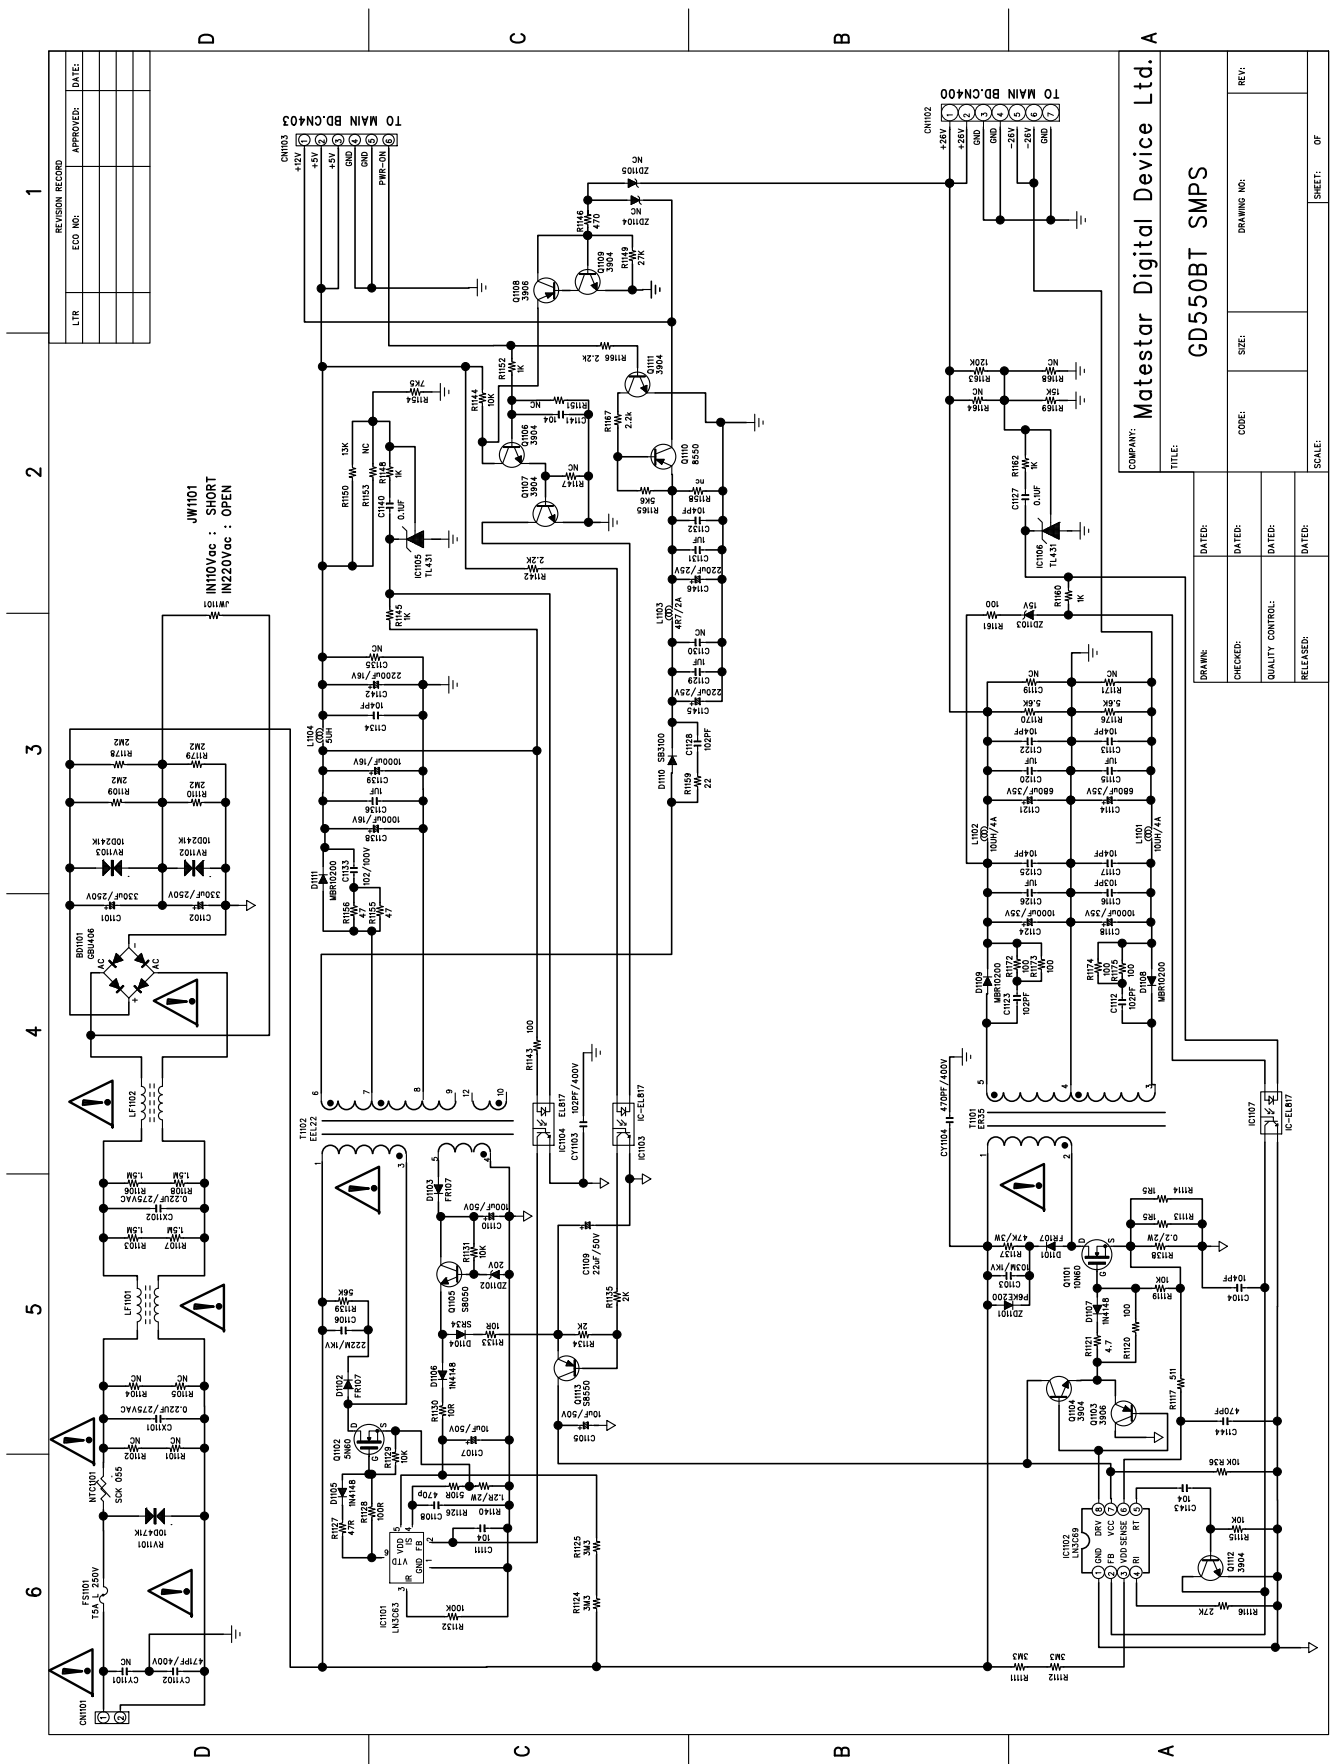

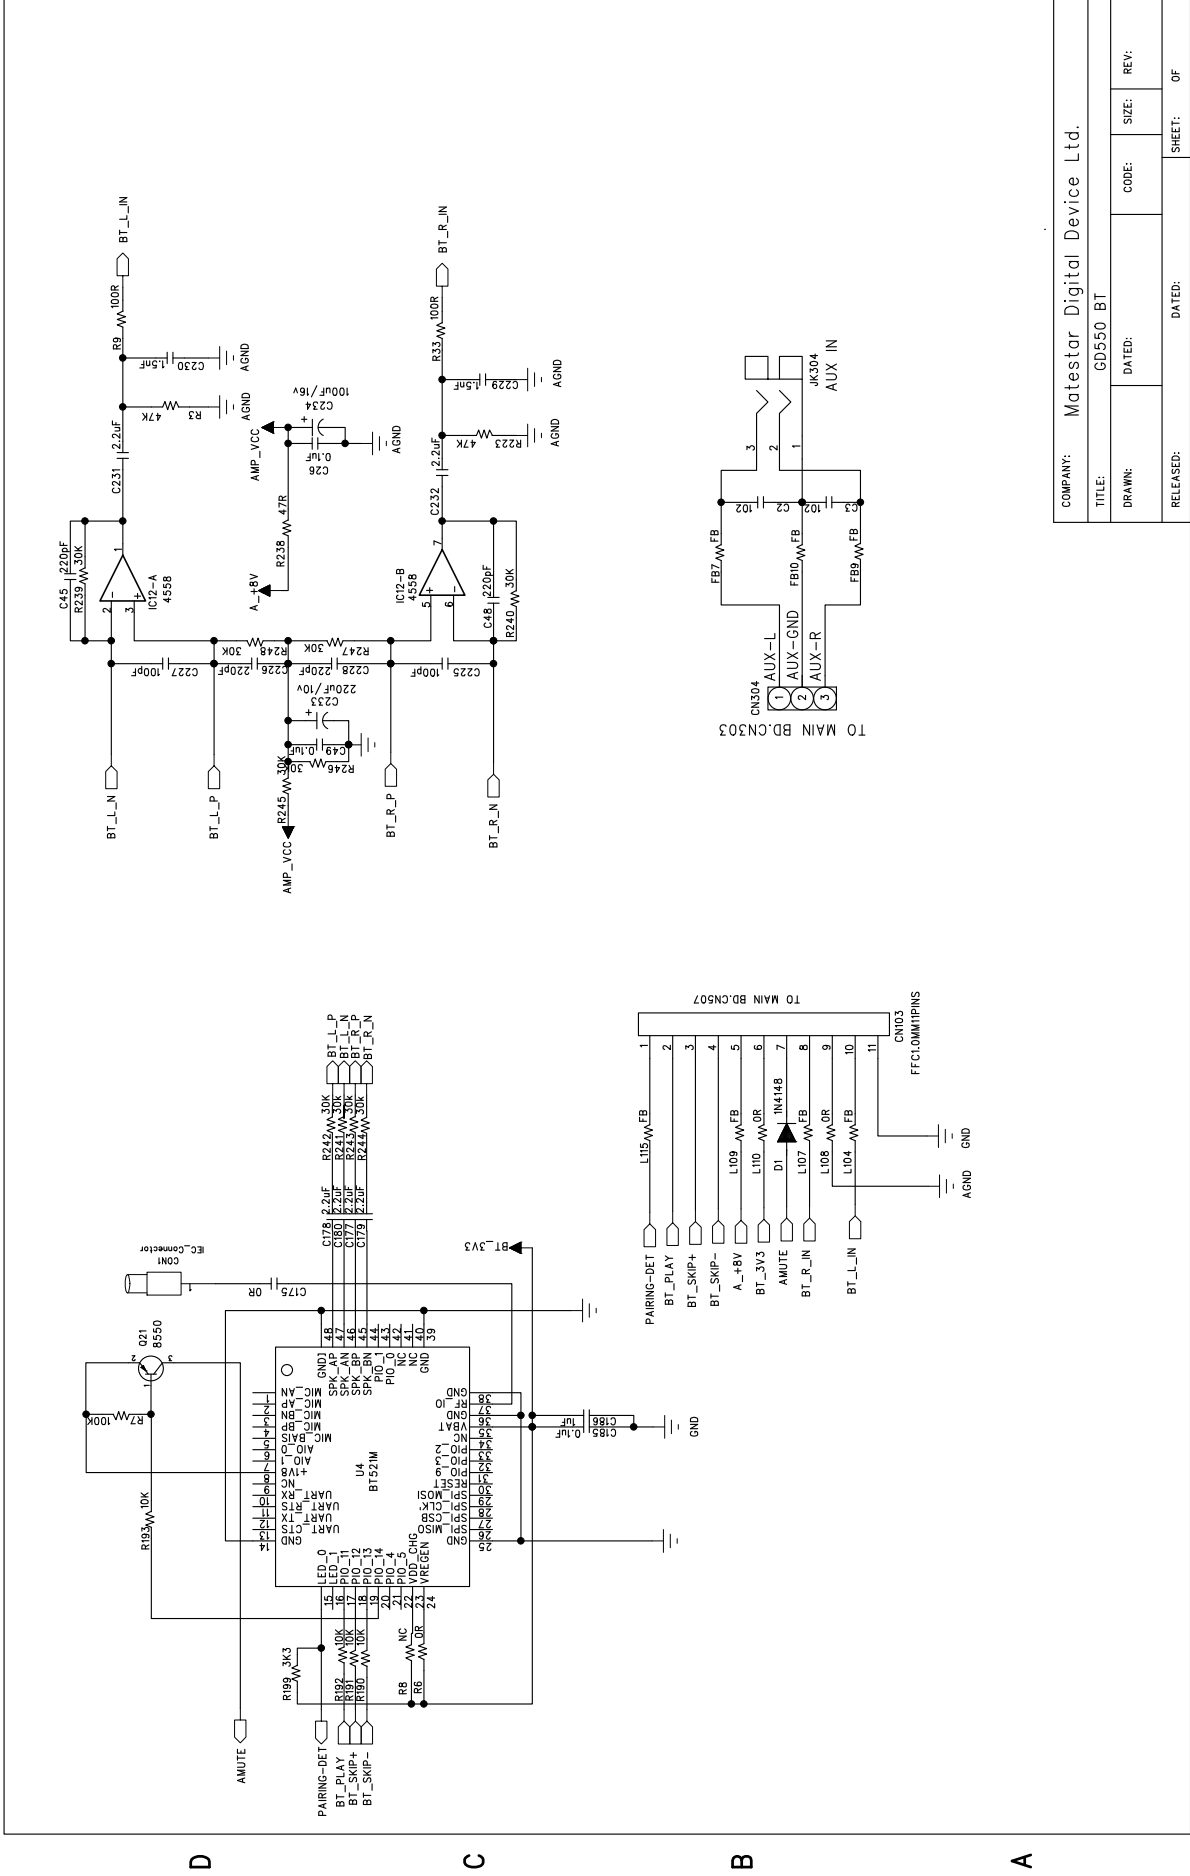

BOM多级展开

Level	Material Code	Brief Description	Unit	Quantity Made
.1	151-230000-200	SC70302 2M POWER CORD	PCS	1.0000
.1	234-261500-022	1PINS "JST" 1500mm line HSG	PCS	1.0000
.1	238-117040-203	SCREW 1.7×4mm BM	PCS	2.0000
.1	238-117050-632	SCREW 1.7×5mm PWB D=7mm	PCS	1.0000
.1	238-117050-632	SCREW 1.7×5mm PWB D=7mm	PCS	1.0000
.1	238-126080-602	SCREW 2.6×8mm PB	PCS	8.0000
.1	238-126080-602	SCREW 2.6×8mm PB	PCS	2.0000
.1	238-126080-602	SCREW 2.6×8mm PB	PCS	1.0000
.1	238-126080-631	SCREW 2.6×8mm PWA	PCS	4.0000
.1	238-126080-631	SCREW 2.6×8mm PWA	PCS	2.0000
.1	238-130060-102	SCREW 3×6mm KB	PCS	2.0000
.1	238-130060-102	SCREW 3×6mm KB	PCS	2.0000
.1	238-130060-202	SCREW 3×6mm BB	PCS	4.0000
.1	238-130060-202	SCREW 3×6mm BB	PCS	2.0000
.1	238-130060-202	SCREW 3×6mm BB	PCS	1.0000
.1	238-130060-202	SCREW 3×6mm BB	PCS	3.0000
.1	238-130060-202	SCREW 3×6mm BB	PCS	2.0000
.1	238-130060-202	SCREW 3×6mm BB	PCS	1.0000
.1	238-130080-201	SCREW 3×8mm BB	PCS	5.0000
.1	238-130080-201	SCREW 3×8mm BB	PCS	1.0000
.1	238-130080-201	SCREW 3×8mm BB	PCS	3.0000
.1	238-130080-201	SCREW 3×8mm BB	PCS	2.0000
.1	238-130080-201	SCREW 3×8mm BB	PCS	2.0000
.1	238-130080-602	SCREW 3×8mm PB	PCS	1.0000
.1	238-130080-602	SCREW 3×8mm PB	PCS	2.0000
.1	238-130100-202	SCREW 3×10mm BB	PCS	2.0000
.1	238-130100-602	SCREW 3×10mm PB	PCS	4.0000
.1	250-021500-022	1.5M 透明音箱线 两头开外皮15mm 浸锡 1	PCS	1.0000
.1	356-112350-091	MECHANISM DA11B3VF SAN CD DECK	PCS	1.0000
.1	408-430200-010	DISCUS	PCS	1.0000
.1	408-430200-030	DISCUS (带三个定位脚) M616/G616	PCS	1.0000
.1	408-500001-001	GD500 POWER HEATSINK-1	PCS	1.0000
.1	408-500001-003	GD-500 METAL-HEAT-BRA-1	PCS	1.0000
.1	408-500002-001	GD-500 POWER HEATSINK-2	PCS	1.0000
.1	408-500002-003	GD-500 METAL-HEAT-BRA-2	PCS	1.0000
.1	408-500003-001	GD-500 AMPLIFIER-HEATSINK	PCS	1.0000
.1	408-928003-100	IRON PLATEN	PCS	1.0000
.1	420-018013-001	HEAT SINK 18x13X0.16mm DCM3020MIC	PCS	1.0000
.1	458-164113-050	164*113*0.43(IA300/GD550)	PCS	1.0000
.1	458-200030-001	RUBBER FOOT	pcs	1.0000
.1	458-328840-220	RUBBER SILICON(BLACK) HARDNESS	PCS	1.0000
.1	458-552059-054	IB12 Silica gel pad	PCS	1.0000
.1	466-235013-013	STRAP FOR MOTOR	PCS	1.0000
.1	473-300160-500	30×16×5mm TB30/RDN1 CD MAGNET RIM	PCS	1.0000
.1	485-010500-060	GD500 面壳	PCS	1.0000
.1	485-020500-060	GD500 后板	PCS	1.0000
.1	485-030500-080	GD500 底壳	PCS	1.0000
.1	485-500000-020	IA300 铝面板	PCS	1.0000
.1	603-010001-000	LABEL	PCS	1.0000
.1	603-010002-000	LABEL	PCS	1.0000
.1	603-030006-000	LABEL IA300	PCS	1.0000
.1	603-050001-000	LABEL	PCS	3.0000
.1	603-090003-000	LABEL GD550	PCS	1.0000

BOM多级展开

.1	603-150003-000	Label IA300	PCS	1.0000
.1	603-170047-000	LABEL GD550	PCS	1.0000
.1	603-900264-000	LABEL GD550	PCS	1.0000
.1	604-320009-080	IA300 RC	PCS	1.0000
.1	604-340009-080	GD550 BT SLIVER THZ-04 美捷喷油	PCS	1.0000
.1	678-410375-005	EPE FORM (PM50D/EM11/21)	PCS	1.0000
.1	730-550001-030	GD550BT (WATSON)	PCS	1.0000
.1	731-550000-010	INSTRUCTION MANUAL GD550	PCS	1.0000
.1	740-550001-010	GD550(IA300) Iriver	PCS	1.0000
.1	741-550000-010	IA300 Iriver	PCS	1.0000
.1	747-005501-000	GD550(IA300) PAPER CARE(套)	套	1.0000
.1	DA300-TUNE-KR0	P.C.B IA300 TUNER BD	PCS	1.0000
..2	203-271072-210	100 UF/10V +-20% ELECT CAP	PCS	3.0000
..2	229-327680-100	CRYSTAL 32.768 KHZ 12.5PF +-10PPM 3	PCS	1.0000
..2	232-100160-112	HEADER FOR FFC 10 PINS 1.25mm R	PCS	1.0000
..2	248-013020-001	DCM3020/MCM3000 TUNER BD.PCB	PCS	1.0000
..2	301-300005-016	0 OHM +-5% 1/16W 0603 SMT RESISTOR	PCS	2.0000
..2	301-303305-016	33 OHM +-5% 1/16W 0603 SMT RESISTO	PCS	1.0000
..2	301-311015-016	100 OHM +-5% 1/16W 0603 SMT RESISTO	PCS	1.0000
..2	301-313315-016	330 OHM +-5% 1/16W 0603 SMT RESISTO	PCS	3.0000
..2	301-321025-016	1 KOHM +-5% 1/16W 0603 SMT RESISTO	PCS	5.0000
..2	301-324725-016	4.7 KOHM +-5% 1/16W 0603 SMT RESIST	PCS	1.0000
..2	301-331035-016	10 KOHM +-5% 1/16W 0603 SMT RESISTO	PCS	4.0000
..2	301-341045-016	100 KOHM +-5% 1/16W 0603 SMT RESIS	PCS	2.0000
..2	302-302205-550	22PF/50V +-5% 0603 SMT C.CAP	PCS	2.0000
..2	302-303305-550	33PF/50V +-5% 0603 SMT C.CAP	PCS	7.0000
..2	302-312215-550	220PF/50V +-5% 0603 SMT C.CAP	PCS	2.0000
..2	302-341045-550	0.1UF/50V +-5% 0603 SMT C.CAP	PCS	4.0000
..2	302-351055-550	1UF/50V +-5% 0603 SMT C.CAP	PCS	4.0000
..2	306-200033-108	DIODE FOR ZENER SMT 3.3V 1/8W SOD	PCS	1.0000
..2	307-009014-030	TRANSISTOR FOR SMT 9014C SOT-23	PCS	2.0000
..2	310-004705-120	IC FOR SMT BGA SI4705-D60-GMR	PCS	1.0000
..2	322-134000-221	SEBG160808U252MT SMT FERRITE	PCS	2.0000
..2	326-327000-000	270nH SDCL 1608CR27	PCS	1.0000
.1	MD550-AUXJ-DE0	GD550BT AUX BD	PCS	1.0000
..2	203-072272-210	220 UF/10V +-20% ELECT CAP	PCS	2.0000
..2	206-104148-000	DIODE 1N4148 DO-34	PCS	1.0000
..2	232-110130-312	HEADER FOR FFC 11 PINS 1.25mm V	PCS	1.0000
..2	235-100150-112	CABLE FOR FFC 10 PINS 1.25mm 150mm	PCS	1.0000
..2	235-110130-212	CABLE FOR FFC 11 PINS 1.25mm 130mm	PCS	1.0000
..2	241-000084-013	AV-8.4-13 RCA JACK	PCS	1.0000
..2	244-103780-150	3PINS "JST" 2.0mm 150mm HSG	PCS	1.0000
..2	247-030550-004	GD550BT KEY BD.PCB	PCS	1.0000
..2	260-000521-550	BLUETOOTH MODULE BTM521 GD550BT	PCS	1.0000
..2	301-100005-014	RESISTOR SMT 1206 0 OHM +-5% 1/4W	PCS	1.0000
..2	301-300005-016	0 OHM +-5% 1/16W 0603 SMT RESISTOR	PCS	4.0000
..2	301-304705-016	47 OHM +-5% 1/16W 0603 SMT RESISTO	PCS	1.0000
..2	301-311015-016	100 OHM +-5% 1/16W 0603 SMT RESISTO	PCS	2.0000
..2	301-323325-016	3.3 KOHM +-5% 1/16W 0603 SMT RESIST	PCS	1.0000
..2	301-331035-016	10 KOHM +-5% 1/16W 0603 SMT RESIST	PCS	4.0000
..2	301-333035-016	30 KOHM +-5% 1/16W 0603 SMT RESIST	PCS	6.0000
..2	301-334335-016	43 KOHM +-5% 1/16W 0603 SMT RESIST	PCS	4.0000
..2	301-334735-016	47 KOHM +-5% 1/16W 0603 SMT RESIST	PCS	2.0000
..2	301-341045-016	100 KOHM +-5% 1/16W 0603 SMT RESIS	PCS	1.0000
..2	302-311015-550	100PF/50V +-5% 0603 SMT C.CAP	PCS	2.0000
..2	302-312215-550	220PF/50V +-5% 0603 SMT C.CAP	PCS	4.0000

BOM多级展开

..2	302-321021-150	0.001UF/50V +-15% 0603 SMT C.CAP	PCS	2.0000
..2	302-321525-550	0.0015UF/50V +-5% SMT C.CAP	PCS	2.0000
..2	302-341041-150	0.1UF/50V +-10% 0603 SMT C.CAP	PCS	4.0000
..2	302-352251-150	2.2UF/50V +-10% 0603 SMT C.CAP	PCS	6.0000
..2	307-008550-020	TRANSISTOR FOR SMT S8550M-C SOT-23	PCS	1.0000
..2	310-004558-100	IC FOR SMT CF4558CB	PCS	1.0000
..2	322-134000-221	SEBG160808U252MT SMT FERRITE	PCS	6.0000
.1	MD550-DISP-DE0	GD550BT DISPLAY BD	PCS	1.0000
..2	152-203011-000	ER11.5 CM2030	PCS	1.0000
..2	203-161062-250	10 UF/50V +-20% ELECT CAP	PCS	1.0000
..2	203-171072-210	100 UF/10V +-20% ELECT CAP	PCS	3.0000
..2	206-108330-001	DIODE RECEIVER SIR8330L	PCS	1.0000
..2	206-200056-102	DIODE ZENER 5.6V 1/2W DO-34	PCS	1.0000
..2	206-200270-102	DIODE ZENER 27V 1/2W DO-34	PCS	1.0000
..2	207-008050-030	TRANSISTOR S8050-C TO-92 HFE120-200	PCS	2.0000
..2	217-060650-500	H=5.0mm W=6×6mm 2P SWITCH FOR TA	PCS	7.0000
..2	220-025100-015	DISPLAY FOR VFD(25100-1A11)IA300&G	PCS	1.0000
..2	226-002200-000	22uH +-10% CHOKE COIL	PCS	2.0000
..2	227-080301-300	LED 3MM 红/橙双色共阳极	PCS	1.0000
..2	227-080500-443	LED 5MM 雾状白发蓝超高亮长脚	PCS	1.0000
..2	232-160190-310	HEADER FOR FFC 16 PINS 1.0mm V	PCS	1.0000
..2	235-160090-110	CABLE FOR FFC 16 PINS 1.0mm 90mm A	PCS	1.0000
..2	237-990100-000	10MM WIRE FOR COPPER JUMPER	PCS	2.000000
...3	403-000075-000	WIRE FOR COPPER JUMPER	KG	0.000066
..2	240-003528-906	CKX-305-28 内铜套	PCS	2.0000
..2	244-104780-101	4PIN 2.0 100 MM	PCS	1.0000
..2	244-105780-100	5pin 100mm 2.0	PCS	1.0000
..2	244-107780-100	7PIN 100MM 2.0	PCS	1.0000
..2	247-030550-003	GD550BT DISPLAY BD.PCB	PCS	1.0000
..2	253-040145-120	4PIN 2.0mm R USB CONNECTOR	PCS	2.0000
..2	270-122112-241	E1221A3AV1FE0086 ROTARY ENCODER	PCS	3.0000
..2	301-100005-014	RESISTOR SMT 1206 0 OHM +-5% 1/4W	PCS	12.0000
..2	301-300005-016	0 OHM +-5% 1/16W 0603 SMT RESISTOR	PCS	4.0000
..2	301-311215-016	120 OHM +-5% 1/16W 0603 SMT RESISTO	PCS	3.0000
..2	301-312215-016	220 OHM +-5% 1/16W 0603 SMT RESISTO	PCS	4.0000
..2	301-314715-016	470 OHM +-5% 1/16W 0603 SMT RESISTO	PCS	1.0000
..2	301-321025-016	1 KOHM +-5% 1/16W 0603 SMT RESISTO	PCS	3.0000
..2	301-321225-016	1.2 KOHM +-5% 1/16W 0603 SMT RESIST	PCS	1.0000
..2	301-321825-016	1.8 KOHM +-5% 1/16W 0603 SMT RESIST	PCS	4.0000
..2	301-324725-016	4.7 KOHM +-5% 1/16W 0603 SMT RESIST	PCS	1.0000
..2	301-331035-016	10 KOHM +-5% 1/16W 0603 SMT RESISTO	PCS	8.0000
..2	301-335635-016	56 KOHM +-5% 1/16W 0603 SMT RESISTO	PCS	1.0000
..2	302-161062-216	10UF/16V +-20% SMT C.CAP	PCS	2.0000
..2	302-235631-150	0.056UF/50V +-10% SMT C.CAP	PCS	1.0000
..2	302-302205-550	22PF/50V +-5% 0603 SMT C.CAP	PCS	2.0000
..2	302-321021-150	0.001UF/50V +-15% 0603 SMT C.CAP	PCS	4.0000
..2	302-332231-150	0.022UF/50V +-10% SMT C.CAP	PCS	2.0000
..2	302-341041-150	0.1UF/50V +-10% 0603 SMT C.CAP	PCS	16.0000
..2	306-000034-100	DIODE FOR SMT SK34 3A	PCS	1.0000
..2	306-104148-000	DIODE FOR SMT LL4148	PCS	3.0000
..2	307-008050-030	TRANSISTOR FOR SMT S8050M-C SOT-23	PCS	1.0000
..2	307-008550-020	TRANSISTOR FOR SMT S8550M-C SOT-23	PCS	1.0000
..2	307-009014-030	TRANSISTOR FOR SMT 9014C SOT-23	PCS	1.0000
..2	310-016311-154	IC FOR SMT CS16311EN	PCS	1.0000
..2	322-134000-220	SEBG160808U300MT SMT FERRITE	PCS	4.0000
..2	322-134000-221	SEBG160808U252MT SMT FERRITE	PCS	13.0000

BOM多级展开

.1	MD550-MAIN-DE0	GD550BT MAIN BD	PCS	1.0000
..2	003-041048-250	CAPACITOR CERAMIC 104P/50V +80% -2	PCS	2.0000
..2	005-042241-199	0.22 UF/100V +-10% MYLAR CAP	PCS	1.0000
..2	005-046841-150	0.68UF 250V +-10% MYLAR CAP: 编带	PCS	2.0000
..2	201-102205-205	RESISTOR NKNP 22 OHM +-5% 2W 立式	PCS	2.0000
..2	203-061062-225	10 UF/25V +-20% ELECT CAP	PCS	9.0000
..2	203-062262-216	22 UF/16V +-20% ELECT CAP	PCS	2.0000
..2	203-064762-216	47 UF/16V +-20% ELECT CAP	PCS	11.0000
..2	203-064762-235	47 UF/35V +-20% ELECT CAP	PCS	2.0000
..2	203-071072-216	100 UF/16V +-20% ELECT CAP	PCS	6.0000
..2	203-071072-235	100 UF/35V +-20% ELECT CAP	PCS	2.0000
..2	203-072272-210	220 UF/10V +-20% ELECT CAP	PCS	6.0000
..2	203-074772-210	470 UF/10V +-20% ELECT CAP	PCS	3.0000
..2	203-081082-235	1000 UF/35V +-20% ELECT CAP	PCS	2.0000
..2	203-084725-202	4700 UF/25V +-20% ELECT CAP	PCS	2.0000
..2	206-104148-000	DIODE 1N4148 DO-34	PCS	9.0000
..2	206-200056-102	DIODE ZENER 5.6V 1/2W DO-34	PCS	2.0000
..2	206-200082-102	DIODE ZENER 8.2V 1/2W DO-34	PCS	1.0000
..2	206-304001-001	DIODE RECTIFIER IN4001 DO-41 立式编带	PCS	3.0000
..2	207-000772-250	TRANSISTOR 2SB772-P TO-126	PCS	2.0000
..2	207-008050-030	TRANSISTOR S8050-C TO-92 HFE120-20	PCS	1.0000
..2	207-008550-020	TRANSISTOR S8550-C TO-92 HFE120-20	PCS	1.0000
..2	221-035005-009	3.5X9-237-T FERRITE BEAD立式编带	PCS	7.0000
..2	226-001000-002	10uH 2A CHOKE COIL	PCS	1.0000
..2	226-003300-002	RLC1012-330M-LF 33 CHOKE COIL	PCS	2.0000
..2	226-004700-550	P1519-470M 5A 屏闭	PCS	2.0000
..2	229-327680-200	CRYSTAL 32.768 KHZ 12.5PF +-20PPM 3	PCS	2.0000
..2	232-100160-312	HEADER FOR FFC 10 PINS 1.25mm V	PCS	1.0000
..2	232-110130-312	HEADER FOR FFC 11 PINS 1.25mm V	PCS	1.0000
..2	232-160190-310	HEADER FOR FFC 16 PINS 1.0mm V	PCS	2.0000
..2	233-030200-020	HEADER FOR 3 PINS 2.0mm V	PCS	1.0000
..2	233-040200-020	HEADER FOR 4 PINS 2.0mm V	PCS	1.0000
..2	233-050200-020	HEADER FOR 5 PINS 2.0mm V	PCS	2.0000
..2	233-060200-020	HEADER FOR 6 PINS 2.0mm V	PCS	1.0000
..2	233-071200-020	HEADER FOR 7 PINS 2.0mm R	PCS	1.0000
..2	235-160250-110	CABLE FOR FFC 16 PINS 1.0mm 250mm	PCS	1.0000
..2	242-400100-110	WP4-10A(配套胶塞)	PCS	1.0000
..2	244-072405-280	7PINS "JST" 24# 280mm HSG	PCS	1.0000
..2	244-106265-260	6PIN 26# 2.5 260MM	PCS	1.0000
..2	244-206180-250	6PINS "JST" 2.0mm 250mm 28# HSG	PCS	1.0000
..2	244-405180-250	5PINS "JST" 2.0mm 250mm 28# HSG	PCS	1.0000
..2	247-030550-002	GD550BT MAIN BD PCB	PCS	1.0000
..2	301-100005-014	RESISTOR SMT 1206 0 OHM +-5% 1/4W	PCS	2.0000
..2	301-101005-014	RESISTOR SMT 1206 10 OHM +-5% 1/4W	PCS	5.0000
..2	301-300005-016	0 OHM +-5% 1/16W 0603 SMT RESISTOR	PCS	12.0000
..2	301-301005-016	10 OHM +-5% 1/16W 0603 SMT RESISTO	PCS	2.0000
..2	301-301505-016	15 OHM +-5% 1/16W 0603 SMT RESISTO	PCS	1.0000
..2	301-304705-016	47 OHM +-5% 1/16W 0603 SMT RESISTO	PCS	2.0000
..2	301-312215-016	220 OHM +-5% 1/16W 0603 SMT RESISTO	PCS	6.0000
..2	301-313315-016	330 OHM +-5% 1/16W 0603 SMT RESISTO	PCS	13.0000
..2	301-314715-016	470 OHM +-5% 1/16W 0603 SMT RESISTO	PCS	5.0000
..2	301-321025-016	1 KOHM +-5% 1/16W 0603 SMT RESISTO	PCS	1.0000
..2	301-322025-016	2 KOHM +-5% 1/16W 0603 SMT RESISTO	PCS	2.0000
..2	301-322225-016	2.2 KOHM +-5% 1/16W 0603 SMT RESIST	PCS	1.0000
..2	301-323025-016	3 KOHM +-5% 1/16W 0603 SMT RESISTO	PCS	1.0000
..2	301-323325-016	3.3 KOHM +-5% 1/16W 0603 SMT RESIST	PCS	8.0000

BOM多级展开

..2	301-323925-016	3.9 KOHM +-5% 1/16W 0603 SMT RESIST	PCS	1.0000
..2	301-324725-016	4.7 KOHM +-5% 1/16W 0603 SMT RESIST	PCS	14.0000
..2	301-325625-016	5.6 KOHM +-5% 1/16W 0603 SMT RESIST	PCS	6.0000
..2	301-326225-016	6.2 KOHM +-5% 1/16W 0603 SMT RESIST	PCS	4.0000
..2	301-329125-016	9.1 KOHM +-5% 1/16W SMT RESISTOR	PCS	2.0000
..2	301-331035-016	10 KOHM +-5% 1/16W 0603 SMT RESIST	PCS	48.0000
..2	301-331235-016	12 KOHM +-5% 1/16W 0603 SMT RESIST	PCS	1.0000
..2	301-331535-016	15 KOHM +-5% 1/16W 0603 SMT RESIST	PCS	4.0000
..2	301-331835-016	18 KOHM +-5% 1/16W 0603 SMT RESIST	PCS	1.0000
..2	301-332035-016	20 KOHM +-5% 1/16W 0603 SMT RESIST	PCS	4.0000
..2	301-332235-016	22 KOHM +-5% 1/16W 0603 SMT RESIST	PCS	2.0000
..2	301-332435-016	24 KOHM +-5% 1/16W 0603 SMT RESIST	PCS	1.0000
..2	301-333035-016	30 KOHM +-5% 1/16W 0603 SMT RESIST	PCS	3.0000
..2	301-333335-016	33 KOHM +-5% 0603 SMT RESISTOR	PCS	2.0000
..2	301-333935-016	39 KOHM +-5% SMT RESISTOR	PCS	2.0000
..2	301-334331-016	43.2 KOHM +-1% SMT RESISTOR	PCS	2.0000
..2	301-334735-016	47 KOHM +-5% 1/16W 0603 SMT RESIST	PCS	7.0000
..2	301-334931-016	49.9 KOHM +-1% 1/16W SMT RESISTOR	PCS	4.0000
..2	301-336835-016	68 KOHM +-5% SMT RESISTOR	PCS	4.0000
..2	301-337531-016	75 KOHM +-1% 1/16W SMT RESISTOR	PCS	2.0000
..2	301-341045-016	100 KOHM +-5% 1/16W 0603 SMT RESIS	PCS	11.0000
..2	301-361065-016	10 MOHM +-5% 1/16W SMT RESISTOR	PCS	1.0000
..2	302-141042-250	0.1UF/50V +-20% SMT C.CAP	PCS	2.0000
..2	302-302205-550	22PF/50V +-5% 0603 SMT C.CAP	PCS	3.0000
..2	302-302705-550	27PF/50V +-5% 0603 SMT C.CAP	PCS	2.0000
..2	302-303005-550	30PF/50V +-5% 0603 SMT C.CAP	PCS	1.0000
..2	302-303305-550	33PF/50V +-5% 0603 SMT C.CAP	PCS	27.0000
..2	302-304705-550	47PF/50V +-5% SMT C.CAP	PCS	14.0000
..2	302-306805-550	68PF/50V +-5% 0603 SMT C.CAP	PCS	3.0000
..2	302-311015-550	100PF/50V +-5% 0603 SMT C.CAP	PCS	25.0000
..2	302-312215-550	220PF/50V +-5% 0603 SMT C.CAP	PCS	8.0000
..2	302-321025-550	0.001UF/50V +-5% 0603 SMT C.CAP	PCS	29.0000
..2	302-322721-150	0.0027UF/50V +-10% SMT C.CAP	PCS	2.0000
..2	302-331031-150	0.01UF/50V +-10% 0603 SMT C.CAP	PCS	6.0000
..2	302-331531-150	0.015UF/50V +-10% SMT C.CAP	PCS	2.0000
..2	302-332231-150	0.022UF/50V +-10% SMT C.CAP	PCS	2.0000
..2	302-334731-150	0.047UF/50V +-10% SMT C.CAP	PCS	1.0000
..2	302-341041-150	0.1UF/50V +-10% 0603 SMT C.CAP	PCS	87.0000
..2	302-342241-150	0.22UF/50V +-10% 0603 X7R	PCS	6.0000
..2	302-344741-150	0.47UF/50V +-10% 0603 SMT C.CAP	PCS	1.0000
..2	302-351051-150	1UF/50V +-10% 0603 SMT C.CAP	PCS	15.0000
..2	302-352251-150	2.2UF/50V +-10% 0603 SMT C.CAP	PCS	31.0000
..2	306-000034-100	DIODE FOR SMT SK34 3A	PCS	1.0000
..2	307-003401-003	TRANSISTOR FOR SMT AO3401 SOT-23	PCS	4.0000
..2	307-008050-030	TRANSISTOR FOR SMT S8050M-C SOT-23	PCS	7.0000
..2	307-008550-020	TRANSISTOR FOR SMT S8550M-C SOT-23	PCS	3.0000
..2	307-009014-030	TRANSISTOR FOR SMT 9014C SOT-23	PCS	9.0000
..2	310-001007-024	IC FOR SMT TG1007-ADJ	PCS	1.0000
..2	310-001117-133	IC FOR SMT CW1117-3.3V	PCS	2.0000
..2	310-002314-000	IC FOR SMT PT2314	PCS	1.0000
..2	310-002402-103	IC FOR SMT AT24C02BN-SH-T ATMEL	PCS	1.0000
..2	310-002520-008	IC FOR SMT EN25F20	PCS	1.0000
..2	310-002761-104	IC FOR SMT D2761	PCS	2.0000
..2	310-004052-116	IC FOR SMT TC4052BFT	PCS	1.0000
..2	310-004800-115	IC FOR SMT ETK4800	PCS	1.0000
..2	310-005677-100	IC FOR SMT M5677-ALAA	PCS	1.0000

BOM多级展开

..2	310-005888-100	IC FOR SMT SA5888	PCS	1.0000
..2	310-006021-100	IC FOR SMT ETA6021	PCS	2.0000
..2	310-006817-100	IC FOR SMT CA6817	PCS	1.0000
..2	310-007222-100	IC FOR SMT SGM7222	PCS	1.0000
..2	310-007540-100	IC FOR SMT LN7540PR	PCS	1.0000
..2	310-892200-000	IC FOR SMT TDA8922CTH/N1,118	PCS	1.0000
..2	322-134000-220	SEBG160808U300MT SMT FERRITE	PCS	2.0000
..2	322-134000-221	SEBG160808U252MT SMT FERRITE	PCS	32.0000
..2	322-134102-220	SEBG160808U102MT SMT FERRITE	PCS	4.0000
..1	MD550-SMPS-DE0	GD550BT SMPS BD	PCS	1.0000
..2	001-012415-014	RESISTOR VARI 14D-241K	PCS	2.0000
..2	001-014715-010	RESISTOR VARI 10D-471K	PCS	1.0000
..2	003-042241-127	CAPACITOR MPF 0.22 UF/275V +-10%	PCS	2.0000
..2	005-031031-100	103K 1KV +-10% MYLAR CAP (立式编带)	PCS	1.0000
..2	152-300035-000	TRANSFORMER ER35 MCM3000	PCS	1.0000
..2	152-300220-000	IA300 EEL-22 HP-G00591	PCS	1.0000
..2	201-000515-010	RESISTOR VARI 5D-9K	PCS	1.0000
..2	201-002040-011	RESISTOR NKNP 0.2 OHM +-1% 2W	PCS	1.0000
..2	201-012040-011	1.2E 2W +-1% RESISTOR	PCS	1.0000
..2	201-034700-305	RESISTOR CR 47 KOHM +-5% 3W	PCS	1.0000
..2	201-035600-205	RESISTOR CR 56 KOHM +-5% 2W	PCS	1.0000
..2	202-021000-000	0.001 UF/400V AC (立式编带)	PCS	1.0000
..2	202-047100-000	CERAMIC CAP (立式编带)	PCS	2.0000
..2	203-061062-250	10 UF/50V +-20% ELECT CAP	PCS	2.0000
..2	203-064762-235	47 UF/35V +-20% ELECT CAP	PCS	1.0000
..2	203-071072-235	100 UF/35V +-20% ELECT CAP	PCS	1.0000
..2	203-072272-225	220 UF/25V +-20% ELECT CAP	PCS	1.0000
..2	203-073372-250	330UF/250V 18*40 ELECT CAP	PCS	2.0000
..2	203-074772-216	470 UF/16V +-20% ELECT CAP	PCS	2.0000
..2	203-074772-225	470 UF/25V +-20% ELECT CAP	PCS	1.0000
..2	203-081082-216	1000 UF/16V +-20% ELECT CAP	PCS	1.0000
..2	203-081082-235	1000 UF/35V +-20% ELECT CAP	PCS	4.0000
..2	204-022200-100	222P 1KV 3A +-10 MYLAR CAP (立式编带)	PCS	1.0000
..2	206-000303-000	DIODE RECTIFIER HER303 DO-201AD	PCS	1.0000
..2	206-010100-000	DIODE RECTIFIER BR10100 TO-220F	PCS	1.0000
..2	206-300107-000	DIODE RECTIFIER FR107 DO-41	PCS	3.0000
..2	206-300200-000	DIODE TRANSIENT VS P6KE200A 600W	PCS	1.0000
..2	206-300406-000	DIODE RECTIFIER GBU406	PCS	1.0000
..2	206-310200-000	DIODE RECTIFIER MBR10200 TO-220	PCS	2.0000
..2	207-005060-040	TRANSISTOR 5N60 TO-220F	PCS	1.0000
..2	207-008050-030	TRANSISTOR S8050-C TO-92 HFE120-20	PCS	1.0000
..2	207-008550-020	TRANSISTOR S8550-C TO-92 HFE120-20	PCS	1.0000
..2	207-101060-040	TRANSISTOR 10N60 TO-220F MOS	PCS	1.0000
..2	210-000431-003	IC TL431A TO-92	PCS	2.0000
..2	210-000817-004	IC EL-817MC	PCS	3.0000
..2	210-001010-817	IC K1010	PCS	1.0000
..2	226-000050-005	RL0810-5R0M-LF CHOKE COIL	PCS	1.0000
..2	226-000470-002	RL0608-4R7K-LF 2A CHOKE COIL	PCS	1.0000
..2	226-004700-550	P1519-470M 5A 屏闭	PCS	2.0000
..2	226-010302-287	LB287-15581 CHOKE COIL	PCS	1.0000
..2	226-301600-000	16MH CHOKE COIL	PCS	1.0000
..2	231-920500-250	5RT T5A FUSE	PCS	1.0000
..2	233-020080-040	2 PINS "JST" 4.0mm V HEADER	PCS	1.0000
..2	233-060200-025	HEADER FOR 6 PINS 2.5mm V	PCS	1.0000
..2	233-070200-025	HEADER FOR 7 PINS 2.5mm V	PCS	1.0000
..2	237-990100-000	10MM WIRE FOR COPPER JUMPER	PCS	14.000000

BOM多级展开

...3	403-000075-000	WIRE FOR COPPER JUMPER	KG	0.000462
..2	247-040300-000	IA300/GD550BT SMPS BD	PCS	1.0000
..2	301-100005-014	RESISTOR SMT 1206 0 OHM +-5% 1/4W	PCS	6.0000
..2	301-102205-014	RESISTOR SMT 1206 22 OHM +-5% 1/4W	PCS	1.0000
..2	301-104705-014	RESISTOR SMT 1206 47 OHM +-5% 1/4W	PCS	3.0000
..2	301-111015-014	RESISTOR SMT 1206 100 OHM +-5% 1/4W	PCS	4.0000
..2	301-125625-014	5.6 KOHM 1/4W 1206 +-5% SMT RESISTOR	PCS	3.0000
..2	301-151055-014	1 M OHM 1/4W 1206 SMT RESISTOR	PCS	2.0000
..2	301-151555-014	1.5 M OHM 1206 SMT RESISTOR	PCS	4.0000
..2	301-200475-018	4.7 OHM +-5% 1/8W SMT RESISTOR	PCS	1.0000
..2	301-201005-018	10 OHM +-5% 1/8W SMT RESISTOR	PCS	2.0000
..2	301-211015-018	100 OHM +-5% 1/8W SMT RESISTOR	PCS	4.0000
..2	301-214715-018	470 OHM +-5% 1/8W SMT RESISTOR	PCS	1.0000
..2	301-215115-018	510 OHM +-5% 1/8W SMT RESISTOR	PCS	2.0000
..2	301-221025-018	1 KOHM +-5% 1/8W SMT RESISTOR	PCS	5.0000
..2	301-222025-018	2 KOHM +-5% 1/8W SMT RESISTOR (清	PCS	2.0000
..2	301-222225-018	2.2 KOHM +-5% 1/8W SMT RESISTOR	PCS	2.0000
..2	301-227525-018	7.5 KOHM +-5% 1/8W SMT RESISTOR	PCS	1.0000
..2	301-231035-018	10 KOHM +-5% 1/8W SMT RESISTOR	PCS	7.0000
..2	301-231835-018	18 KOHM +-5% 1/8W SMT RESISTOR	PCS	1.0000
..2	301-232735-018	27 KOHM +-5% 1/8W SMT RESISTOR	PCS	2.0000
..2	301-241045-018	100 KOHM +-5% 1/8W SMT RESISTOR	PCS	1.0000
..2	301-241545-018	150 KOHM +-5% 1/8W SMT RESISTOR	PCS	1.0000
..2	301-253355-018	3.3 MOHM +-5% 1/8W SMT RESISTOR	PCS	4.0000
..2	301-301505-014	1206 1.5E +-5% 1/4W SMT RESISTOR	PCS	2.0000
..2	301-331335-016	13 KOHM +-5% 1/16W 0603 SMT RESISTOR	PCS	1.0000
..2	301-343645-016	360 KOHM +-5% 1/16W 0603 SMT RESISTOR	PCS	1.0000
..2	302-214715-550	470PF/50V +-5% 0805 SMT C.CAP	PCS	1.0000
..2	302-221020-300	SMT C.CAP 102P 300V+-20%	PCS	4.0000
..2	302-221021-150	0.001UF/50V +-10% 0805 SMT C.CAP	PCS	1.0000
..2	302-241042-250	0.1UF/50V +-20% 0805 SMT C.CAP	PCS	12.0000
..2	302-251051-150	1UF/50V +-10% 0805 SMT C.CAP	PCS	8.0000
..2	306-000034-100	DIODE FOR SMT SK34 3A	PCS	1.0000
..2	306-104148-000	DIODE FOR SMT LL4148	PCS	3.0000
..2	306-200151-102	DIODE FOR ZENER SMT 15V 1/2W LL-34	PCS	1.0000
..2	306-200201-102	DIODE FOR ZENER SMT 20V 1/2W LL-34	PCS	2.0000
..2	306-200361-102	DIODE FOR ZENER SMT 36V 1/2W LL-34	PCS	1.0000
..2	307-003904-000	TRANSISTOR FOR SMT MMBT3904 SOT-23	PCS	6.0000
..2	307-003906-000	TRANSISTOR FOR SMT MMBT3906 SOT-23	PCS	2.0000
..2	307-008550-020	TRANSISTOR FOR SMT S8550M-C SOT-23	PCS	1.0000
..2	310-000363-000	IC FOR SMT LN3C63	PCS	1.0000
..2	310-000369-108	IC FOR SMT LN3C69	PCS	1.0000
.1	MD550-PLST-001	PLASTIC	SET	1.0000
..2	531-050000-000	面壳	PCS	1.0000
...3	006-425000-000	HIPS KUMHO HI425	KG	0.0800
...3	007-020021-000	色种 KM5027/2801黑种(250g)	PCS	0.0016
..2	531-250000-000	显示支架	PCS	1.0000
...3	006-750000-000	ABS KUMHO 750SW	KG	0.0070
...3	007-020021-000	色种 KM5027/2801黑种(250g)	PCS	0.0014
..2	531-350000-000	显示镜	PCS	1.0000
...3	006-001000-000	PMMA 三菱丽阳 MF-001	KG	0.0100
..2	531-650000-000	网架	PCS	2.0000
...3	006-425000-000	HIPS KUMHO HI425	KG	0.1000
...3	007-020021-000	色种 KM5027/2801黑种(250g)	PCS	0.0020
..2	531-650000-001	高音喇叭装饰圈	PCS	2.0000
...3	006-425000-000	HIPS KUMHO HI425	KG	0.0300

BOM多级展开

...3	007-020021-000	色种 KM5027/2801黑种(250g)	PCS	0.0060
..2	531-650000-002	高音喇叭支架	PCS	2.0000
...3	006-425000-000	HIPS KUMHO HI425	KG	0.0300
...3	007-020021-000	色种 KM5027/2801黑种(250g)	PCS	0.0060
..2	531-650000-003	低音喇叭支架	PCS	2.0000
...3	006-425000-000	HIPS KUMHO HI425	KG	0.0200
...3	007-020021-000	色种 KM5027/2801黑种(250g)	PCS	0.0060
..2	532-350000-000	音量钮	PCS	3.0000
..2	533-750000-000	CD门	PCS	1.0000
...3	006-750000-000	ABS KUMHO 750SW	KG	0.0050
...3	007-020021-000	色种 KM5027/2801黑种(250g)	PCS	0.0001
..2	535-150000-001	电源钮	PCS	1.0000
...3	006-750000-000	ABS KUMHO 750SW	KG	1.0000
...3	007-020021-000	色种 KM5027/2801黑种(250g)	PCS	0.0001
..2	535-150000-002	CD门按钮	PCS	1.0000
...3	006-750000-000	ABS KUMHO 750SW	KG	0.0050
...3	007-020021-000	色种 KM5027/2801黑种(250g)	PCS	0.0001
..2	535-250000-000	停止/播放钮	PCS	1.0000
...3	006-750000-000	ABS KUMHO 750SW	KG	0.0050
...3	007-020021-000	色种 KM5027/2801黑种(250g)	PCS	0.0001
..2	535-450000-001	LOADER支架	PCS	4.0000
...3	006-750000-000	ABS KUMHO 750SW	KG	0.0200
...3	007-020021-000	色种 KM5027/2801黑种(250g)	PCS	0.0004
..2	535-450000-002	胶脚支架	PCS	4.0000
...3	006-750000-000	ABS KUMHO 750SW	KG	0.0200
...3	007-020021-000	色种 KM5027/2801黑种(250g)	PCS	0.0004
..2	535-450000-003	电源板支架	PCS	1.0000
...3	006-750000-000	ABS KUMHO 750SW	KG	0.0050
...3	007-020021-000	色种 KM5027/2801黑种(250g)	PCS	0.0001
..2	535-450000-004	散热片支架	PCS	2.0000
...3	006-750000-000	ABS KUMHO 750SW	KG	0.0100
...3	007-020021-000	色种 KM5027/2801黑种(250g)	PCS	0.0002
..2	667-100000-000	牛线夹	PCS	1.0000
...3	006-210000-000	PA66 21SPC	KG	0.0050
...3	007-020021-000	色种 KM5027/2801黑种(250g)	PCS	0.0001
..2	670-100000-000	CD机芯大架	PCS	1.0000
...3	006-750000-000	ABS KUMHO 750SW	KG	0.0600
...3	007-020021-000	色种 KM5027/2801黑种(250g)	PCS	0.0012
..2	671-000000-000	机芯小架	PCS	1.0000
...3	006-750000-000	ABS KUMHO 750SW	KG	0.0250
...3	007-020021-000	色种 KM5027/2801黑种(250g)	PCS	0.0005
..2	673-100000-000	CD托盘	PCS	1.0000
...3	006-750000-000	ABS KUMHO 750SW	KG	0.0400
...3	007-020021-000	色种 KM5027/2801黑种(250g)	PCS	0.0080
..2	674-100000-001	吸盘	PCS	1.0000
...3	006-750000-000	ABS KUMHO 750SW	KG	0.0050
...3	007-020021-000	色种 KM5027/2801黑种(250g)	PCS	0.0002
..2	674-100000-002	桥架	PCS	1.0000
...3	006-750000-000	ABS KUMHO 750SW	KG	0.0120
...3	007-020021-000	色种 KM5027/2801黑种(250g)	PCS	0.0002
..2	674-100000-003	机芯滑块	PCS	1.0000
...3	006-904400-000	POM 宝理 M90-44	KG	0.0050
..2	674-100000-004	双连齿轮	PCS	1.0000
...3	006-904400-000	POM 宝理 M90-44	KG	0.0050
..2	674-100000-005	滑动齿轮	PCS	1.0000
...3	006-904400-000	POM 宝理 M90-44	KG	0.0050

BOM多级展开

..2	675-000000-000	马达皮带轮	PCS	1.0000
...3	006-904400-000	POM 宝理 M90-44	KG	0.0050