


# ONKYO® SERVICE MANUAL

## CD Receiver MODEL CR-N755(B/S)

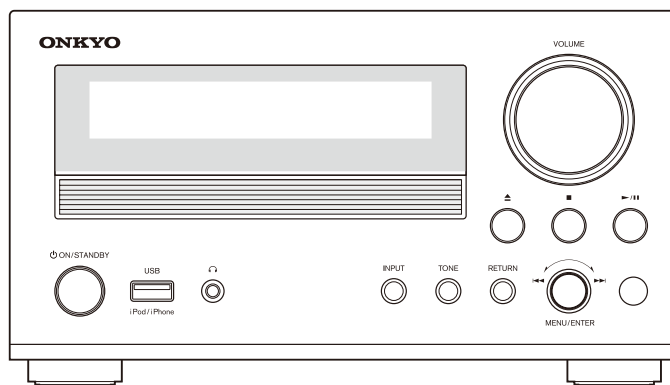

**Black and Silver models**

|           |               |
|-----------|---------------|
| B MPP/MPB | 230V AC, 50Hz |
| S MPP     |               |
| B MDC     | 120V AC, 60Hz |



**RC-850S**

### SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK  ON THE SCHEMATIC DIAGRAM AND IN THE PARTS LIST ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE THESE COMPONENTS WITH ONKYO PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL.

MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.

Onkyo Corporation  
Service Department

## Service Procedures - 1

### WARNING

#### WARNING:

TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE.

#### CAUTION:

TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER (OR BACK). NO USER-SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.



**WARNING**  
RISK OF ELECTRIC SHOCK  
DO NOT OPEN

**AVIS**  
RISQUE DE CHOC ELECTRIQUE  
NE PAS OUVRIR



The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

### LASER CAUTION

This unit contains a semiconductor laser system and is classified as a "CLASS 1 LASER PRODUCT". So, to use this model properly, read this Instruction Manual carefully. In case of any trouble, please contact the store where you purchased the unit. To prevent being exposed to the laser beam, do not try to open the enclosure.

The label on the right is applied on the rear panel except for USA and Canadian models.

**"CLASS 1 LASER  
PRODUCT"**

#### CAUTION:

VISIBLE LASER RADIATION WHEN OPEN AND INTERLOCK FAILED OR DEFEATED. DO NOT STARE INTO BEAM.

1. This unit is a CLASS 1 LASER PRODUCT and employs a laser inside the cabinet.

#### CAUTION:

THIS PRODUCT UTILIZES A LASER. USE OF CONTROLS OR ADJUSTMENTS OR PERFORMANCE OF PROCEDURES OTHER THAN THOSE SPECIFIED HEREIN MAY RESULT IN HAZARDOUS RADIATION EXPOSURE.

2. To prevent the laser from being exposed, do not remove the cover. Refer servicing to qualified personnel.

### LASER DIODE

Never look at the laser light beam through the objective lens. The visible laser beam may harm the human eye. Use an appropriate viewer or TV camera to observe the laser beam.

Any laser diode will be damaged by a large current or pulse. Avoid current surges and electrostatic discharges. Safety grounding of the human body and all measuring equipment, jigs and tools is absolutely necessary. The use of a grounding mat on the workbench and floor is necessary. Even a small electrostatic discharge from the human body may destroy the laser diode instantaneously or reduce its life time.

The pins of the laser diode may be shorted at the factory by a solder bridge at the FPC for protection during transportation and storage of the unit. If this is the case, open the short circuit (accessible from the bottom side of the module) quickly with grounded soldering iron (less than 300°C).

The damage of the diode might be indicated by an increase of the laser current.

## Service Procedures - 2

### INITIAL SETTING FOR SHIPPING

Initialization of memories.

Press STANDBY/ON button while pressing down CD STOP button, then the FLT displays "CLEAR", and turn to STAND-BY. Remove power cord from power line.

### TEST MODE

#### 1) Main Microprocessor Version display

Press ON/STANDBY button while pressing down TONE button, when the unit is POWER ON.

#### 2) DSP Version display.

Press INPUT button 1 times while Main Microprocessor version display.

#### 3) Model display

Press INPUT button 1 times while DSP version display.

#### 4) Display test

Press INPUT button 1 times while Model display.

#### 5) Key test

Press INPUT button 1 times while FL full light.

### TEST MODE for OPERATION

Push STANDBY/ON button while pushing down Return key after setting the Vol to minimum, to display "TEST-1-00".

Push INPUT button, then get the "TEST2-00"→"TEST3-00"→"TEST4-00" mode.

In the test mode, >>| / |<< of JOG DIAL is TEST MODE UP/DOWN.

INPUT button and JOG DIAL's originally operation can't work when it is in the test mode.

### 出荷ポジション

メモリのイニシャライズ

本体 STOPキーを押しながらON/STANDBYキーを押す。

表示管に"CL E A R"が表示されながらスタンバイになるのでACコードを抜く。

### テストモードについて

メインマイコンのバージョン表示

POWER ON中にTONEキーを押しながらON/STANDBYキーを押す。

DSPのバージョン表示

メインマイコンバージョン表示中にINPUTキーを1回押す。

機種表示

DSPバージョン表示中にINPUTキーを1回押す。

ディスプレイテスト

機種表示中にINPUTキーを1回押す。全点灯モードになる。

キーテスト

全点灯モード中にINPUTキーを1回押す。キーテストモードになる。

### 動作テストモード

VolumeをMINにし、RETURNキーを押しながらSTANDBY/ONキーを押すと、表示管は"TEST-1-00"の表示になる。

再度、INPUTキーを押すと"TEST2-00"→"TEST3-00"→"TEST4-00"→"TEST5-00"のモードに入る。

テストモード中はJOG DIALを>>| / |<< するとTEST MODE UP/DOWNする。

テストモード中は本来のDISPLAY/DIRECT、DIRECT/TONEの機能はなくなる。

## OPERATION CHECK

### 1. CURRENT-DETECTION AND VOLTAGE-DETECTION CHECK

- 1)Change the state to "TEST-2-00".
- 2)The set never change to protect mode when 2 ohms load is connected to each channel under the conditions of peak-to-zero 17.5Vp (35Vpp) output for both channels and no load by using the INTEGRA amplifier series designated circuit with 200Hz square wave.
- 3)The set must change to protect mode when 0.5 ohm load is connected to each channel under the conditions of peak-to-zero 17.5Vp (35Vpp) output for L,R channels and no load by using the the INTEGRA amplifier series designated circuit with 200Hz square wave.
- 4)When input +1.6V DC voltage more than 1sec to each channel trough 1K $\Omega$  resistor under no SP load, the set must change to protect mode.

### 2. CONFIRMATION OF REMOTE CONTROL OPERATION

- 1)Confirm that the specified operations for each button are made.
- 2)Confirm RI opearion.

### 3. VOLH SIGNAL CHECK

- 1)Change the state to "TEST-4-36".
- 2)Input the -20dBFS signal of 1KHz to OPTICAL,If "Asb" indicator is displayed ,it's OK.NO Display is NG.

### 4. FRONT USB

Connect iPhone or iPod to Front USB terminal,Check the operation of playback by hearing.

### 5. Line2,Line3, Coaxial/Line out

Confirm the input and output of Line and the input of Line2/3 operation and Coaxial input operation by hearing test.

### 6. REAR USB

Connect USB memory to Rear USB terminal,Check the operation of playback by hearing.

### 7. ETHERNET TERMINAL


Connect LAN cable to Ethernet terminal,Please set to Test mode"3-11"Check the operation of playback by hearing.  
Sampling frequency of 44.1KHz/48Khz are needed for Playback source.

### 8.USB DETECT CHECK

At first, Please set to Test mode"3-09",Connect USB memory to Front USB terminal.

Confirm the display of "DETECT OK".

If the display is nothing, it's NG.

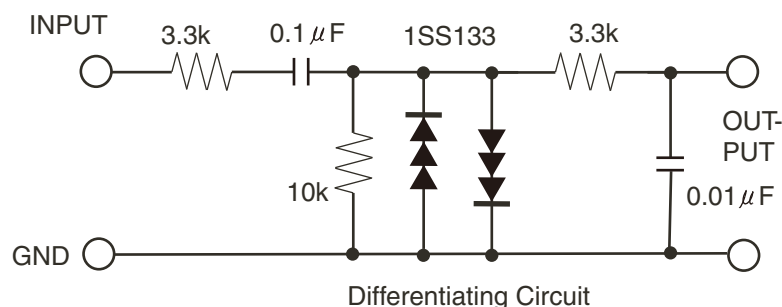

A

B

C

D

## Exploded views - 1

1

2

3

4


5

A172  
x 8pcs.A132  
x 3pcs.

Refer to Exploded views - 4

Refer to Exploded views - 2

Refer to Exploded views - 3

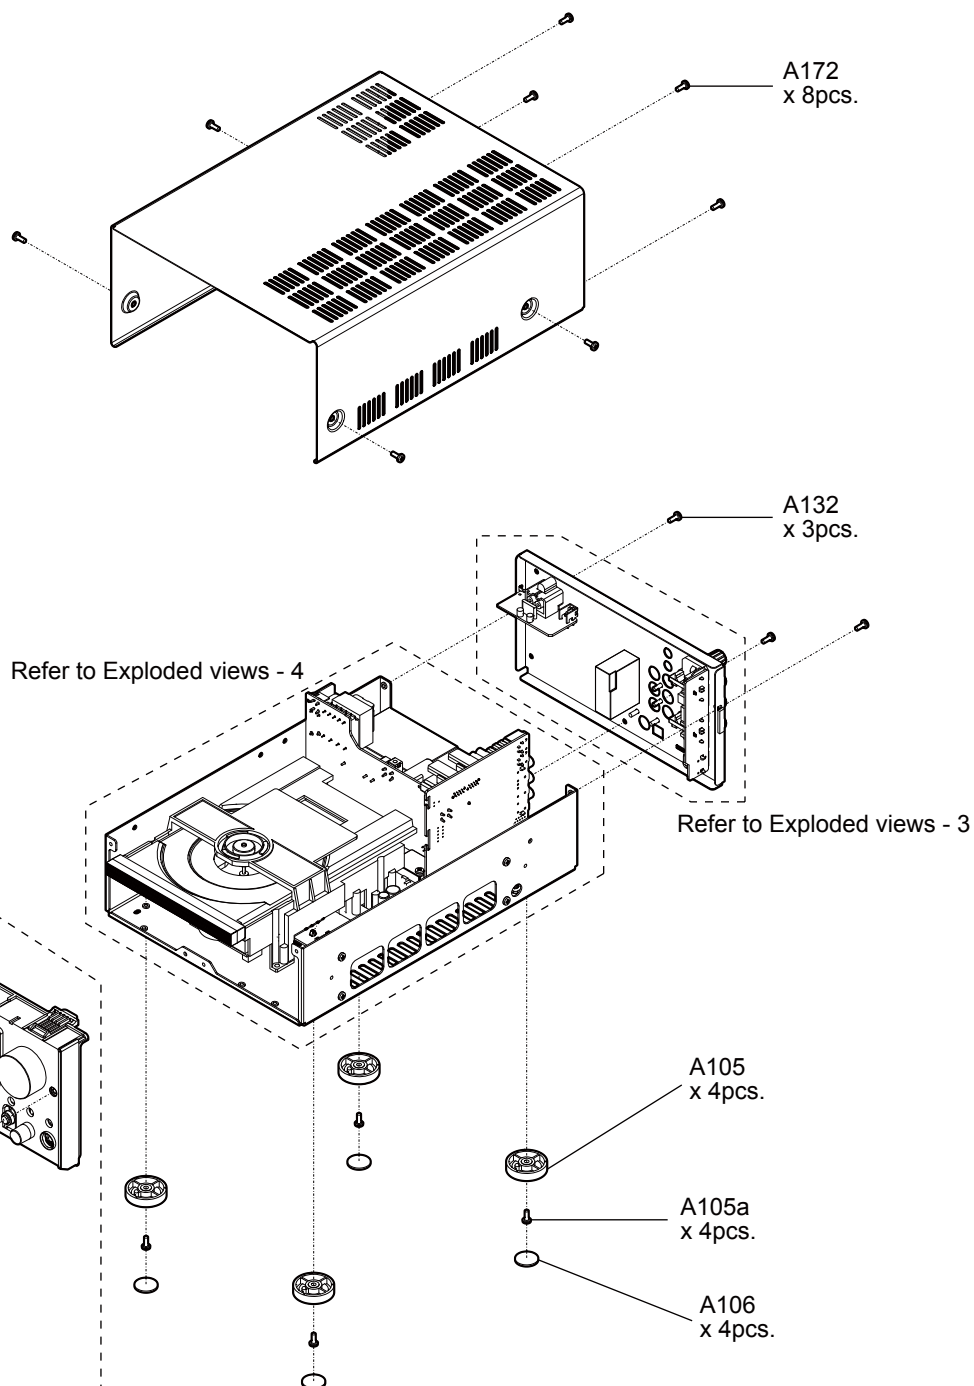A142  
x 3pcs.A105  
x 4pcs.A105a  
x 4pcs.A106  
x 4pcs.A161  
x 3pcs.

A

B

C

D

## Exploded views - 1

1

A172  
x 8pcs.

2

3

Refer to Exploded views - 4

A132  
x 3pcs.


Refer to Exploded views - 3

Refer to Exploded views - 2

4

A142  
x 3pcs.A105  
x 4pcs.A105a  
x 4pcs.A106  
x 4pcs.A161  
x 3pcs.

5

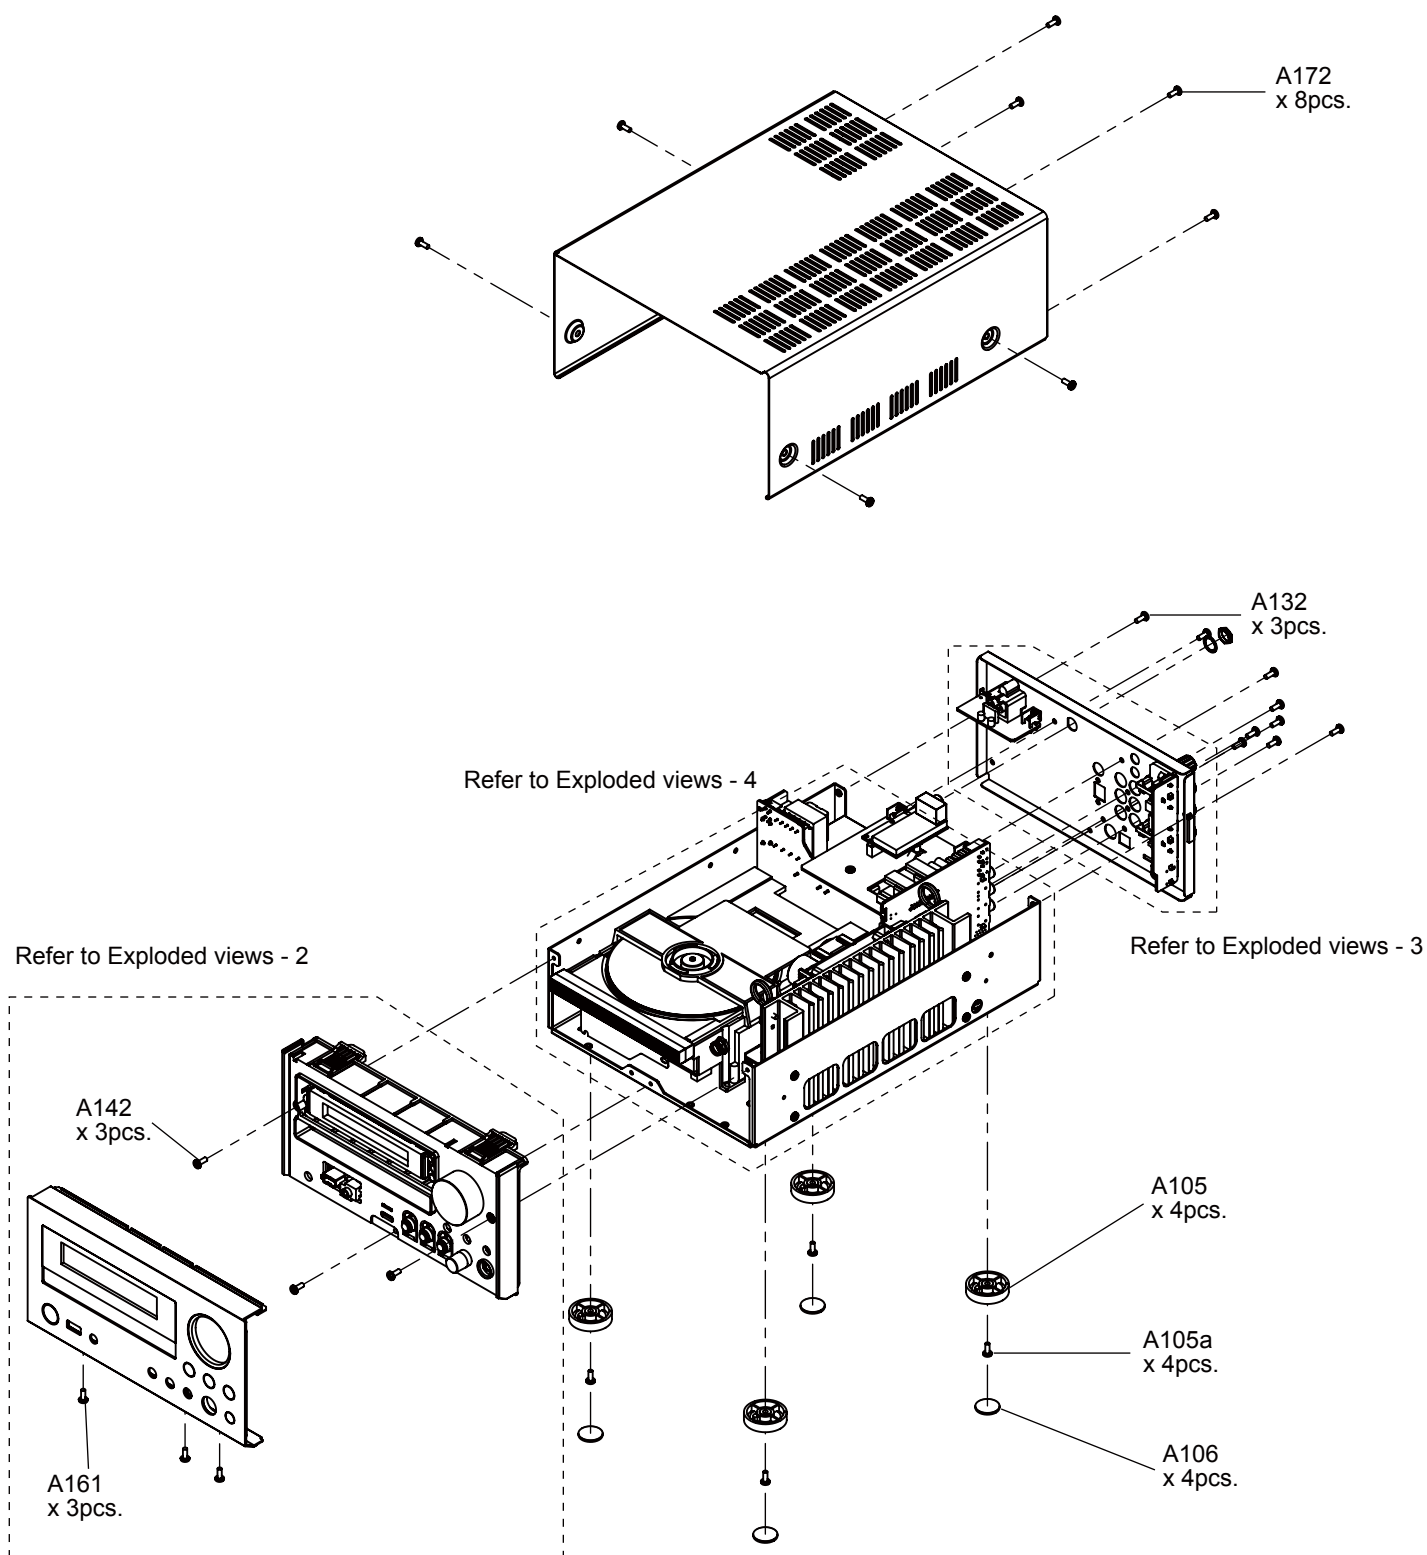

A

B

C

D

## Exploded views - 1

1

A171  
COVERA172  
x 8pcs.

2

3

Refer to Exploded views - 3

A132  
x 3pcs.


Refer to Exploded views - 4


Refer to Exploded views - 2

4

A142  
x 3pcs.A161  
x 3pcs.A105  
x 4pcs.A105a  
x 4pcs.A106  
x 4pcs.

5

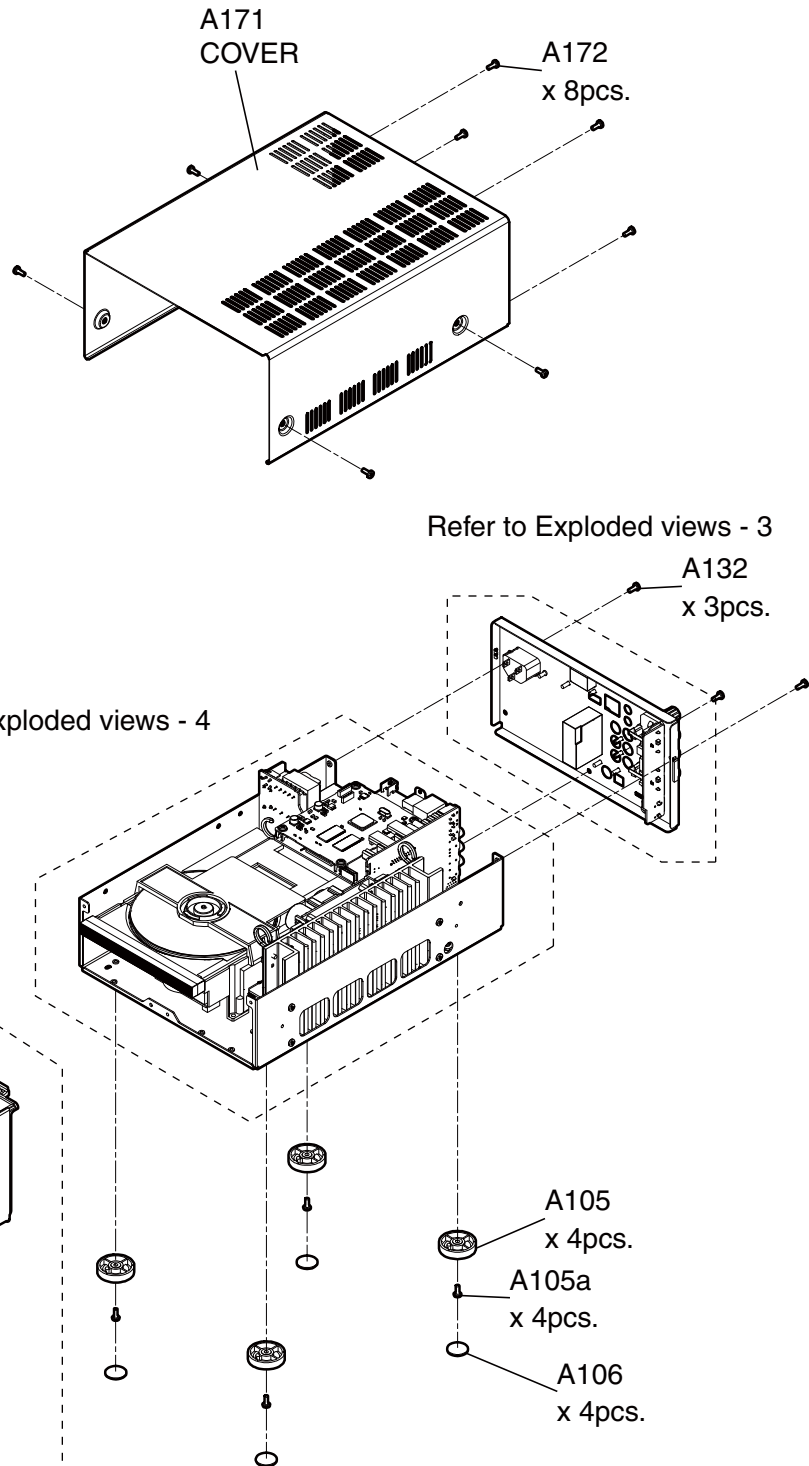

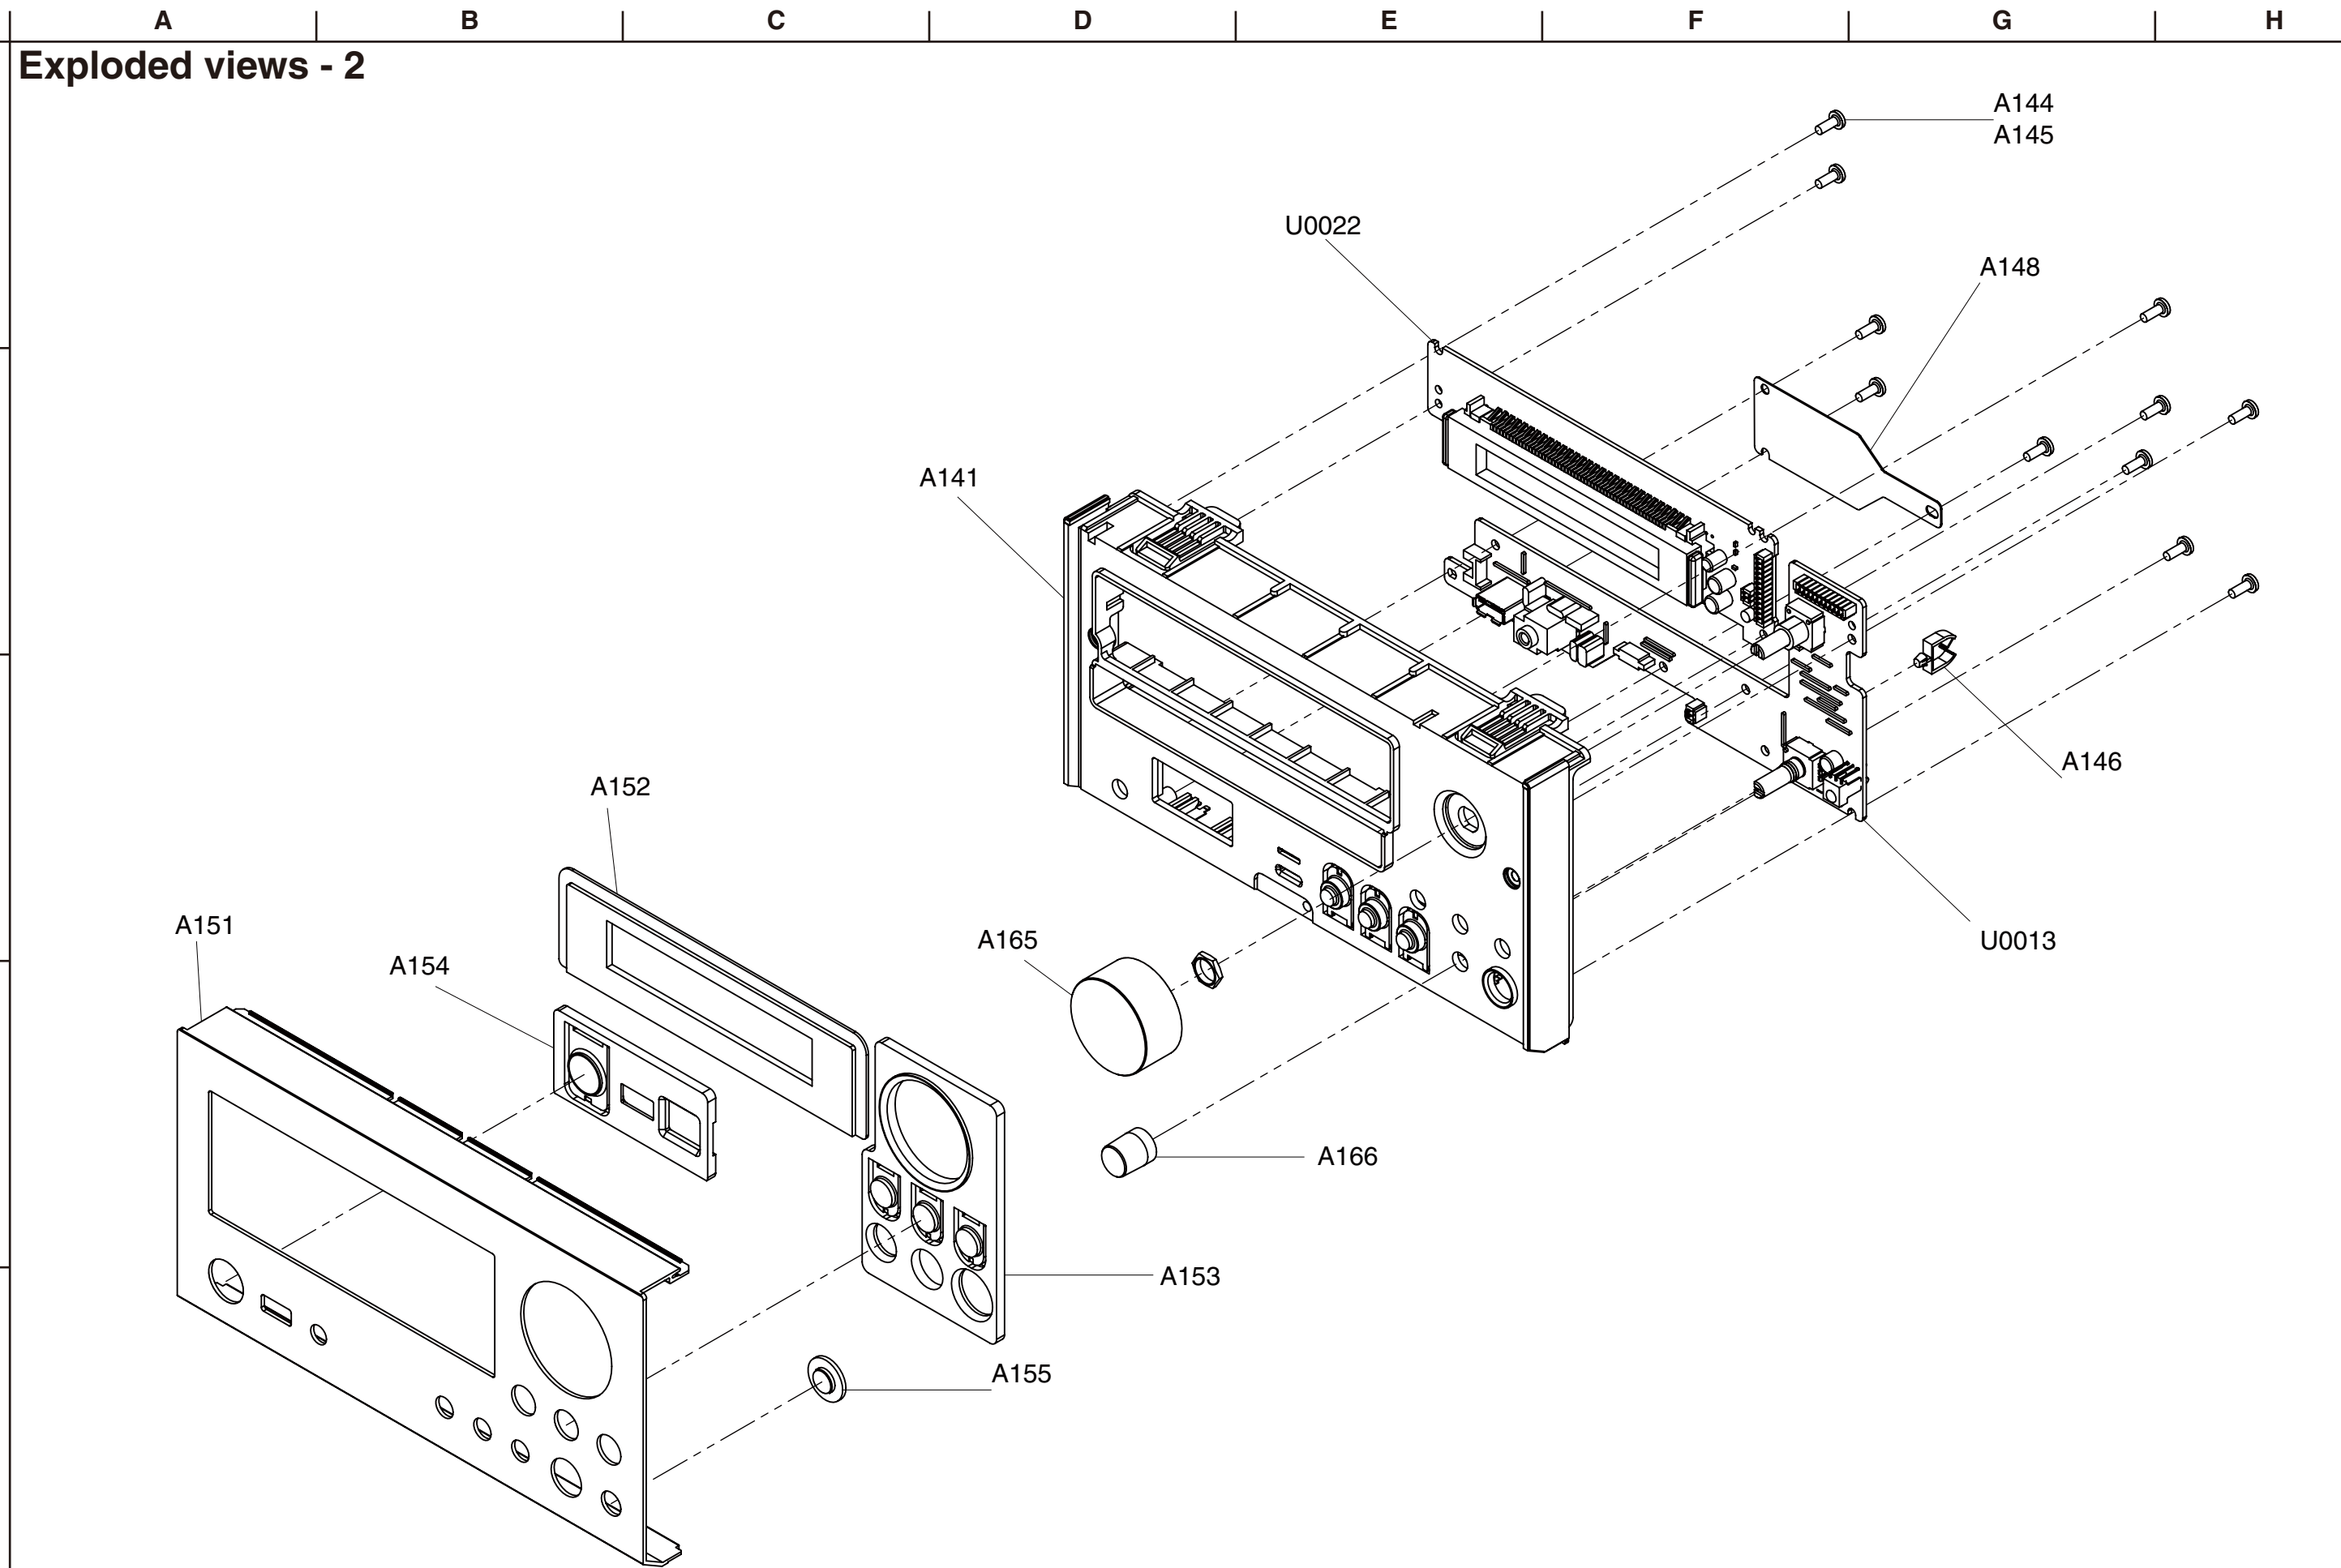



A

B

C

D

## Exploded views - 3


1

2

3

4

5

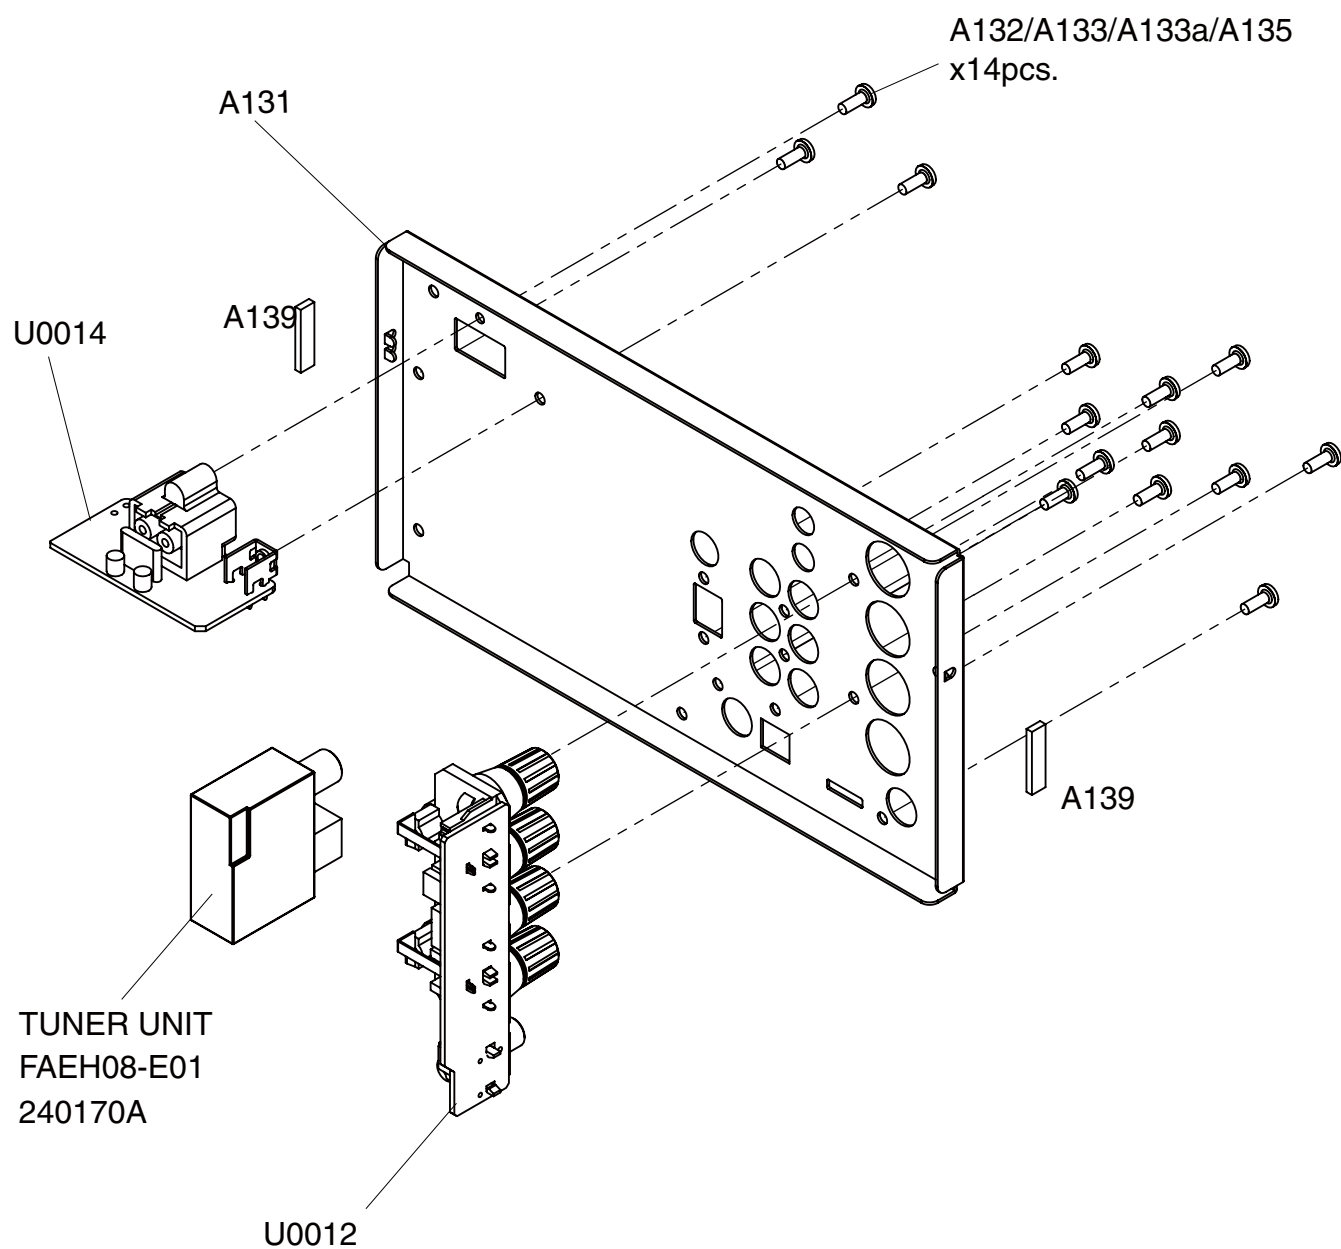

A

B

C

D

## Exploded views - 3


1

2

3

4

5

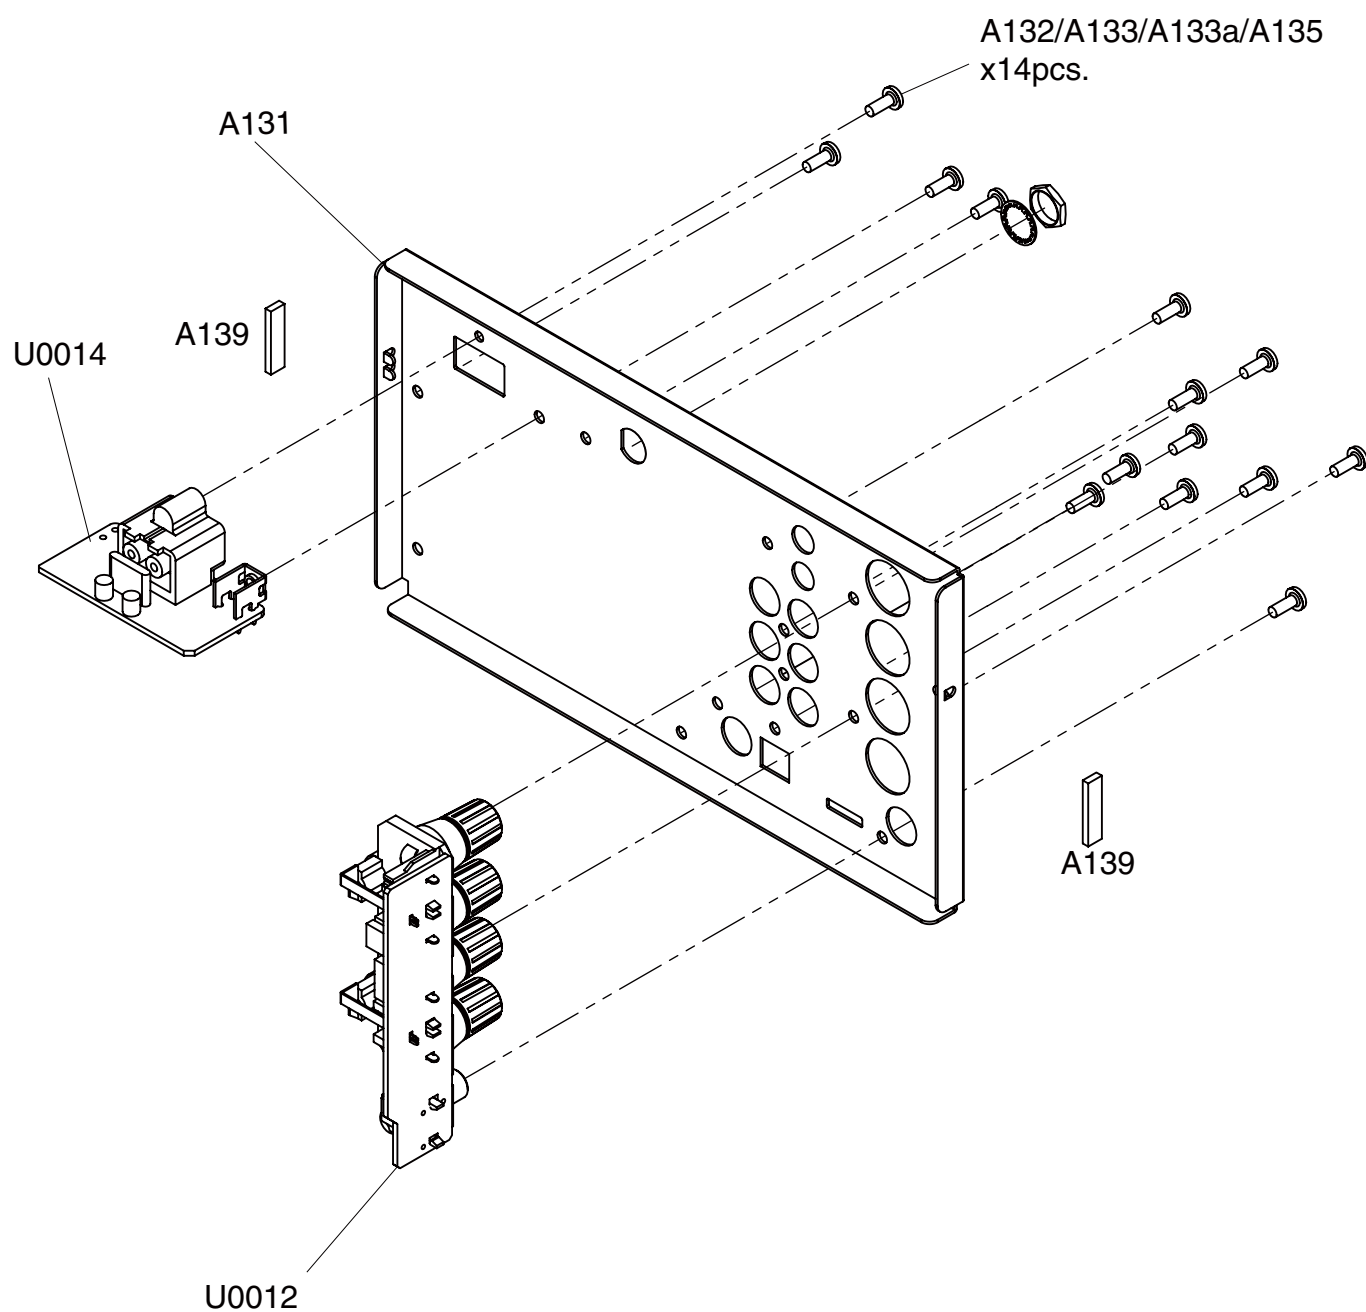

A

B

C

D

## Exploded views - 3


1

2

3

4

5

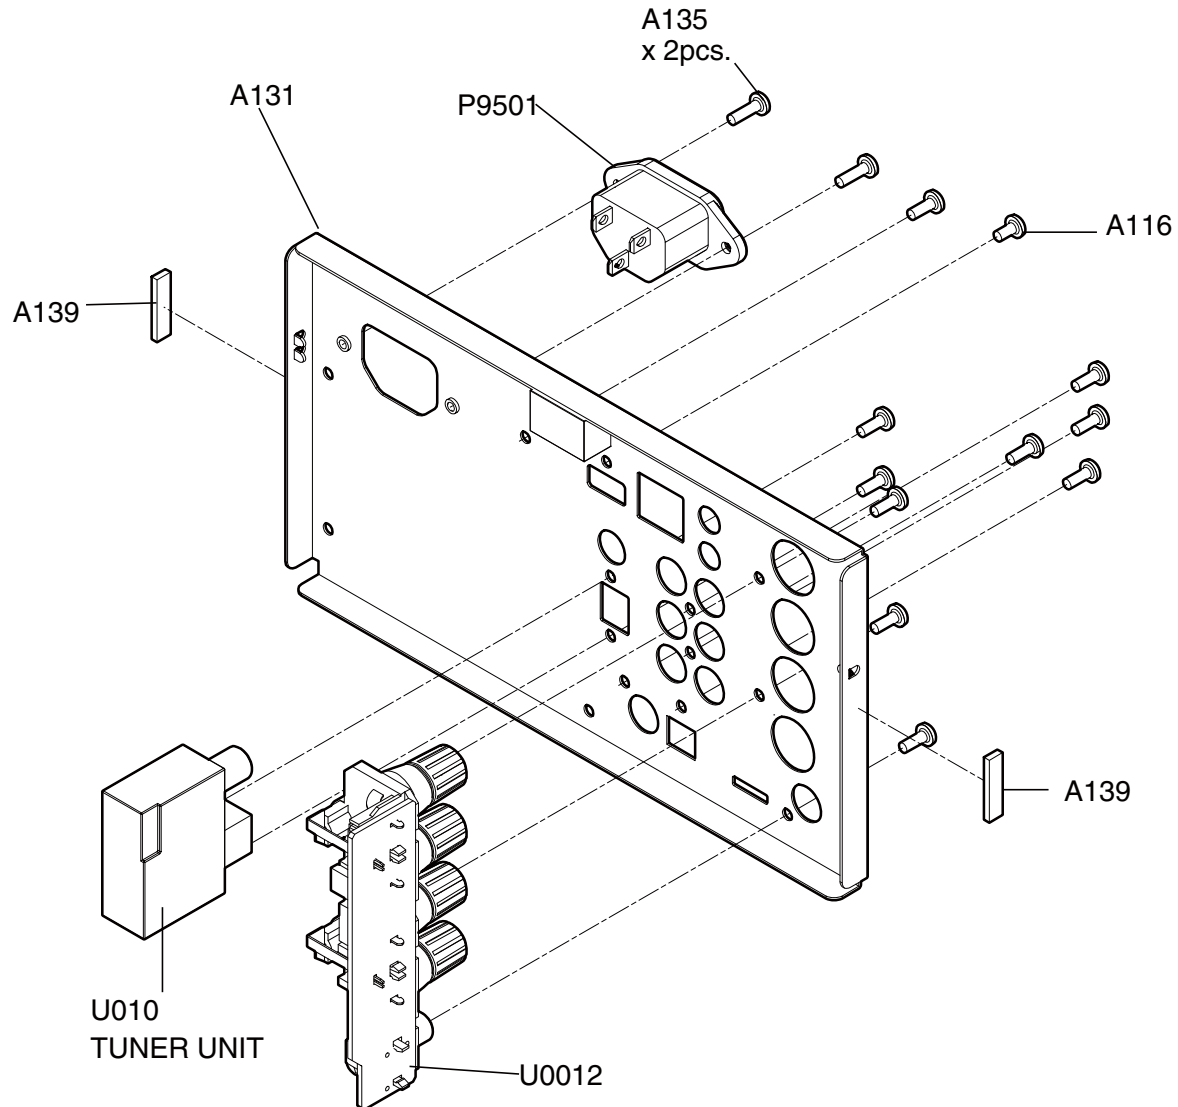

Other Screws:  
3TTB+8B(3BC)  
838430088GR

A


B

C

D


## Exploded views - 4

1




Refer to Exploded views - 6, 7

2

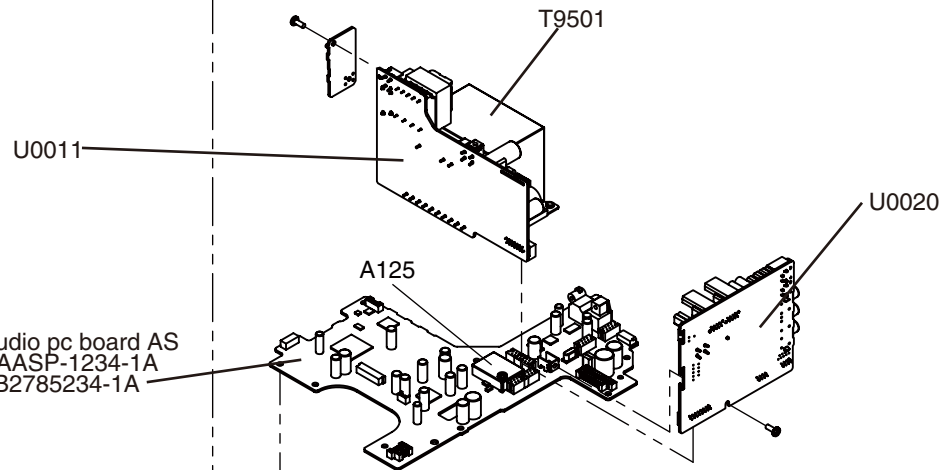


3



Refer to Exploded views - 5

4

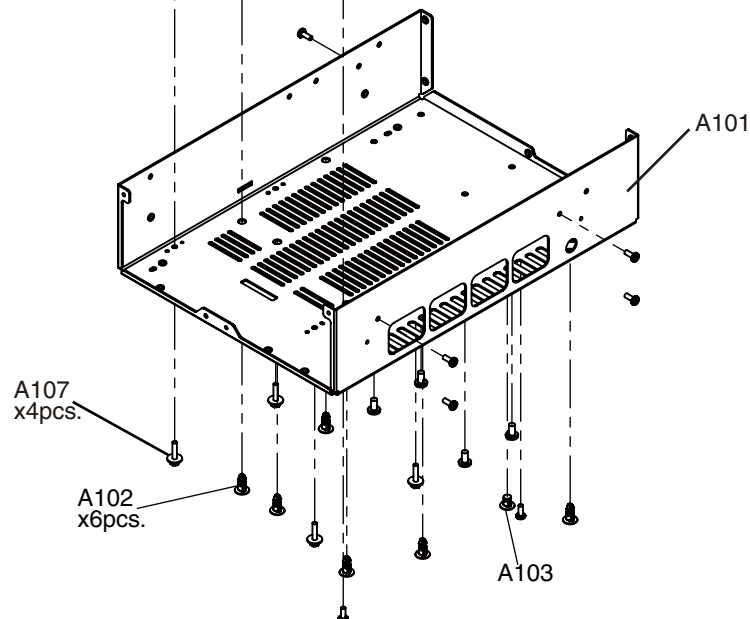

5

Other SCREW:  
838430088GR  
3TTB+8B(3BC)

A


B

C

D


## Exploded views - 4

1




Refer to Exploded views - 6, 7

2

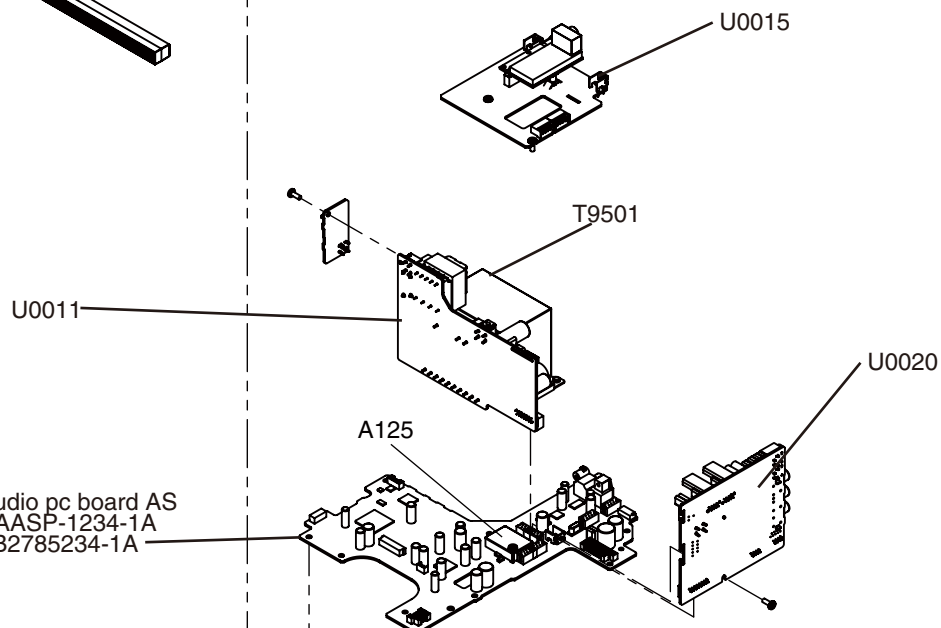


3



Refer to Exploded views - 5

4

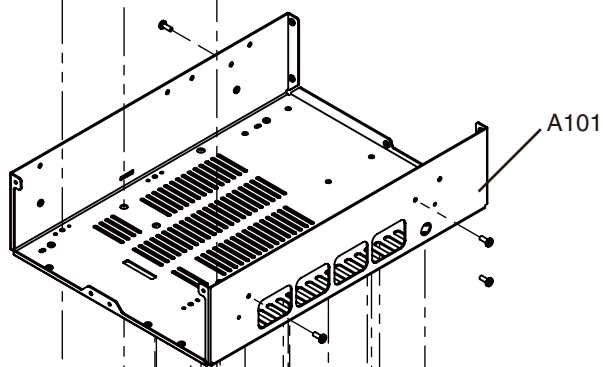

5

A107  
x4pcs.A102  
x6pcs.

A103

Other SCREW:  
838430088GR  
3TTB+8B(3BC)


A

B

C

D

## Exploded views - 4

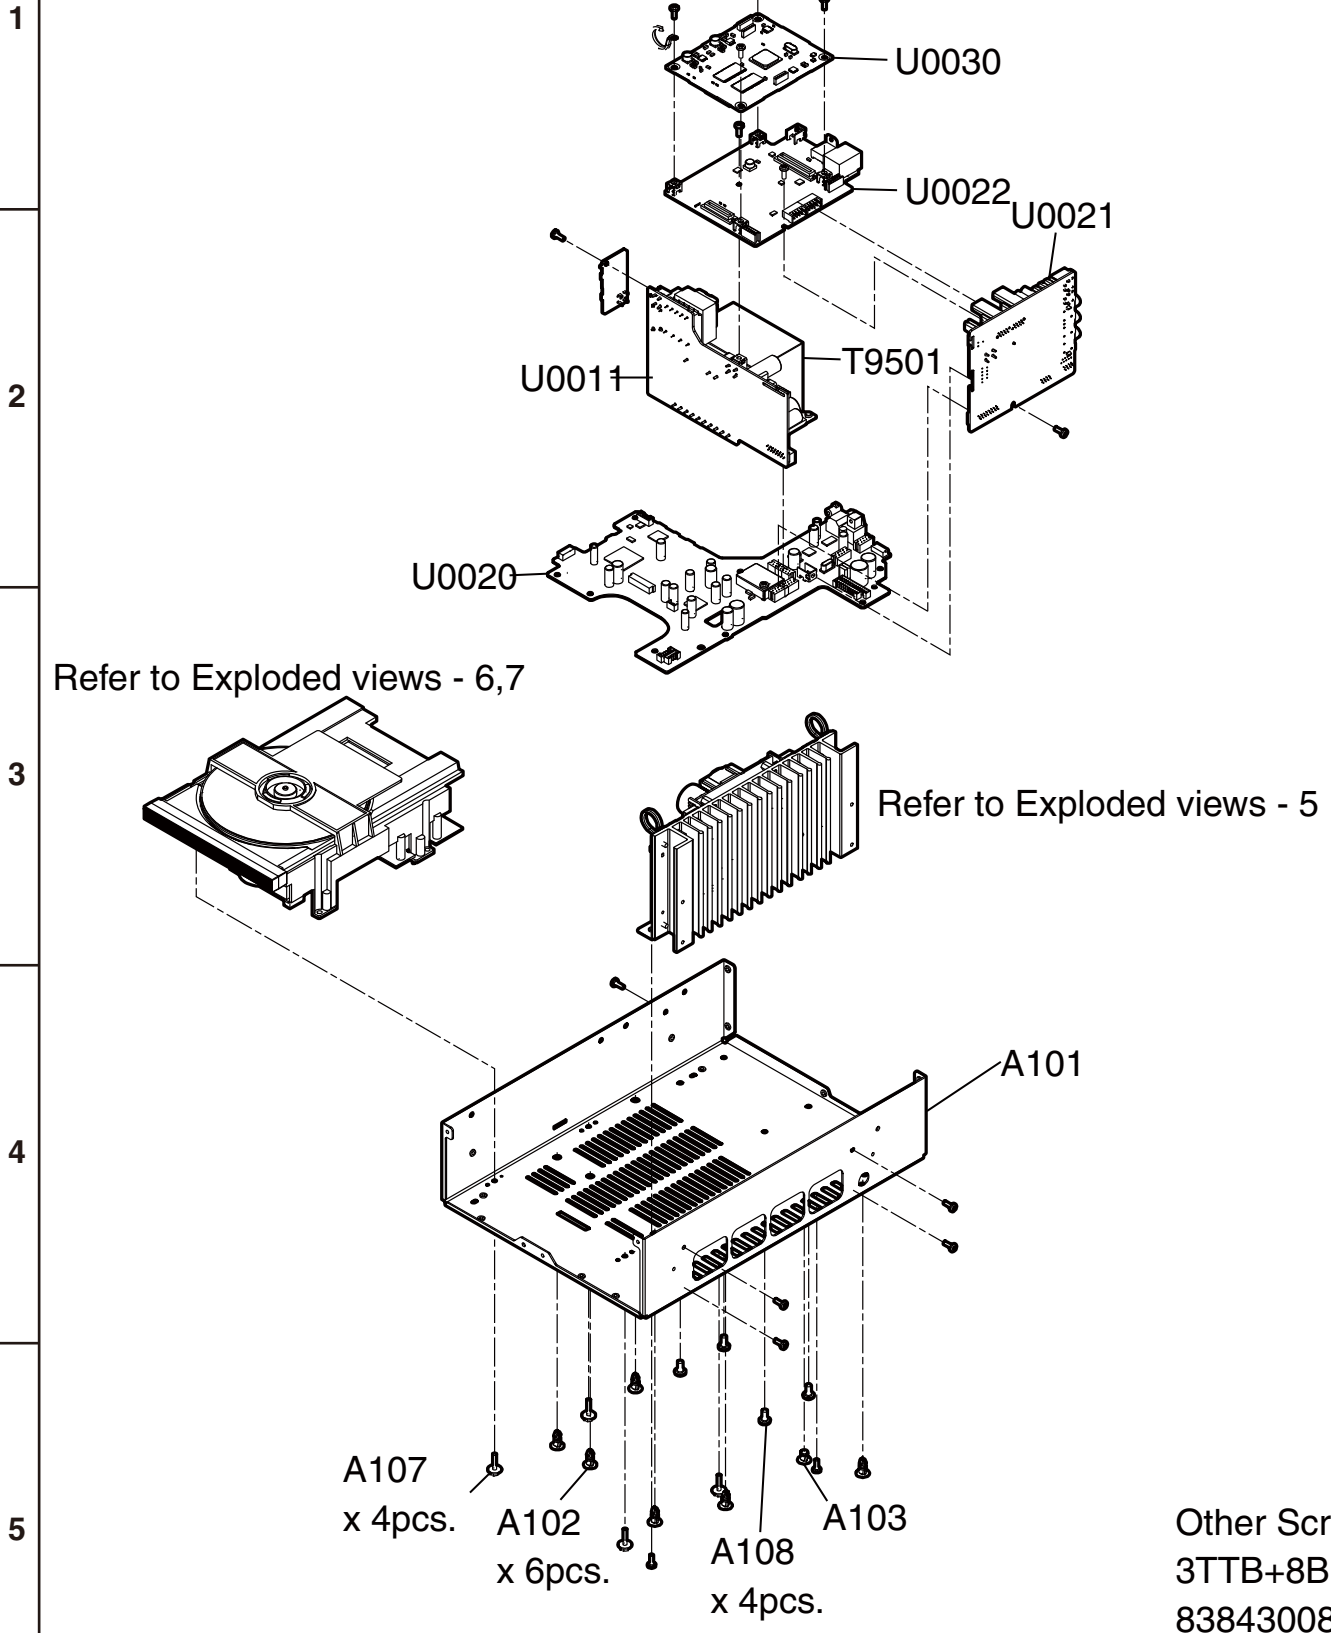

A B C D E F G H

Exploded views - 5


1

2

3

4

5

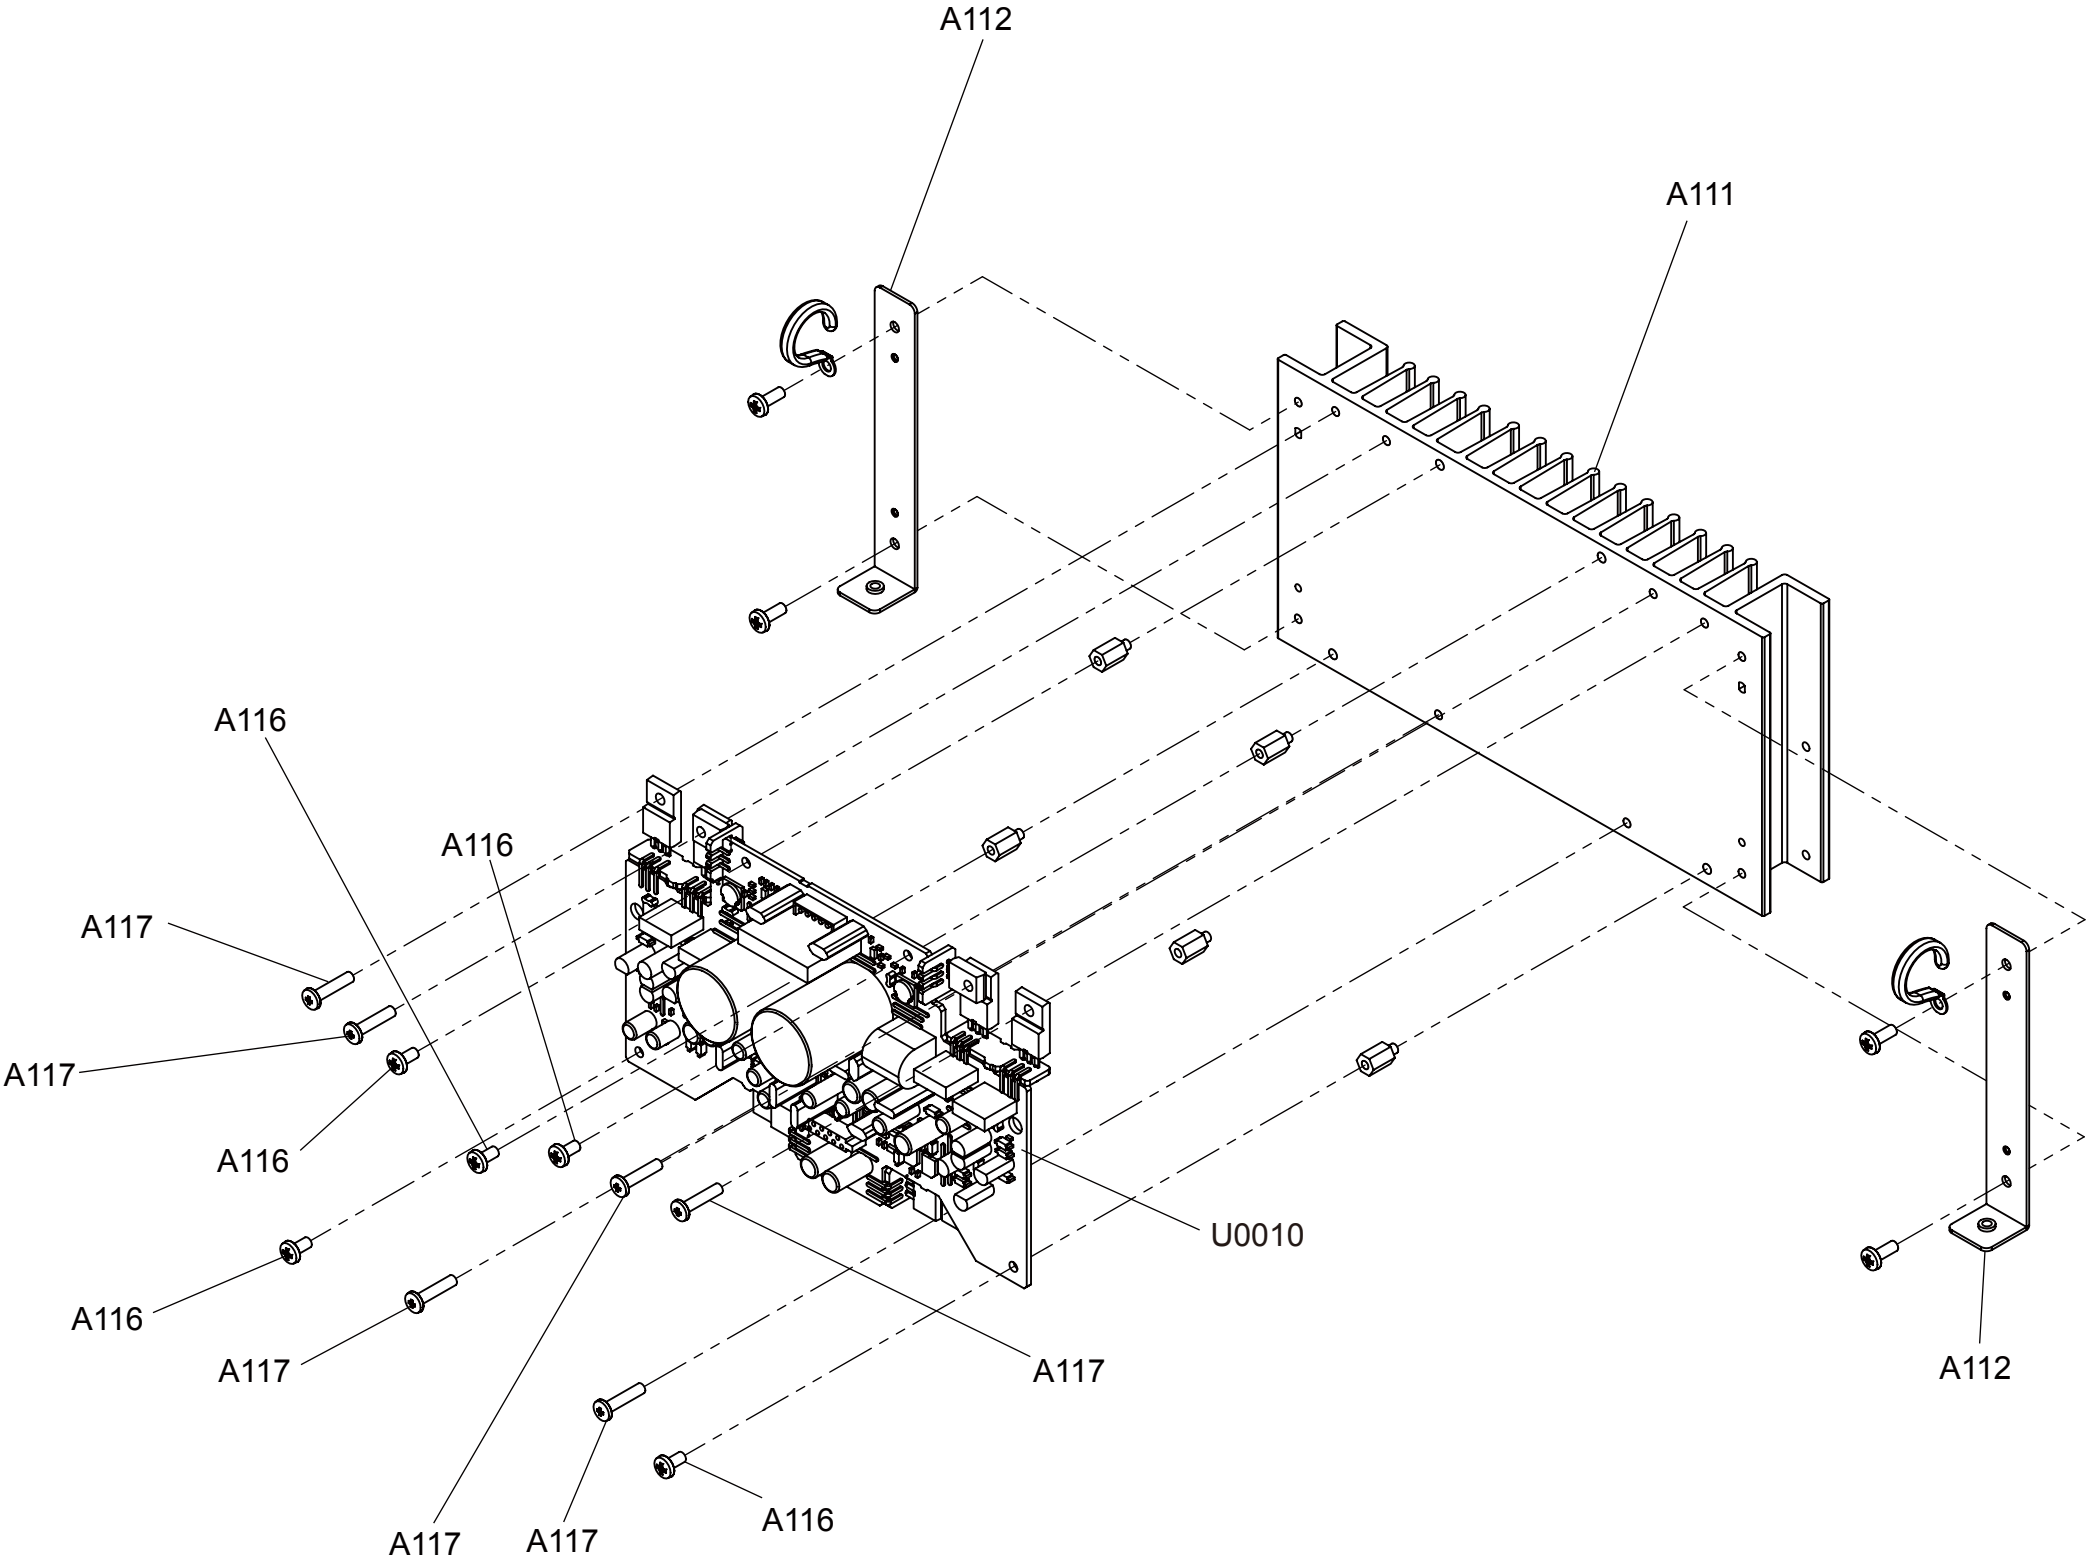

Other SCREW  
838430088GR  
3TTB+8B(3BC)

## EXPLODED VIEWS - 6

## CD MECHANISM : NAMEC-3 + DA11VFGP


## &lt;Note&gt;

CD MECHANISM =

Tray loading unit : "NAMEC-3"

+

Drive unit : "DA11VFGP"

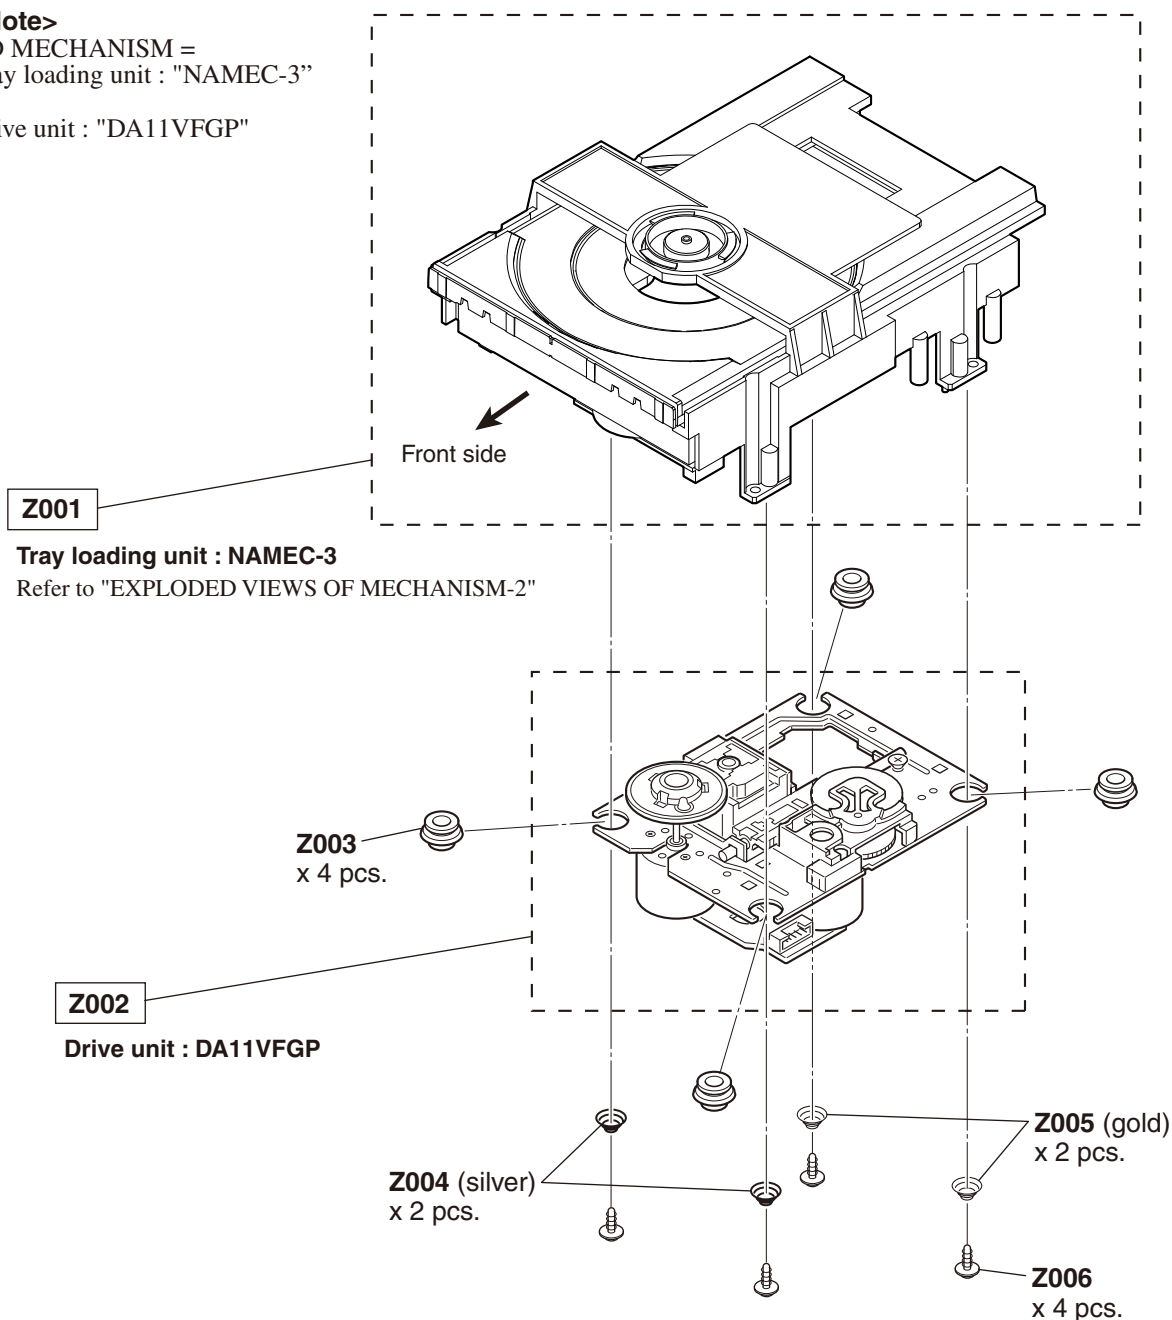


## PARTS LIST

| REF. NO. | PART NAME  | DESCRIPTION | Q'TY | PART NO. (SN) |
|----------|------------|-------------|------|---------------|
| Z001     | MECHA      | NAMEC-3     | 1    | NAMEC3        |
| Z002     | MECHA UNIT | DA11VFGP    | 1    | 24800060      |
| Z003     | INSULATOR  | (CDC-A)     | 4    | 24818058      |
| Z004     | SPRING     | (TP-D)      | 2    | 24820071      |
| Z005     | SPRING     | (TP-E)      | 2    | 24820072      |
| Z006     | SCREW      | 2.6*8*w10   | 4    | 801632        |
| Z007     | LABEL      | (DVD3-S)    | 1    | 29364822      |



## EXPLODED VIEWS - 7

## CD TRAY LOADING UNIT : NAMEC-3

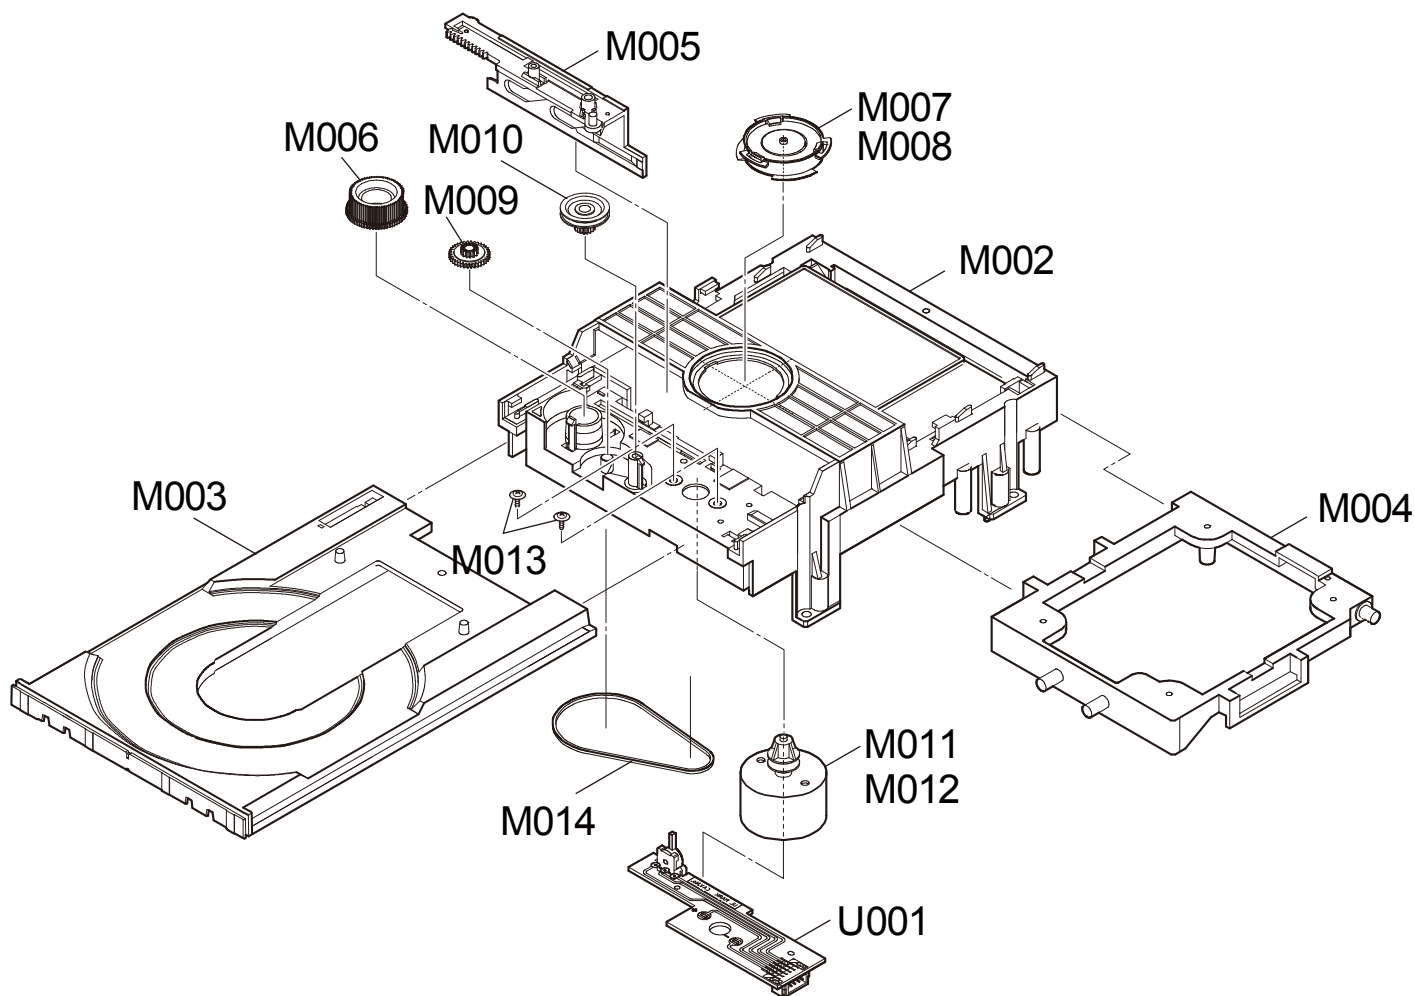

## PARTS LIST

| REF. NO.            | PART NAME    | DESCRIPTION   | Q'TY | PART NO. (SN) |
|---------------------|--------------|---------------|------|---------------|
| <b>[MECHANISM]</b>  |              |               |      |               |
| M002                | CHASSIS      | ---           | 1    | 24802060      |
| M003                | TRAY         | ---           | 1    | 24840177      |
| M004                | CHASSIS SUB  | ---           | 1    | 24802061      |
| M005                | CAM SLIDER   | SA            | 1    | 24840178      |
| M006                | GEAR TRAY    | ---           | 1    | 24810098      |
| M007                | CLAMPER      | SA            | 1    | 24840180      |
| M008                | MAGNET       | ---           | 1    | 24832032      |
| M009                | GEAR A       | ---           | 1    | 24810099      |
| M010                | PULLEY-GEAR  | ---           | 1    | 24810100      |
| M011                | MOTOR        | M50-C18G0     | 1    | 24804053      |
| M012                | PULLEY-M     | ---           | 1    | 24810101      |
| M013                | SCREW        | 2.6P+4FN      | 2    | 82112604      |
| M014                | BELT LOADING | ---           | 1    | 24816042      |
| <b>[TUNER UNIT]</b> |              |               |      |               |
| U001                | MEC-AS       | BAMEC-1302-1A | 1    | 1B287502-1A   |

A

B

C


D

E

Schematic Diagrams - 0


Model No. CR-555/555DAB/N755 Schematic Diagram List

| PART NO | FUNCTION                                     | MODEL  |           |         |
|---------|----------------------------------------------|--------|-----------|---------|
|         |                                              | CR-555 | CR-555DAB | CR-N755 |
| PART-1  | BLOCK DIAGRAM                                | YES    | YES       | YES     |
| PART-2  | MAIN AMP                                     | YES    | YES       | YES     |
| PART-3  | CR-555 DISPLAY BLOCK                         | YES    | YES       | NO      |
| PART-4  | CR-N755 DISPLAY BLOCK                        | NO     | NO        | YES     |
| PART-5  | DAB SECTION                                  | NO     | YES       | NO      |
| PART-6  | POWER SUPPLY BLOCK                           | YES    | YES       | YES     |
| PART-7  | SP TEMINAL                                   | YES    | YES       | YES     |
| PART-8  | DIR USB SECTION                              | YES    | YES       | YES     |
| PART-9  | CD_BE MICON SECTION                          | YES    | YES       | YES     |
| PART-10 | ASP SECTION                                  | YES    | YES       | YES     |
| PART-11 | NETWORK USB                                  | NO     | NO        | YES     |
| PART-12 | 1st DSP MEMORY SECTION                       | NO     | NO        | YES     |
| PART-13 | DSP/Audio/GPIO/DC-DC Power/Connector Section | NO     | NO        | YES     |
| PART-14 | Net/USB/Power Section                        | NO     | NO        | YES     |

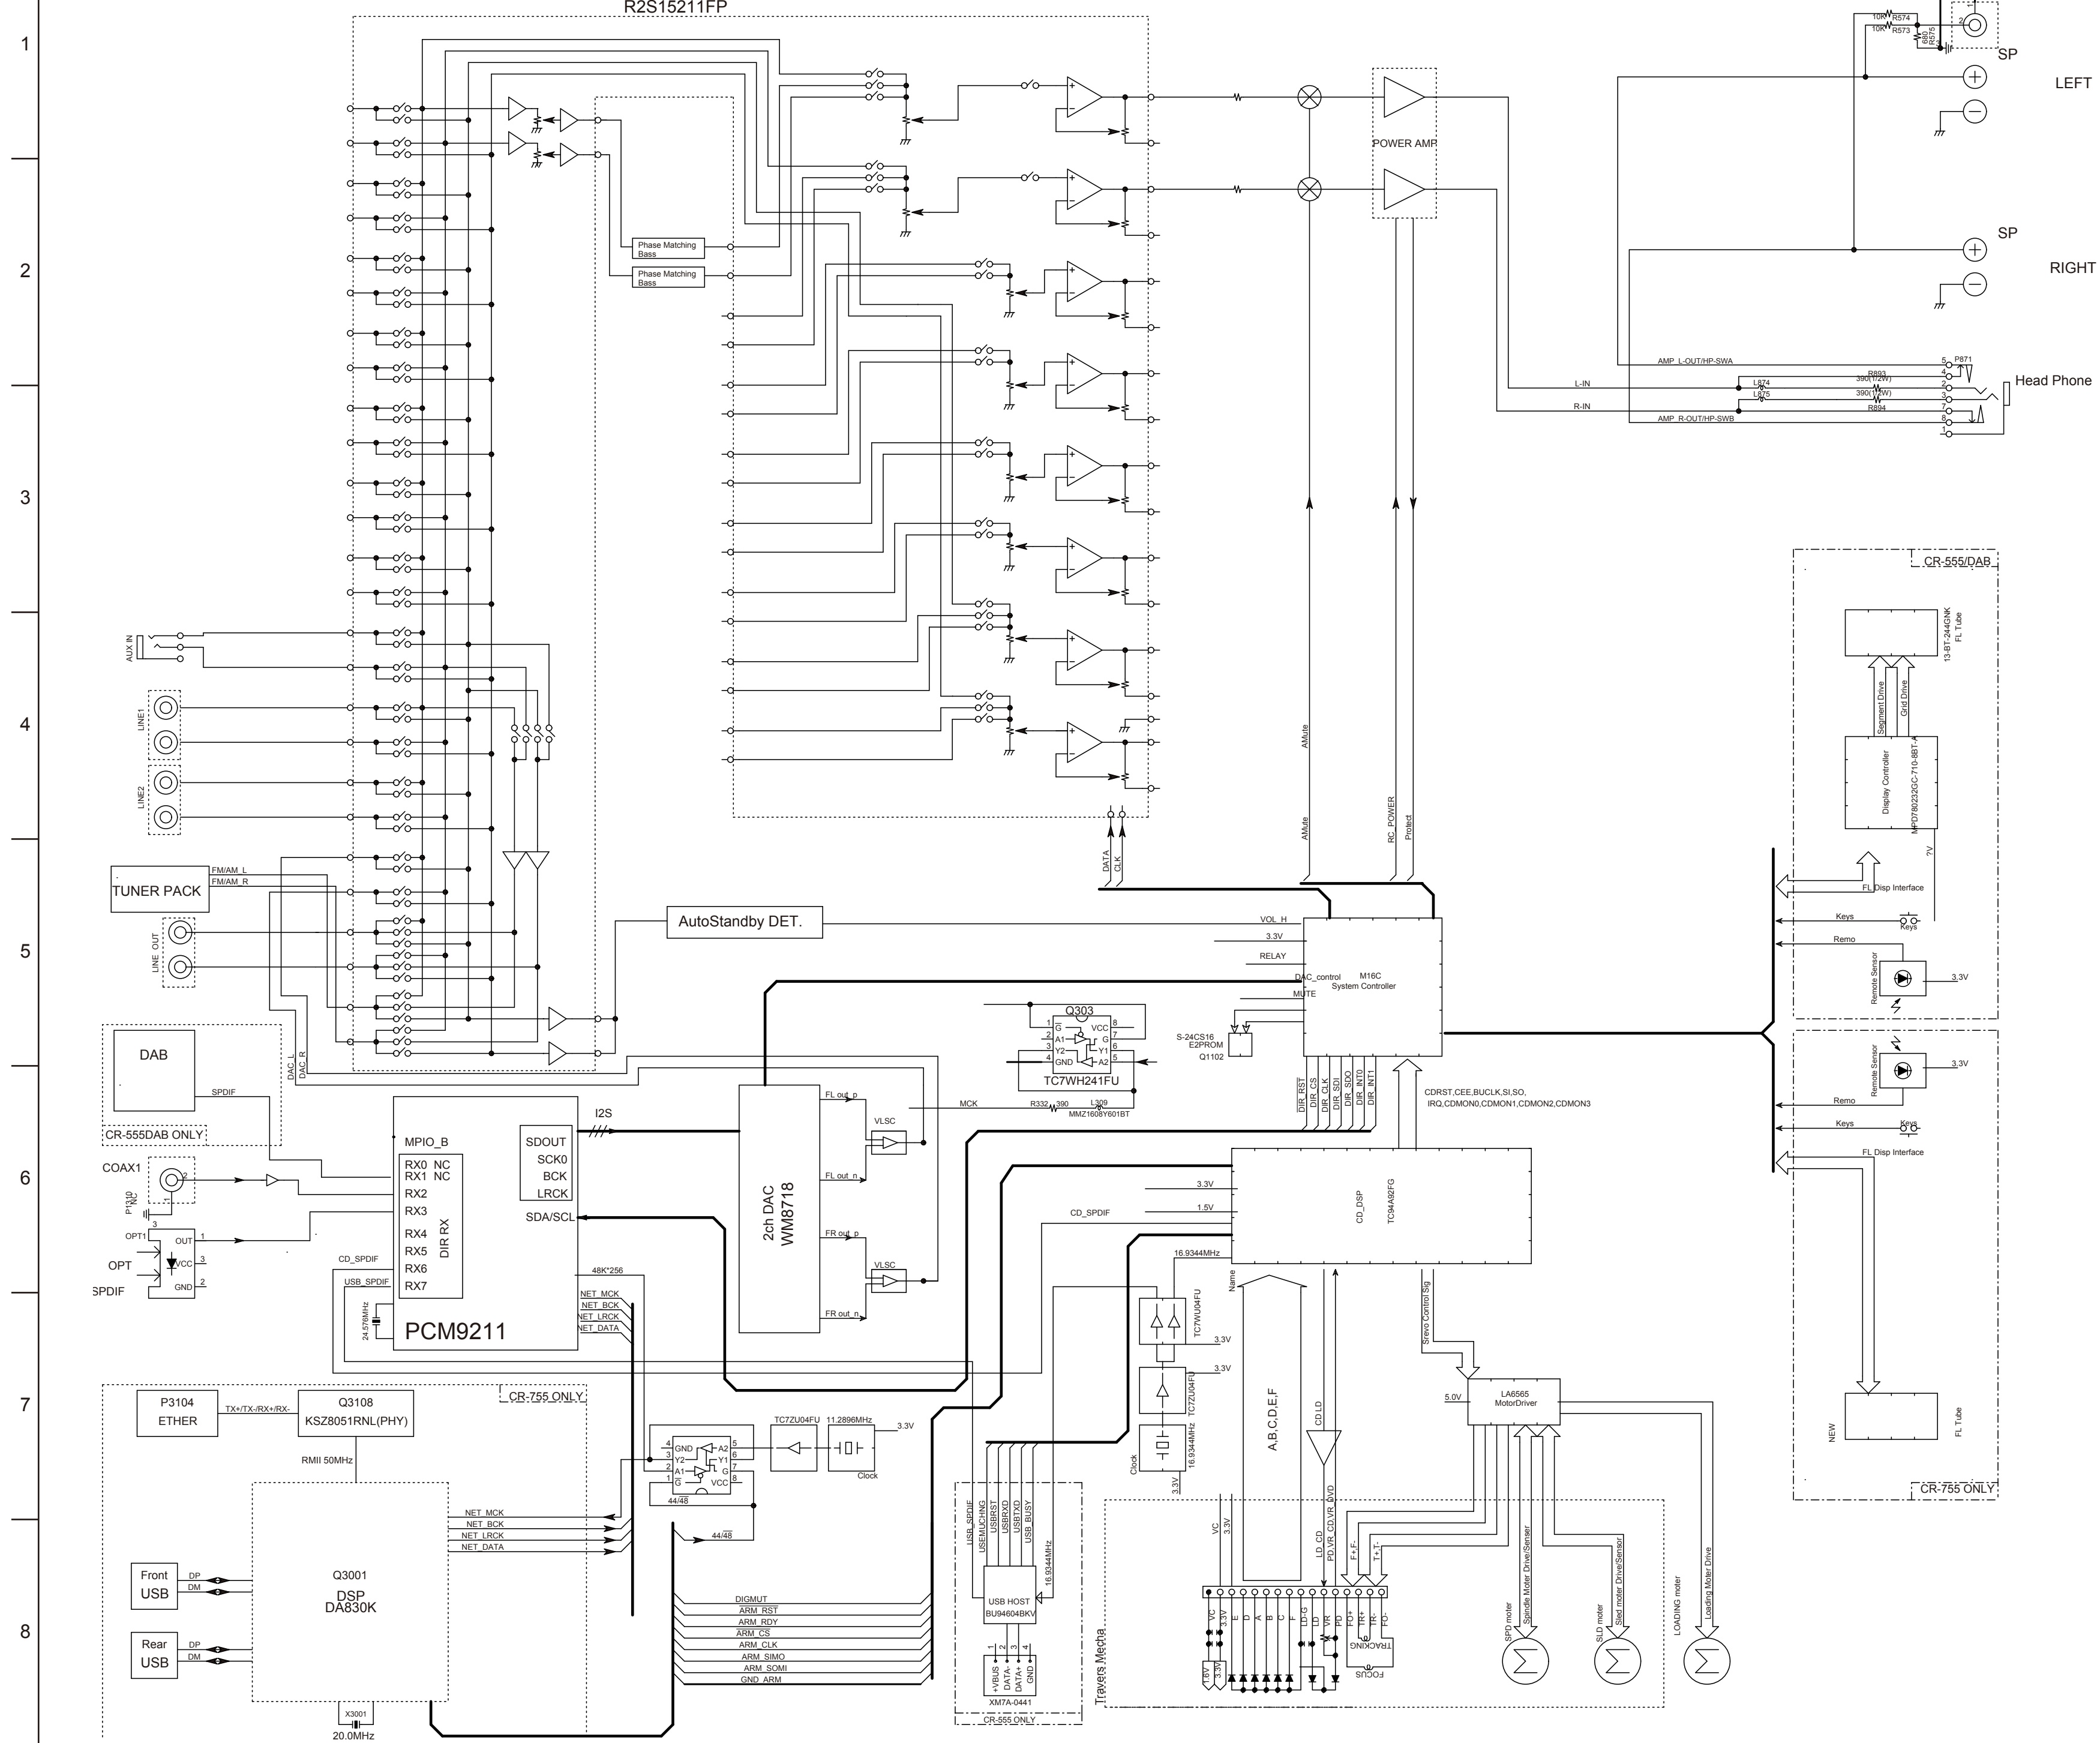

## BAAMP-1225

Amplifier pc board AS

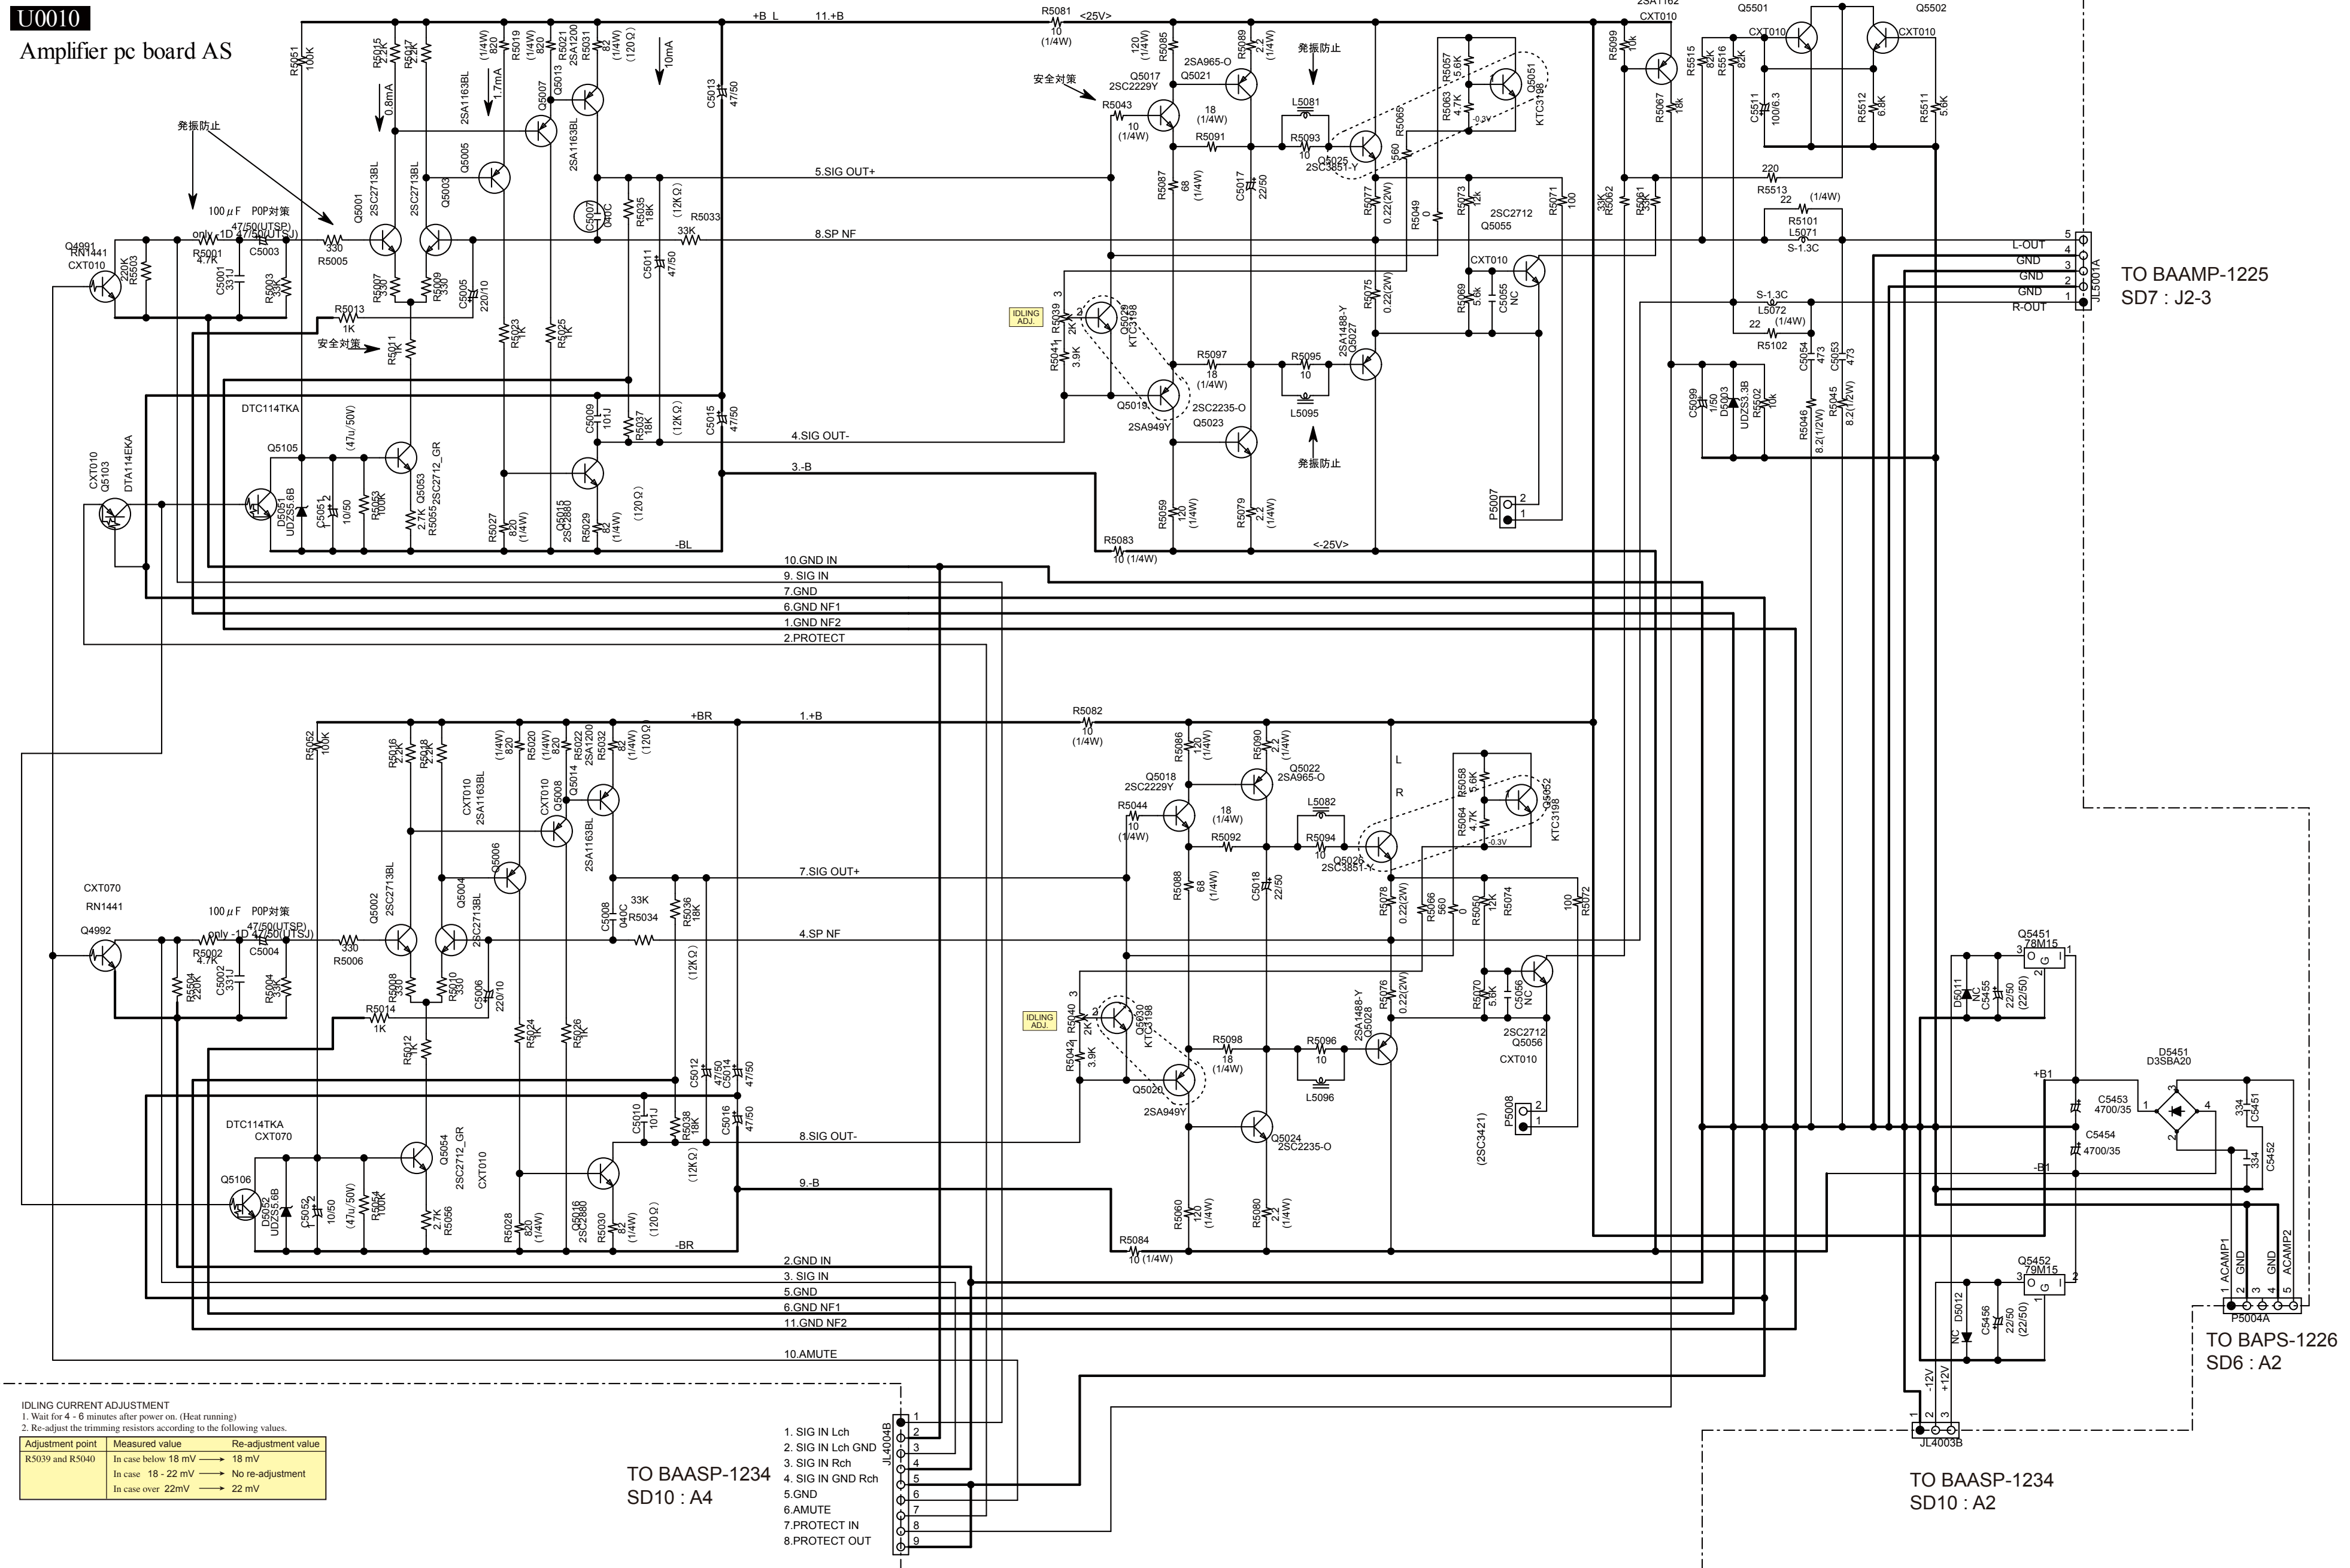


Schematic Diagrams - 3  
Display Section

BADIS-1228 Model No. CR-555/555DAB/N755 SCHEMATIC DIAGRAM (PART-3) CR-555 DISPLAY BLOCK

U0020

Display pc board AS

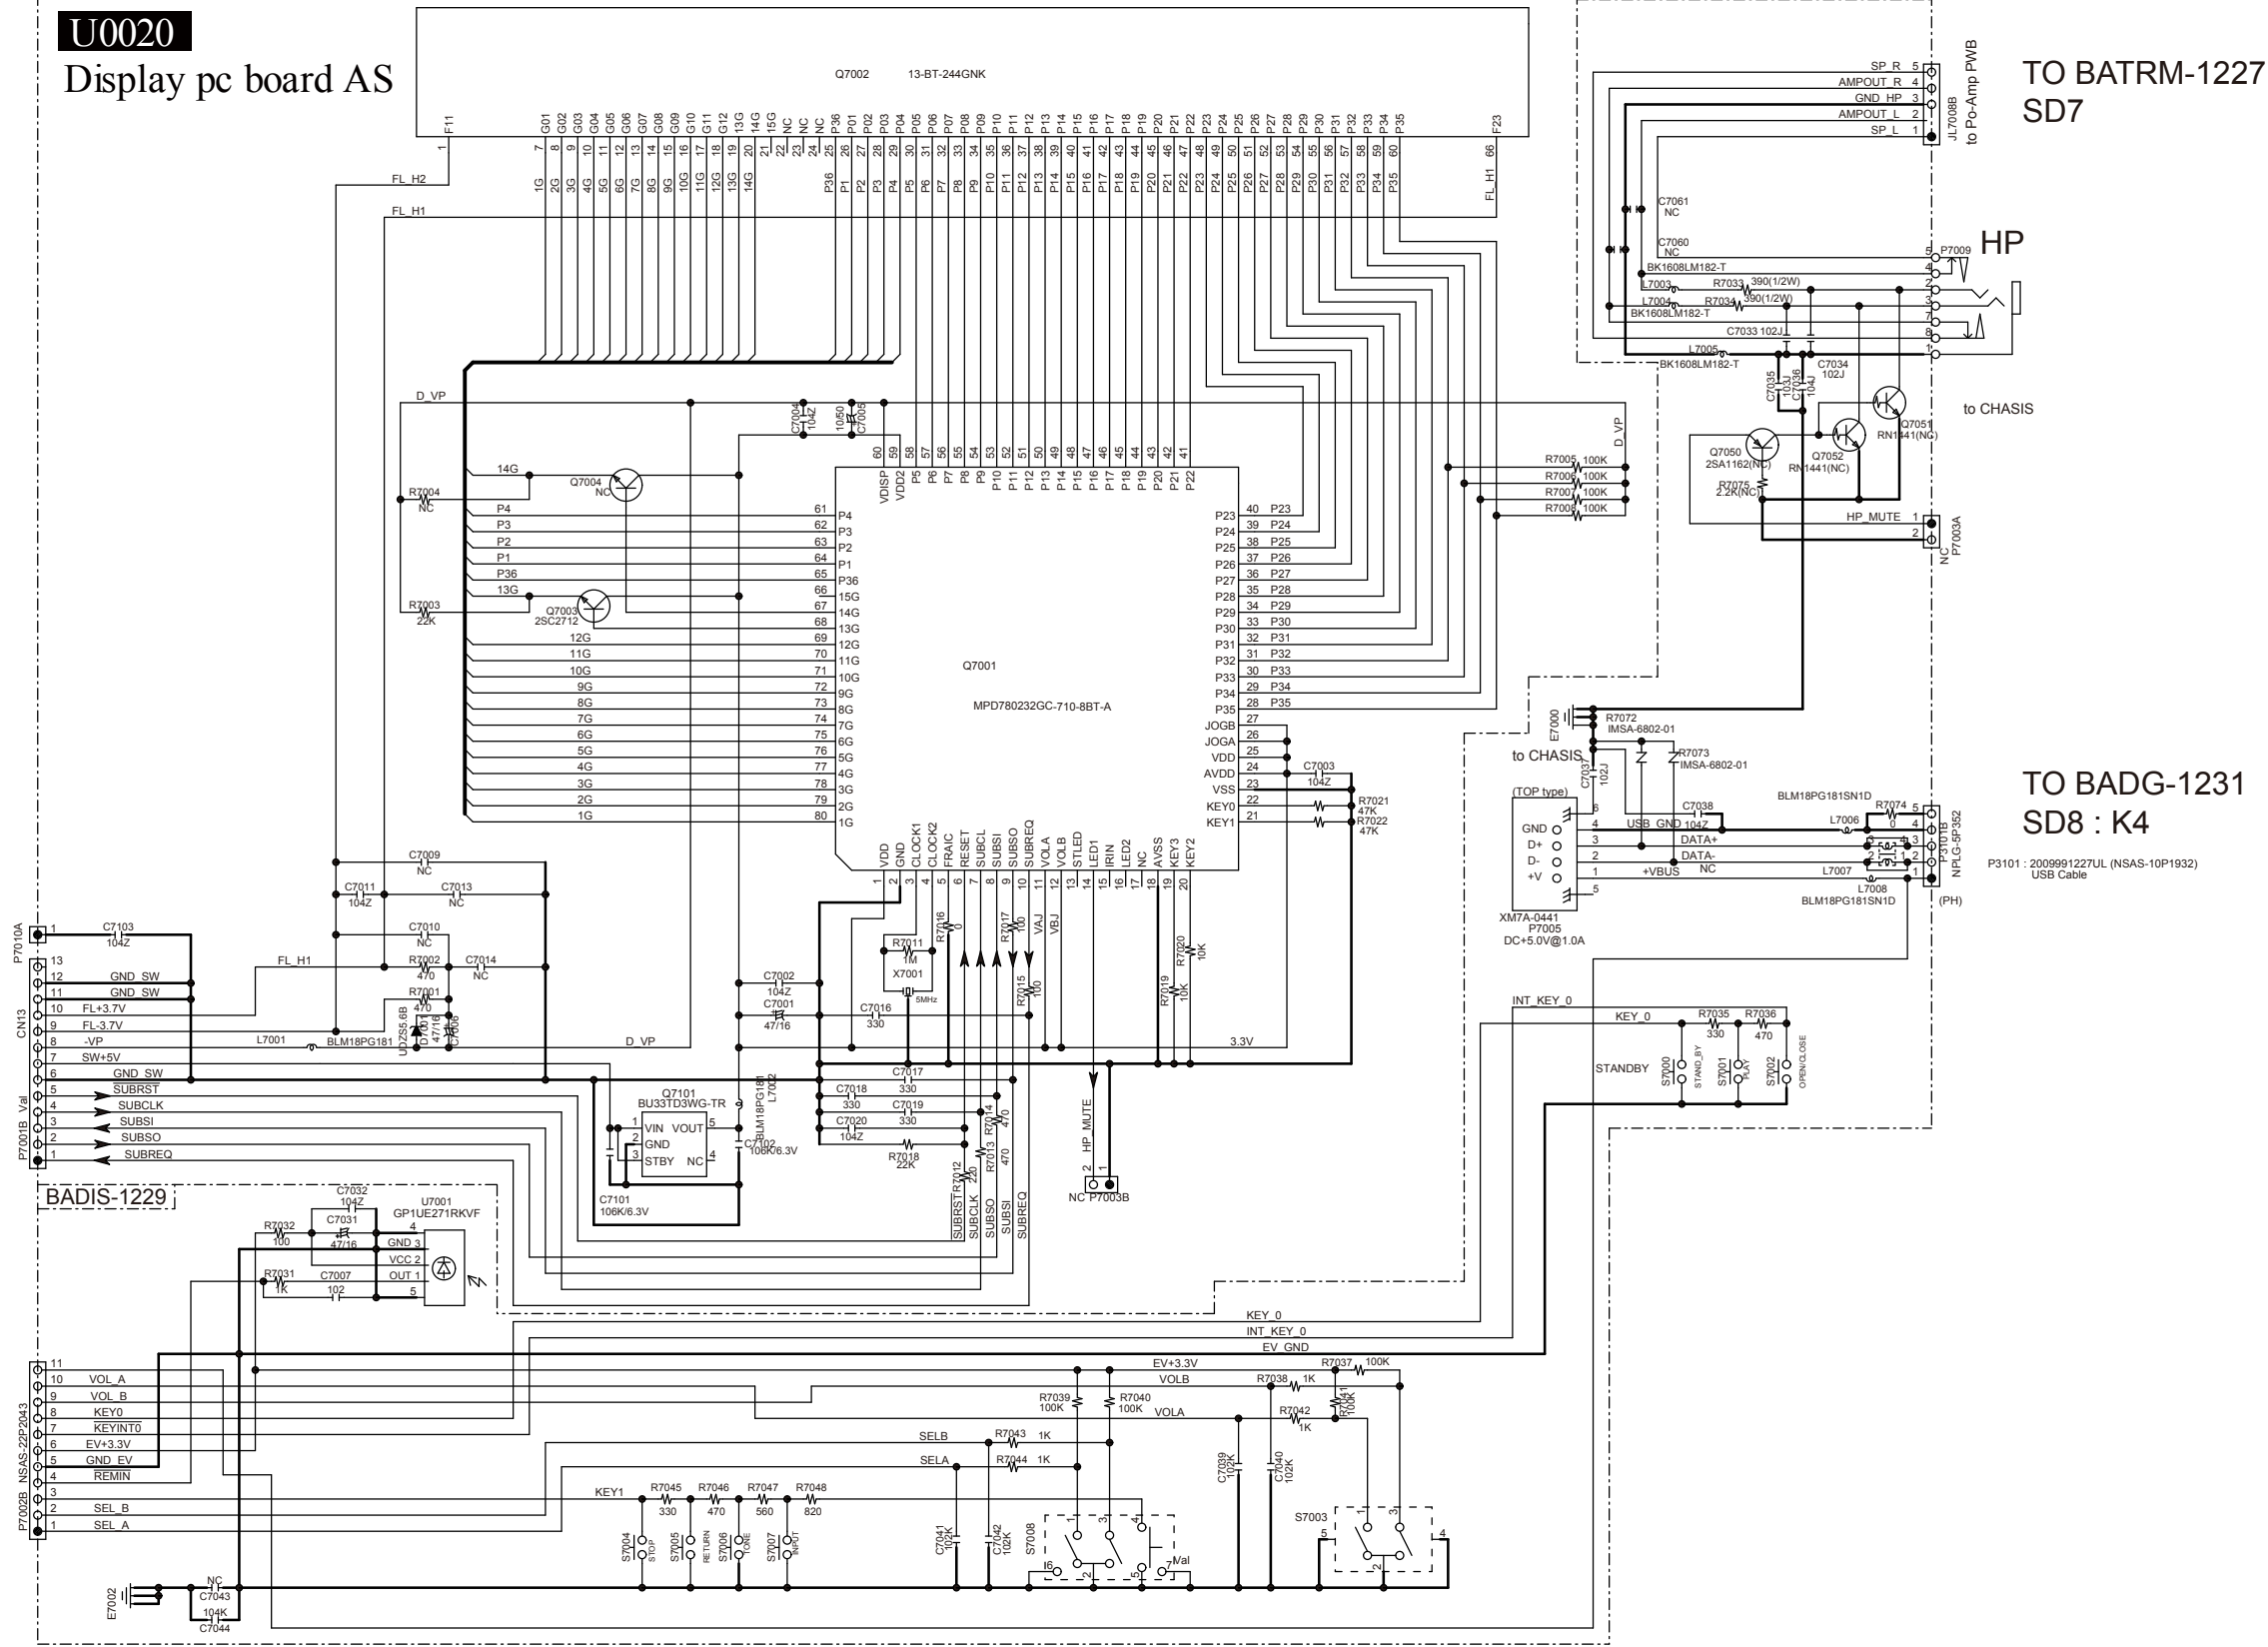




## Schematic Diagrams - 4 Display Section

BADIS-1239 Model No. CR-555/555DAB/N755 SCHEMATIC DIAGRAM (PART-4) CR-N755 DISPLAY BLOCK

U0023

Display pc board AS

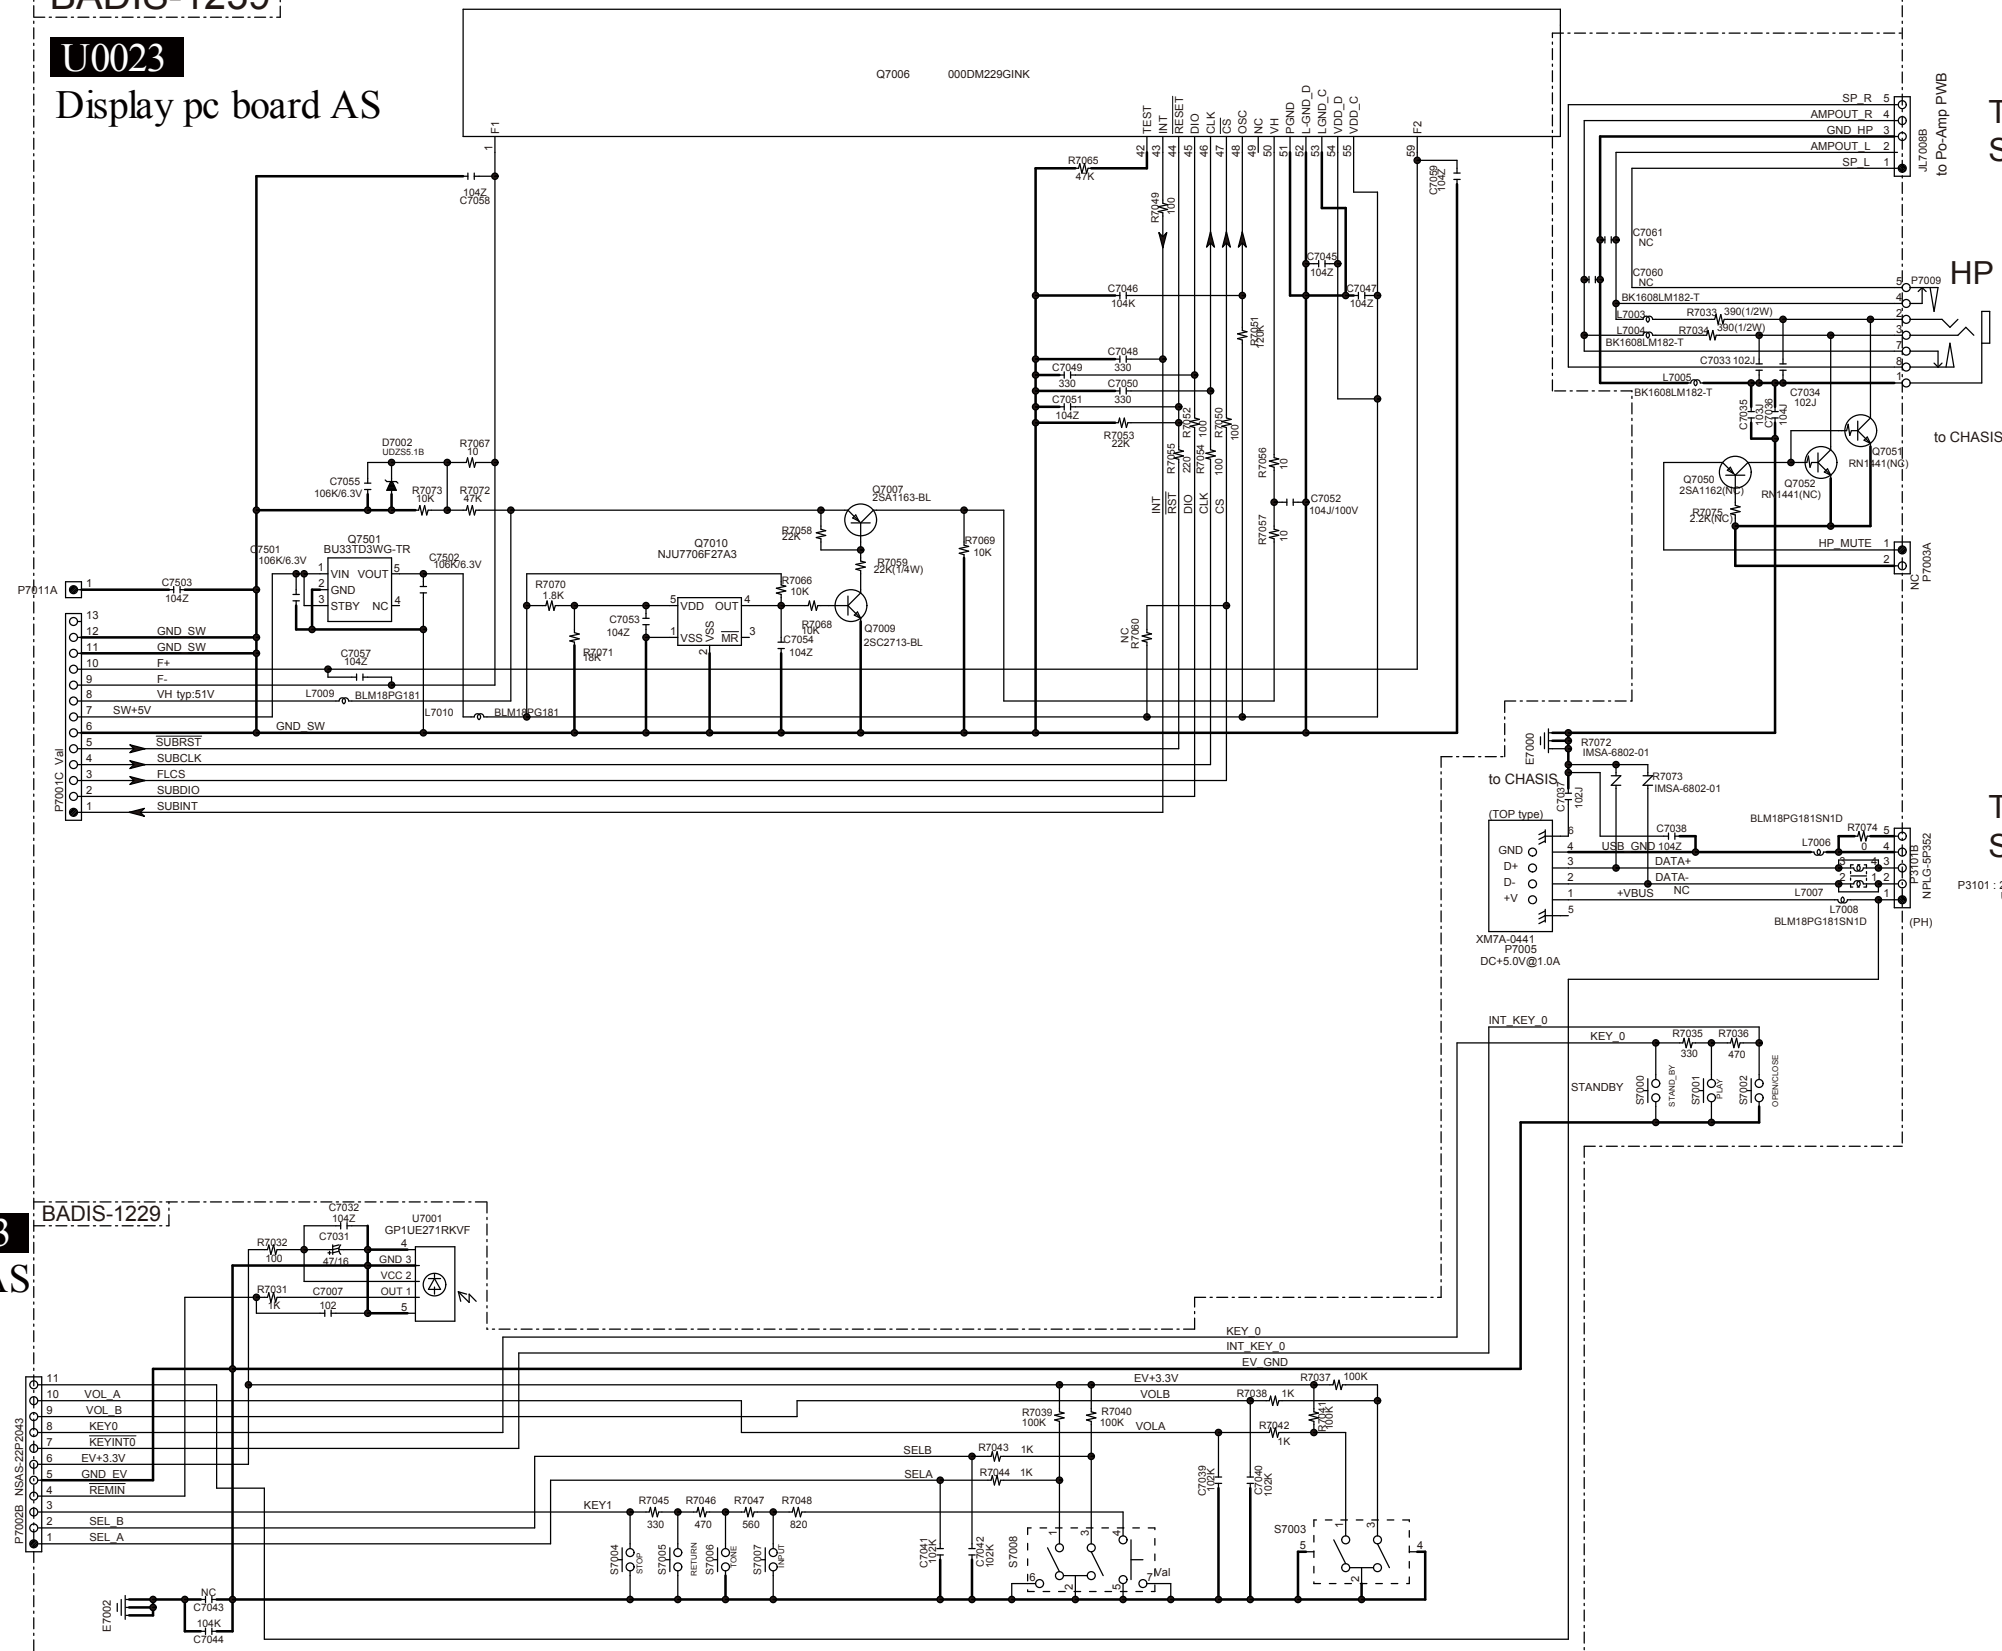

TO BATRM-1227  
SD7

P3101 : 2009991227UL (NSAS-10P1932)  
USB Cable

TO BADG-1231  
SD8 : K4

P3101 : 2009991227UL (NSAS-10P1932)  
USB Cable

U0013


Display pc board AS

TO BADIS-1239  
SD4 : A5  
TO BADG-1231  
SD9 : G1-H1

# Schematic Diagrams - 5

## DAB Section


### Model No. CR-555/555DAB/N755 SCHEMATIC DIAGRAM (PART-5) DAB SECTION

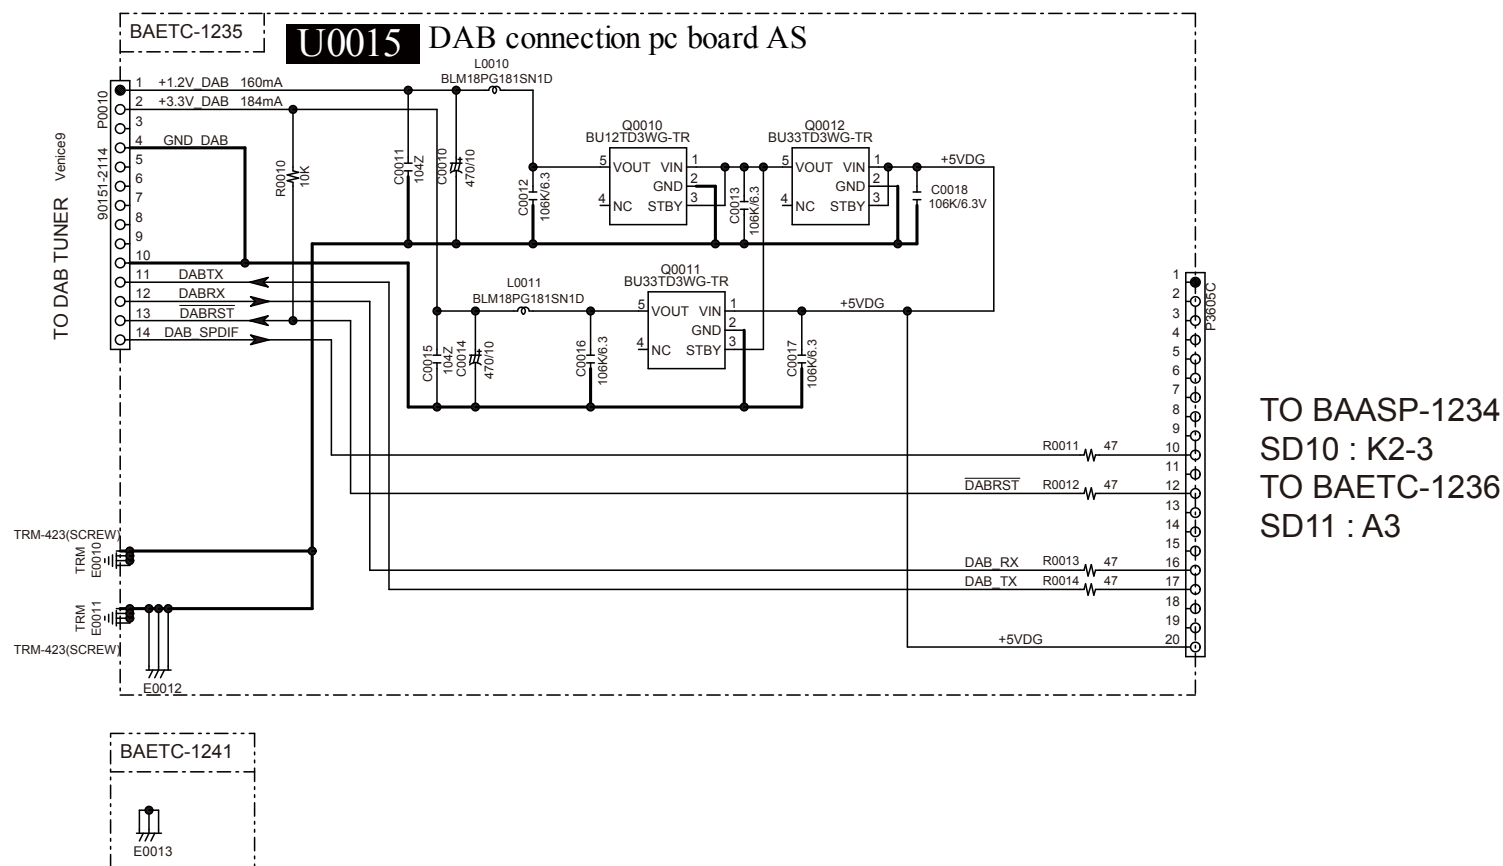

## Schematic Diagrams - 6

**U0011** Power supply pc board AS

Model No. CR-555/555DAB/N755 SCHEMATIC DIAGRAM (PART-6) POWER SUPPLY BLOCK

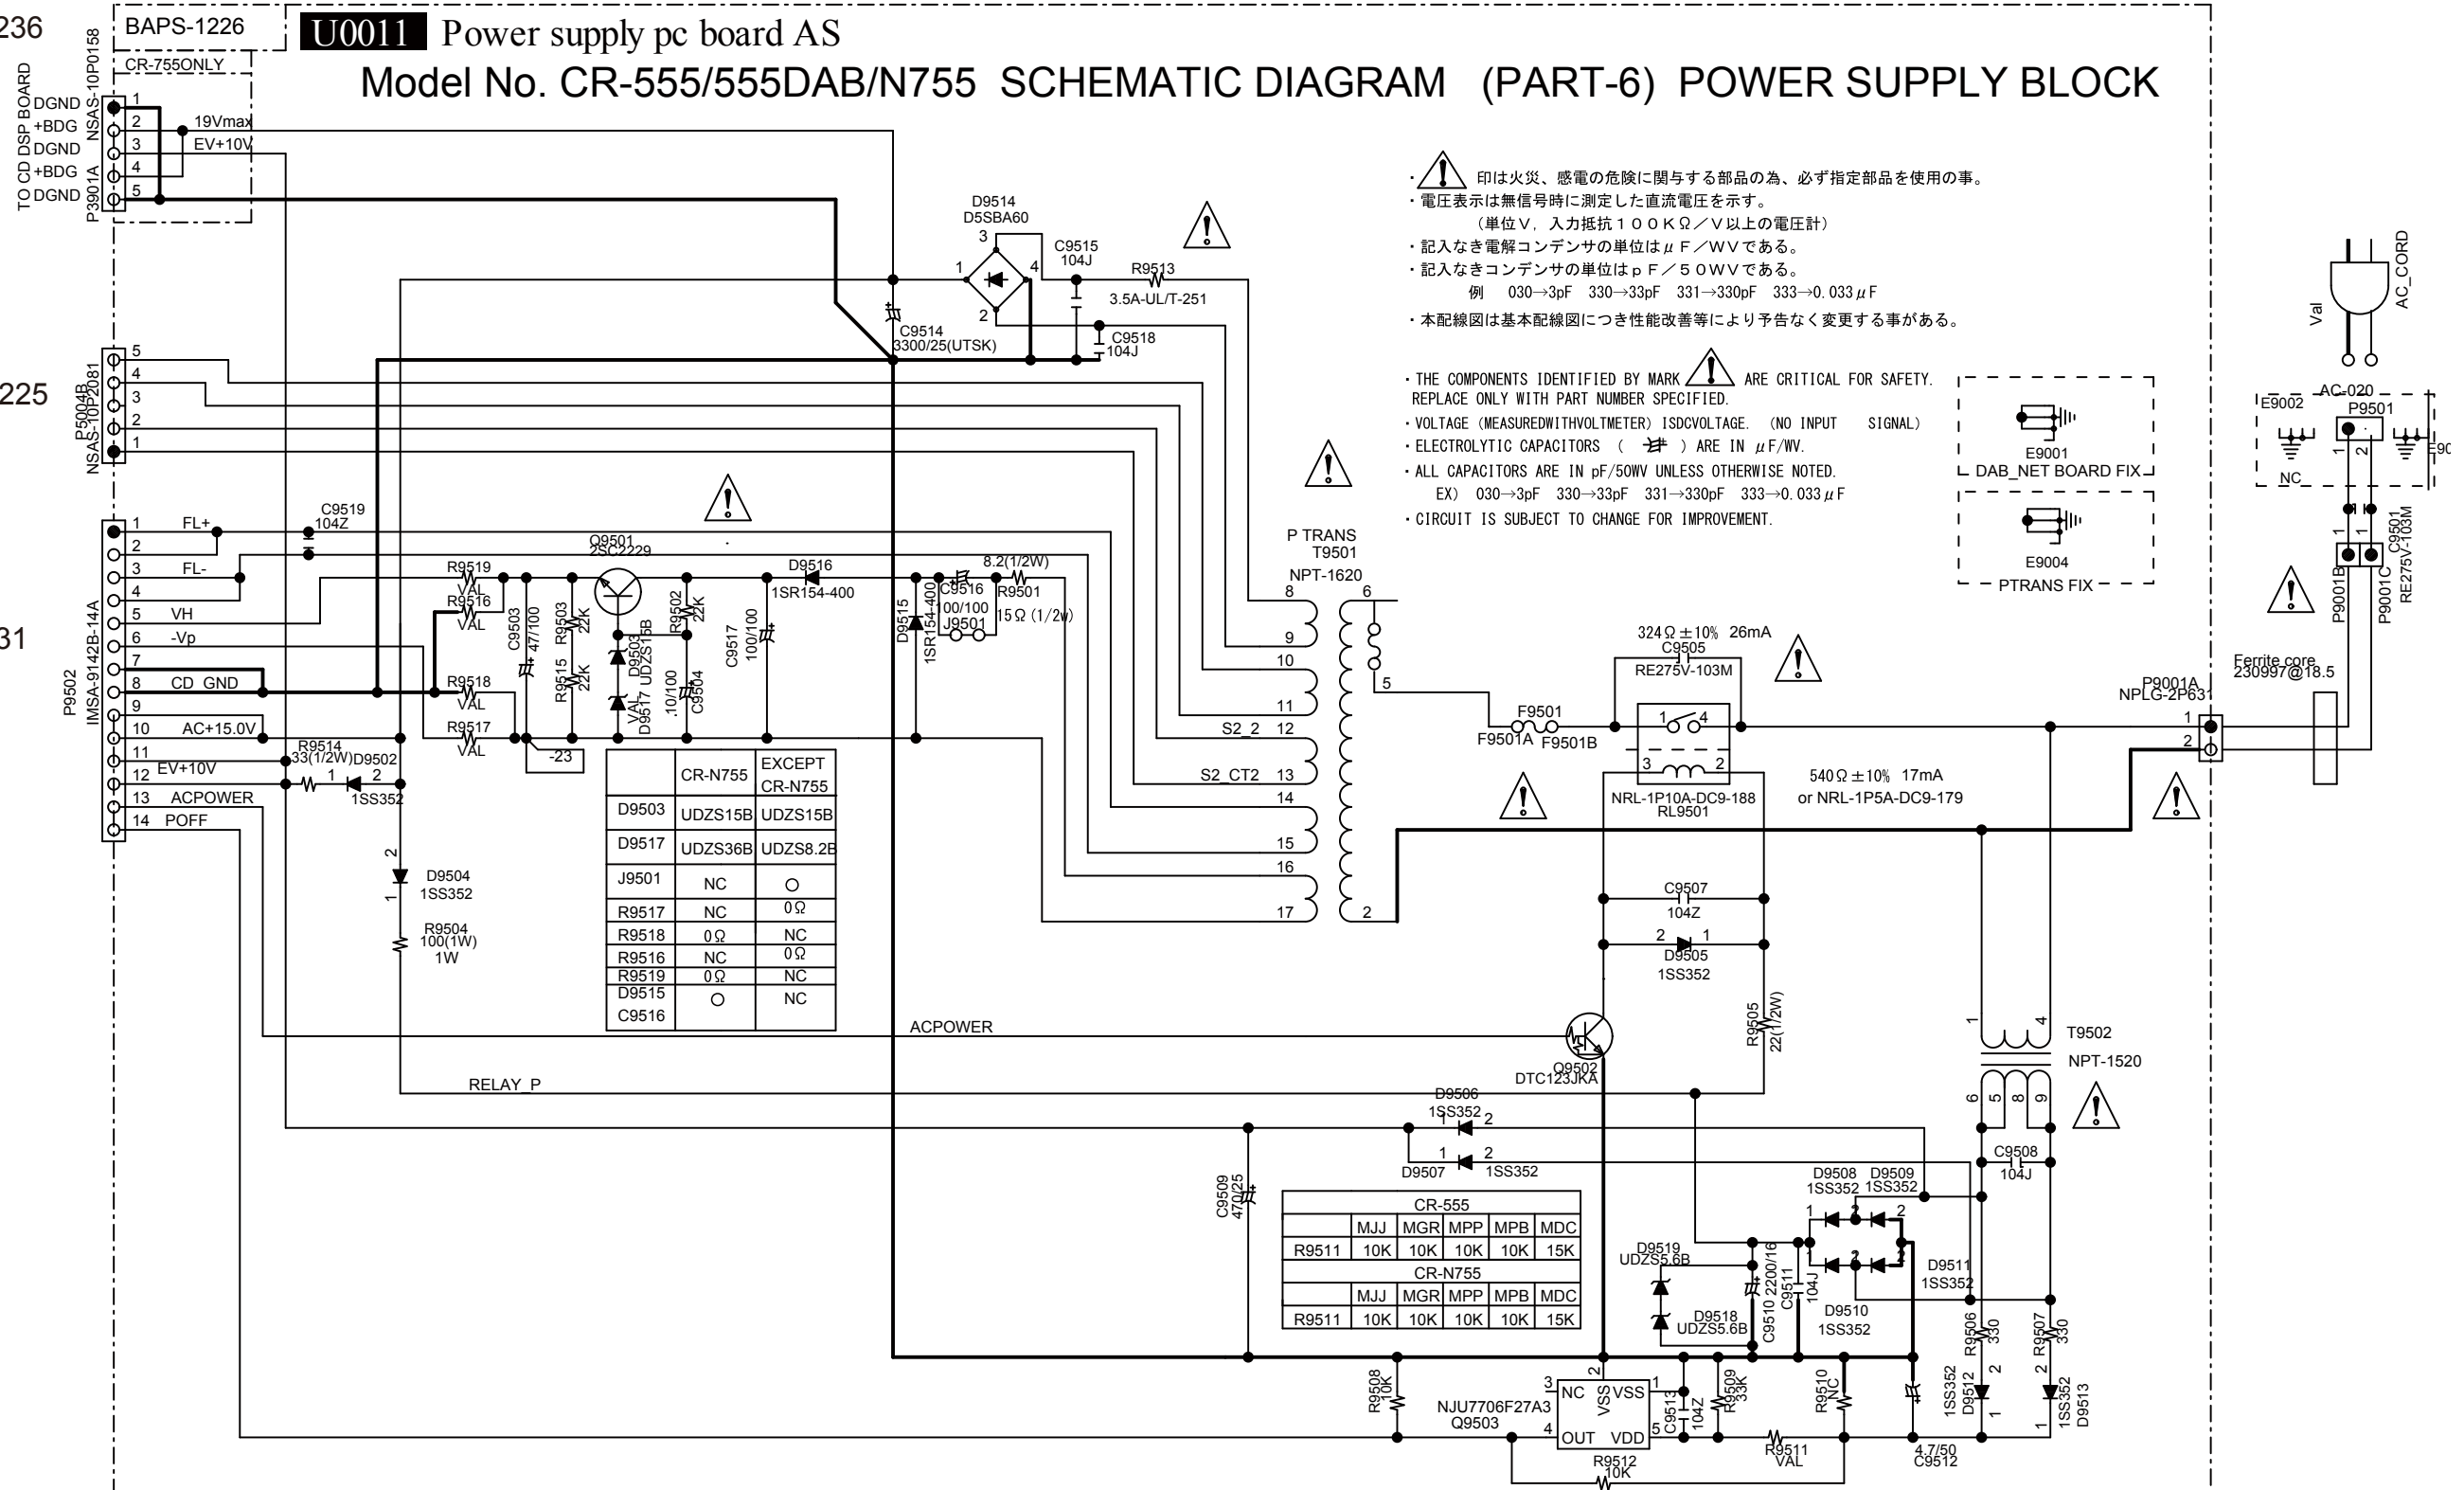

## ATTENTION

AFIN D'ASSURER UNE PROTECTION  
PERMANENTE CONTRE LES RISQUES  
D'INCENDIE, REMPLACER UNIQUEMENT  
PAR UN FUSIBLE DE MEME TYPE  
ET CALIBRATION COMME INDIQUE.

[illegible]

CE SYMBOLE INDIQUE QUE LE FUSIBLE UTILISE EST A LENT, E POUR UNE PROTECTION PERMANENTE,N'UTILISER QUE DES FUSIBLES DE MEME TYPE. CE DARNIER EST INDIQUE LA QU LE PRESENT SYMBOL EST APPOSE.



A

B

C

D


E

## Schematic Diagrams - 7

## Speaker Terminal

Model No. CR-555/555DAB/N755 SCHEMATIC DIAGRAM (PART-7) SP TERMINAL

U0012 SP Terminal pc board AS

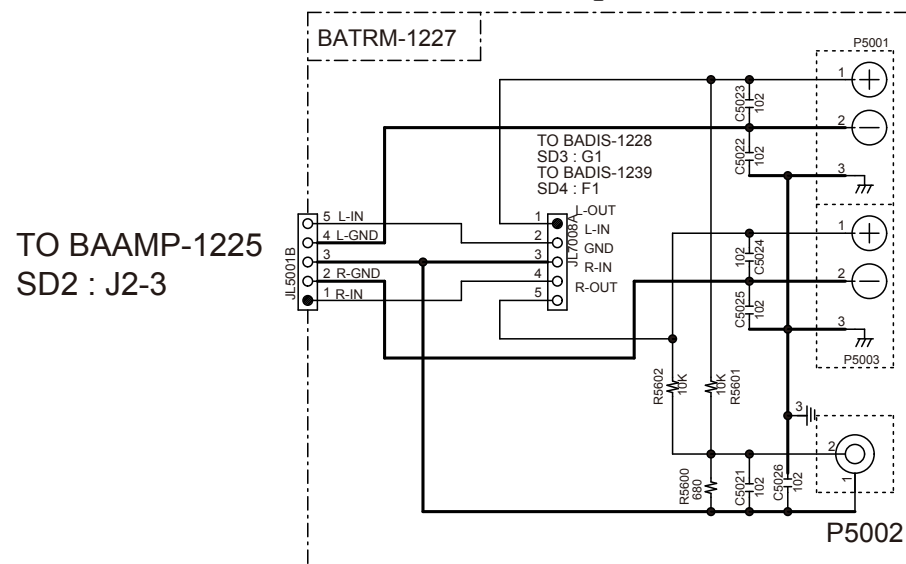

**U0021** Digital pc board AS







Schematic Diagrams - 10  
AF / Selector / CD DAC Section

U0022 Audio pc board AS

BAASP-1234

Model No. CR-555/555DAB/N755 SCHEMATIC DIAGRAM (PART-10) ASP SECTION


TO BAAMP-1225  
SD2 : I8

TO BAAMP-1225  
SD2 : E8

AUX  
LINE1  
LINE2

TO BAAMP-1225  
SD2 : K8

|           | R4090<br>R4094 4095 | R4083 R4088<br>R4085~R4087<br>R4091~R4093<br>R4111 | R4096 | R4099~R4101<br>R4103~R4109 | R4097 R4098<br>R4102 R4110 | R4104 | R4084 | R4088 |
|-----------|---------------------|----------------------------------------------------|-------|----------------------------|----------------------------|-------|-------|-------|
| CR-555    | NC                  | NC                                                 | NC    | NC                         | NC                         | NC    | NC    | NC    |
| CR-555DAB | 47ohm               | NC                                                 | 0ohm  | 47K                        | NC                         | NC    | NC    | 47ohm |
| CR-N755   | 47ohm               | 47ohm                                              | NC    | NC                         | NC                         | 47K   | 0ohm  | NC    |

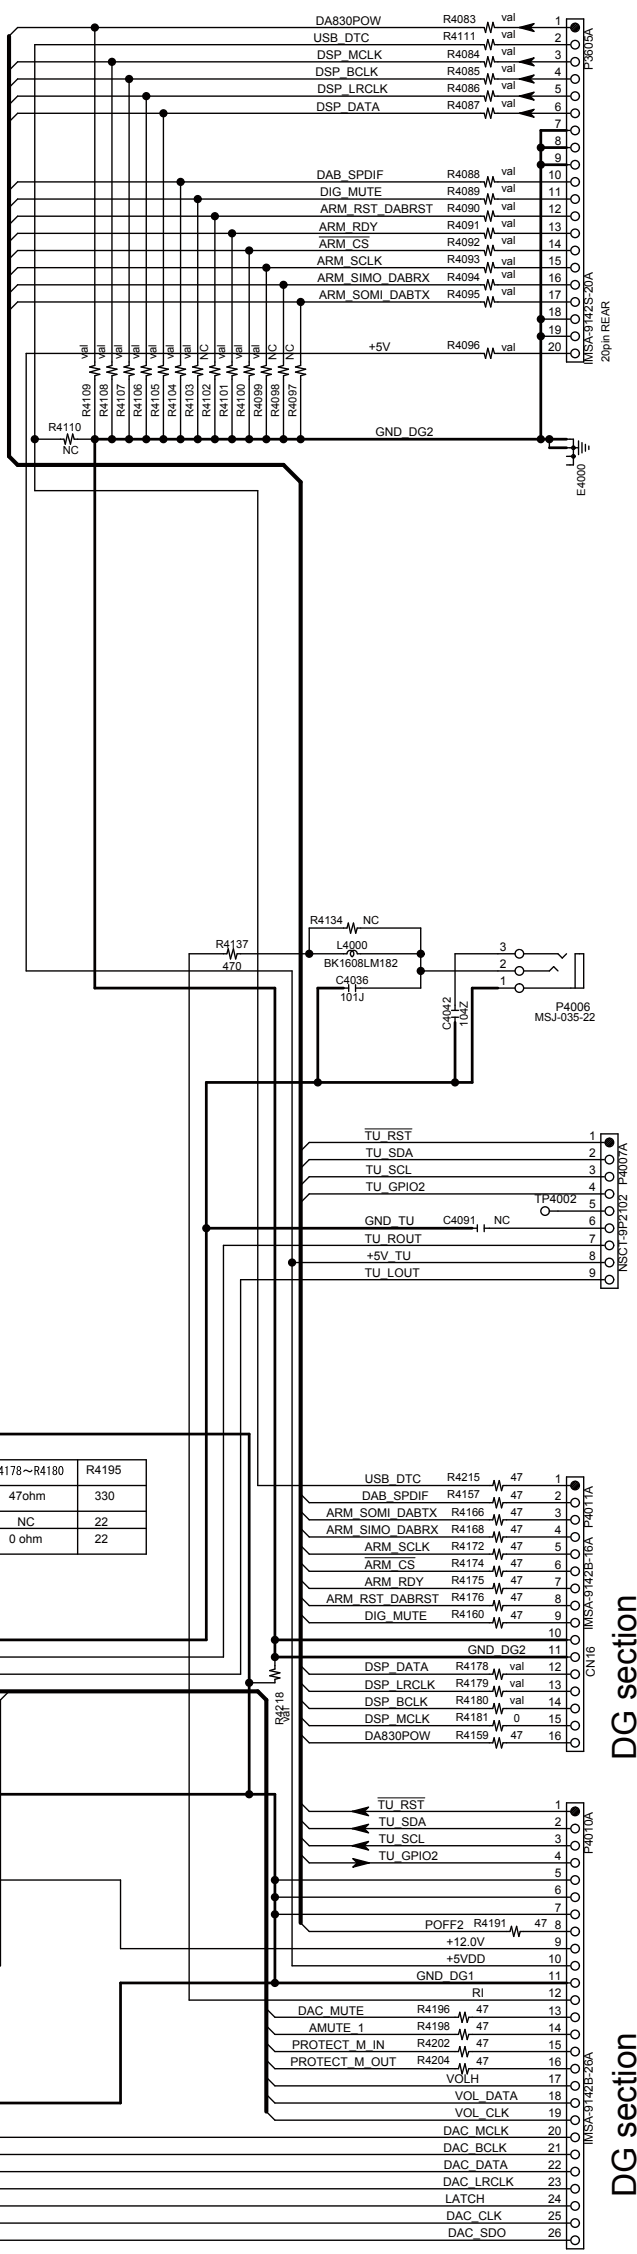

TO BAETC-1235  
SD5 : D2-3

TO BADG-1231  
SD9 : K2

TO BADG-1231  
SD9 : K3-4

DG section

DG section

2


3

4

5


U0022

Network / USB pc board AS

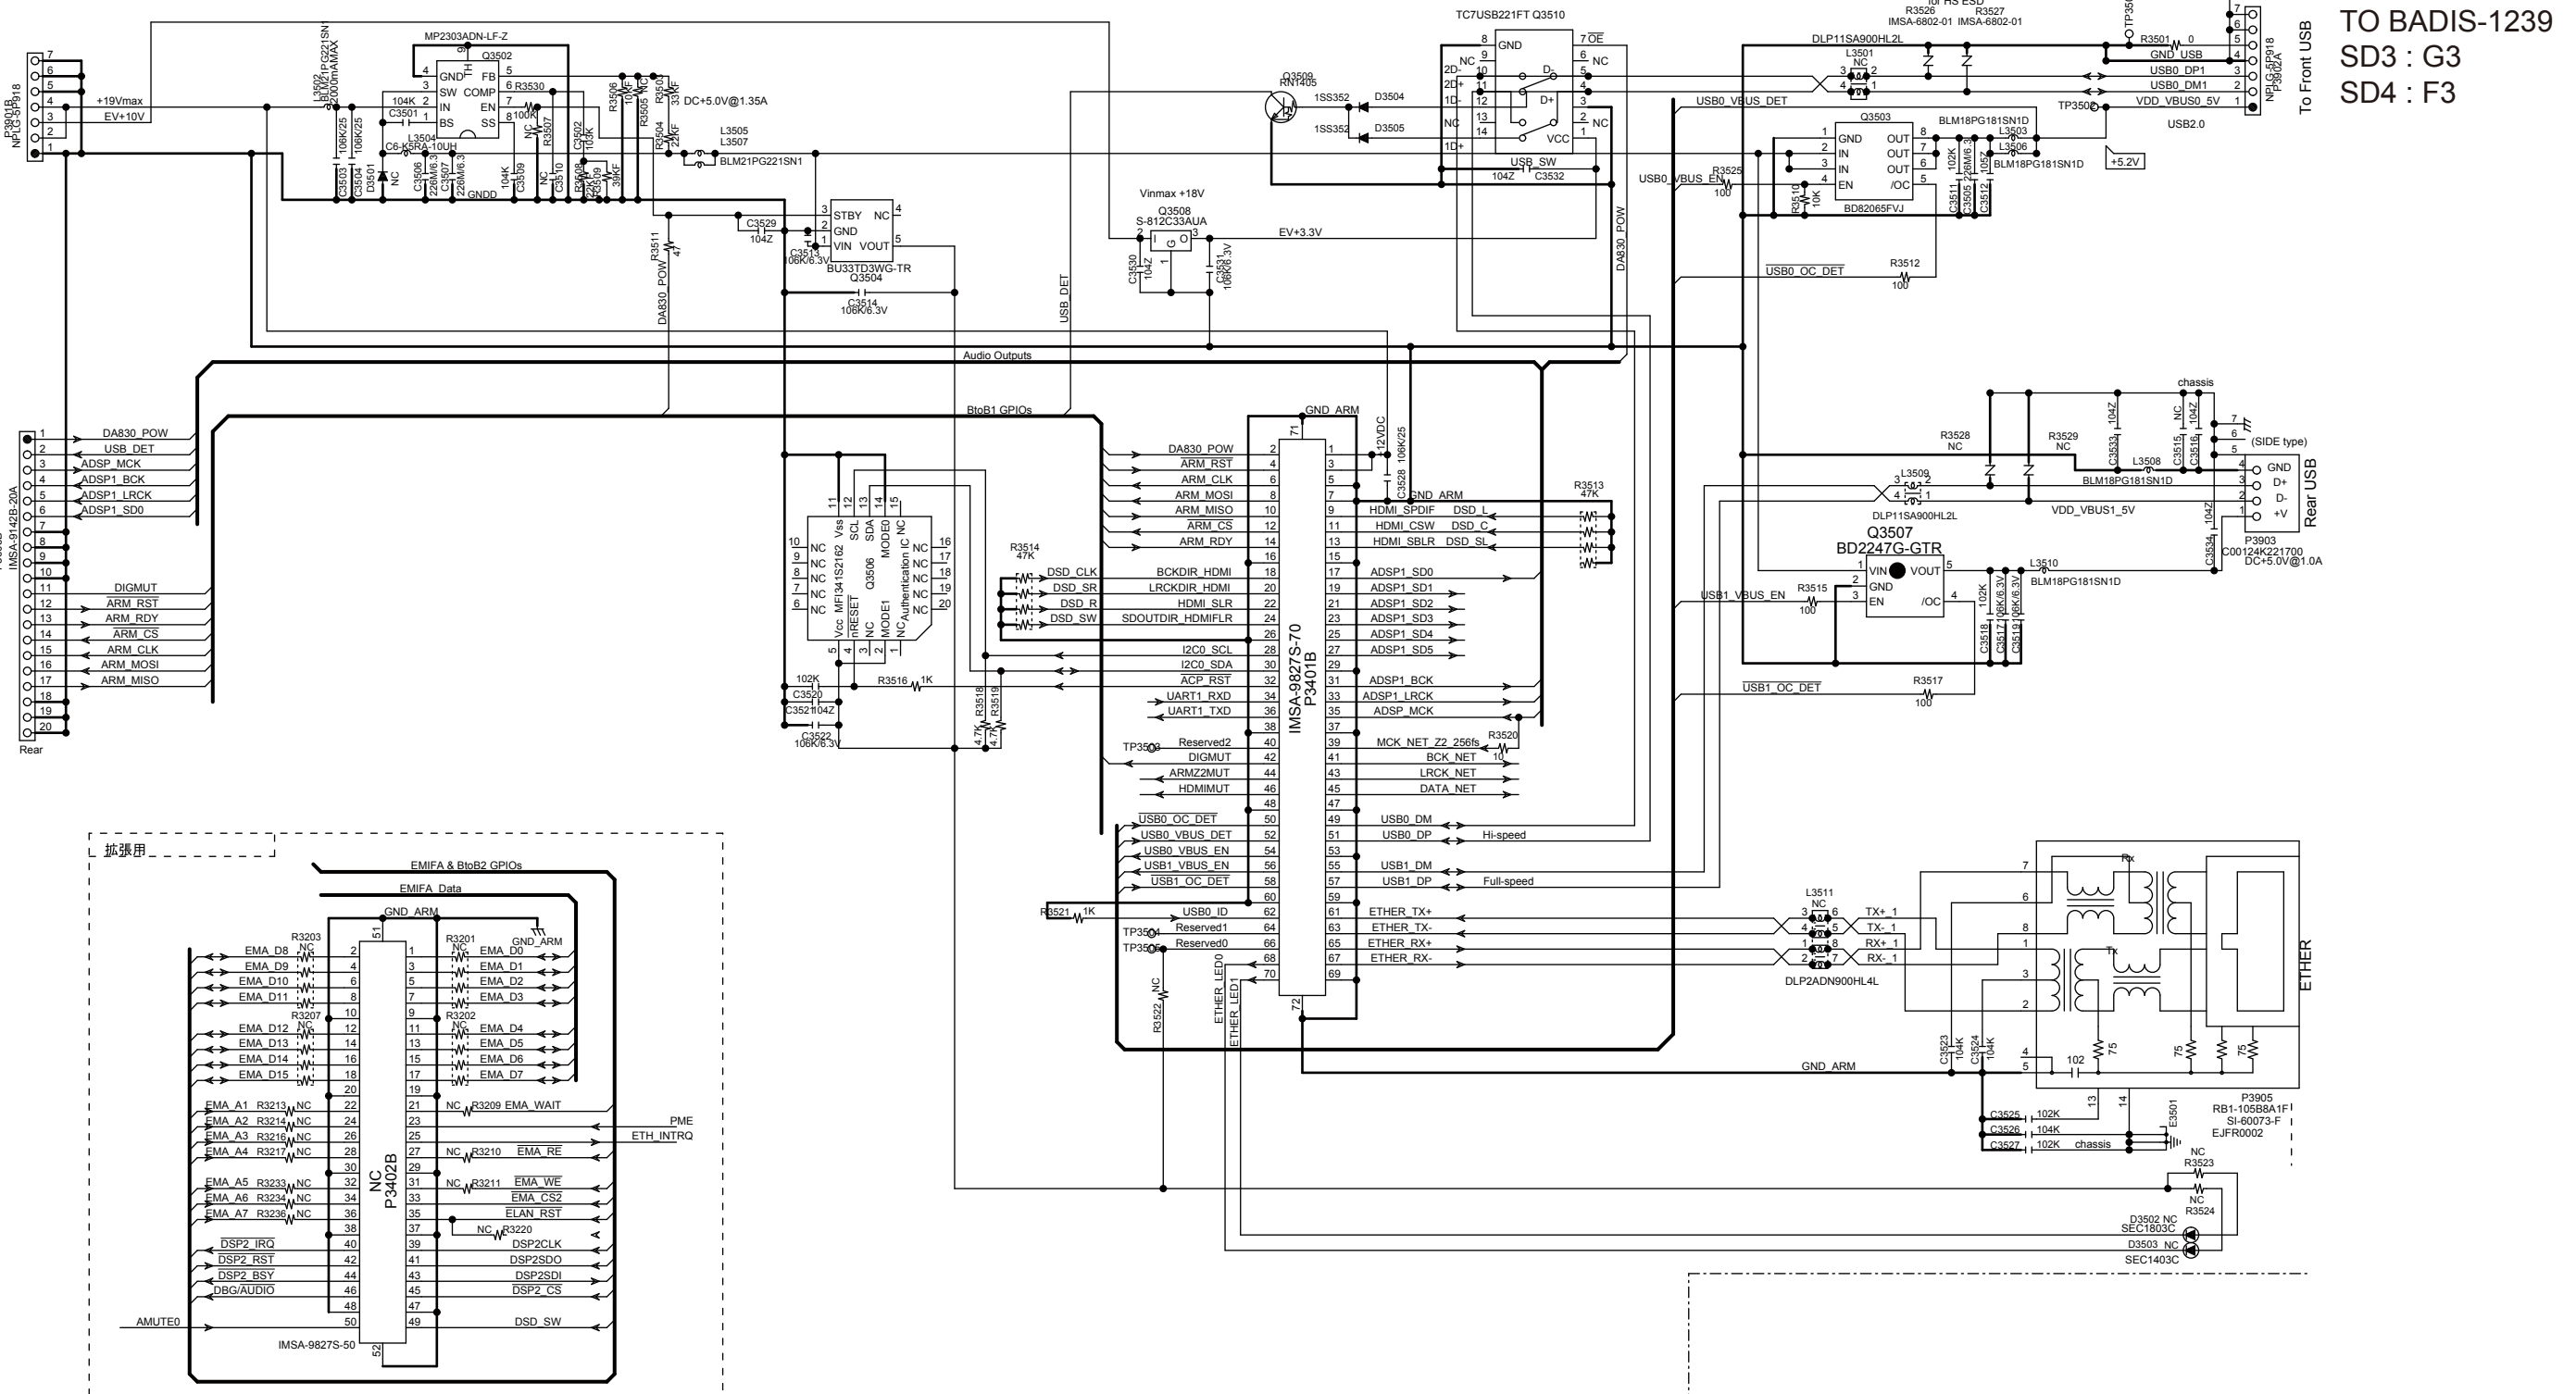

Model No. CR-555/555DAB/N755 SCHEMATIC DIAGRAM (PART-12) 1stDSP Memory Section

**U0030** DSP pc board AS

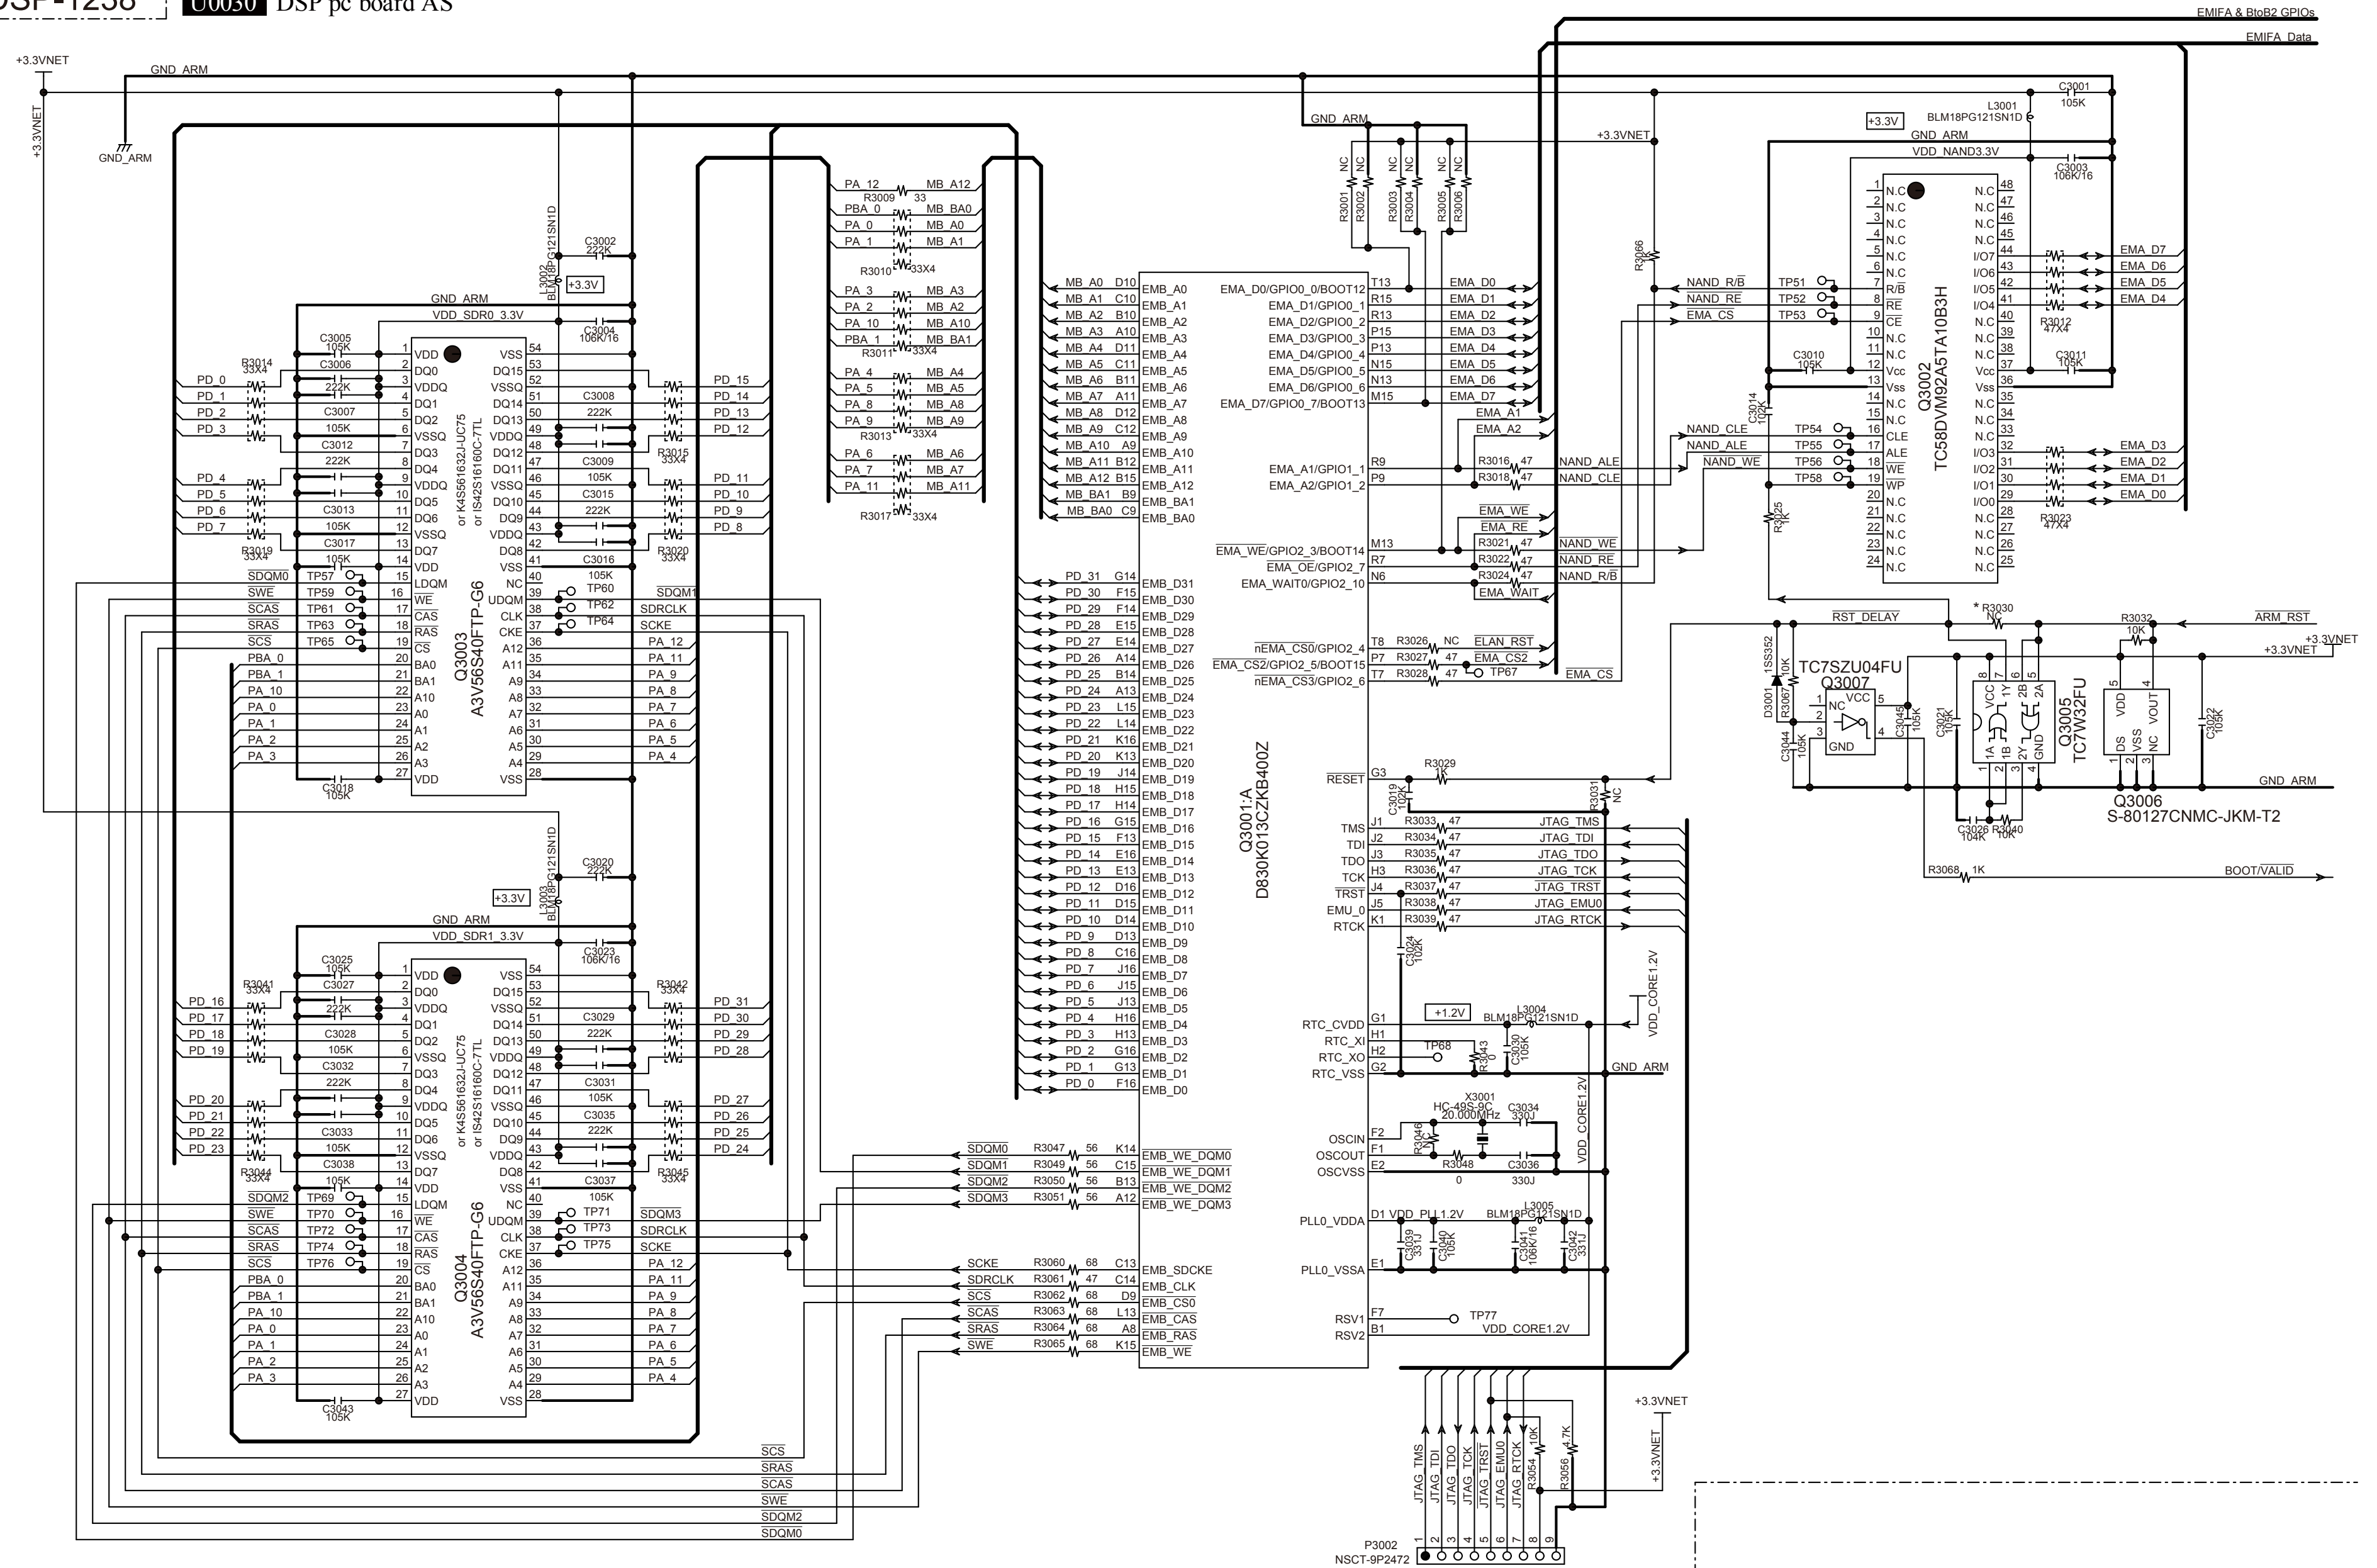



## Schematic Diagrams - 13


DSP / Audio / GPIO / Power / Connector Section

U0030 DSP pc board AS


## Model No. CR-555/555DAB/N755 SCHEMATIC DIAGRAM (PART-13)

BADSP-1238

## DSP/Audio/GPIO/DC-DC Power/Connector Section

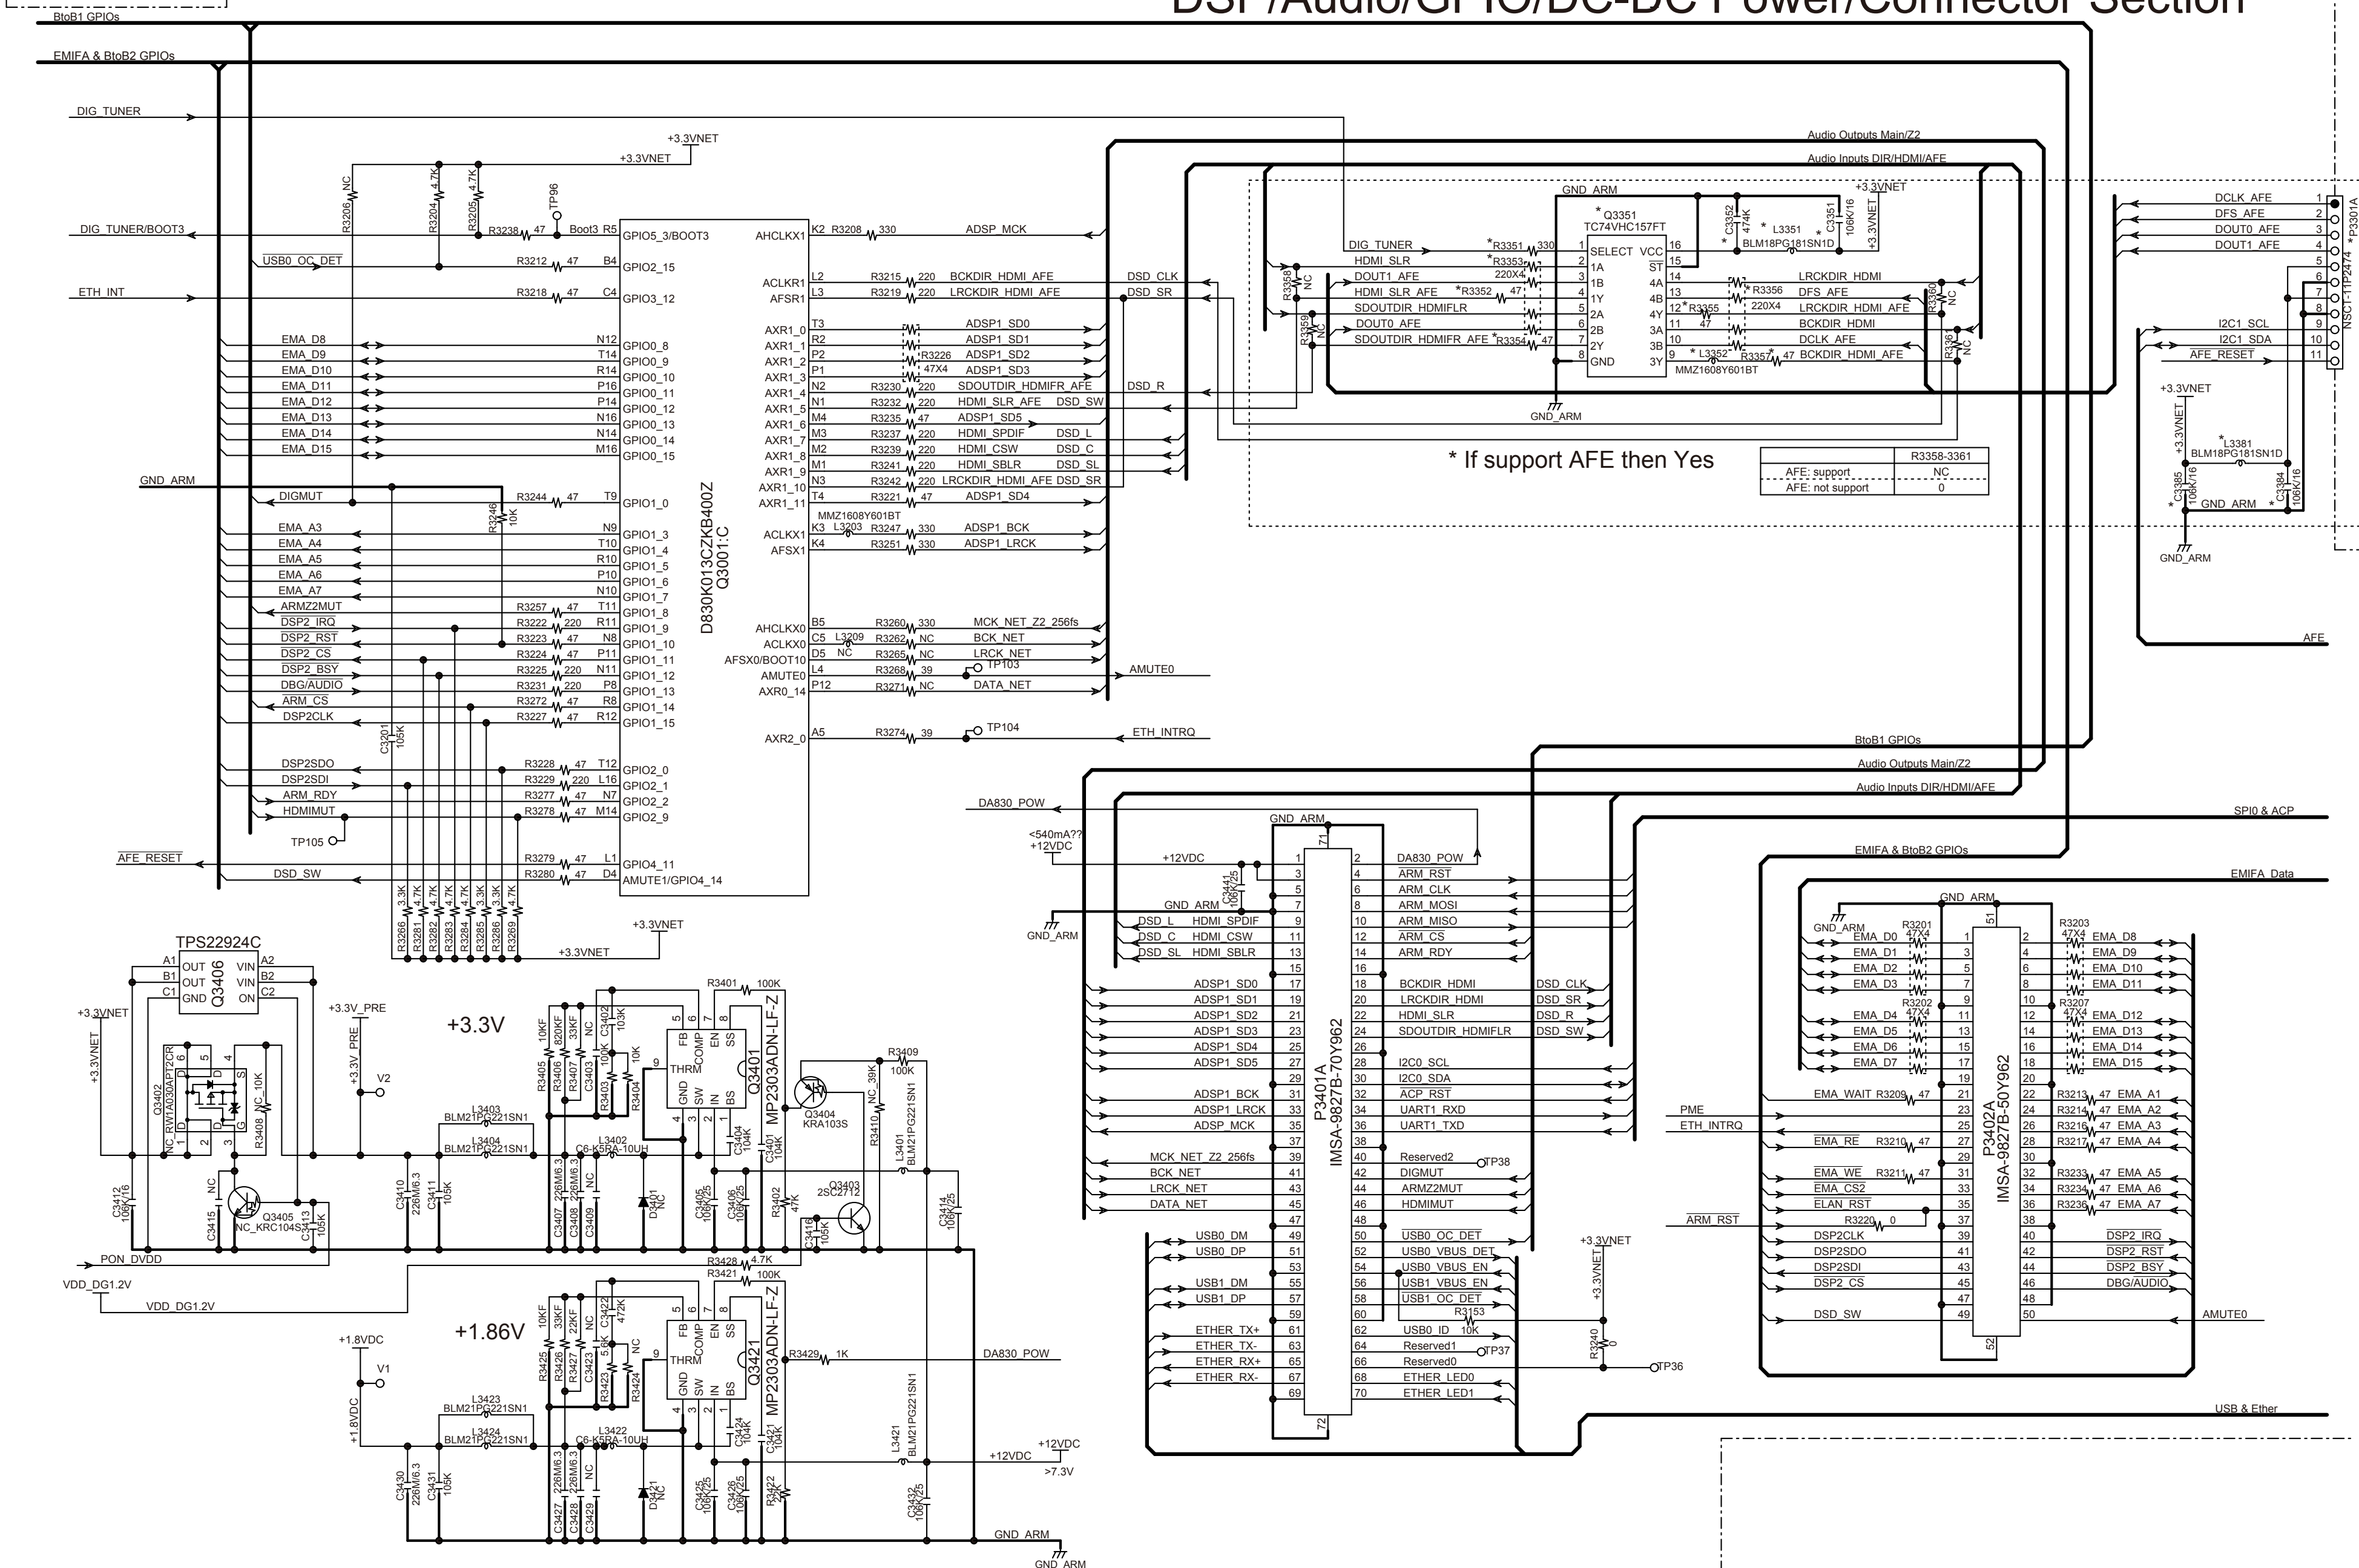

**U0030** DSP pc board AS

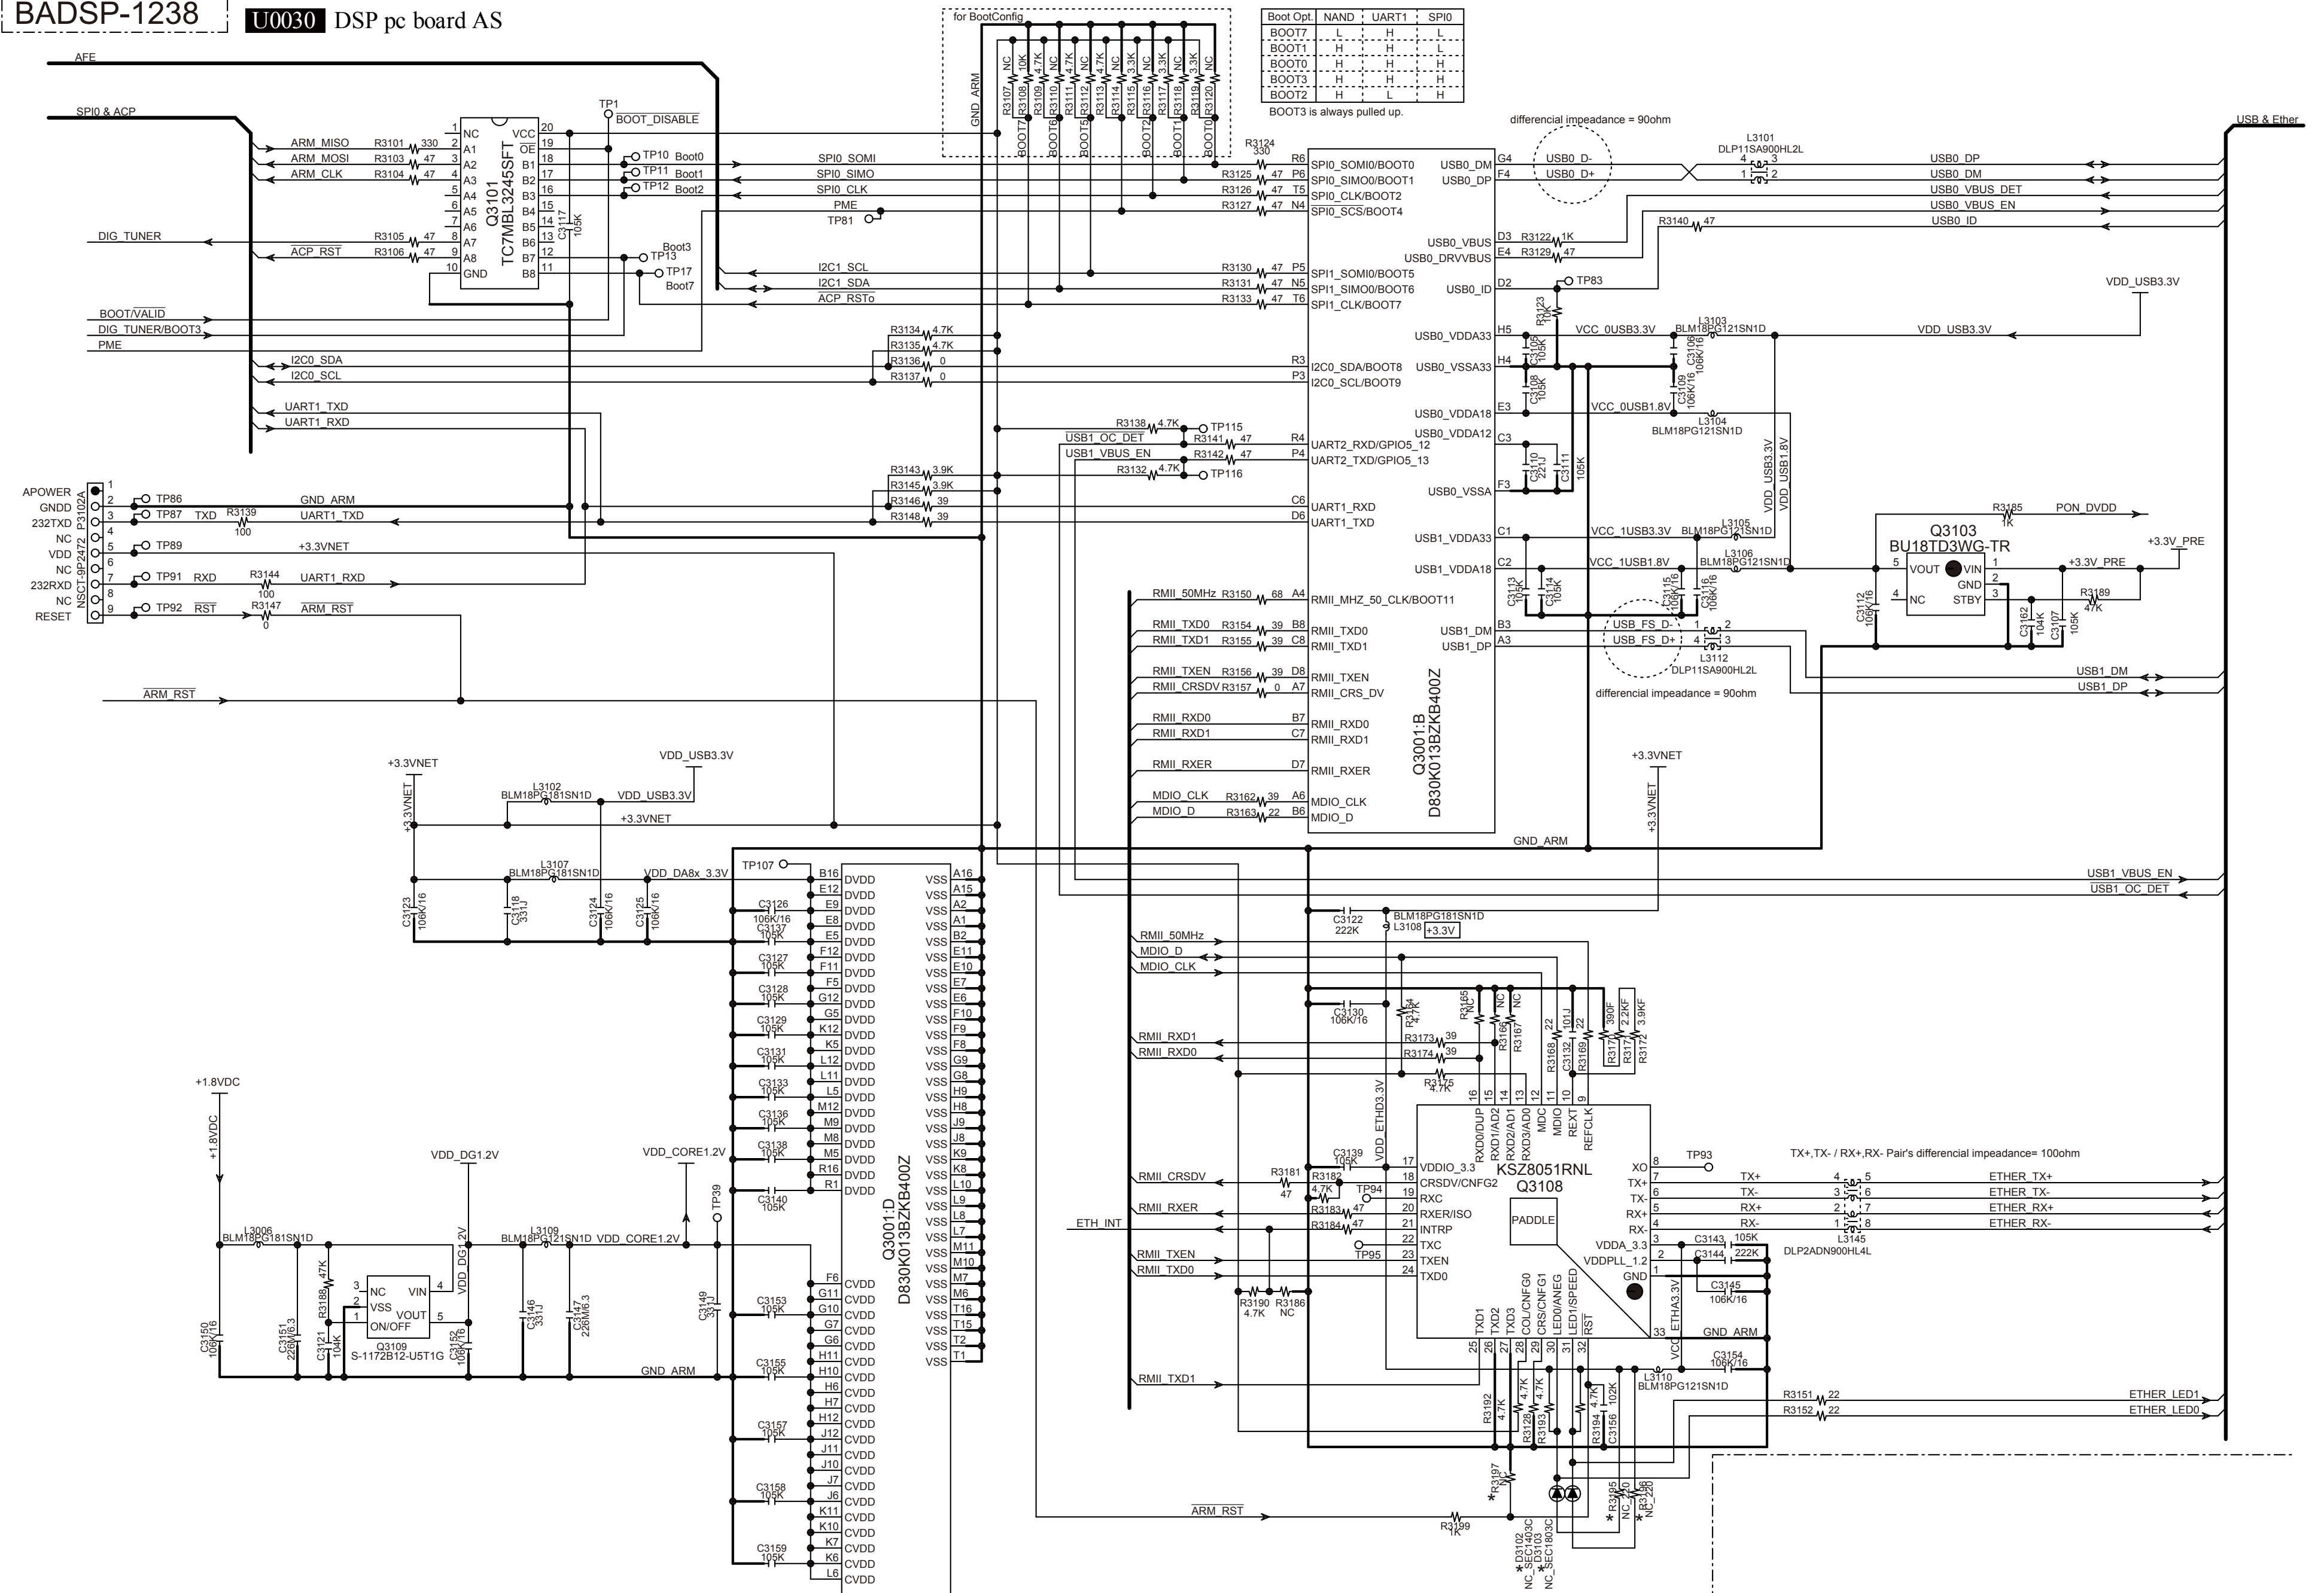



## &lt;Note&gt;

Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.

**NOTE : THE COMPONENTS IDENTIFIED BY THE MARK ! ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE ONLY WITH PART NUMBER SPECIFIED.**

**CR-N755\_C(B)MDC**

## &lt;Notes&gt;

(B) : Black color model

&lt;MDC&gt; : 120V,Canadian/USA/(Mexico) model

**EXPLODED VIEW PARTS LIST****CR-N755\_C(B)MDC**

| REF. NO.               | PART NAME  | DESCRIPTION        | Q'TY | PART NO. (SN) | REMARKS |
|------------------------|------------|--------------------|------|---------------|---------|
| <b>[CHASSIS SCREW]</b> |            |                    |      |               |         |
| A100                   | SPACER     | (PC)t0.3 x 25 x 4  | 2    | 27270546      |         |
| A101                   | CHASSIS    | CR555/755          | 1    | 27100572A     |         |
| A102                   | HOLDER     | KGLS-6RT           | 6    | 27190693A     |         |
| A103                   | HOLDER     | KGPS-6RF           | 1    | 27191112      |         |
| A104                   | CUSHION    | (BUTYL)            | 1    | 28141748      |         |
| A105                   | BOTTOM LEG |                    | 4    | 27175435      |         |
| A105a                  | SCREW      | 3TTB+8B(3BC)       | 4    | 838430088GR   |         |
| A106                   | CUSHION    |                    | 4    | 28141774      |         |
| A107                   | SCREW      | 3SMH10W.SW+15B(CU) | 4    | 801606        |         |
| A108                   | SCREW      | 4TTC+8C(3BC)SR     | 4    | 801658        |         |
| A109                   | TAPE       | TAPE(CLOTH-8U)     | 1    | 29110082      |         |
| A110                   | IB CUSHION | W15 x 3t TAPE      | 1    | 28141585      |         |
| A111                   | HEAT SINK  | CR555/755          | 1    | 27160672B     |         |
| A112                   | RETAINER   | (H)                | 2    | 27142288      |         |
| A113                   | SCREW      | 3TTB+8B(3BC)       | 2    | 838430088GR   |         |
| A114                   | SCREW      | 3TTB+8B(3BC)       | 4    | 838430088GR   |         |
| A115                   | SPACER     | (PC)               | 4    | 27270485      |         |
| A116                   | SCREW      | 3P+6FN(3BC)        | 4    | 82143006GR    |         |
| A117                   | SCREW      | 3SMS6W.SW+14B(CU)  | 6    | 801659        |         |
| A118                   | CLIP       | CS-1U              | 3    | 27255004      |         |
| A120                   | WIRE TIE   | BSK-1              | 6    | 260208        |         |
| A121                   | SCREW      | 3TTB+8B(3BC)       | 4    | 838430088GR   |         |
| A122                   | CUSHION    | (BUTYL)            | 1    | 28141748      |         |
| A123                   | CUSHION    | (BUTYL)            | 1    | 28141748      |         |
| A125                   | SHLD CASE  | CR555/N755         | 1    | 27225197A     | N       |
| A126                   | CUSHION    | HBK08 t:5 20 x 20  | 1    | 28141916      |         |
| A127                   | SCREW      | 3TTB+8B(3BC)       | 1    | 838430088GR   |         |
| A131                   | REAR PANEL | MDC CR755          | 1    | 27124437D     | N       |

|              |            |                           |      |             |      |
|--------------|------------|---------------------------|------|-------------|------|
| A131a        | TAPE       | TAPE(CLOTH-8U)            | 1    | 29110082    |      |
| A132         | SCREW      | 3TTB+8B(3BC)              | 3    | 838430088GR |      |
| A133         | SCREW      | 3TTB+8B(3BC)              | 7    | 838430088GR |      |
| A133a        | SCREW      | 3TTB+8B(3BC)              | 2    | 838430088GR |      |
| A133b        | SCREW      | 3TTB+8B(3BC)              | 1    | 838430088GR |      |
| A133c        | SCREW      | 3TTB+8B(3BC)              | 4    | 838430088GR |      |
| A134         | SCREW      | 3P+6FN(3BC)               | 1    | 82143006GR  |      |
| A135         | SCREW      | 3TTF+10B(3BC)             | 2    | 835430108GR |      |
| A136         | SPACER     | t0.5x phi8x phi3.2 TEFLON | 2    | 27270438    |      |
| A137         | CLIP       | CS-1U                     | 1    | 27255004    |      |
| A139         | CUSHION    |                           | 2    | 28141799    |      |
| A140         | SCREW      | 3TTB+8B(3BC)              | 1    | 838430088GR |      |
| [CABINET]    |            |                           |      |             |      |
| A141         | F BRACKET  | (B)                       | 1    | 27111605C   |      |
| A142         | SCREW      | 3TTB+8B(3BC)              | 3    | 838430088GR |      |
| A143         | IB CUSHION | W15 x 3t TAPE             | 1    | 28141585    |      |
| A144         | SCREW      | 3TTB+8B(3BC)              | 7    | 838430088GR |      |
| A145         | SCREW      | 3TTB+8B(3BC)              | 4    | 838430088GR |      |
| A146         | HOLDER     | (CRAMP) UA-0 V0           | 1    | 27190608-1  |      |
| A147         | CLIP       | CS-1U                     | 1    | 27255004    |      |
| A148         | ISO PLT    |                           | 1    | 28175350    |      |
| A151         | F PANEL    | CRN755(B)MPP/PB           | 1    | 27213614B   | N    |
| A152         | CLEAR PLT  | CR755                     | 1    | 28192393    | N    |
| A153         | KNOB       | (PLAY)(B)                 | 1    | 28327085    |      |
| A154         | KNOB       | (STBY)(B)                 | 1    | 28327087    |      |
| A155         | CLEAR PLT  | RE(B)                     | 1    | 28192370A   |      |
| A161         | SCREW      | 3TTB+8B(3BC)              | 2    | 838430088GR |      |
| A164         | CUSHION    | t1 10 x 10                | 2    | 28141915    |      |
| A165         | KNOB       | (VOL)AS(B)                | 1    | 28327079    |      |
| A166         | KNOB       | (JOG)(B)                  | 1    | 28327089    |      |
| A170a        | LABEL      | (E-CON)                   | { 1} | 29364978    |      |
| A171         | COVER      | CR555/755 (B)             | 1    | 28210110    |      |
| A172         | SCREW      | 3TTB+8B(3BC)              | 8    | 838430088GR |      |
| A181         | DOOR       | (TRAY)(B)                 | 1    | 28148833    |      |
| [TRANS COIL] |            |                           |      |             |      |
| L9001        | CORE       | RH-25-15-12(Dot)          | 1    | 230997      |      |
| T9001        | P TRANS    | NPT-1620D                 | 1    | 2302053     | N, ! |
| [SW TRM]     |            |                           |      |             |      |
| F9501        | FUSE       | 2.5A-T/UL-ST2             | 1    | 252254GR    | !    |
| F9501D       | FUSE LABEL | 2.5A125V                  | 1    | 29363738    | !    |
| P010         | FFC        | NCFC7-091012              | 1    | 2047091012  |      |
| P1011        | SOCKET AS  | NSAS-10P0997              | 1    | 20022391010 |      |

|                               |                                      |                       |       |                 |         |
|-------------------------------|--------------------------------------|-----------------------|-------|-----------------|---------|
| P1017                         | SOCKET AS                            | NSAS-12P0960          | 1     | 20022391210UL   |         |
| P1019A                        | FFC                                  | NCFC4-16045           | 1     | 204416045       |         |
| P2501E                        | SOCKET AS                            | NSAS-10P1924          | 1     | 2009991224UL    |         |
| P9001D                        | FASTON AS                            | FASTON SOCKET         | 1     | 1F999026A       |         |
| P9501                         | AC INLET                             | R301X2PSn             | 1     | 25053358        | !       |
| [MECHANISM]                   |                                      |                       |       |                 |         |
| Z001                          | MECHA                                | NAMEC-3               | 1     | NAMEC3          |         |
| Z002                          | MECHA UNIT                           | EM101 RNS             | 1     | 24800066        |         |
| Z003                          | INSULATOR                            | (CDC-A)               | 4     | 24818058        |         |
| Z004                          | SPRING                               | (TP-D)                | 2     | 24820071        |         |
| Z005                          | SPRING                               | (TP-E)                | 2     | 24820072        |         |
| Z006                          | SCREW                                | 2.6 x 8 x w10         | 4     | 801632          |         |
| Z007                          | LABEL                                | (DVD3-S)              | 1     | 29364822        |         |
| [TUNER UNIT]                  |                                      |                       |       |                 |         |
| U001                          | U0010, U0011, U0012, U0013           | BAAMP-1225-1E *       | 1     | 1B278525-1E     | MDC     |
| U0010                         | Amplifier pc board AS                | BAAMP-1225-1E         | 1     | 1B2785225-1E    |         |
| U0011                         | Power Supply pc board AS             | BAPS-1226-1E          | 1     | 1B2785226-1E    |         |
| U0012                         | Terminal pc board AS                 | BATRM-1227-1E         | 1     | 1B2785227-1E    |         |
| U0013                         | Display pc board AS                  | BADIS-1229-1E         | 1     | 1B2785229-1E    |         |
| U002                          | U0020, U0021, U0022, U0023, U0024    | BADG-1231-1E *        | 1     | 1B278531-1E     | MDC     |
| U0020                         | Digital pc board AS                  | BADG-1231-1E          | 1     | 1B2785231-1E    |         |
| U0021                         | Audio Signal Processor pc board AS   | BAASP-1234-1E         | 1     | 1B2785234-1E    |         |
| U0022                         | ETC. pc board AS                     | BAETC-1236-1E         | 1     | 1B2785236-1E    |         |
| U0023                         | Display pc board AS                  | BADIS-1239-1E         | 1     | 1B2785239-1E    |         |
| U0024                         | ETC. pc board AS                     | BAETC-1240-1E         | 1     | 1B2785240-1E    |         |
| U003                          | U0030                                | BADSP-1238-1A *       | 1     | 1B278538-1A     | MDC     |
| U0030                         | Digital Signal Processor pc board AS | BADSP-1238-1A         | 1     | 1B2785238-1A    |         |
| U010                          | TUNER UNIT                           | KST-MW004MS1-S89S     | 1     | 240171          |         |
|                               |                                      |                       |       | CR-N755_C(B)MDC |         |
| PACKING PROCEDURES PARTS LIST |                                      |                       |       |                 |         |
| REF. NO.                      | PART NAME                            | DESCRIPTION           | Q'TY  | PART NO. (SN)   | REMARKS |
| [PACKING]                     |                                      |                       |       |                 |         |
| A124                          | TAPE                                 | TAPE(CLOTH-16U)       | 1     | 29110083        |         |
| A301                          | SHEET                                | 800 x 600RGK-3274-1P4 | 1     | 29095864        |         |
| A301a                         | TAPE                                 | (SEROHAN)NITTO NO.29  | 1     | 29110149        |         |
| A303                          | PAD                                  | CR555/755             | 1     | 29092624A       |         |
| A303a                         | PAD                                  | (Front)               | { 1 } | 29092625A       |         |
| A303b                         | PAD                                  | (Rear)                | { 1 } | 29092626        |         |
| A307a                         | LABEL                                | (DES)CRN755(B)MDC     | { 1 } | 29392013A       | N       |

| [ACCESSORY] |            |                         |      |            |   |
|-------------|------------|-------------------------|------|------------|---|
| A401        | POLY BAG   | w250xd350               | 1    | 29100250A  |   |
| A402        | REMO CON   | RC-850S                 | 1    | 24140850   | N |
| A403        | BATTERY    | R03/AAA(UM-4)           | 2    | 3010124    |   |
| A403 or     | BATTERY    | R03/24D(UM-4)           | ( 2) | 3010503    |   |
| A404        | FM ANT AS  | Type W                  | 1    | 292191     |   |
| A405        | ANT COIL   | NMA-3057                | 1    | 232140     |   |
| A405 or     | ANT COIL   | AM LOOP-ANTENNA         | ( 1) | 232207     |   |
| A407        | CORD AS    | SP CABEL(RED/)          | 1    | 2050084    |   |
| A408        | ACCESSORY  | CORK FOOT1t x phi15 x 8 | 1    | 292226     | ! |
| A410        | AC CORD    | AS-UC-2                 | 1    | 253301VOL  | ! |
| A410 or     | AC CORD    | AS-UC-2                 | ( 1) | 253352ATES | ! |
| A411        | WRNTY CARD | (ONKYO)                 | 1    | 29365135   |   |
| A421        | INS MANUAL | En(CR755)               | 1    | 29401166   | N |
| A422        | INS MANUAL | U2FrEs(CR755)           | 1    | 29401167   | N |
| A427        | INS MANUAL | U3EnDeFr(D-055)         | 1    | 29401283A  | N |
| A429        | INST SHEET | U8(No Detect)           | 1    | 29355890   |   |
| A430        | INST SHEET | U12(IR-SERVICE)ONK      | 1    | 29355881   |   |

CR-N755\_C(B)MDC

## PC BOARD PARTS LIST

U001

BAAMP-1225-1E

| CIRCUIT NO       | PART NAME | DESCRIPTION | Q'TY | PART NO. (SN) | REMARKS |
|------------------|-----------|-------------|------|---------------|---------|
| [SEMI CONDUCTOR] |           |             |      |               |         |
| D5003            | ZENER D   | UDZS3.3B    | 1    | 224550330R2   |         |
| D5003 or         | ZENER D   | DZ2J033M0L  | ( 1) | 224760330R2   |         |
| D5051            | ZENER D   | UDZS5.6B    | 1    | 224550560R2   |         |
| D5051 or         | ZENER D   | DZ2J056M0L  | ( 1) | 224760560R2   |         |
| D5052            | ZENER D   | UDZS5.6B    | 1    | 224550560R2   |         |
| D5052 or         | ZENER D   | DZ2J056M0L  | ( 1) | 224760560R2   |         |
| D5451            | DIODE     | D3SBA60     | 1    | 22380272F     |         |
| D9502            | C-DIODE   | 1SS352      | 1    | 223234R2      |         |
| D9502 or         | C-DIODE   | 1SS355      | ( 1) | 223269R2      |         |
| D9502 or         | C-DIODE   | MA2J111     | ( 1) | 223279R2      |         |
| D9502 or         | C-DIODE   | KDS4148U    | ( 1) | 223283R2      |         |
| D9502 or         | C-DIODE   | DA2J10100   | ( 1) | 223303R2      |         |
| D9503            | ZENER D   | UDZS15B     | 1    | 224551500R2   |         |
| D9503 or         | ZENER D   | DZ2J150M0L  | ( 1) | 224761500R2   |         |
| D9504            | C-DIODE   | 1SS352      | 1    | 223234R2      |         |

|          |         |           |     |          |
|----------|---------|-----------|-----|----------|
| D9504 or | C-DIODE | 1SS355    | (1) | 223269R2 |
| D9504 or | C-DIODE | MA2J111   | (1) | 223279R2 |
| D9504 or | C-DIODE | KDS4148U  | (1) | 223283R2 |
| D9504 or | C-DIODE | DA2J10100 | (1) | 223303R2 |
| D9505    | C-DIODE | 1SS352    | 1   | 223234R2 |
| D9505 or | C-DIODE | 1SS355    | (1) | 223269R2 |
| D9505 or | C-DIODE | MA2J111   | (1) | 223279R2 |
| D9505 or | C-DIODE | KDS4148U  | (1) | 223283R2 |
| D9505 or | C-DIODE | DA2J10100 | (1) | 223303R2 |
| D9506    | C-DIODE | 1SS352    | 1   | 223234R2 |
| D9506 or | C-DIODE | 1SS355    | (1) | 223269R2 |
| D9506 or | C-DIODE | MA2J111   | (1) | 223279R2 |
| D9506 or | C-DIODE | KDS4148U  | (1) | 223283R2 |
| D9506 or | C-DIODE | DA2J10100 | (1) | 223303R2 |
| D9507    | C-DIODE | 1SS352    | 1   | 223234R2 |
| D9507 or | C-DIODE | 1SS355    | (1) | 223269R2 |
| D9507 or | C-DIODE | MA2J111   | (1) | 223279R2 |
| D9507 or | C-DIODE | KDS4148U  | (1) | 223283R2 |
| D9507 or | C-DIODE | DA2J10100 | (1) | 223303R2 |
| D9508    | C-DIODE | 1SS352    | 1   | 223234R2 |
| D9508 or | C-DIODE | 1SS355    | (1) | 223269R2 |
| D9508 or | C-DIODE | MA2J111   | (1) | 223279R2 |
| D9508 or | C-DIODE | KDS4148U  | (1) | 223283R2 |
| D9508 or | C-DIODE | DA2J10100 | (1) | 223303R2 |
| D9509    | C-DIODE | 1SS352    | 1   | 223234R2 |
| D9509 or | C-DIODE | 1SS355    | (1) | 223269R2 |
| D9509 or | C-DIODE | MA2J111   | (1) | 223279R2 |
| D9509 or | C-DIODE | KDS4148U  | (1) | 223283R2 |
| D9509 or | C-DIODE | DA2J10100 | (1) | 223303R2 |
| D9510    | C-DIODE | 1SS352    | 1   | 223234R2 |
| D9510 or | C-DIODE | 1SS355    | (1) | 223269R2 |
| D9510 or | C-DIODE | MA2J111   | (1) | 223279R2 |
| D9510 or | C-DIODE | KDS4148U  | (1) | 223283R2 |
| D9510 or | C-DIODE | DA2J10100 | (1) | 223303R2 |
| D9511    | C-DIODE | 1SS352    | 1   | 223234R2 |
| D9511 or | C-DIODE | 1SS355    | (1) | 223269R2 |
| D9511 or | C-DIODE | MA2J111   | (1) | 223279R2 |
| D9511 or | C-DIODE | KDS4148U  | (1) | 223283R2 |
| D9511 or | C-DIODE | DA2J10100 | (1) | 223303R2 |
| D9512    | C-DIODE | 1SS352    | 1   | 223234R2 |
| D9512 or | C-DIODE | 1SS355    | (1) | 223269R2 |
| D9512 or | C-DIODE | MA2J111   | (1) | 223279R2 |



|          |         |                     |      |             |
|----------|---------|---------------------|------|-------------|
| D9512 or | C-DIODE | KDS4148U            | ( 1) | 223283R2    |
| D9512 or | C-DIODE | DA2J10100           | ( 1) | 223303R2    |
| D9513    | C-DIODE | 1SS352              | 1    | 223234R2    |
| D9513 or | C-DIODE | 1SS355              | ( 1) | 223269R2    |
| D9513 or | C-DIODE | MA2J111             | ( 1) | 223279R2    |
| D9513 or | C-DIODE | KDS4148U            | ( 1) | 223283R2    |
| D9513 or | C-DIODE | DA2J10100           | ( 1) | 223303R2    |
| D9514    | DIODE   | D5SBA60             | 1    | 22380070F   |
| D9515    | C-DIODE | 1SR154-400          | 1    | 22380284R2  |
| D9516    | C-DIODE | 1SR154-400          | 1    | 22380284R2  |
| D9517    | ZENER D | UDZS36B             | 1    | 224553600R2 |
| D9517 or | ZENER D | DZ2J360M0L          | ( 1) | 224763600R2 |
| D9518    | ZENER D | UDZS5.6B            | 1    | 224550560R2 |
| D9518 or | ZENER D | DZ2J056M0L          | ( 1) | 224760560R2 |
| D9519    | ZENER D | UDZS5.6B            | 1    | 224550560R2 |
| D9519 or | ZENER D | DZ2J056M0L          | ( 1) | 224760560R2 |
| Q4991    | TR      | RN1441              | 1    | 2215410R2   |
| Q4991 or | TR      | RTAN430C-T112-1     | ( 1) | 2217780R2   |
| Q4992    | TR      | RN1441              | 1    | 2215410R2   |
| Q4992 or | TR      | RTAN430C-T112-1     | ( 1) | 2217780R2   |
| Q5001    | TR      | 2SC2713-BL          | 1    | 2213136R2   |
| Q5002    | TR      | 2SC2713-BL          | 1    | 2213136R2   |
| Q5003    | TR      | 2SC2713-BL          | 1    | 2213136R2   |
| Q5004    | TR      | 2SC2713-BL          | 1    | 2213136R2   |
| Q5005    | TR      | 2SA1163-GR          | 1    | 2216755R2   |
| Q5006    | TR      | 2SA1163-GR          | 1    | 2216755R2   |
| Q5007    | TR      | 2SA1163-GR          | 1    | 2216755R2   |
| Q5008    | TR      | 2SA1163-GR          | 1    | 2216755R2   |
| Q5013    | TR      | 2SA1200-Y(2LONK,ZE) | 1    | 2217584R2   |
| Q5014    | TR      | 2SA1200-Y(2LONK,ZE) | 1    | 2217584R2   |
| Q5015    | TR      | 2SC2880-Y(2LONK,ZE) | 1    | 2217594R2   |
| Q5016    | TR      | 2SC2880-Y(2LONK,ZE) | 1    | 2217594R2   |
| Q5017    | TR      | 2SC2229-Y(TPE6_F)   | 1    | 2211634T    |
| Q5017 or | TR      | 2SC2229-O(TPE6_F)   | ( 1) | 2211633T    |
| Q5018    | TR      | 2SC2229-Y(TPE6_F)   | 1    | 2211634T    |
| Q5018 or | TR      | 2SC2229-O(TPE6_F)   | ( 1) | 2211633T    |
| Q5019    | TR      | 2SA949-Y(TPE6_F)    | 1    | 2211354T    |
| Q5019 or | TR      | 2SA949-O(TPE6_F)    | ( 1) | 2211353T    |
| Q5020    | TR      | 2SA949-Y(TPE6_F)    | 1    | 2211354T    |
| Q5020 or | TR      | 2SA949-O(TPE6_F)    | ( 1) | 2211353T    |
| Q5021    | TR      | 2SA965-O(TPE6_F)    | 1    | 2211643T    |
| Q5022    | TR      | 2SA965-O(TPE6_F)    | 1    | 2211643T    |

|                 |                |                        |       |              |   |
|-----------------|----------------|------------------------|-------|--------------|---|
| Q5023           | TR             | 2SC2235-O(TPE6_F)      | 1     | 2211653T     |   |
| Q5024           | TR             | 2SC2235-O(TPE6_F)      | 1     | 2211653T     |   |
| Q5025           | TR             | 2SC3851-Y              | 1     | 2203384      |   |
| Q5026           | TR             | 2SC3851-Y              | 1     | 2203384      |   |
| Q5027           | TR             | 2SA1488-Y              | 1     | 2203394      |   |
| Q5028           | TR             | 2SA1488-Y              | 1     | 2203394      |   |
| Q5029           | TR             | KTC3198-GR             | 1     | 2215985T     |   |
| Q5030           | TR             | KTC3198-GR             | 1     | 2215985T     |   |
| Q5051           | TR             | KTC3198-GR             | 1     | 2215985T     |   |
| Q5052           | TR             | KTC3198-GR             | 1     | 2215985T     |   |
| Q5053           | TR             | 2SC2712-GR             | 1     | 2213145R2    |   |
| Q5053 or        | TR             | KTC3875-GR             | ( 1 ) | 2216175R2    |   |
| Q5054           | TR             | 2SC2712-GR             | 1     | 2213145R2    |   |
| Q5054 or        | TR             | KTC3875-GR             | ( 1 ) | 2216175R2    |   |
| Q5055           | TR             | 2SC2712-GR             | 1     | 2213145R2    |   |
| Q5055 or        | TR             | KTC3875-GR             | ( 1 ) | 2216175R2    |   |
| Q5056           | TR             | 2SC2712-GR             | 1     | 2213145R2    |   |
| Q5056 or        | TR             | KTC3875-GR             | ( 1 ) | 2216175R2    |   |
| Q5057           | TR             | 2SA1162-GR             | 1     | 2214375R2    |   |
| Q5057 or        | TR             | KTA1504-GR             | ( 1 ) | 2216185R2    |   |
| Q5103           | TR             | DTA114EKA              | 1     | 2217050R2    |   |
| Q5105           | TR             | DTC114TKA              | 1     | 2216670R2    |   |
| Q5105 or        | TR             | KRC111S                | ( 1 ) | 2217850R2    |   |
| Q5106           | TR             | DTC114TKA              | 1     | 2216670R2    |   |
| Q5106 or        | TR             | KRC111S                | ( 1 ) | 2217850R2    |   |
| Q5451           | IC             | 78M15HF(NJM78M15FA)    | 1     | 222780155JRC |   |
| Q5452           | IC             | 79M15HF(NJM79M15FA)    | 1     | 222790155JRC |   |
| Q5501           | TR             | 2SC2712-GR             | 1     | 2213145R2    |   |
| Q5501 or        | TR             | KTC3875-GR             | ( 1 ) | 2216175R2    |   |
| Q5502           | TR             | 2SC2712-GR             | 1     | 2213145R2    |   |
| Q5502 or        | TR             | KTC3875-GR             | ( 1 ) | 2216175R2    |   |
| Q9501           | TR             | 2SC2229-Y(TPE6_F)      | 1     | 2211634T     |   |
| Q9501 or        | TR             | 2SC2229-O(TPE6_F)      | ( 1 ) | 2211633T     |   |
| Q9502           | TR             | DTC123JKA              | 1     | 2216690R2    |   |
| Q9502 or        | TR             | KRC105S                | ( 1 ) | 2217290R2    |   |
| Q9503           | IC             | NJU7706F27A3           | 1     | 22242614R2   |   |
| [CHASSIS SCREW] |                |                        |       |              |   |
| E7000           | RETAINER       | (EARTH)                | 1     | 27142293     | N |
| E7002           | RETAINER       | (EARTH)                | 1     | 27142293     | N |
| E9004           | TRM-423(SCREW) | NEJITANSI ST3          | 1     | 25060495     |   |
| [TRANS COIL]    |                |                        |       |              |   |
| L5071           | S COIL         | SC-0.8X11.5X12.5T-6.5L | 1     | 231393S      |   |

|             |         |                        |      |             |   |
|-------------|---------|------------------------|------|-------------|---|
| L5072       | S COIL  | SC-0.8X11.5X12.5T-6.5L | 1    | 231393S     |   |
| L5081       | FR CORE | ---                    | 1    | 5597-45502  |   |
| L5082       | FR CORE | ---                    | 1    | 5597-45502  |   |
| L5095       | FR CORE | ---                    | 1    | 5597-45502  |   |
| L5096       | FR CORE | ---                    | 1    | 5597-45502  |   |
| L7003       | EMIFIL  | BK1608LM182-T          | 1    | 230958R1    |   |
| L7004       | EMIFIL  | BK1608LM182-T          | 1    | 230958R1    |   |
| L7005       | EMIFIL  | BK1608LM182-T          | 1    | 230958R1    |   |
| L7006       | CORE    | BLM18PG181SN1D         | 1    | 2350005R1   |   |
| L7008       | CORE    | BLM18PG181SN1D         | 1    | 2350005R1   |   |
| T9502       | P TRANS | NPT-1520JQ             | 1    | 2301812A    | ! |
| [CAPACITOR] |         |                        |      |             |   |
| C5001       | UPZ C   | 2AUPZTF331JE           | 1    | 376333314T  |   |
| C5002       | UPZ C   | 2AUPZTF331JE           | 1    | 376333314T  |   |
| C5003       | UTSJ C  | CE04W50V-47M(UTSJ)     | 1    | 398084707BT |   |
| C5004       | UTSJ C  | CE04W50V-47M(UTSJ)     | 1    | 398084707BT |   |
| C5005       | UTSP C  | CE04W10V-220M(UTSP)    | 1    | 397532217AT |   |
| C5006       | UTSP C  | CE04W10V-220M(UTSP)    | 1    | 397532217AT |   |
| C5007       | CERA C  | CC45SL50V-040C         | 1    | 345020401T  |   |
| C5008       | CERA C  | CC45SL50V-040C         | 1    | 345020401T  |   |
| C5009       | UPZ C   | 2AUPZTF101JE           | 1    | 376331014T  |   |
| C5010       | UPZ C   | 2AUPZTF101JE           | 1    | 376331014T  |   |
| C5011       | UTSP C  | CE04W50V 47M(UTSP)     | 1    | 397584707T  |   |
| C5011 or    | UTSP C  | CE04W50V 47M(UTSP)     | ( 1) | 397584707AT |   |
| C5012       | UTSP C  | CE04W50V 47M(UTSP)     | 1    | 397584707T  |   |
| C5012 or    | UTSP C  | CE04W50V 47M(UTSP)     | ( 1) | 397584707AT |   |
| C5013       | UTSP C  | CE04W50V 47M(UTSP)     | 1    | 397584707T  |   |
| C5013 or    | UTSP C  | CE04W50V 47M(UTSP)     | ( 1) | 397584707AT |   |
| C5014       | UTSP C  | CE04W50V 47M(UTSP)     | 1    | 397584707T  |   |
| C5014 or    | UTSP C  | CE04W50V 47M(UTSP)     | ( 1) | 397584707AT |   |
| C5015       | UTSP C  | CE04W50V 47M(UTSP)     | 1    | 397584707T  |   |
| C5015 or    | UTSP C  | CE04W50V 47M(UTSP)     | ( 1) | 397584707AT |   |
| C5016       | UTSP C  | CE04W50V 47M(UTSP)     | 1    | 397584707T  |   |
| C5016 or    | UTSP C  | CE04W50V 47M(UTSP)     | ( 1) | 397584707AT |   |
| C5017       | UTSP C  | CE04W50V-22M(UTSP)     | 1    | 397582207T  |   |
| C5017 or    | UTSP C  | CE04W50V-22M(UTSP)     | ( 1) | 397582207AT |   |
| C5018       | UTSP C  | CE04W50V-22M(UTSP)     | 1    | 397582207T  |   |
| C5018 or    | UTSP C  | CE04W50V-22M(UTSP)     | ( 1) | 397582207AT |   |
| C5021       | MKT C   | B32529C0102J289        | 1    | 376491024T  |   |
| C5022       | MKT C   | B32529C0102J289        | 1    | 376491024T  |   |
| C5023       | MKT C   | B32529C0102J289        | 1    | 376491024T  |   |
| C5024       | MKT C   | B32529C0102J289        | 1    | 376491024T  |   |

|          |          |                      |      |             |   |
|----------|----------|----------------------|------|-------------|---|
| C5025    | MKT C    | B32529C0102J289      | 1    | 376491024T  |   |
| C5026    | MKT C    | B32529C0102J289      | 1    | 376491024T  |   |
| C5051    | UTSP C   | CE04W50V-10M(UTSP)   | 1    | 397581007T  |   |
| C5051 or | UTSP C   | CE04W50V-10M(UTSP)   | ( 1) | 397581007AT |   |
| C5052    | UTSP C   | CE04W50V-10M(UTSP)   | 1    | 397581007T  |   |
| C5052 or | UTSP C   | CE04W50V-10M(UTSP)   | ( 1) | 397581007AT |   |
| C5053    | TF C     | ECQ-V50V-473J        | 1    | 374724734T  |   |
| C5054    | TF C     | ECQ-V50V-473J        | 1    | 374724734T  |   |
| C5099    | ELECT C  | CE04W50V-1M          | 1    | 355780109T  |   |
| C5451    | TF C     | ECQ-V50V-334J        | 1    | 374723344T  |   |
| C5452    | TF C     | ECQ-V50V-334J        | 1    | 374723344T  |   |
| C5453    | ELECT C  | CE69W35V-4700M       | 1    | 3504477A    |   |
| C5454    | ELECT C  | CE69W35V-4700M       | 1    | 3504477A    |   |
| C5455    | UTSP C   | CE04W50V-22M(UTSP)   | 1    | 397582207T  |   |
| C5455 or | UTSP C   | CE04W50V-22M(UTSP)   | ( 1) | 397582207AT |   |
| C5456    | UTSP C   | CE04W50V-22M(UTSP)   | 1    | 397582207T  |   |
| C5456 or | UTSP C   | CE04W50V-22M(UTSP)   | ( 1) | 397582207AT |   |
| C5511    | ELECT C  | CE04W6.3V-100M       | 1    | 355721019T  |   |
| C7007    | C-CERA C | CC725CH1H-102J1      | 1    | 342101024R1 |   |
| C7031    | ELECT C  | CE04W16V-47M         | 1    | 355744709T  |   |
| C7032    | C-CERA C | CK725F1E-104Z1       | 1    | 332161040R1 |   |
| C7033    | MKT C    | B32529C0102J289      | 1    | 376491024T  |   |
| C7034    | MKT C    | B32529C0102J289      | 1    | 376491024T  |   |
| C7035    | TF C     | ECQ-V50V-103J        | 1    | 374721034T  |   |
| C7036    | TF C     | ECQ-V50V-104J        | 1    | 374721044T  |   |
| C7037    | C-CERA C | CC725CH1H-102J1      | 1    | 342101024R1 |   |
| C7038    | C-CERA C | CK725F1E-104Z1       | 1    | 332161040R1 |   |
| C7039    | C-CERA C | CK725B1H-102K1       | 1    | 332101025R1 |   |
| C7040    | C-CERA C | CK725B1H-102K1       | 1    | 332101025R1 |   |
| C7041    | C-CERA C | CK725B1H-102K1       | 1    | 332101025R1 |   |
| C7042    | C-CERA C | CK725B1H-102K1       | 1    | 332101025R1 |   |
| C7044    | C-CERA C | CK725B1C-104K1       | 1    | 332121045R1 |   |
| C9503    | VR C     | CE04W100V-47M(VR)    | 1    | 394694707T  |   |
| C9504    | VR C     | CE04W100V-10M(VR)    | 1    | 394691007T  |   |
| C9505    | IS C     | RE275V-103M          | 1    | 3500196S    | ! |
| C9507    | C-CERA C | CK725F1E-104Z1       | 1    | 332161040R1 |   |
| C9508    | TF C     | ECQ-V50V-104J        | 1    | 374721044T  |   |
| C9509    | UTSP C   | CE04W25V-470M(UTSP)  | 1    | 397554717T  |   |
| C9510    | UTSK C   | CE04W16V-2200M(UTSK) | 1    | 398342227S  |   |
| C9511    | TF C     | ECQ-V50V-104J        | 1    | 374721044T  |   |
| C9512    | UTSP C   | CE04W50V-4.7M(UTSP)  | 1    | 397580477AT |   |
| C9513    | C-CERA C | CK725F1E-104Z1       | 1    | 332161040R1 |   |

|            |             |                      |   |             |
|------------|-------------|----------------------|---|-------------|
| C9514      | UTSK C      | CE04W25V-3300M(UTSK) | 1 | 398353327S  |
| C9515      | TF C        | ECQ-V50V-104J        | 1 | 374721044T  |
| C9516      | SPC C       | CE04W100V-100M(RJ5)  | 1 | 396791017T  |
| C9517      | SPC C       | CE04W100V-100M(RJ5)  | 1 | 396791017T  |
| C9518      | TF C        | ECQ-V50V-104J        | 1 | 374721044T  |
| C9519      | C-CERA C    | CK725F1E-104Z1       | 1 | 332161040R1 |
| R5600      | C-CARBON R  | RN72K1J-681JE        | 1 | 435036814R1 |
| [RESISTOR] |             |                      |   |             |
| R5001      | CARBON R    | R16J-4.7K            | 1 | 417344724T  |
| R5002      | CARBON R    | R16J-4.7K            | 1 | 417344724T  |
| R5003      | C-CARBON R  | RN72K1J-333JE        | 1 | 435033334R1 |
| R5004      | C-CARBON R  | RN72K1J-333JE        | 1 | 435033334R1 |
| R5005      | C-CARBON R  | RN72K1J-331JE        | 1 | 435033314R1 |
| R5006      | C-CARBON R  | RN72K1J-331JE        | 1 | 435033314R1 |
| R5007      | C-CARBON R  | RN72K1J-331JE        | 1 | 435033314R1 |
| R5008      | C-CARBON R  | RN72K1J-331JE        | 1 | 435033314R1 |
| R5009      | C-CARBON R  | RN72K1J-331JE        | 1 | 435033314R1 |
| R5010      | C-CARBON R  | RN72K1J-331JE        | 1 | 435033314R1 |
| R5011      | C-CARBON R  | RN72K1J-102JE        | 1 | 435031024R1 |
| R5012      | C-CARBON R  | RN72K1J-102JE        | 1 | 435031024R1 |
| R5013      | CARBON R    | R16J-1K              | 1 | 417341024T  |
| R5014      | CARBON R    | R16J-1K              | 1 | 417341024T  |
| R5015      | C-CARBON R  | RN72K1J-222JE        | 1 | 435032224R1 |
| R5016      | C-CARBON R  | RN72K1J-222JE        | 1 | 435032224R1 |
| R5017      | C-CARBON R  | RN72K1J-222JE        | 1 | 435032224R1 |
| R5018      | C-CARBON R  | RN72K1J-222JE        | 1 | 435032224R1 |
| R5019      | NF CARBON R | R25J-820             | 1 | 415478214T  |
| R5020      | NF CARBON R | R25J-820             | 1 | 415478214T  |
| R5021      | NF CARBON R | R25J-820             | 1 | 415478214T  |
| R5022      | NF CARBON R | R25J-820             | 1 | 415478214T  |
| R5023      | C-CARBON R  | RN72K1J-102JE        | 1 | 435031024R1 |
| R5024      | C-CARBON R  | RN72K1J-102JE        | 1 | 435031024R1 |
| R5025      | C-CARBON R  | RN72K1J-102JE        | 1 | 435031024R1 |
| R5026      | C-CARBON R  | RN72K1J-102JE        | 1 | 435031024R1 |
| R5027      | NF CARBON R | R25J-820             | 1 | 415478214T  |
| R5028      | NF CARBON R | R25J-820             | 1 | 415478214T  |
| R5029      | NF CARBON R | R25J-82              | 1 | 415478204T  |
| R5030      | NF CARBON R | R25J-82              | 1 | 415478204T  |
| R5031      | NF CARBON R | R25J-82              | 1 | 415478204T  |
| R5032      | NF CARBON R | R25J-82              | 1 | 415478204T  |
| R5033      | CARBON R    | R16J-33K             | 1 | 417343334T  |
| R5034      | CARBON R    | R16J-33K             | 1 | 417343334T  |

|       |             |               |   |             |
|-------|-------------|---------------|---|-------------|
| R5035 | C-CARBON R  | RN72K1J-183JE | 1 | 435031834R1 |
| R5036 | C-CARBON R  | RN72K1J-183JE | 1 | 435031834R1 |
| R5037 | C-CARBON R  | RN72K1J-183JE | 1 | 435031834R1 |
| R5038 | C-CARBON R  | RN72K1J-183JE | 1 | 435031834R1 |
| R5039 | TRIM R      | N06HR2KBB     | 1 | 5211402T    |
| R5040 | TRIM R      | N06HR2KBB     | 1 | 5211402T    |
| R5041 | CARBON R    | R16J-3.9K     | 1 | 417343924T  |
| R5042 | CARBON R    | R16J-3.9K     | 1 | 417343924T  |
| R5043 | NF CARBON R | R25J-10       | 1 | 415471004T  |
| R5044 | NF CARBON R | R25J-10       | 1 | 415471004T  |
| R5045 | METAL R     | RNU1/2WCJ-8.2 | 1 | 453530824T  |
| R5046 | METAL R     | RNU1/2WCJ-8.2 | 1 | 453530824T  |
| R5049 | C-CARBON R  | RN72K1J-000JE | 1 | 435030004R1 |
| R5050 | C-CARBON R  | RN72K1J-000JE | 1 | 435030004R1 |
| R5051 | C-CARBON R  | RN72K1J-104JE | 1 | 435031044R1 |
| R5052 | C-CARBON R  | RN72K1J-104JE | 1 | 435031044R1 |
| R5053 | C-CARBON R  | RN72K1J-104JE | 1 | 435031044R1 |
| R5054 | C-CARBON R  | RN72K1J-104JE | 1 | 435031044R1 |
| R5055 | C-CARBON R  | RN72K1J-272JE | 1 | 435032724R1 |
| R5056 | C-CARBON R  | RN72K1J-272JE | 1 | 435032724R1 |
| R5057 | C-CARBON R  | RN72K1J-562JE | 1 | 435035624R1 |
| R5058 | C-CARBON R  | RN72K1J-562JE | 1 | 435035624R1 |
| R5059 | NF CARBON R | R25J-120      | 1 | 415471214T  |
| R5060 | NF CARBON R | R25J-120      | 1 | 415471214T  |
| R5061 | C-CARBON R  | RN72K1J-333JE | 1 | 435033334R1 |
| R5062 | C-CARBON R  | RN72K1J-333JE | 1 | 435033334R1 |
| R5063 | C-CARBON R  | RN72K1J-472JE | 1 | 435034724R1 |
| R5064 | C-CARBON R  | RN72K1J-472JE | 1 | 435034724R1 |
| R5065 | C-CARBON R  | RN72K1J-561JE | 1 | 435035614R1 |
| R5066 | C-CARBON R  | RN72K1J-561JE | 1 | 435035614R1 |
| R5067 | C-CARBON R  | RN72K1J-183JE | 1 | 435031834R1 |
| R5069 | C-CARBON R  | RN72K1J-562JE | 1 | 435035624R1 |
| R5070 | C-CARBON R  | RN72K1J-562JE | 1 | 435035624R1 |
| R5071 | C-CARBON R  | RN72K1J-101JE | 1 | 435031014R1 |
| R5072 | C-CARBON R  | RN72K1J-101JE | 1 | 435031014R1 |
| R5073 | C-CARBON R  | RN72K1J-123JE | 1 | 435031234R1 |
| R5074 | C-CARBON R  | RN72K1J-123JE | 1 | 435031234R1 |
| R5075 | METAL R     | RNU2WCJ-0.22  | 1 | 452732294F  |
| R5076 | METAL R     | RNU2WCJ-0.22  | 1 | 452732294F  |
| R5077 | METAL R     | RNU2WCJ-0.22  | 1 | 452732294F  |
| R5078 | METAL R     | RNU2WCJ-0.22  | 1 | 452732294F  |
| R5079 | NF CARBON R | R25J-2.2      | 1 | 415470224T  |



|       |             |               |   |             |
|-------|-------------|---------------|---|-------------|
| R5080 | NF CARBON R | R25J-2.2      | 1 | 415470224T  |
| R5081 | NF CARBON R | R25J-10       | 1 | 415471004T  |
| R5082 | NF CARBON R | R25J-10       | 1 | 415471004T  |
| R5083 | NF CARBON R | R25J-10       | 1 | 415471004T  |
| R5084 | NF CARBON R | R25J-10       | 1 | 415471004T  |
| R5085 | NF CARBON R | R25J-120      | 1 | 415471214T  |
| R5086 | NF CARBON R | R25J-120      | 1 | 415471214T  |
| R5087 | NF CARBON R | R25J-68       | 1 | 415476804T  |
| R5088 | NF CARBON R | R25J-68       | 1 | 415476804T  |
| R5089 | NF CARBON R | R25J-2.2      | 1 | 415470224T  |
| R5090 | NF CARBON R | R25J-2.2      | 1 | 415470224T  |
| R5091 | NF CARBON R | R25J-18       | 1 | 415471804T  |
| R5092 | NF CARBON R | R25J-18       | 1 | 415471804T  |
| R5093 | CARBON R    | R16J-10       | 1 | 417341004T  |
| R5094 | CARBON R    | R16J-10       | 1 | 417341004T  |
| R5095 | CARBON R    | R16J-10       | 1 | 417341004T  |
| R5096 | CARBON R    | R16J-10       | 1 | 417341004T  |
| R5097 | NF CARBON R | R25J-18       | 1 | 415471804T  |
| R5098 | NF CARBON R | R25J-18       | 1 | 415471804T  |
| R5099 | C-CARBON R  | RN72K1J-103JE | 1 | 435031034R1 |
| R5101 | C-CARBON R  | RN72K2E-220JE | 1 | 43522204R1  |
| R5102 | C-CARBON R  | RN72K2E-220JE | 1 | 43522204R1  |
| R5502 | C-CARBON R  | RN72K1J-103JE | 1 | 435031034R1 |
| R5503 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R5504 | C-CARBON R  | RN72K1J-224JE | 1 | 435032244R1 |
| R5511 | C-CARBON R  | RN72K1J-562JE | 1 | 435035624R1 |
| R5512 | C-CARBON R  | RN72K1J-682JE | 1 | 435036824R1 |
| R5513 | C-CARBON R  | RN72K1J-221JE | 1 | 435032214R1 |
| R5515 | C-CARBON R  | RN72K1J-823JE | 1 | 435038234R1 |
| R5516 | C-CARBON R  | RN72K1J-823JE | 1 | 435038234R1 |
| R5601 | C-CARBON R  | RN72K1J-103JE | 1 | 435031034R1 |
| R5602 | C-CARBON R  | RN72K1J-103JE | 1 | 435031034R1 |
| R5801 | C-CARBON R  | RN72K1J-000JE | 1 | 435030004R1 |
| R5803 | C-CARBON R  | RN72K1J-000JE | 1 | 435030004R1 |
| R5804 | C-CARBON R  | RN72K1J-000JE | 1 | 435030004R1 |
| R5805 | C-CARBON R  | RN72K1J-000JE | 1 | 435030004R1 |
| R5806 | C-CARBON R  | RN72K2E-000JE | 1 | 435220004R1 |
| R5807 | C-CARBON R  | RN72K1J-000JE | 1 | 435030004R1 |
| R5808 | C-CARBON R  | RN72K2E-000JE | 1 | 435220004R1 |
| R5809 | C-CARBON R  | RN72K2E-000JE | 1 | 435220004R1 |
| R5810 | C-CARBON R  | RN72K1J-000JE | 1 | 435030004R1 |
| R5811 | C-CARBON R  | RN72K1J-000JE | 1 | 435030004R1 |

|          |                |                           |   |             |   |
|----------|----------------|---------------------------|---|-------------|---|
| R5812    | C-CARBON R     | RN72K1J-000JE             | 1 | 435030004R1 |   |
| R5813    | C-CARBON R     | RN72K1J-000JE             | 1 | 435030004R1 |   |
| R5814    | C-CARBON R     | RN72K1J-000JE             | 1 | 435030004R1 |   |
| R5815    | C-CARBON R     | RN72K1J-000JE             | 1 | 435030004R1 |   |
| R7031    | C-CARBON R     | RN72K1J-102JE             | 1 | 435031024R1 |   |
| R7032    | C-CARBON R     | RN72K1J-101JE             | 1 | 435031014R1 |   |
| R7033    | METAL O R      | RS1/2WBJ-390              | 1 | 443523914T  |   |
| R7034    | METAL O R      | RS1/2WBJ-390              | 1 | 443523914T  |   |
| R7035    | C-CARBON R     | RN72K1J-331JE             | 1 | 435033314R1 |   |
| R7036    | C-CARBON R     | RN72K1J-471JE             | 1 | 435034714R1 |   |
| R7037    | C-CARBON R     | RN72K1J-104JE             | 1 | 435031044R1 |   |
| R7038    | C-CARBON R     | RN72K1J-102JE             | 1 | 435031024R1 |   |
| R7039    | C-CARBON R     | RN72K1J-104JE             | 1 | 435031044R1 |   |
| R7040    | C-CARBON R     | RN72K1J-104JE             | 1 | 435031044R1 |   |
| R7041    | C-CARBON R     | RN72K1J-104JE             | 1 | 435031044R1 |   |
| R7042    | C-CARBON R     | RN72K1J-102JE             | 1 | 435031024R1 |   |
| R7043    | C-CARBON R     | RN72K1J-102JE             | 1 | 435031024R1 |   |
| R7044    | C-CARBON R     | RN72K1J-102JE             | 1 | 435031024R1 |   |
| R7045    | C-CARBON R     | RN72K1J-331JE             | 1 | 435033314R1 |   |
| R7046    | C-CARBON R     | RN72K1J-471JE             | 1 | 435034714R1 |   |
| R7047    | C-CARBON R     | RN72K1J-561JE             | 1 | 435035614R1 |   |
| R7048    | C-CARBON R     | RN72K1J-821JE             | 1 | 435038214R1 |   |
| R7072    | ESD            | IMSA-6802-01Y901_1608SIZE | 1 | 4000255R1   |   |
| R7073    | ESD            | IMSA-6802-01Y901_1608SIZE | 1 | 4000255R1   |   |
| R7074    | C-CARBON R     | RN72K1J-000JE             | 1 | 435030004R1 |   |
| R9501    | METAL O R      | RS1/2WBJ-15               | 1 | 443521504T  |   |
| R9502    | C-CARBON R     | RN72K1J-223JE             | 1 | 435032234R1 |   |
| R9503    | C-CARBON R     | RN72K1J-223JE             | 1 | 435032234R1 |   |
| R9504    | METAL O R      | RS1WBJ-100                | 1 | 443621014T  |   |
| R9505    | METAL O R      | RS1/2WBJ-22               | 1 | 443522204T  |   |
| R9506    | C-CARBON R     | RN72K1J-331JE             | 1 | 435033314R1 |   |
| R9507    | C-CARBON R     | RN72K1J-331JE             | 1 | 435033314R1 |   |
| R9508    | C-CARBON R     | RN72K1J-103JE             | 1 | 435031034R1 |   |
| R9509    | C-CARBON R     | RN72K1J-333JE             | 1 | 435033334R1 |   |
| R9511    | C-CARBON R     | RN72K1J-153JE             | 1 | 435031534R1 |   |
| R9512    | C-CARBON R     | RN72K1J-103JE             | 1 | 435031034R1 |   |
| R9513    | FUSE           | 3.5A-UL/T-251             | 1 | 252370T     | ! |
| R9514    | METAL O R      | RS1/2WBJ-33               | 1 | 443523304T  |   |
| R9515    | C-CARBON R     | RN72K1J-223JE             | 1 | 435032234R1 |   |
| [SW TRM] |                |                           |   |             |   |
| E9001    | TRM-423(SCREW) | NEJITANSI ST3             | 1 | 25060495    |   |
| F9501A   | FUSE HOL       | NSCT-1P2031               | 1 | 25052133T   | ! |

|                     |            |                       |       |               |   |
|---------------------|------------|-----------------------|-------|---------------|---|
| F9501B              | FUSE HOL   | NSCT-1P2031           | 1     | 25052133T     | ! |
| JL4003B             | WIRE HOL   | NSCT-3P874            | 1     | 25051087      |   |
| JL4004B             | WIRE HOL   | NSCT-9P880            | 1     | 25051093      |   |
| JL5001A             | WIRE HOL   | NSCT-5P876            | 1     | 25051089      |   |
| JL5001B             | WIRE HOL   | NSCT-5P876            | 1     | 25051089      |   |
| JL7008A             | WIRE TRAP  | NPLG-5P588            | 1     | 25055626      |   |
| JL7008B             | WIRE HOL   | NSCT-5P876            | 1     | 25051089      |   |
| P3101B              | PLUG       | NPLG-5P352            | 1     | 25055369      |   |
| P3901A              | SOCKET AS  | NSAS-10P0158          | 1     | 2006391010UL  |   |
| P5001               | TRM        | NTM-2PDMCR399         | 1     | 25060471      |   |
| P5002               | PIN JACK   | NPJ-1PDB556           | 1     | 25045774      |   |
| P5003               | TRM        | NTM-2PDMCR399         | 1     | 25060471      |   |
| P5004A              | PLUG       | NPLG-5P119            | 1     | 25055135      |   |
| P5004B              | SOCKET AS  | NSAS-10P2081          | 1     | 2009991278UL  | N |
| P5007               | PLUG       | NPLG-2P645            | 1     | 25055689      |   |
| P5008               | PLUG       | NPLG-2P645            | 1     | 25055689      |   |
| P5901               | CRIMP AS   | 1.8S-SGM-51T-4:BLK50  | 1     | 20799186UL    |   |
| P7002B              | SOCKET AS  | NSAS-22P2043          | 1     | 2002E382235UL | N |
| P7005               | PLUG       | XM7A-0441             | 1     | 25056605      |   |
| P7009               | ST JACK    | MSJ-035-05A BAG SR LF | 1     | 25045927      |   |
| P9001A              | PLUG       | NPLG-2P631            | 1     | 25055675      |   |
| P9502               | PLUG       | IMSA-9142B-14A        | 1     | 25056597      |   |
| R9518               | C-CARBON R | RN72K1J-000JE         | 1     | 435030004R1   |   |
| R9519               | C-CARBON R | RN72K1J-000JE         | 1     | 435030004R1   |   |
| RL9501              | RELAY      | NRL-1P10A-DC9-188     | 1     | 25065693      | ! |
| RL9501 or           | RELAY      | NRL-1P5A-DC9-179      | ( 1 ) | 25065669      | ! |
| S7000               | PUSH SW    | NPS-111-S681          | 1     | 25035718T     |   |
| S7001               | PUSH SW    | NPS-111-S681          | 1     | 25035718T     |   |
| S7002               | PUSH SW    | NPS-111-S681          | 1     | 25035718T     |   |
| S7003               | R ENCODE   | REB12305PVB-299-9092  | 1     | 25065688      |   |
| S7004               | PUSH SW    | NPS-111-S681          | 1     | 25035718T     |   |
| S7005               | PUSH SW    | NPS-111-S681          | 1     | 25035718T     |   |
| S7006               | PUSH SW    | NPS-111-S681          | 1     | 25035718T     |   |
| S7007               | PUSH SW    | NPS-111-S681          | 1     | 25035718T     |   |
| S7008               | R ENCODE   | XRE0122PVB-299-9904   | 1     | 25065689      |   |
| <b>[TUNER UNIT]</b> |            |                       |       |               |   |
| U7001               | REMO SENS  | GP1UE271RKVF          | 1     | 24130016      |   |

U002

BADG-1231-1E

| CIRCUIT NO              | PART NAME | DESCRIPTION | Q'TY | PART NO. (SN) | REMARKS |
|-------------------------|-----------|-------------|------|---------------|---------|
| <b>[SEMI CONDUCTOR]</b> |           |             |      |               |         |
| D1001                   | C-DIODE   | 1SS352      | 1    | 223234R2      |         |
| D1001 or                | C-DIODE   | 1SS355      | ( 1) | 223269R2      |         |
| D1001 or                | C-DIODE   | MA2J111     | ( 1) | 223279R2      |         |
| D1001 or                | C-DIODE   | KDS4148U    | ( 1) | 223283R2      |         |
| D1001 or                | C-DIODE   | DA2J10100   | ( 1) | 223303R2      |         |
| D1002                   | C-DIODE   | 1SS352      | 1    | 223234R2      |         |
| D1002 or                | C-DIODE   | 1SS355      | ( 1) | 223269R2      |         |
| D1002 or                | C-DIODE   | MA2J111     | ( 1) | 223279R2      |         |
| D1002 or                | C-DIODE   | KDS4148U    | ( 1) | 223283R2      |         |
| D1002 or                | C-DIODE   | DA2J10100   | ( 1) | 223303R2      |         |
| D1903                   | C-DIODE   | 1SR154-400  | 1    | 22380284R2    |         |
| D1905                   | ZENER D   | UDZS4.7B    | 1    | 224550470R2   |         |
| D1905 or                | ZENER D   | DZ2J047M0L  | ( 1) | 224760470R2   |         |
| D3504                   | C-DIODE   | 1SS352      | 1    | 223234R2      |         |
| D3504 or                | C-DIODE   | 1SS355      | ( 1) | 223269R2      |         |
| D3504 or                | C-DIODE   | MA2J111     | ( 1) | 223279R2      |         |
| D3504 or                | C-DIODE   | KDS4148U    | ( 1) | 223283R2      |         |
| D3504 or                | C-DIODE   | DA2J10100   | ( 1) | 223303R2      |         |
| D3505                   | C-DIODE   | 1SS352      | 1    | 223234R2      |         |
| D3505 or                | C-DIODE   | 1SS355      | ( 1) | 223269R2      |         |
| D3505 or                | C-DIODE   | MA2J111     | ( 1) | 223279R2      |         |
| D3505 or                | C-DIODE   | KDS4148U    | ( 1) | 223283R2      |         |
| D3505 or                | C-DIODE   | DA2J10100   | ( 1) | 223303R2      |         |
| D4001                   | C-DIODE   | 1SS352      | 1    | 223234R2      |         |
| D4001 or                | C-DIODE   | 1SS355      | ( 1) | 223269R2      |         |
| D4001 or                | C-DIODE   | MA2J111     | ( 1) | 223279R2      |         |
| D4001 or                | C-DIODE   | KDS4148U    | ( 1) | 223283R2      |         |
| D4001 or                | C-DIODE   | DA2J10100   | ( 1) | 223303R2      |         |
| D4002                   | C-DIODE   | 1SS352      | 1    | 223234R2      |         |
| D4002 or                | C-DIODE   | 1SS355      | ( 1) | 223269R2      |         |
| D4002 or                | C-DIODE   | MA2J111     | ( 1) | 223279R2      |         |
| D4002 or                | C-DIODE   | KDS4148U    | ( 1) | 223283R2      |         |
| D4002 or                | C-DIODE   | DA2J10100   | ( 1) | 223303R2      |         |
| D4003                   | C-DIODE   | 1SS352      | 1    | 223234R2      |         |
| D4003 or                | C-DIODE   | 1SS355      | ( 1) | 223269R2      |         |
| D4003 or                | C-DIODE   | MA2J111     | ( 1) | 223279R2      |         |
| D4003 or                | C-DIODE   | KDS4148U    | ( 1) | 223283R2      |         |
| D4003 or                | C-DIODE   | DA2J10100   | ( 1) | 223303R2      |         |
| D4004                   | C-DIODE   | 1SS352      | 1    | 223234R2      |         |

|          |         |            |     |             |
|----------|---------|------------|-----|-------------|
| D4004 or | C-DIODE | 1SS355     | (1) | 223269R2    |
| D4004 or | C-DIODE | MA2J111    | (1) | 223279R2    |
| D4004 or | C-DIODE | KDS4148U   | (1) | 223283R2    |
| D4004 or | C-DIODE | DA2J10100  | (1) | 223303R2    |
| D4005    | C-DIODE | 1SS352     | 1   | 223234R2    |
| D4005 or | C-DIODE | 1SS355     | (1) | 223269R2    |
| D4005 or | C-DIODE | MA2J111    | (1) | 223279R2    |
| D4005 or | C-DIODE | KDS4148U   | (1) | 223283R2    |
| D4005 or | C-DIODE | DA2J10100  | (1) | 223303R2    |
| D4006    | ZENER D | UDZS3.3B   | 1   | 224550330R2 |
| D4006 or | ZENER D | DZ2J033M0L | (1) | 224760330R2 |
| D4007    | C-DIODE | 1SS352     | 1   | 223234R2    |
| D4007 or | C-DIODE | 1SS355     | (1) | 223269R2    |
| D4007 or | C-DIODE | MA2J111    | (1) | 223279R2    |
| D4007 or | C-DIODE | KDS4148U   | (1) | 223283R2    |
| D4007 or | C-DIODE | DA2J10100  | (1) | 223303R2    |
| D4008    | C-DIODE | 1SS352     | 1   | 223234R2    |
| D4008 or | C-DIODE | 1SS355     | (1) | 223269R2    |
| D4008 or | C-DIODE | MA2J111    | (1) | 223279R2    |
| D4008 or | C-DIODE | KDS4148U   | (1) | 223283R2    |
| D4008 or | C-DIODE | DA2J10100  | (1) | 223303R2    |
| D4009    | ZENER D | UDZS6.8B   | 1   | 224550680R2 |
| D4009 or | ZENER D | DZ2J068M0L | (1) | 224760680R2 |
| D4010    | ZENER D | UDZS6.8B   | 1   | 224550680R2 |
| D4010 or | ZENER D | DZ2J068M0L | (1) | 224760680R2 |
| D4011    | C-DIODE | 1SS352     | 1   | 223234R2    |
| D4011 or | C-DIODE | 1SS355     | (1) | 223269R2    |
| D4011 or | C-DIODE | MA2J111    | (1) | 223279R2    |
| D4011 or | C-DIODE | KDS4148U   | (1) | 223283R2    |
| D4011 or | C-DIODE | DA2J10100  | (1) | 223303R2    |
| D4012    | C-DIODE | 1SS352     | 1   | 223234R2    |
| D4012 or | C-DIODE | 1SS355     | (1) | 223269R2    |
| D4012 or | C-DIODE | MA2J111    | (1) | 223279R2    |
| D4012 or | C-DIODE | KDS4148U   | (1) | 223283R2    |
| D4012 or | C-DIODE | DA2J10100  | (1) | 223303R2    |
| D4013    | C-DIODE | 1SS352     | 1   | 223234R2    |
| D4013 or | C-DIODE | 1SS355     | (1) | 223269R2    |
| D4013 or | C-DIODE | MA2J111    | (1) | 223279R2    |
| D4013 or | C-DIODE | KDS4148U   | (1) | 223283R2    |
| D4013 or | C-DIODE | DA2J10100  | (1) | 223303R2    |
| D4014    | C-DIODE | 1SS352     | 1   | 223234R2    |
| D4014 or | C-DIODE | 1SS355     | (1) | 223269R2    |

|          |         |                     |       |               |
|----------|---------|---------------------|-------|---------------|
| D4014 or | C-DIODE | MA2J111             | ( 1 ) | 223279R2      |
| D4014 or | C-DIODE | KDS4148U            | ( 1 ) | 223283R2      |
| D4014 or | C-DIODE | DA2J10100           | ( 1 ) | 223303R2      |
| D4015    | C-DIODE | 1SS352              | 1     | 223234R2      |
| D4015 or | C-DIODE | 1SS355              | ( 1 ) | 223269R2      |
| D4015 or | C-DIODE | MA2J111             | ( 1 ) | 223279R2      |
| D4015 or | C-DIODE | KDS4148U            | ( 1 ) | 223283R2      |
| D4015 or | C-DIODE | DA2J10100           | ( 1 ) | 223303R2      |
| D7002    | ZENER D | UDZS5.1B            | 1     | 224550510R2   |
| D7002 or | ZENER D | DZ2J051M0L          | ( 1 ) | 224760510R2   |
| D8001    | C-DIODE | 1SS352              | 1     | 223234R2      |
| D8001 or | C-DIODE | 1SS355              | ( 1 ) | 223269R2      |
| D8001 or | C-DIODE | MA2J111             | ( 1 ) | 223279R2      |
| D8001 or | C-DIODE | KDS4148U            | ( 1 ) | 223283R2      |
| D8001 or | C-DIODE | DA2J10100           | ( 1 ) | 223303R2      |
| D8002    | C-DIODE | 1SS352              | 1     | 223234R2      |
| D8002 or | C-DIODE | 1SS355              | ( 1 ) | 223269R2      |
| D8002 or | C-DIODE | MA2J111             | ( 1 ) | 223279R2      |
| D8002 or | C-DIODE | KDS4148U            | ( 1 ) | 223283R2      |
| D8002 or | C-DIODE | DA2J10100           | ( 1 ) | 223303R2      |
| D8008    | C-DIODE | 1SS352              | 1     | 223234R2      |
| D8008 or | C-DIODE | 1SS355              | ( 1 ) | 223269R2      |
| D8008 or | C-DIODE | MA2J111             | ( 1 ) | 223279R2      |
| D8008 or | C-DIODE | KDS4148U            | ( 1 ) | 223283R2      |
| D8008 or | C-DIODE | DA2J10100           | ( 1 ) | 223303R2      |
| Q1002    | IC      | TC74VHCU04FT        | 1     | 22274004HR2TO |
| Q1009    | IC      | S-1172B15-U5T1G     | 1     | 22242778R2    |
| Q1012    | IC      | LA6565              | 1     | 22242339R2    |
| Q1013    | IC      | TC94A92FG           | 1     | 22242658R3    |
| Q1015    | TR      | KTA1504-Y           | 1     | 2216184R2     |
| Q1901    | IC      | MP2303ADN-LF-Z      | 1     | 22242785R2    |
| Q1902    | IC      | BU33TD3WG-TR        | 1     | 22242715R2    |
| Q2501    | IC      | BU33TD3WG-TR        | 1     | 22242715R2    |
| Q2502    | IC      | TC7SZU04FU          | 1     | 22242512R2TO  |
| Q2502 or | IC      | SN74LVC1GU04DCKR    | ( 1 ) | 22242815R2TI  |
| Q2502 or | IC      | 74LVC1GU04GW        | ( 1 ) | 22242816R2NX  |
| Q2503    | IC      | TC7WH241FU(TE12L_F) | 1     | 22242076R2TO  |
| Q2504    | IC      | PCM9211PTR          | 1     | 22242703R2    |
| Q2505    | IC      | 74HCU04F            | 1     | 222740046R2   |
| Q2506    | IC      | BU33TD3WG-TR        | 1     | 22242715R2    |
| Q2509    | TR      | KRC102S             | 1     | 2216190R2     |
| Q3502    | IC      | MP2303ADN-LF-Z      | 1     | 22242785R2    |



|          |         |                     |      |              |   |
|----------|---------|---------------------|------|--------------|---|
| Q3503    | IC      | BD82065FVJ          | 1    | 22242718R2   |   |
| Q3503 or | IC      | AP2815AMMTR-G1      | ( 1) | 22242818R2   |   |
| Q3504    | IC      | BU33TD3WG-TR        | 1    | 22242715R2   |   |
| Q3506    | IC      | MFI341S2162         | 1    | 22242803R2   |   |
| Q3507    | IC      | BD2247G-GTR         | 1    | 22242795R2   |   |
| Q3508    | IC      | S-812C33AUA-C2N     | 1    | 22242222R2   |   |
| Q3509    | TR      | RN1405              | 1    | 2214500R2    |   |
| Q3509 or | TR      | KRC105S             | ( 1) | 2217290R2    |   |
| Q3510    | IC      | TC7USB221FT         | 1    | 22242621R2   |   |
| Q4004    | TR      | RN1441              | 1    | 2215410R2    |   |
| Q4004 or | TR      | RTAN430C-T112-1     | ( 1) | 2217780R2    |   |
| Q4005    | TR      | RN1441              | 1    | 2215410R2    |   |
| Q4005 or | TR      | RTAN430C-T112-1     | ( 1) | 2217780R2    |   |
| Q4007    | TR      | 2SC3324-GR(TE85L_F) | 1    | 2216825R2    |   |
| Q4008    | TR      | 2SC3324-GR(TE85L_F) | 1    | 2216825R2    |   |
| Q4009    | TR      | 2SA1312-GR(TE85L_F) | 1    | 2216835R2    |   |
| Q4010    | TR      | 2SA1312-GR(TE85L_F) | 1    | 2216835R2    |   |
| Q4011    | TR      | 2SC3324-GR(TE85L_F) | 1    | 2216825R2    |   |
| Q4012    | TR      | 2SC3324-GR(TE85L_F) | 1    | 2216825R2    |   |
| Q4013    | IC      | 78M12HF(NJM78M12FA) | 1    | 222780125JRC |   |
| Q4014    | IC      | 79M12HF(NJM79M12FA) | 1    | 222790125JRC |   |
| Q4015    | IC      | NJM4580M-D          | 1    | 22241448R2   |   |
| Q4016    | IC      | R2S15211FP          | 1    | 22242297R3   |   |
| Q4017    | IC      | BU33TD3WG-TR        | 1    | 22242715R2   |   |
| Q4018    | IC      | 78M05(NJM78M05FA)   | 1    | 222780055JRC |   |
| Q4020    | IC      | WM8718SEDS/RV       | 1    | 22241991R2   |   |
| Q4021    | TR      | KRC104S             | 1    | 2216210R2    |   |
| Q4021 or | TR      | RN1404              | ( 1) | 2214490R2    |   |
| Q4021 or | TR      | DTC144EE            | ( 1) | 2216390R2    |   |
| Q4022    | TR      | KRC104S             | 1    | 2216210R2    |   |
| Q4022 or | TR      | RN1404              | ( 1) | 2214490R2    |   |
| Q4022 or | TR      | DTC144EE            | ( 1) | 2216390R2    |   |
| Q4023    | TR      | KRC104S             | 1    | 2216210R2    |   |
| Q4023 or | TR      | RN1404              | ( 1) | 2214490R2    |   |
| Q4023 or | TR      | DTC144EE            | ( 1) | 2216390R2    |   |
| Q4501    | IC      | NJM4580M-D          | 1    | 22241448R2   |   |
| Q4502    | IC      | NJM4580M-D          | 1    | 22241448R2   |   |
| Q4503    | IC      | NJM4580M-D          | 1    | 22241448R2   |   |
| Q4504    | IC      | NJM4580M-D          | 1    | 22241448R2   |   |
| Q4505    | IC      | NJM4580M-D          | 1    | 22241448R2   |   |
| Q4506    | IC      | NJM4580M-D          | 1    | 22241448R2   |   |
| Q7006    | FL TUBE | 000DM229GINK        | 1    | 212280       | N |

|                 |            |                           |      |                 |  |
|-----------------|------------|---------------------------|------|-----------------|--|
| Q7006A          | CUSHION    | 5 x 10 x 25               | 2    | 28141926        |  |
| Q7007           | TR         | 2SA1163-BL(TE85L_F)       | 1    | 2216756R2       |  |
| Q7007 or        | TR         | KTA1517-GR                | ( 1) | 2216305R2       |  |
| Q7009           | TR         | 2SC2713-BL                | 1    | 2213136R2       |  |
| Q7009 or        | TR         | 2SC2713-GR(TE85R_F)       | ( 1) | 2213135R2       |  |
| Q7010           | IC         | NJU7706F27A3              | 1    | 22242614R2      |  |
| Q7501           | IC         | BU33TD3WG-TR              | 1    | 22242715R2      |  |
| Q8001           | TR         | RN1402                    | 1    | 2214470R2       |  |
| Q8001 or        | TR         | KRC102S                   | ( 1) | 2216190R2       |  |
| Q8002           | TR         | RN2403                    | 1    | 2214540R2       |  |
| Q8002 or        | TR         | KRA103S                   | ( 1) | 2216230R2       |  |
| Q8003           | TR         | RN2403                    | 1    | 2214540R2       |  |
| Q8003 or        | TR         | KRA103S                   | ( 1) | 2216230R2       |  |
| Q8004           | TR         | RN1402                    | 1    | 2214470R2       |  |
| Q8004 or        | TR         | KRC102S                   | ( 1) | 2216190R2       |  |
| Q8005           | IC         | S-812C50AUA-C3E           | 1    | 22242240R2      |  |
| Q8006           | IC         | BU33TD3WG-TR              | 1    | 22242715R2      |  |
| Q8007           | IC         | NJU7706F27A3              | 1    | 22242614R2      |  |
| Q8008           | TR         | 2SA1162-GR                | 1    | 2214375R2       |  |
| Q8008 or        | TR         | KTA1504-GR                | ( 1) | 2216185R2       |  |
| Q8009           | TR         | 2SA1162-GR                | 1    | 2214375R2       |  |
| Q8009 or        | TR         | KTA1504-GR                | ( 1) | 2216185R2       |  |
| Q8010           | IC (MAIN)  | MPD70F3746GJ-GAE-AX (0565 | 1    | 222W0079R305650 |  |
| Q8012           | IC         | R1EX25064ASA00A           | 1    | 22242581R2      |  |
| Q8012 or        | IC         | M95640-WMN6TP             | ( 1) | 22242643R2      |  |
| Q8012 or        | IC         | BR25S640FJ                | ( 1) | 22242761R2      |  |
| Q8013           | TR         | KTA1504-GR                | 1    | 2216185R2       |  |
| Q8013 or        | TR         | 2SA1162-GR                | ( 1) | 2214375R2       |  |
| [CHASSIS SCREW] |            |                           |      |                 |  |
| A4000           | HOLDER     | HOLDER(CLAMP)             | 1    | 27190540-1      |  |
| [TRANS COIL]    |            |                           |      |                 |  |
| L1001           | EMIFIL     | BK1608LM252-T             | 1    | 230956R2        |  |
| L1002           | CHOKE COIL | LBC2518T2R2M              | 1    | 231364M022R2    |  |
| L1003           | CHOKE COIL | LBC2518T2R2M              | 1    | 231364M022R2    |  |
| L1004           | CHOKE COIL | LBC2518T2R2M              | 1    | 231364M022R2    |  |
| L1005           | CHOKE COIL | LBC2518T2R2M              | 1    | 231364M022R2    |  |
| L1007           | CHOKE COIL | LBC2518T2R2M              | 1    | 231364M022R2    |  |
| L1010           | EMIFIL     | BK1608LL680-T             | 1    | 2350013R1       |  |
| L1011           | CHOKE COIL | LBC2518T2R2M              | 1    | 231364M022R2    |  |
| L1901           | CHOKE COIL | BLM21PG221SN1             | 1    | 230949R2        |  |
| L1902           | CHOKE COIL | 0182-7E08Q-100M-RA        | 1    | 231396M100R2    |  |
| L1903           | CHOKE COIL | LBC2518T2R2M              | 1    | 231364M022R2    |  |

|             |            |                     |      |              |
|-------------|------------|---------------------|------|--------------|
| L1904       | CHOKE COIL | LBC2518T2R2M        | 1    | 231364M022R2 |
| L1905       | CHOKE COIL | LBC2518T2R2M        | 1    | 231364M022R2 |
| L2501       | CORE       | MMZ1608Y601BT       | 1    | 2350004R1    |
| L2502       | CORE       | MMZ1608Y601BT       | 1    | 2350004R1    |
| L2503       | CORE       | MMZ1608Y601BT       | 1    | 2350004R1    |
| L2504       | CORE       | MMZ1608Y601BT       | 1    | 2350004R1    |
| L2506       | CORE       | MMZ1608Y601BT       | 1    | 2350004R1    |
| L2507       | CORE       | BLM18PG181SN1D      | 1    | 2350005R1    |
| L2508       | CORE       | MMZ1608Y601BT       | 1    | 2350004R1    |
| L2510       | CHOKE COIL | LBC2518T470M        | 1    | 231364M470R2 |
| L2512       | CHOKE COIL | BLM21PG221SN1       | 1    | 230949R2     |
| L2513       | CHOKE COIL | LBC2518T220M        | 1    | 231364M220R2 |
| L2514       | EMIFIL     | BK1608HS102-T       | 1    | 230955R2     |
| L3502       | CHOKE COIL | BLM21PG221SN1       | 1    | 230949R2     |
| L3503       | CORE       | BLM18PG181SN1D      | 1    | 2350005R1    |
| L3504       | CHOKE COIL | C6-K5RA-10UH        | 1    | 231451P100R2 |
| L3505       | CHOKE COIL | BLM21PG221SN1       | 1    | 230949R2     |
| L3506       | CORE       | BLM18PG181SN1D      | 1    | 2350005R1    |
| L3507       | CHOKE COIL | BLM21PG221SN1       | 1    | 230949R2     |
| L3508       | CORE       | BLM18PG181SN1D      | 1    | 2350005R1    |
| L3510       | CORE       | BLM18PG181SN1D      | 1    | 2350005R1    |
| L4000       | EMIFIL     | BK1608LM182-T       | 1    | 230958R1     |
| L7009       | CORE       | BLM18PG181SN1D      | 1    | 2350005R1    |
| L7010       | CORE       | BLM18PG181SN1D      | 1    | 2350005R1    |
| L8001       | CHOKE COIL | LBC2518T470M        | 1    | 231364M470R2 |
| X1001       | CRYSTAL    | HC-49S-16.9344M     | 1    | 3010508T     |
| X2501       | CRYSTAL    | HC-49S 9C11.2896M   | 1    | 3010513R2    |
| X2502       | CRYSTAL    | HC-49S 9C24.5760M   | 1    | 3010516R2    |
| X8001       | CERA LOCK  | CSTCR5M00G53-B0     | 1    | 3010356R2    |
| [CAPACITOR] |            |                     |      |              |
| C1004       | C-CERA C   | CK725B1H-103K1      | 1    | 332101035R1  |
| C1005       | C-CERA C   | CC725CH1H-220J1     | 1    | 342102204R1  |
| C1006       | C-CERA C   | CC725CH1H-180J1     | 1    | 342101804R1  |
| C1025       | C-CERA C   | CK725F1E-104Z1      | 1    | 332161040R1  |
| C1026       | UTSP C     | CE04W10V-220M(UTSP) | 1    | 397532217AT  |
| C1027       | UTSP C     | CE04W16V-470M(UTSP) | 1    | 397544717T   |
| C1028       | C-CERA C   | CK725B0J-106K       | 1    | 332091065R2  |
| C1028 or    | C-CERA C   | CK732B16V-106K      | ( 1) | 332071065R2  |
| C1029       | C-CERA C   | CK725B0J-226M       | 1    | 332092267R2  |
| C1030       | C-CERA C   | CK725F1A-105Z1      | 1    | 332181050R1  |
| C1031       | C-CERA C   | CK725F1E-104Z1      | 1    | 332161040R1  |
| C1032       | C-CERA C   | CK725B1H-103K1      | 1    | 332101035R1  |

|          |          |                     |      |             |
|----------|----------|---------------------|------|-------------|
| C1033    | UTSP C   | CE04W10V-220M(UTSP) | 1    | 397532217AT |
| C1034    | C-CERA C | CK725F1A-105Z1      | 1    | 332181050R1 |
| C1035    | C-CERA C | CK725F1A-105Z1      | 1    | 332181050R1 |
| C1036    | C-CERA C | CK725B1H-153K1      | 1    | 332101535R1 |
| C1039    | C-CERA C | CK725F1A-105Z1      | 1    | 332181050R1 |
| C1040    | C-CERA C | CC725CH1H-470J1     | 1    | 342104704R1 |
| C1041    | C-CERA C | CK725B1H-473K1      | 1    | 332104735R1 |
| C1042    | ELECT C  | CE04W6.3V-220M      | 1    | 355722219T  |
| C1043    | UTSP C   | CE04W25V-100M(UTSP) | 1    | 397551017AT |
| C1045    | C-CERA C | CK725F1A-105Z1      | 1    | 332181050R1 |
| C1046    | C-CERA C | CK725B1H-222K1      | 1    | 332102225R1 |
| C1047    | C-CERA C | CK725B1C-104K1      | 1    | 332121045R1 |
| C1048    | C-CERA C | CK725F1A-105Z1      | 1    | 332181050R1 |
| C1049    | UTSP C   | CE04W10V-470M(UTSP) | 1    | 397534717T  |
| C1050    | C-CERA C | CK725B1H-103K1      | 1    | 332101035R1 |
| C1051    | C-CERA C | CK725B1H-472K1      | 1    | 332104725R1 |
| C1052    | C-CERA C | CK725B1C-104K1      | 1    | 332121045R1 |
| C1054    | UTSP C   | CE04W10V-220M(UTSP) | 1    | 397532217AT |
| C1055    | C-CERA C | CK725B1H-153K1      | 1    | 332101535R1 |
| C1056    | C-CERA C | CK725B1H-473K1      | 1    | 332104735R1 |
| C1057    | C-CERA C | CK725B1C-104K1      | 1    | 332121045R1 |
| C1058    | C-CERA C | CK725F1A-105Z1      | 1    | 332181050R1 |
| C1060    | C-CERA C | CK725B1H-332K1      | 1    | 332103325R1 |
| C1061    | C-CERA C | CK725F1A-105Z1      | 1    | 332181050R1 |
| C1062    | C-CERA C | CC725CH1H-471J1     | 1    | 342104714R1 |
| C1064    | C-CERA C | CK725B1H-332K1      | 1    | 332103325R1 |
| C1065    | UTSP C   | CE04W50V-2.2M(UTSP) | 1    | 397580227T  |
| C1065 or | UTSP C   | CE04W50V-2.2M(UTSP) | ( 1) | 397580227AT |
| C1067    | UTSP C   | CE04W10V-220M(UTSP) | 1    | 397532217AT |
| C1068    | UTSP C   | CE04W10V-220M(UTSP) | 1    | 397532217AT |
| C1069    | C-CERA C | CK725F1A-105Z1      | 1    | 332181050R1 |
| C1072    | C-CERA C | CK725F1A-105Z1      | 1    | 332181050R1 |
| C1073    | C-CERA C | CK725F1A-105Z1      | 1    | 332181050R1 |
| C1076    | C-FILM C | ECHU16V-562J        | 1    | 373045624R2 |
| C1077    | C-CERA C | CK725B1H-333K1      | 1    | 332103335R1 |
| C1078    | C-CERA C | CK725F1A-105Z1      | 1    | 332181050R1 |
| C1080    | C-CERA C | CC725CH1H-471J1     | 1    | 342104714R1 |
| C1083    | C-CERA C | CK725B1H-473K1      | 1    | 332104735R1 |
| C1085    | C-CERA C | CK725B1H-473K1      | 1    | 332104735R1 |
| C1086    | ELECT C  | CE04W6.3V-100M      | 1    | 355721019T  |
| C1087    | C-CERA C | CK725B1H-473K1      | 1    | 332104735R1 |
| C1088    | VR C     | CE04W6.3V-1000M(VR) | 1    | 394621027T  |

|          |          |                     |      |             |
|----------|----------|---------------------|------|-------------|
| C1093    | C-CERA C | CK725F1E-104Z1      | 1    | 332161040R1 |
| C1094    | C-CERA C | CC725CH1H-681J1     | 1    | 342106814R1 |
| C1095    | C-CERA C | CC725CH1H-101J1     | 1    | 342101014R1 |
| C1096    | C-CERA C | CC725CH1H-101J1     | 1    | 342101014R1 |
| C1903    | C-CERA C | CK725B1E-106K       | 1    | 332221065R2 |
| C1904    | C-CERA C | CK725B1E-106K       | 1    | 332221065R2 |
| C1905    | C-CERA C | CK725B1C-104K1      | 1    | 332121045R1 |
| C1906    | C-CERA C | CK725B0J-226M       | 1    | 332092267R2 |
| C1907    | C-CERA C | CK725B0J-226M       | 1    | 332092267R2 |
| C1909    | C-CERA C | CK725B1C-104K1      | 1    | 332121045R1 |
| C1911    | C-CERA C | CK725B1H-103K1      | 1    | 332101035R1 |
| C1912    | C-CERA C | CK725B0J-106K       | 1    | 332091065R2 |
| C1912 or | C-CERA C | CK732B16V-106K      | ( 1) | 332071065R2 |
| C1913    | UTSP C   | CE04W16V-470M(UTSP) | 1    | 397544717T  |
| C1914    | C-CERA C | CK725B0J-106K       | 1    | 332091065R2 |
| C1914 or | C-CERA C | CK732B16V-106K      | ( 1) | 332071065R2 |
| C1915    | UTSP C   | CE04W25V-100M(UTSP) | 1    | 397551017AT |
| C1916    | VR C     | CE04W6.3V-4700M(VR) | 1    | 394624727S  |
| C2501    | C-CERA C | CK725B0J-106K       | 1    | 332091065R2 |
| C2501 or | C-CERA C | CK732B16V-106K      | ( 1) | 332071065R2 |
| C2502    | C-CERA C | CK725B0J-106K       | 1    | 332091065R2 |
| C2502 or | C-CERA C | CK732B16V-106K      | ( 1) | 332071065R2 |
| C2503    | C-CERA C | CK725B1H-103K1      | 1    | 332101035R1 |
| C2504    | UTSP C   | CE04W10V-220M(UTSP) | 1    | 397532217AT |
| C2505    | C-CERA C | CC725CH1H-180J1     | 1    | 342101804R1 |
| C2506    | C-CERA C | CC725CH1H-080D1     | 1    | 342100802R1 |
| C2507    | C-CERA C | CK725B1H-103K1      | 1    | 332101035R1 |
| C2508    | C-CERA C | CK725B0J-106K       | 1    | 332091065R2 |
| C2508 or | C-CERA C | CK732B16V-106K      | ( 1) | 332071065R2 |
| C2509    | C-CERA C | CK725B1H-103K1      | 1    | 332101035R1 |
| C2510    | C-CERA C | CK725B1H-103K1      | 1    | 332101035R1 |
| C2511    | C-CERA C | CC725CH1H-180J1     | 1    | 342101804R1 |
| C2512    | C-CERA C | CK725F1E-104Z1      | 1    | 332161040R1 |
| C2513    | UTSP C   | CE04W10V-100M(UTSP) | 1    | 397531017T  |
| C2514    | UTSP C   | CE04W16V-470M(UTSP) | 1    | 397544717T  |
| C2515    | C-CERA C | CK725F1E-104Z1      | 1    | 332161040R1 |
| C2516    | C-CERA C | CK725F1E-104Z1      | 1    | 332161040R1 |
| C2518    | C-CERA C | CK725F1E-104Z1      | 1    | 332161040R1 |
| C2519    | UTSP C   | CE04W10V-100M(UTSP) | 1    | 397531017T  |
| C2520    | C-CERA C | CK725B1C-104K1      | 1    | 332121045R1 |
| C2524    | C-CERA C | CK725F1E-104Z1      | 1    | 332161040R1 |
| C2525    | C-CERA C | CC725CH1H-100D1     | 1    | 342101002R1 |

|          |          |                 |      |             |
|----------|----------|-----------------|------|-------------|
| C2526    | C-CERA C | CC725CH1H-100D1 | 1    | 342101002R1 |
| C2527    | C-CERA C | CK725B1H-472K1  | 1    | 332104725R1 |
| C2528    | C-CERA C | CK725B0J-106K   | 1    | 332091065R2 |
| C2528 or | C-CERA C | CK732B16V-106K  | ( 1) | 332071065R2 |
| C2529    | C-CERA C | CK725B1H-223K1  | 1    | 332102235R1 |
| C2530    | C-CERA C | CK725B1H-473K1  | 1    | 332104735R1 |
| C2532    | C-CERA C | CK725B1H-103K1  | 1    | 332101035R1 |
| C2539    | C-CERA C | CK725B1C-104K1  | 1    | 332121045R1 |
| C2540    | C-CERA C | CC725CH1H-330J1 | 1    | 342103304R1 |
| C3501    | C-CERA C | CK725B1C-104K1  | 1    | 332121045R1 |
| C3502    | C-CERA C | CK725B1H-103K1  | 1    | 332101035R1 |
| C3503    | C-CERA C | CK725B1E-106K   | 1    | 332221065R2 |
| C3504    | C-CERA C | CK725B1E-106K   | 1    | 332221065R2 |
| C3505    | C-CERA C | CK725B0J-226M   | 1    | 332092267R2 |
| C3506    | C-CERA C | CK725B0J-226M   | 1    | 332092267R2 |
| C3507    | C-CERA C | CK725B0J-226M   | 1    | 332092267R2 |
| C3509    | C-CERA C | CK725B1C-104K1  | 1    | 332121045R1 |
| C3511    | C-CERA C | CK725B1H-102K1  | 1    | 332101025R1 |
| C3512    | C-CERA C | CK725F1A-105Z1  | 1    | 332181050R1 |
| C3513    | C-CERA C | CK725B0J-106K   | 1    | 332091065R2 |
| C3513 or | C-CERA C | CK732B16V-106K  | ( 1) | 332071065R2 |
| C3514    | C-CERA C | CK725B0J-106K   | 1    | 332091065R2 |
| C3514 or | C-CERA C | CK732B16V-106K  | ( 1) | 332071065R2 |
| C3516    | C-CERA C | CK725F1E-104Z1  | 1    | 332161040R1 |
| C3517    | C-CERA C | CK725B0J-106K   | 1    | 332091065R2 |
| C3517 or | C-CERA C | CK732B16V-106K  | ( 1) | 332071065R2 |
| C3518    | C-CERA C | CK725B1H-102K1  | 1    | 332101025R1 |
| C3519    | C-CERA C | CK725B0J-106K   | 1    | 332091065R2 |
| C3519 or | C-CERA C | CK732B16V-106K  | ( 1) | 332071065R2 |
| C3520    | C-CERA C | CK725B1H-102K1  | 1    | 332101025R1 |
| C3521    | C-CERA C | CK725F1E-104Z1  | 1    | 332161040R1 |
| C3522    | C-CERA C | CK725B0J-106K   | 1    | 332091065R2 |
| C3522 or | C-CERA C | CK732B16V-106K  | ( 1) | 332071065R2 |
| C3523    | C-CERA C | CK725B1C-104K1  | 1    | 332121045R1 |
| C3524    | C-CERA C | CK725B1C-104K1  | 1    | 332121045R1 |
| C3525    | C-CERA C | CK725B1H-102K1  | 1    | 332101025R1 |
| C3526    | C-CERA C | CK725B1C-104K1  | 1    | 332121045R1 |
| C3527    | C-CERA C | CK725B1H-102K1  | 1    | 332101025R1 |
| C3528    | C-CERA C | CK725B1E-106K   | 1    | 332221065R2 |
| C3529    | C-CERA C | CK725F1E-104Z1  | 1    | 332161040R1 |
| C3530    | C-CERA C | CK725F1E-104Z1  | 1    | 332161040R1 |
| C3531    | C-CERA C | CK725B0J-106K   | 1    | 332091065R2 |

|          |          |                     |      |             |
|----------|----------|---------------------|------|-------------|
| C3531 or | C-CERA C | CK732B16V-106K      | ( 1) | 332071065R2 |
| C3532    | C-CERA C | CK725F1E-104Z1      | 1    | 332161040R1 |
| C3533    | C-CERA C | CK725F1E-104Z1      | 1    | 332161040R1 |
| C3534    | C-CERA C | CK725F1E-104Z1      | 1    | 332161040R1 |
| C4011    | UTSJ C   | CE04W50V-47M(UTSJ)  | 1    | 398084707BT |
| C4012    | UTSJ C   | CE04W50V-47M(UTSJ)  | 1    | 398084707BT |
| C4013    | UTSJ C   | CE04W50V-47M(UTSJ)  | 1    | 398084707BT |
| C4014    | UTSJ C   | CE04W50V-47M(UTSJ)  | 1    | 398084707BT |
| C4015    | C-FILM C | ECHU50V-221J        | 1    | 373022214R2 |
| C4016    | C-FILM C | ECHU50V-221J        | 1    | 373022214R2 |
| C4017    | C-FILM C | ECHU50V-221J        | 1    | 373022214R2 |
| C4018    | C-FILM C | ECHU50V-221J        | 1    | 373022214R2 |
| C4019    | C-FILM C | ECHU50V-221J        | 1    | 373022214R2 |
| C4020    | C-FILM C | ECHU50V-221J        | 1    | 373022214R2 |
| C4021    | UTSP C   | CE04W25V-100M(UTSP) | 1    | 397551017AT |
| C4022    | UTSP C   | CE04W25V-100M(UTSP) | 1    | 397551017AT |
| C4023    | TF C     | ECQ-V50V-104J       | 1    | 374721044T  |
| C4024    | TF C     | ECQ-V50V-104J       | 1    | 374721044T  |
| C4025    | TF C     | ECQ-V50V-224J       | 1    | 374722244T  |
| C4026    | TF C     | ECQ-V50V-224J       | 1    | 374722244T  |
| C4027    | UTSP C   | CE04W25V-100M(UTSP) | 1    | 397551017AT |
| C4028    | UTSP C   | CE04W25V-100M(UTSP) | 1    | 397551017AT |
| C4029    | TF C     | ECQ-V50V-334J       | 1    | 374723344T  |
| C4030    | TF C     | ECQ-V50V-334J       | 1    | 374723344T  |
| C4031    | TF C     | ECQ-V50V-224J       | 1    | 374722244T  |
| C4032    | TF C     | ECQ-V50V-224J       | 1    | 374722244T  |
| C4033    | UTSP C   | CE04W25V-100M(UTSP) | 1    | 397551017AT |
| C4034    | UTSP C   | CE04W25V-100M(UTSP) | 1    | 397551017AT |
| C4036    | C-CERA C | CC725CH1H-101J1     | 1    | 342101014R1 |
| C4038    | TF C     | ECQ-V50V-223J       | 1    | 374722234T  |
| C4039    | TF C     | ECQ-V50V-104J       | 1    | 374721044T  |
| C4040    | TF C     | ECQ-V50V-104J       | 1    | 374721044T  |
| C4042    | C-CERA C | CK725F1E-104Z1      | 1    | 332161040R1 |
| C4046    | TF C     | ECQ-V50V-223J       | 1    | 374722234T  |
| C4047    | TF C     | ECQ-V50V-104J       | 1    | 374721044T  |
| C4050    | TF C     | ECQ-V50V-104J       | 1    | 374721044T  |
| C4051    | UTSP C   | CE04W25V-220M(UTSP) | 1    | 397552217T  |
| C4052    | UTSP C   | CE04W25V-220M(UTSP) | 1    | 397552217T  |
| C4053    | UTSP C   | CE04W25V-100M(UTSP) | 1    | 397551017AT |
| C4054    | UTSP C   | CE04W25V-100M(UTSP) | 1    | 397551017AT |
| C4055    | UTSP C   | CE04W10V-100M(UTSP) | 1    | 397531017T  |
| C4056    | C-CERA C | CK725B1E-106K       | 1    | 332221065R2 |



|          |          |                     |      |             |
|----------|----------|---------------------|------|-------------|
| C4057    | C-CERA C | CK725B1E-106K       | 1    | 332221065R2 |
| C4058    | UTSP C   | CE04W25V-220M(UTSP) | 1    | 397552217T  |
| C4059    | UTSP C   | CE04W25V-220M(UTSP) | 1    | 397552217T  |
| C4060    | TF C     | ECQ-V50V-104J       | 1    | 374721044T  |
| C4063    | C-CERA C | CK725F1E-104Z1      | 1    | 332161040R1 |
| C4064    | UTSP C   | CE04W10V-220M(UTSP) | 1    | 397532217AT |
| C4069    | UTSP C   | CE04W10V-220M(UTSP) | 1    | 397532217AT |
| C4072    | TF C     | ECQ-V50V-104J       | 1    | 374721044T  |
| C4076    | C-CERA C | CK725F1E-104Z1      | 1    | 332161040R1 |
| C4077    | TF C     | ECQ-V50V-104J       | 1    | 374721044T  |
| C4078    | TF C     | ECQ-V50V-104J       | 1    | 374721044T  |
| C4079    | UTSP C   | CE04W25V-100M(UTSP) | 1    | 397551017AT |
| C4080    | UTSP C   | CE04W10V-220M(UTSP) | 1    | 397532217AT |
| C4081    | UTSP C   | CE04W50V-10M(UTSP)  | 1    | 397581007T  |
| C4081 or | UTSP C   | CE04W50V-10M(UTSP)  | ( 1) | 397581007AT |
| C4082    | UTSP C   | CE04W50V-10M(UTSP)  | 1    | 397581007T  |
| C4082 or | UTSP C   | CE04W50V-10M(UTSP)  | ( 1) | 397581007AT |
| C4085    | C-FILM C | ECHU50V-221J        | 1    | 373022214R2 |
| C4086    | C-FILM C | ECHU50V-221J        | 1    | 373022214R2 |
| C4087    | TF C     | ECQ-V50V-104J       | 1    | 374721044T  |
| C4088    | TF C     | ECQ-V50V-104J       | 1    | 374721044T  |
| C4089    | UTSP C   | CE04W10V-220M(UTSP) | 1    | 397532217AT |
| C4090    | UTSP C   | CE04W10V-220M(UTSP) | 1    | 397532217AT |
| C4501    | C-FILM C | ECHU50V-102J        | 1    | 373021024R2 |
| C4502    | C-FILM C | ECHU50V-102J        | 1    | 373021024R2 |
| C4503    | C-FILM C | ECHU50V-681J        | 1    | 373026814R2 |
| C4504    | C-FILM C | ECHU50V-681J        | 1    | 373026814R2 |
| C4505    | C-FILM C | ECHU50V-681J        | 1    | 373026814R2 |
| C4506    | C-FILM C | ECHU50V-681J        | 1    | 373026814R2 |
| C4507    | C-FILM C | ECHU50V-101J        | 1    | 373021014R2 |
| C4508    | C-FILM C | ECHU50V-101J        | 1    | 373021014R2 |
| C4509    | C-FILM C | ECHU50V-221J        | 1    | 373022214R2 |
| C4510    | C-FILM C | ECHU50V-221J        | 1    | 373022214R2 |
| C4511    | MKT C    | B32529C0682J289     | 1    | 376496824T  |
| C4512    | MKT C    | B32529C0682J289     | 1    | 376496824T  |
| C4513    | MKT C    | B32529C0472J289     | 1    | 376494724T  |
| C4514    | MKT C    | B32529C0472J289     | 1    | 376494724T  |
| C7045    | C-CERA C | CK725F1E-104Z1      | 1    | 332161040R1 |
| C7046    | C-CERA C | CK725B1C-104K1      | 1    | 332121045R1 |
| C7047    | C-CERA C | CK725F1E-104Z1      | 1    | 332161040R1 |
| C7048    | C-CERA C | CC725CH1H-330J1     | 1    | 342103304R1 |
| C7049    | C-CERA C | CC725CH1H-330J1     | 1    | 342103304R1 |

|          |          |                       |      |             |
|----------|----------|-----------------------|------|-------------|
| C7050    | C-CERA C | CC725CH1H-330J1       | 1    | 342103304R1 |
| C7051    | C-CERA C | CK725F1E-104Z1        | 1    | 332161040R1 |
| C7053    | C-CERA C | CK725F1E-104Z1        | 1    | 332161040R1 |
| C7054    | C-CERA C | CK725F1E-104Z1        | 1    | 332161040R1 |
| C7055    | C-CERA C | CK725B0J-106K         | 1    | 332091065R2 |
| C7055 or | C-CERA C | CK732B16V-106K        | ( 1) | 332071065R2 |
| C7057    | C-CERA C | CK725F1E-104Z1        | 1    | 332161040R1 |
| C7058    | C-CERA C | CK725F1E-104Z1        | 1    | 332161040R1 |
| C7059    | C-CERA C | CK725F1E-104Z1        | 1    | 332161040R1 |
| C7501    | C-CERA C | CK725B0J-106K         | 1    | 332091065R2 |
| C7501 or | C-CERA C | CK732B16V-106K        | ( 1) | 332071065R2 |
| C7502    | C-CERA C | CK725B0J-106K         | 1    | 332091065R2 |
| C7502 or | C-CERA C | CK732B16V-106K        | ( 1) | 332071065R2 |
| C7503    | C-CERA C | CK725F1E-104Z1        | 1    | 332161040R1 |
| C7600    | C-CERA C | CK725F1H-224Z1        | 1    | 332152240R1 |
| C7601    | C-CERA C | CK725F1H-224Z1        | 1    | 332152240R1 |
| C8001    | C-CERA C | CK725F1E-104Z1        | 1    | 332161040R1 |
| C8002    | C-CERA C | CK725F1E-104Z1        | 1    | 332161040R1 |
| C8003    | C-CERA C | CK725F1E-104Z1        | 1    | 332161040R1 |
| C8004    | C-CERA C | CK725F1E-104Z1        | 1    | 332161040R1 |
| C8005    | C-CERA C | CK725B0J-106K         | 1    | 332091065R2 |
| C8005 or | C-CERA C | CK732B16V-106K        | ( 1) | 332071065R2 |
| C8006    | UTSP C   | CE04W25V-100M(UTSP)   | 1    | 397551017AT |
| C8007    | UTSP C   | CE04W6.3V-1000M(UTSP) | 1    | 397521027T  |
| C8008    | C-CERA C | CK725F1E-104Z1        | 1    | 332161040R1 |
| C8009    | C-CERA C | CK725B0J-106K         | 1    | 332091065R2 |
| C8009 or | C-CERA C | CK732B16V-106K        | ( 1) | 332071065R2 |
| C8010    | C-CERA C | CK725B0J-106K         | 1    | 332091065R2 |
| C8010 or | C-CERA C | CK732B16V-106K        | ( 1) | 332071065R2 |
| C8011    | C-CERA C | CK725F1E-104Z1        | 1    | 332161040R1 |
| C8012    | C-CERA C | CK725F1E-104Z1        | 1    | 332161040R1 |
| C8013    | C-CERA C | CK725F1E-104Z1        | 1    | 332161040R1 |
| C8014    | C-CERA C | CK725F1E-104Z1        | 1    | 332161040R1 |
| C8015    | C-CERA C | CK725F1E-104Z1        | 1    | 332161040R1 |
| C8016    | UTSP C   | CE04W50V-4.7M(UTSP)   | 1    | 397580477AT |
| C8017    | C-CERA C | CK725F1E-104Z1        | 1    | 332161040R1 |
| C8018    | C-CERA C | CK725F1E-104Z1        | 1    | 332161040R1 |
| C8019    | C-CERA C | CK725F1E-104Z1        | 1    | 332161040R1 |
| C8020    | C-CERA C | CK725F1E-104Z1        | 1    | 332161040R1 |
| C8021    | C-CERA C | CK725F1E-104Z1        | 1    | 332161040R1 |
| C8022    | C-CERA C | CK725F1E-104Z1        | 1    | 332161040R1 |
| C8024    | C-CERA C | CK725F1E-104Z1        | 1    | 332161040R1 |

|            |            |                 |   |             |
|------------|------------|-----------------|---|-------------|
| C8028      | C-CERA C   | CK725F1E-104Z1  | 1 | 332161040R1 |
| C8029      | C-CERA C   | CK725F1E-104Z1  | 1 | 332161040R1 |
| C8031      | C-CERA C   | CC725CH1H-101J1 | 1 | 342101014R1 |
| C8032      | C-CERA C   | CK725F1E-104Z1  | 1 | 332161040R1 |
| [RESISTOR] |            |                 |   |             |
| R1002      | C-CARBON R | RN72K1J-221JE   | 1 | 435032214R1 |
| R1003      | C-CARBON R | RN72K1J-821JE   | 1 | 435038214R1 |
| R1004      | C-CARBON R | RN72K1J-105JE   | 1 | 435031054R1 |
| R1005      | C-CARBON R | RN72K1J-272JE   | 1 | 435032724R1 |
| R1006      | C-CARBON R | RN72K1J-331JE   | 1 | 435033314R1 |
| R1022      | C-CARBON R | RN72K1J-332JE   | 1 | 435033324R1 |
| R1057      | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1 |
| R1058      | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1 |
| R1059      | C-CARBON R | RN72K1J-334JE   | 1 | 435033344R1 |
| R1060      | C-CARBON R | RN72K1J-153JE   | 1 | 435031534R1 |
| R1061      | C-CARBON R | RN72K1J-470JE   | 1 | 435034704R1 |
| R1062      | C-CARBON R | RN72K1J-470JE   | 1 | 435034704R1 |
| R1063      | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1 |
| R1064      | C-CARBON R | RN72K1J-473JE   | 1 | 435034734R1 |
| R1065      | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1 |
| R1066      | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1 |
| R1067      | C-CARBON R | RN72K1J-470JE   | 1 | 435034704R1 |
| R1068      | C-CARBON R | RN72K1J-470JE   | 1 | 435034704R1 |
| R1069      | C-CARBON R | RN72K1J-103JE   | 1 | 435031034R1 |
| R1070      | C-CARBON R | RN72K1J-473JE   | 1 | 435034734R1 |
| R1071      | C-CARBON R | RN72K1J-221FE   | 1 | 435032212R1 |
| R1074      | C-CARBON R | RN72K1J-473JE   | 1 | 435034734R1 |
| R1082      | C-CARBON R | RN72K1J-153JE   | 1 | 435031534R1 |
| R1083      | C-CARBON R | RN72K1J-470JE   | 1 | 435034704R1 |
| R1084      | C-CARBON R | RN72K1J-153JE   | 1 | 435031534R1 |
| R1085      | C-CARBON R | RN72K1J-000JE   | 1 | 435030004R1 |
| R1086      | C-CARBON R | RN72K1J-222JE   | 1 | 435032224R1 |
| R1087      | C-CARBON R | RN72K1J-000JE   | 1 | 435030004R1 |
| R1088      | C-CARBON R | RN72K1J-222JE   | 1 | 435032224R1 |
| R1089      | C-CARBON R | RN72K1J-000JE   | 1 | 435030004R1 |
| R1091      | C-CARBON R | RN72K1J-000JE   | 1 | 435030004R1 |
| R1092      | C-CARBON R | RN72K1J-000JE   | 1 | 435030004R1 |
| R1093      | C-CARBON R | RN72K1J-105JE   | 1 | 435031054R1 |
| R1094      | C-CARBON R | RN72K1J-000JE   | 1 | 435030004R1 |
| R1096      | C-CARBON R | RN72K1J-332JE   | 1 | 435033324R1 |
| R1097      | C-CARBON R | RN72K1J-000JE   | 1 | 435030004R1 |
| R1099      | C-CARBON R | RN72K1J-000JE   | 1 | 435030004R1 |

|       |            |               |   |             |
|-------|------------|---------------|---|-------------|
| R1100 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |
| R1101 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |
| R1102 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |
| R1103 | C-CARBON R | RN72K1J-123JE | 1 | 435031234R1 |
| R1105 | C-CARBON R | RN72K1J-153JE | 1 | 435031534R1 |
| R1106 | C-CARBON R | RN72K1J-100JE | 1 | 435031004R1 |
| R1107 | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1 |
| R1112 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R1114 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R1115 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R1119 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R1120 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R1123 | C-CARBON R | RN72K1J-330JE | 1 | 435033304R1 |
| R1124 | C-CARBON R | RN72K1J-330JE | 1 | 435033304R1 |
| R1144 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R1145 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R1146 | C-CARBON R | RN72K1J-153JE | 1 | 435031534R1 |
| R1147 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |
| R1902 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |
| R1904 | C-CARBON R | RN72K1J-223FE | 1 | 435032232R1 |
| R1905 | C-CARBON R | RN72K1J-103FE | 1 | 435031032R1 |
| R1907 | C-CARBON R | RN72K1J-223FE | 1 | 435032232R1 |
| R1908 | C-CARBON R | RN72K1J-333FE | 1 | 435033332R1 |
| R1909 | METAL R    | RNU1WCJ-1.5   | 1 | 453630154T  |
| R1910 | METAL R    | RNU1WCJ-1.5   | 1 | 453630154T  |
| R1911 | C-CARBON R | RN72K1J-393FE | 1 | 435033932R1 |
| R1912 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |
| R2501 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R2502 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |
| R2503 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |
| R2504 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |
| R2505 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |
| R2506 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |
| R2507 | C-CARBON R | RN72K1J-471JE | 1 | 435034714R1 |
| R2508 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R2509 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |
| R2510 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R2511 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R2512 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R2513 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |
| R2514 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R2515 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |

|          |            |               |      |               |
|----------|------------|---------------|------|---------------|
| R2516    | C-CARBON R | RN72K1J-823JE | 1    | 435038234R1   |
| R2517    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R2518    | C-CARBON R | RN72K1J-103JE | 1    | 435031034R1   |
| R2519    | C-CARBON R | RN72K1J-331JE | 1    | 435033314R1   |
| R2520    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R2521    | C-CARBON R | RN72K1J-105JE | 1    | 435031054R1   |
| R2522    | C-CARBON R | RN72K1J-331JE | 1    | 435033314R1   |
| R2523    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R2524    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R2525    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R2526    | C-CARBON R | RN72K1J-103JE | 1    | 435031034R1   |
| R2527    | C-CARBON R | RN72K1J-103JE | 1    | 435031034R1   |
| R2529    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R2530    | C-CARBON R | RN72K1J-103JE | 1    | 435031034R1   |
| R2532    | C-CARBON R | RN72K1J-561FE | 1    | 435035612R1   |
| R2533    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R2534    | C-CARBON R | RN72K1J-103JE | 1    | 435031034R1   |
| R2536    | C-CARBON R | RN72K1J-331JE | 1    | 435033314R1   |
| R2537    | C-CARBON R | RN72K1J-331JE | 1    | 435033314R1   |
| R2538    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R2539    | C-CARBON R | RN72K1J-103JE | 1    | 435031034R1   |
| R2541    | C-CARBON R | RN72K1J-151JE | 1    | 435031514R1   |
| R2542    | C-CARBON R | RN72K1J-151JE | 1    | 435031514R1   |
| R2543    | C-CARBON R | RN72K1J-331JE | 1    | 435033314R1   |
| R2546    | C-CARBON R | RN72K1J-103JE | 1    | 435031034R1   |
| R2547    | C-CARBON R | RN72K1J-101JE | 1    | 435031014R1   |
| R2548    | C-CARBON R | RN72K1J-103JE | 1    | 435031034R1   |
| R2549    | C-CARBON R | RN72K1J-221JE | 1    | 435032214R1   |
| R2550    | C-CARBON R | RN72K1J-103JE | 1    | 435031034R1   |
| R2551    | C-CARBON R | RN72K1J-681JE | 1    | 435036814R1   |
| R2552    | C-CARBON R | RN72K1J-103JE | 1    | 435031034R1   |
| R3501    | C-CARBON R | RN72K1J-000JE | 1    | 435030004R1   |
| R3503    | C-CARBON R | RN72K1J-333FE | 1    | 435033332R1   |
| R3504    | C-CARBON R | RN72K1J-223FE | 1    | 435032232R1   |
| R3506    | C-CARBON R | RN72K1J-103FE | 1    | 435031032R1   |
| R3508    | C-CARBON R | RN72K1J-223FE | 1    | 435032232R1   |
| R3509    | C-CARBON R | RN72K1J-393FE | 1    | 435033932R1   |
| R3510    | C-CARBON R | RN72K1J-103JE | 1    | 435031034R1   |
| R3511    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3512    | C-CARBON R | RN72K1J-101JE | 1    | 435031014R1   |
| R3513    | C-R NET    | RM7LJ473X04   | 1    | 43484747304R2 |
| R3513 or | C-R NET    | YCN104-473-JK | ( 1) | 43464C47304R1 |

|          |            |                           |      |               |
|----------|------------|---------------------------|------|---------------|
| R3514    | C-R NET    | RM7LJ473X04               | 1    | 43484747304R2 |
| R3514 or | C-R NET    | YCN104-473-JK             | ( 1) | 43464C47304R1 |
| R3515    | C-CARBON R | RN72K1J-101JE             | 1    | 435031014R1   |
| R3516    | C-CARBON R | RN72K1J-102JE             | 1    | 435031024R1   |
| R3517    | C-CARBON R | RN72K1J-101JE             | 1    | 435031014R1   |
| R3518    | C-CARBON R | RN72K1J-472JE             | 1    | 435034724R1   |
| R3519    | C-CARBON R | RN72K1J-472JE             | 1    | 435034724R1   |
| R3520    | C-CARBON R | RN72K1J-100JE             | 1    | 435031004R1   |
| R3521    | C-CARBON R | RN72K1J-102JE             | 1    | 435031024R1   |
| R3525    | C-CARBON R | RN72K1J-101JE             | 1    | 435031014R1   |
| R3526    | ESD        | IMSA-6802-01Y901_1608SIZE | 1    | 4000255R1     |
| R3527    | ESD        | IMSA-6802-01Y901_1608SIZE | 1    | 4000255R1     |
| R3528    | ESD        | IMSA-6802-01Y901_1608SIZE | 1    | 4000255R1     |
| R3529    | ESD        | IMSA-6802-01Y901_1608SIZE | 1    | 4000255R1     |
| R3530    | C-CARBON R | RN72K1J-104JE             | 1    | 435031044R1   |
| R4001    | C-CARBON R | RN72K1J-103JE             | 1    | 435031034R1   |
| R4002    | C-CARBON R | RN72K1J-104JE             | 1    | 435031044R1   |
| R4003    | C-CARBON R | RN72K1J-473JE             | 1    | 435034734R1   |
| R4004    | C-CARBON R | RN72K1J-104JE             | 1    | 435031044R1   |
| R4005    | C-CARBON R | RN72K1J-473JE             | 1    | 435034734R1   |
| R4006    | C-CARBON R | RN72K1J-104JE             | 1    | 435031044R1   |
| R4007    | C-CARBON R | RN72K1J-473JE             | 1    | 435034734R1   |
| R4008    | C-CARBON R | RN72K1J-000JE             | 1    | 435030004R1   |
| R4009    | C-CARBON R | RN72K1J-000JE             | 1    | 435030004R1   |
| R4027    | C-CARBON R | RN72K1J-224JE             | 1    | 435032244R1   |
| R4028    | C-CARBON R | RN72K1J-224JE             | 1    | 435032244R1   |
| R4029    | C-CARBON R | RN72K1J-101JE             | 1    | 435031014R1   |
| R4030    | C-CARBON R | RN72K1J-101JE             | 1    | 435031014R1   |
| R4033    | C-CARBON R | RN72K1J-101JE             | 1    | 435031014R1   |
| R4034    | C-CARBON R | RN72K1J-101JE             | 1    | 435031014R1   |
| R4035    | C-CARBON R | RN72K1J-224JE             | 1    | 435032244R1   |
| R4036    | C-CARBON R | RN72K1J-224JE             | 1    | 435032244R1   |
| R4037    | C-CARBON R | RN72K1J-331JE             | 1    | 435033314R1   |
| R4038    | C-CARBON R | RN72K1J-331JE             | 1    | 435033314R1   |
| R4039    | C-CARBON R | RN72K1J-331JE             | 1    | 435033314R1   |
| R4040    | C-CARBON R | RN72K1J-331JE             | 1    | 435033314R1   |
| R4041    | C-CARBON R | RN72K1J-331JE             | 1    | 435033314R1   |
| R4042    | C-CARBON R | RN72K1J-331JE             | 1    | 435033314R1   |
| R4043    | C-CARBON R | RN72K1J-224JE             | 1    | 435032244R1   |
| R4044    | C-CARBON R | RN72K1J-224JE             | 1    | 435032244R1   |
| R4045    | C-CARBON R | RN72K1J-224JE             | 1    | 435032244R1   |
| R4046    | C-CARBON R | RN72K1J-224JE             | 1    | 435032244R1   |

|       |            |               |   |             |
|-------|------------|---------------|---|-------------|
| R4047 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |
| R4048 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |
| R4051 | METAL O R  | RS1/2WBJ-22   | 1 | 443522204T  |
| R4052 | METAL O R  | RS1/2WBJ-22   | 1 | 443522204T  |
| R4053 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |
| R4054 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |
| R4055 | C-CARBON R | RN72K1J-474JE | 1 | 435034744R1 |
| R4056 | C-CARBON R | RN72K1J-474JE | 1 | 435034744R1 |
| R4057 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |
| R4058 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |
| R4059 | C-CARBON R | RN72K1J-332JE | 1 | 435033324R1 |
| R4060 | C-CARBON R | RN72K1J-332JE | 1 | 435033324R1 |
| R4061 | C-CARBON R | RN72K1J-332JE | 1 | 435033324R1 |
| R4062 | C-CARBON R | RN72K1J-332JE | 1 | 435033324R1 |
| R4063 | C-CARBON R | RN72K1J-153JE | 1 | 435031534R1 |
| R4064 | C-CARBON R | RN72K1J-153JE | 1 | 435031534R1 |
| R4065 | C-CARBON R | RN72K1J-562JE | 1 | 435035624R1 |
| R4066 | C-CARBON R | RN72K1J-562JE | 1 | 435035624R1 |
| R4067 | C-CARBON R | RN72K1J-562JE | 1 | 435035624R1 |
| R4068 | C-CARBON R | RN72K1J-562JE | 1 | 435035624R1 |
| R4069 | C-CARBON R | RN72K1J-332JE | 1 | 435033324R1 |
| R4070 | C-CARBON R | RN72K1J-332JE | 1 | 435033324R1 |
| R4071 | C-CARBON R | RN72K1J-123JE | 1 | 435031234R1 |
| R4072 | C-CARBON R | RN72K1J-123JE | 1 | 435031234R1 |
| R4073 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |
| R4074 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |
| R4075 | C-CARBON R | RN72K1J-272FE | 1 | 435032722R1 |
| R4076 | C-CARBON R | RN72K1J-272FE | 1 | 435032722R1 |
| R4077 | C-CARBON R | RN72K1J-221FE | 1 | 435032212R1 |
| R4078 | C-CARBON R | RN72K1J-221FE | 1 | 435032212R1 |
| R4079 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |
| R4080 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |
| R4081 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |
| R4082 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |
| R4083 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4084 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |
| R4085 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4086 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4087 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4089 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4090 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4091 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |



|       |            |               |   |             |
|-------|------------|---------------|---|-------------|
| R4092 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4093 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4094 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4095 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4104 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |
| R4111 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4125 | METAL R    | RNU1/2WCJ-6.8 | 1 | 453530684T  |
| R4131 | METAL R    | RNU1/2WCJ-6.8 | 1 | 453530684T  |
| R4132 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |
| R4133 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |
| R4135 | METAL O R  | RS1WBJ-100    | 1 | 443621014T  |
| R4136 | METAL O R  | RS1WBJ-100    | 1 | 443621014T  |
| R4137 | C-CARBON R | RN72K1J-471JE | 1 | 435034714R1 |
| R4140 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |
| R4143 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |
| R4145 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |
| R4146 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |
| R4151 | C-CARBON R | RN72K1J-562JE | 1 | 435035624R1 |
| R4152 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |
| R4153 | C-CARBON R | RN72K2E-220JE | 1 | 435222204R1 |
| R4154 | C-CARBON R | RN72K2E-220JE | 1 | 435222204R1 |
| R4155 | C-CARBON R | RN72K1J-154JE | 1 | 435031544R1 |
| R4156 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |
| R4157 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4158 | C-CARBON R | RN72K1J-181JE | 1 | 435031814R1 |
| R4159 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4160 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4162 | C-CARBON R | RN72K1J-562JE | 1 | 435035624R1 |
| R4166 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4167 | C-CARBON R | RN72K1J-154JE | 1 | 435031544R1 |
| R4168 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4169 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |
| R4170 | METAL O R  | RS1/2WBJ-22   | 1 | 443522204T  |
| R4171 | METAL O R  | RS1/2WBJ-22   | 1 | 443522204T  |
| R4172 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4173 | C-CARBON R | RN72K1J-181JE | 1 | 435031814R1 |
| R4174 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4175 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4176 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4178 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4179 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4180 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |

|       |            |               |   |             |
|-------|------------|---------------|---|-------------|
| R4181 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |
| R4183 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |
| R4191 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4192 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4193 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4195 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |
| R4196 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4197 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4198 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4199 | METAL O R  | RS1WBJ-22     | 1 | 443622204T  |
| R4200 | METAL O R  | RS1WBJ-22     | 1 | 443622204T  |
| R4201 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4202 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4203 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4204 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4205 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4209 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |
| R4210 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |
| R4211 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |
| R4212 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |
| R4213 | C-CARBON R | RN72K2E-047JE | 1 | 435220474R1 |
| R4215 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R4218 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |
| R4501 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |
| R4502 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |
| R4503 | C-CARBON R | RN72K1J-272JE | 1 | 435032724R1 |
| R4504 | C-CARBON R | RN72K1J-272JE | 1 | 435032724R1 |
| R4505 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |
| R4506 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |
| R4507 | C-CARBON R | RN72K1J-271JE | 1 | 435032714R1 |
| R4508 | C-CARBON R | RN72K1J-271JE | 1 | 435032714R1 |
| R4509 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |
| R4510 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |
| R4511 | C-CARBON R | RN72K1J-272JE | 1 | 435032724R1 |
| R4512 | C-CARBON R | RN72K1J-272JE | 1 | 435032724R1 |
| R4513 | C-CARBON R | RN72K1J-152JE | 1 | 435031524R1 |
| R4514 | C-CARBON R | RN72K1J-152JE | 1 | 435031524R1 |
| R4515 | C-CARBON R | RN72K1J-152JE | 1 | 435031524R1 |
| R4516 | C-CARBON R | RN72K1J-152JE | 1 | 435031524R1 |
| R4517 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |
| R4518 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |
| R4519 | C-CARBON R | RN72K1J-681JE | 1 | 435036814R1 |

|       |            |               |   |             |
|-------|------------|---------------|---|-------------|
| R4520 | C-CARBON R | RN72K1J-681JE | 1 | 435036814R1 |
| R4523 | C-CARBON R | RN72K1J-561JE | 1 | 435035614R1 |
| R4524 | C-CARBON R | RN72K1J-561JE | 1 | 435035614R1 |
| R4525 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |
| R4526 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |
| R4527 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |
| R4528 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |
| R4529 | C-CARBON R | RN72K1J-182JE | 1 | 435031824R1 |
| R4530 | C-CARBON R | RN72K1J-182JE | 1 | 435031824R1 |
| R4531 | C-CARBON R | RN72K1J-272JE | 1 | 435032724R1 |
| R4532 | C-CARBON R | RN72K1J-272JE | 1 | 435032724R1 |
| R4533 | C-CARBON R | RN72K1J-152JE | 1 | 435031524R1 |
| R4534 | C-CARBON R | RN72K1J-152JE | 1 | 435031524R1 |
| R4535 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |
| R4536 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |
| R4537 | C-CARBON R | RN72K1J-152JE | 1 | 435031524R1 |
| R4538 | C-CARBON R | RN72K1J-152JE | 1 | 435031524R1 |
| R4539 | C-CARBON R | RN72K1J-152JE | 1 | 435031524R1 |
| R4540 | C-CARBON R | RN72K1J-152JE | 1 | 435031524R1 |
| R4542 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |
| R7049 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |
| R7050 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |
| R7051 | C-CARBON R | RN72K1J-124JE | 1 | 435031244R1 |
| R7052 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |
| R7053 | C-CARBON R | RN72K1J-223JE | 1 | 435032234R1 |
| R7054 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |
| R7055 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |
| R7056 | C-CARBON R | RN72K1J-100JE | 1 | 435031004R1 |
| R7057 | C-CARBON R | RN72K1J-100JE | 1 | 435031004R1 |
| R7058 | C-CARBON R | RN72K1J-223JE | 1 | 435032234R1 |
| R7059 | C-CARBON R | RN72K2E-223JE | 1 | 435222234R1 |
| R7065 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |
| R7066 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R7067 | C-CARBON R | RN72K1J-100JE | 1 | 435031004R1 |
| R7068 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R7069 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R7070 | C-CARBON R | RN72K1J-182JE | 1 | 435031824R1 |
| R7071 | C-CARBON R | RN72K1J-183JE | 1 | 435031834R1 |
| R7072 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |
| R7073 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R7600 | C-CARBON R | RN72K1J-563JE | 1 | 435035634R1 |
| R7601 | C-CARBON R | RN72K1J-563JE | 1 | 435035634R1 |

|          |            |               |      |               |
|----------|------------|---------------|------|---------------|
| R8001    | C-CARBON R | RN72K1J-103JE | 1    | 435031034R1   |
| R8002    | C-CARBON R | RN72K1J-101JE | 1    | 435031014R1   |
| R8003    | C-CARBON R | RN72K1J-101JE | 1    | 435031014R1   |
| R8004    | C-CARBON R | RN72K1J-104JE | 1    | 435031044R1   |
| R8005    | C-CARBON R | RN72K1J-104JE | 1    | 435031044R1   |
| R8006    | C-CARBON R | RN72K1J-000JE | 1    | 435030004R1   |
| R8007    | C-CARBON R | RN72K1J-103JE | 1    | 435031034R1   |
| R8008    | C-CARBON R | RN72K1J-104JE | 1    | 435031044R1   |
| R8009    | C-CARBON R | RN72K1J-104JE | 1    | 435031044R1   |
| R8010    | C-CARBON R | RN72K1J-101JE | 1    | 435031014R1   |
| R8011    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8014    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8015    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8016    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8017    | C-CARBON R | RN72K1J-101JE | 1    | 435031014R1   |
| R8018    | C-CARBON R | RN72K1J-101JE | 1    | 435031014R1   |
| R8019    | C-CARBON R | RN72K1J-104JE | 1    | 435031044R1   |
| R8020    | C-CARBON R | RN72K1J-104JE | 1    | 435031044R1   |
| R8021    | C-CARBON R | RN72K1J-102JE | 1    | 435031024R1   |
| R8022    | C-CARBON R | RN72K1J-102JE | 1    | 435031024R1   |
| R8023    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8024    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8025    | C-CARBON R | RN72K1J-101JE | 1    | 435031014R1   |
| R8026    | C-CARBON R | RN72K1J-101JE | 1    | 435031014R1   |
| R8027    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8028    | C-CARBON R | RN72K1J-272JE | 1    | 435032724R1   |
| R8029    | C-CARBON R | RN72K1J-272JE | 1    | 435032724R1   |
| R8030    | C-CARBON R | RN72K1J-473JE | 1    | 435034734R1   |
| R8032    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8033    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8035    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8036    | C-R NET    | RM7LJ223X04   | 1    | 43484722304R2 |
| R8036 or | C-R NET    | YCN104-223-JK | ( 1) | 43464C22304R1 |
| R8037    | C-CARBON R | RN72K1J-104JE | 1    | 435031044R1   |
| R8038    | C-CARBON R | RN72K1J-104JE | 1    | 435031044R1   |
| R8041    | C-CARBON R | RN72K1J-473JE | 1    | 435034734R1   |
| R8042    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8043    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8044    | C-CARBON R | RN72K1J-104JE | 1    | 435031044R1   |
| R8045    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8046    | C-CARBON R | RN72K1J-104JE | 1    | 435031044R1   |
| R8047    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |

|          |            |               |      |               |
|----------|------------|---------------|------|---------------|
| R8048    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8049    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8050    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8051    | C-CARBON R | RN72K1J-104JE | 1    | 435031044R1   |
| R8052    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8053    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8054    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8055    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8056    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8057    | C-R NET    | RM7LJ473X04   | 1    | 43484747304R2 |
| R8057 or | C-R NET    | YCN104-473-JK | ( 1) | 43464C47304R1 |
| R8058    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8059    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8060    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8061    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8062    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8063    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8065    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8067    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8068    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8069    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8070    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8072    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8074    | C-R NET    | RM7LJ103X04   | 1    | 43484710304R2 |
| R8074 or | C-R NET    | YCN104-103-JK | ( 1) | 43464C10304R1 |
| R8075    | C-CARBON R | RN72K1J-101JE | 1    | 435031014R1   |
| R8077    | C-CARBON R | RN72K1J-101JE | 1    | 435031014R1   |
| R8078    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8079    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8080    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8081    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8082    | C-CARBON R | RN72K1J-104JE | 1    | 435031044R1   |
| R8083    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8084    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8085    | C-R NET    | RM7LJ473X04   | 1    | 43484747304R2 |
| R8085 or | C-R NET    | YCN104-473-JK | ( 1) | 43464C47304R1 |
| R8086    | C-CARBON R | RN72K1J-103JE | 1    | 435031034R1   |
| R8087    | C-CARBON R | RN72K1J-103JE | 1    | 435031034R1   |
| R8088    | C-CARBON R | RN72K1J-104JE | 1    | 435031044R1   |
| R8090    | C-CARBON R | RN72K1J-104JE | 1    | 435031044R1   |
| R8091    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R8092    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |

|          |                |               |      |               |  |
|----------|----------------|---------------|------|---------------|--|
| R8093    | C-CARBON R     | RN72K1J-104JE | 1    | 435031044R1   |  |
| R8094    | C-CARBON R     | RN72K1J-470JE | 1    | 435034704R1   |  |
| R8095    | C-CARBON R     | RN72K1J-470JE | 1    | 435034704R1   |  |
| R8096    | C-CARBON R     | RN72K1J-470JE | 1    | 435034704R1   |  |
| R8097    | C-CARBON R     | RN72K1J-470JE | 1    | 435034704R1   |  |
| R8098    | C-CARBON R     | RN72K1J-104JE | 1    | 435031044R1   |  |
| R8099    | C-CARBON R     | RN72K1J-473JE | 1    | 435034734R1   |  |
| R8101    | C-CARBON R     | RN72K1J-104JE | 1    | 435031044R1   |  |
| R8102    | C-CARBON R     | RN72K1J-470JE | 1    | 435034704R1   |  |
| R8103    | C-CARBON R     | RN72K1J-470JE | 1    | 435034704R1   |  |
| R8104    | C-CARBON R     | RN72K1J-470JE | 1    | 435034704R1   |  |
| R8105    | C-CARBON R     | RN72K1J-470JE | 1    | 435034704R1   |  |
| R8106    | C-CARBON R     | RN72K1J-470JE | 1    | 435034704R1   |  |
| R8107    | C-CARBON R     | RN72K1J-470JE | 1    | 435034704R1   |  |
| R8108    | C-CARBON R     | RN72K1J-470JE | 1    | 435034704R1   |  |
| R8109    | C-CARBON R     | RN72K1J-470JE | 1    | 435034704R1   |  |
| R8110    | C-CARBON R     | RN72K1J-470JE | 1    | 435034704R1   |  |
| R8111    | C-CARBON R     | RN72K1J-470JE | 1    | 435034704R1   |  |
| R8112    | C-R NET        | RM7LJ103X04   | 1    | 43484710304R2 |  |
| R8112 or | C-R NET        | YCN104-103-JK | ( 1) | 43464C10304R1 |  |
| R8114    | C-CARBON R     | RN72K1J-103JE | 1    | 435031034R1   |  |
| R8115    | C-CARBON R     | RN72K1J-470JE | 1    | 435034704R1   |  |
| R8116    | C-CARBON R     | RN72K1J-470JE | 1    | 435034704R1   |  |
| R8117    | C-CARBON R     | RN72K1J-104JE | 1    | 435031044R1   |  |
| R8118    | C-CARBON R     | RN72K1J-470JE | 1    | 435034704R1   |  |
| R8119    | C-CARBON R     | RN72K1J-470JE | 1    | 435034704R1   |  |
| R8120    | C-CARBON R     | RN72K1J-470JE | 1    | 435034704R1   |  |
| R8121    | C-CARBON R     | RN72K1J-103JE | 1    | 435031034R1   |  |
| R8122    | C-CARBON R     | RN72K1J-103JE | 1    | 435031034R1   |  |
| R8123    | C-CARBON R     | RN72K1J-470JE | 1    | 435034704R1   |  |
| R8124    | C-CARBON R     | RN72K1J-470JE | 1    | 435034704R1   |  |
| R8125    | C-CARBON R     | RN72K1J-470JE | 1    | 435034704R1   |  |
| R8126    | C-CARBON R     | RN72K1J-470JE | 1    | 435034704R1   |  |
| R8127    | C-CARBON R     | RN72K1J-000JE | 1    | 435030004R1   |  |
| R8128    | C-CARBON R     | RN72K1J-124JE | 1    | 435031244R1   |  |
| R8129    | C-CARBON R     | RN72K1J-000JE | 1    | 435030004R1   |  |
| [SW TRM] |                |               |      |               |  |
| E1901    | RETAINER       | (TRM)         | 1    | 25060507      |  |
| E2001    | TRM-423(SCREW) | NEJITANSI ST3 | 1    | 25060495      |  |
| E3501    | TRM-423(SCREW) | NEJITANSI ST3 | 1    | 25060495      |  |
| E3503    | RETAINER       | (TRM)         | 1    | 25060507      |  |
| E3504    | RETAINER       | (TRM)         | 1    | 25060507      |  |

|               |                |                       |   |               |  |
|---------------|----------------|-----------------------|---|---------------|--|
| E3505         | RETAINER       | (TRM)                 | 1 | 25060507      |  |
| E3506         | RETAINER       | (TRM)                 | 1 | 25060507      |  |
| E4000         | TRM-423(SCREW) | NEJITANSI ST3         | 1 | 25060495      |  |
| E9006         | TRM            | NTM-1P232(M1700)      | 1 | 25060301      |  |
| JL4003A       | WIRE TRAP      | NPLG-3P586            | 1 | 25055624      |  |
| JL4004A       | WIRE TRAP      | NPLG-9P592            | 1 | 25055630      |  |
| P1011         | PLUG           | NPLG-5P133            | 1 | 25055149      |  |
| P1017         | PLUG           | NPLG-6P134            | 1 | 25055150      |  |
| P1018         | PLUG           | NPLG-2P116            | 1 | 25055132      |  |
| P1019         | SOCKET         | IMSA-9617S-16Y941     | 1 | 25053497R2    |  |
| P2502         | PIN JACK       | NPJ-1PDO585           | 1 | 25045805      |  |
| P3401B        | SOCKET         | IMSA-9827S-70Y927     | 1 | 25053491R2    |  |
| P3605A        | SOCKET         | IMSA-9142S-20A        | 1 | 25053232      |  |
| P3605B        | PLUG           | IMSA-9142B-20A        | 1 | 25056600      |  |
| P3901B        | PLUG           | NPLG-5P918            | 1 | 25055965R2    |  |
| P3902A        | PLUG           | NPLG-5P918            | 1 | 25055965R2    |  |
| P3903         | SOCKET         | C00124K221700         | 1 | 25053410      |  |
| P3905         | SOCKET         | RB1-105B8A1F          | 1 | 25053409      |  |
| P4006         | ST JACK        | MSJ-035-22            | 1 | 25045887      |  |
| P4007A        | SOCKET         | NSCT-9P2102           | 1 | 25052205      |  |
| P4008         | PIN JACK       | NPJ-6PDRW665          | 1 | 25045894      |  |
| P4009         | ST JACK        | MSJ-035-22            | 1 | 25045887      |  |
| P4010A        | PLUG           | IMSA-9142B-26A        | 1 | 25056603      |  |
| P4010B        | SOCKET         | IMSA-9142S-26A        | 1 | 25053235      |  |
| P4011A        | PLUG           | IMSA-9142B-16A        | 1 | 25056598      |  |
| P4011B        | SOCKET         | IMSA-9142S-16A        | 1 | 25053230      |  |
| P4012         | CRIMP AS       | 1.8S-SGF-41T-4:BLK200 | 1 | 20799191UL    |  |
| P7001A        | PLUG           | NPLG-13P141           | 1 | 25055157      |  |
| P7001C        | SOCKET AS      | NSAS-26P2044          | 1 | 2002E382635UL |  |
| P7002A        | PLUG           | NPLG-11P139           | 1 | 25055155      |  |
| P7011A        | CRIMP AS       | 1.8S-TAMAG            | 1 | 2069355100UL  |  |
| P8002         | SOCKET         | IMSA-9618S-09A        | 1 | 25053334R2    |  |
| P8003A        | SOCKET         | IMSA-9618S-09A        | 1 | 25053334R2    |  |
| P9501B        | SOCKET         | IMSA-9142S-14A        | 1 | 25053229      |  |
| [TUNER UNIT]  |                |                       |   |               |  |
| U2501         | PHT CP         | JSR1165-001recieving  | 1 | 24120143      |  |
| U003          |                |                       |   |               |  |
| BADSP-1238-1A |                |                       |   |               |  |



| CIRCUIT NO       | PART NAME | DESCRIPTION              | Q'TY | PART NO. (SN)   | REMARKS |
|------------------|-----------|--------------------------|------|-----------------|---------|
| [SEMI CONDUCTOR] |           |                          |      |                 |         |
| D3001            | C-DIODE   | DA2J10100                | 1    | 223303R2        |         |
| D3001 or         | C-DIODE   | 1SS352                   | ( 1) | 223234R2        |         |
| D3001 or         | C-DIODE   | 1SS355                   | ( 1) | 223269R2        |         |
| D3001 or         | C-DIODE   | MA2J111                  | ( 1) | 223279R2        |         |
| D3001 or         | C-DIODE   | KDS4148U                 | ( 1) | 223283R2        |         |
| Q3001            | IC        | D830K013CZKB400Z         | 1    | 22242819R3      | N       |
| Q3002            | IC (DSP)  | TC58DVM92A5TA10B3H (0566 | 1    | 222W0125R305666 |         |
| Q3003            | IC        | A3V56S40FTP-G6           | 1    | 22242764R2      |         |
| Q3003 or         | IC        | IS42S16160C-7TL          | ( 1) | 22242592R3      |         |
| Q3004            | IC        | A3V56S40FTP-G6           | 1    | 22242764R2      |         |
| Q3004 or         | IC        | IS42S16160C-7TL          | ( 1) | 22242592R3      |         |
| Q3005            | IC        | TC7W32FU                 | 1    | 22241162R2      |         |
| Q3006            | IC        | S-80127CNMC-JKM-T2       | 1    | 22241642R2      |         |
| Q3007            | IC        | TC7SZU04FU               | 1    | 22242512R2TO    |         |
| Q3007 or         | IC        | SN74LVC1GU04DCKR         | ( 1) | 22242815R2TI    |         |
| Q3007 or         | IC        | 74LVC1GU04GW             | ( 1) | 22242816R2NX    |         |
| Q3101            | IC        | TC7MBL3245SFT            | 1    | 22242539R2TO    |         |
| Q3103            | IC        | BU18TD3WG-TR             | 1    | 22242716R2      |         |
| Q3108            | IC        | KSZ8051RNL               | 1    | 22242723R2      |         |
| Q3108 or         | IC        | KSZ8051RNL(REVA2)        | ( 1) | 22242723AR2     |         |
| Q3109            | IC        | S-1172B12-U5T1G          | 1    | 22242777R2      |         |
| Q3351            | IC        | TC74VHC157FT             | 1    | 22274157ER2TO   |         |
| Q3401            | IC        | MP2303ADN-LF-Z           | 1    | 22242785R2      |         |
| Q3403            | TR        | 2SC2712-GR               | 1    | 2213145R2       |         |
| Q3403 or         | TR        | KTC3875-GR               | ( 1) | 2216175R2       |         |
| Q3404            | TR        | KRA103S                  | 1    | 2216230R2       |         |
| Q3406            | IC        | TPS22924CYZPR            | 1    | 22242807R2      |         |
| Q3421            | IC        | MP2303ADN-LF-Z           | 1    | 22242785R2      |         |
| [TRANS COIL]     |           |                          |      |                 |         |
| L3001            | CORE      | BLM18PG121SN1D           | 1    | 2350006R1       |         |
| L3002            | CORE      | BLM18PG121SN1D           | 1    | 2350006R1       |         |
| L3003            | CORE      | BLM18PG121SN1D           | 1    | 2350006R1       |         |
| L3004            | CORE      | BLM18PG121SN1D           | 1    | 2350006R1       |         |
| L3005            | CORE      | BLM18PG121SN1D           | 1    | 2350006R1       |         |
| L3006            | CORE      | BLM18PG181SN1D           | 1    | 2350005R1       |         |
| L3101            | CORE      | DLP11SA900HL2L           | 1    | 2350021R2       |         |
| L3102            | CORE      | BLM18PG181SN1D           | 1    | 2350005R1       |         |
| L3103            | CORE      | BLM18PG121SN1D           | 1    | 2350006R1       |         |
| L3104            | CORE      | BLM18PG121SN1D           | 1    | 2350006R1       |         |
| L3105            | CORE      | BLM18PG121SN1D           | 1    | 2350006R1       |         |

|             |            |                   |   |              |
|-------------|------------|-------------------|---|--------------|
| L3106       | CORE       | BLM18PG121SN1D    | 1 | 2350006R1    |
| L3107       | CORE       | BLM18PG181SN1D    | 1 | 2350005R1    |
| L3108       | CORE       | BLM18PG181SN1D    | 1 | 2350005R1    |
| L3109       | CORE       | BLM18PG121SN1D    | 1 | 2350006R1    |
| L3110       | CORE       | BLM18PG121SN1D    | 1 | 2350006R1    |
| L3112       | CORE       | DLP11SA900HL2L    | 1 | 2350021R2    |
| L3145       | CORE       | DLP2ADN900HL4L    | 1 | 230990R2     |
| L3203       | CORE       | MMZ1608Y601BT     | 1 | 2350004R1    |
| L3351       | CORE       | BLM18PG181SN1D    | 1 | 2350005R1    |
| L3352       | CORE       | MMZ1608Y601BT     | 1 | 2350004R1    |
| L3381       | CORE       | BLM18PG181SN1D    | 1 | 2350005R1    |
| L3401       | CHOKE COIL | BLM21PG221SN1     | 1 | 230949R2     |
| L3402       | CHOKE COIL | C6-K5RA-10UH      | 1 | 231451P100R2 |
| L3403       | CHOKE COIL | BLM21PG221SN1     | 1 | 230949R2     |
| L3404       | CHOKE COIL | BLM21PG221SN1     | 1 | 230949R2     |
| L3421       | CHOKE COIL | BLM21PG221SN1     | 1 | 230949R2     |
| L3422       | CHOKE COIL | C6-K5RA-10UH      | 1 | 231451P100R2 |
| L3423       | CHOKE COIL | BLM21PG221SN1     | 1 | 230949R2     |
| L3424       | CHOKE COIL | BLM21PG221SN1     | 1 | 230949R2     |
| X3001       | CRYSTAL    | HC-49S 9C20.0000M | 1 | 3010514R2    |
| [CAPACITOR] |            |                   |   |              |
| C3001       | C-CERA C   | CK725B1A-105K0    | 1 | 332001055R1  |
| C3002       | C-CERA C   | CK725B1H-222K0    | 1 | 332032225R1  |
| C3003       | C-CERA C   | CK732B16V-106K    | 1 | 332071065R2  |
| C3004       | C-CERA C   | CK732B16V-106K    | 1 | 332071065R2  |
| C3005       | C-CERA C   | CK725B1A-105K0    | 1 | 332001055R1  |
| C3006       | C-CERA C   | CK725B1H-222K0    | 1 | 332032225R1  |
| C3007       | C-CERA C   | CK725B1A-105K0    | 1 | 332001055R1  |
| C3008       | C-CERA C   | CK725B1H-222K0    | 1 | 332032225R1  |
| C3009       | C-CERA C   | CK725B1A-105K0    | 1 | 332001055R1  |
| C3010       | C-CERA C   | CK725B1A-105K0    | 1 | 332001055R1  |
| C3011       | C-CERA C   | CK725B1A-105K0    | 1 | 332001055R1  |
| C3012       | C-CERA C   | CK725B1H-222K0    | 1 | 332032225R1  |
| C3013       | C-CERA C   | CK725B1A-105K0    | 1 | 332001055R1  |
| C3014       | C-CERA C   | CK725B1H-102K0    | 1 | 332031025R1  |
| C3015       | C-CERA C   | CK725B1H-222K0    | 1 | 332032225R1  |
| C3016       | C-CERA C   | CK725B1A-105K0    | 1 | 332001055R1  |
| C3017       | C-CERA C   | CK725B1A-105K0    | 1 | 332001055R1  |
| C3018       | C-CERA C   | CK725B1A-105K0    | 1 | 332001055R1  |
| C3019       | C-CERA C   | CK725B1H-102K0    | 1 | 332031025R1  |
| C3020       | C-CERA C   | CK725B1H-222K0    | 1 | 332032225R1  |
| C3021       | C-CERA C   | CK725B1A-105K0    | 1 | 332001055R1  |

|       |          |                 |   |             |
|-------|----------|-----------------|---|-------------|
| C3022 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3023 | C-CERA C | CK732B16V-106K  | 1 | 332071065R2 |
| C3024 | C-CERA C | CK725B1H-102K0  | 1 | 332031025R1 |
| C3025 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3026 | C-CERA C | CK725B1C-104K0  | 1 | 332011045R1 |
| C3027 | C-CERA C | CK725B1H-222K0  | 1 | 332032225R1 |
| C3028 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3029 | C-CERA C | CK725B1H-222K0  | 1 | 332032225R1 |
| C3030 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3031 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3032 | C-CERA C | CK725B1H-222K0  | 1 | 332032225R1 |
| C3033 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3034 | C-CERA C | CC725CH1H-330J0 | 1 | 342033304R1 |
| C3035 | C-CERA C | CK725B1H-222K0  | 1 | 332032225R1 |
| C3036 | C-CERA C | CC725CH1H-330J0 | 1 | 342033304R1 |
| C3037 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3038 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3039 | C-CERA C | CC725CH1H-331J0 | 1 | 342033314R1 |
| C3040 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3041 | C-CERA C | CK732B16V-106K  | 1 | 332071065R2 |
| C3042 | C-CERA C | CC725CH1H-331J0 | 1 | 342033314R1 |
| C3043 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3044 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3045 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3105 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3106 | C-CERA C | CK732B16V-106K  | 1 | 332071065R2 |
| C3107 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3108 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3109 | C-CERA C | CK732B16V-106K  | 1 | 332071065R2 |
| C3110 | C-CERA C | CC725CH1H-221J0 | 1 | 342032214R1 |
| C3111 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3112 | C-CERA C | CK732B16V-106K  | 1 | 332071065R2 |
| C3113 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3114 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3115 | C-CERA C | CK732B16V-106K  | 1 | 332071065R2 |
| C3116 | C-CERA C | CK732B16V-106K  | 1 | 332071065R2 |
| C3117 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3118 | C-CERA C | CC725CH1H-331J0 | 1 | 342033314R1 |
| C3121 | C-CERA C | CK725B1C-104K0  | 1 | 332011045R1 |
| C3122 | C-CERA C | CK725B1H-222K0  | 1 | 332032225R1 |
| C3123 | C-CERA C | CK732B16V-106K  | 1 | 332071065R2 |
| C3124 | C-CERA C | CK732B16V-106K  | 1 | 332071065R2 |

|       |          |                 |   |             |
|-------|----------|-----------------|---|-------------|
| C3125 | C-CERA C | CK732B16V-106K  | 1 | 332071065R2 |
| C3126 | C-CERA C | CK732B16V-106K  | 1 | 332071065R2 |
| C3127 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3128 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3129 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3130 | C-CERA C | CK732B16V-106K  | 1 | 332071065R2 |
| C3131 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3132 | C-CERA C | CC725CH1H-101J0 | 1 | 342031014R1 |
| C3133 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3136 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3137 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3138 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3139 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3140 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3143 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3144 | C-CERA C | CK725B1H-222K0  | 1 | 332032225R1 |
| C3145 | C-CERA C | CK732B16V-106K  | 1 | 332071065R2 |
| C3146 | C-CERA C | CC725CH1H-331J0 | 1 | 342033314R1 |
| C3147 | C-CERA C | CK725B0J-226M   | 1 | 332092267R2 |
| C3149 | C-CERA C | CC725CH1H-331J0 | 1 | 342033314R1 |
| C3150 | C-CERA C | CK732B16V-106K  | 1 | 332071065R2 |
| C3151 | C-CERA C | CK725B0J-226M   | 1 | 332092267R2 |
| C3152 | C-CERA C | CK732B16V-106K  | 1 | 332071065R2 |
| C3153 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3154 | C-CERA C | CK732B16V-106K  | 1 | 332071065R2 |
| C3155 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3156 | C-CERA C | CK725B1H-102K0  | 1 | 332031025R1 |
| C3157 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3158 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3159 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3162 | C-CERA C | CK725B1C-104K0  | 1 | 332011045R1 |
| C3201 | C-CERA C | CK725B1A-105K0  | 1 | 332001055R1 |
| C3351 | C-CERA C | CK732B16V-106K  | 1 | 332071065R2 |
| C3352 | C-CERA C | CK725B1A-474K0  | 1 | 332004745R1 |
| C3384 | C-CERA C | CK732B16V-106K  | 1 | 332071065R2 |
| C3385 | C-CERA C | CK732B16V-106K  | 1 | 332071065R2 |
| C3401 | C-CERA C | CK725B1C-104K0  | 1 | 332011045R1 |
| C3402 | C-CERA C | CK725B1E-103K0  | 1 | 332021035R1 |
| C3404 | C-CERA C | CK725B1C-104K0  | 1 | 332011045R1 |
| C3405 | C-CERA C | CK725B1E-106K   | 1 | 332221065R2 |
| C3406 | C-CERA C | CK725B1E-106K   | 1 | 332221065R2 |
| C3407 | C-CERA C | CK725B0J-226M   | 1 | 332092267R2 |

|                   |            |                |       |               |
|-------------------|------------|----------------|-------|---------------|
| C3408             | C-CERA C   | CK725B0J-226M  | 1     | 332092267R2   |
| C3410             | C-CERA C   | CK725B0J-226M  | 1     | 332092267R2   |
| C3411             | C-CERA C   | CK725B1A-105K0 | 1     | 332001055R1   |
| C3412             | C-CERA C   | CK732B16V-106K | 1     | 332071065R2   |
| C3413             | C-CERA C   | CK725B1A-105K0 | 1     | 332001055R1   |
| C3414             | C-CERA C   | CK725B1E-106K  | 1     | 332221065R2   |
| C3416             | C-CERA C   | CK725B1A-105K0 | 1     | 332001055R1   |
| C3421             | C-CERA C   | CK725B1C-104K0 | 1     | 332011045R1   |
| C3422             | C-CERA C   | CK725B1H-472K0 | 1     | 332034725R1   |
| C3424             | C-CERA C   | CK725B1C-104K0 | 1     | 332011045R1   |
| C3425             | C-CERA C   | CK725B1E-106K  | 1     | 332221065R2   |
| C3426             | C-CERA C   | CK725B1E-106K  | 1     | 332221065R2   |
| C3427             | C-CERA C   | CK725B0J-226M  | 1     | 332092267R2   |
| C3428             | C-CERA C   | CK725B0J-226M  | 1     | 332092267R2   |
| C3430             | C-CERA C   | CK725B0J-226M  | 1     | 332092267R2   |
| C3431             | C-CERA C   | CK725B1A-105K0 | 1     | 332001055R1   |
| C3432             | C-CERA C   | CK725B1E-106K  | 1     | 332221065R2   |
| C3441             | C-CERA C   | CK725B1E-106K  | 1     | 332221065R2   |
| <b>[RESISTOR]</b> |            |                |       |               |
| R3009             | C-CARBON R | RN72K1J-330JE  | 1     | 435033304R1   |
| R3010             | C-R NET    | RM7LJ330X04    | 1     | 43484733004R2 |
| R3010 or          | C-R NET    | YCN104-330-JK  | ( 1 ) | 43464C33004R1 |
| R3011             | C-R NET    | RM7LJ330X04    | 1     | 43484733004R2 |
| R3011 or          | C-R NET    | YCN104-330-JK  | ( 1 ) | 43464C33004R1 |
| R3012             | C-R NET    | RM7LJ470X04    | 1     | 43484747004R2 |
| R3012 or          | C-R NET    | YCN104-470-JK  | ( 1 ) | 43464C47004R1 |
| R3013             | C-R NET    | RM7LJ330X04    | 1     | 43484733004R2 |
| R3013 or          | C-R NET    | YCN104-330-JK  | ( 1 ) | 43464C33004R1 |
| R3014             | C-R NET    | RM7LJ330X04    | 1     | 43484733004R2 |
| R3014 or          | C-R NET    | YCN104-330-JK  | ( 1 ) | 43464C33004R1 |
| R3015             | C-R NET    | RM7LJ330X04    | 1     | 43484733004R2 |
| R3015 or          | C-R NET    | YCN104-330-JK  | ( 1 ) | 43464C33004R1 |
| R3016             | C-CARBON R | RN72K1J-470JE  | 1     | 435034704R1   |
| R3017             | C-R NET    | RM7LJ330X04    | 1     | 43484733004R2 |
| R3017 or          | C-R NET    | YCN104-330-JK  | ( 1 ) | 43464C33004R1 |
| R3018             | C-CARBON R | RN72K1J-470JE  | 1     | 435034704R1   |
| R3019             | C-R NET    | RM7LJ330X04    | 1     | 43484733004R2 |
| R3019 or          | C-R NET    | YCN104-330-JK  | ( 1 ) | 43464C33004R1 |
| R3020             | C-R NET    | RM7LJ330X04    | 1     | 43484733004R2 |
| R3020 or          | C-R NET    | YCN104-330-JK  | ( 1 ) | 43464C33004R1 |
| R3021             | C-CARBON R | RN72K1J-470JE  | 1     | 435034704R1   |
| R3022             | C-CARBON R | RN72K1J-470JE  | 1     | 435034704R1   |

|          |            |               |      |               |
|----------|------------|---------------|------|---------------|
| R3023    | C-R NET    | RM7LJ470X04   | 1    | 43484747004R2 |
| R3023 or | C-R NET    | YCN104-470-JK | ( 1) | 43464C47004R1 |
| R3024    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3025    | C-CARBON R | RN72K1J-102JE | 1    | 435031024R1   |
| R3027    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3028    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3029    | C-CARBON R | RN72K1J-102JE | 1    | 435031024R1   |
| R3032    | C-CARBON R | RN72K1J-103JE | 1    | 435031034R1   |
| R3033    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3034    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3035    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3036    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3037    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3038    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3039    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3040    | C-CARBON R | RN72K1J-103JE | 1    | 435031034R1   |
| R3041    | C-R NET    | RM7LJ330X04   | 1    | 43484733004R2 |
| R3041 or | C-R NET    | YCN104-330-JK | ( 1) | 43464C33004R1 |
| R3042    | C-R NET    | RM7LJ330X04   | 1    | 43484733004R2 |
| R3042 or | C-R NET    | YCN104-330-JK | ( 1) | 43464C33004R1 |
| R3043    | C-CARBON R | RN72K1J-000JE | 1    | 435030004R1   |
| R3044    | C-R NET    | RM7LJ330X04   | 1    | 43484733004R2 |
| R3044 or | C-R NET    | YCN104-330-JK | ( 1) | 43464C33004R1 |
| R3045    | C-R NET    | RM7LJ330X04   | 1    | 43484733004R2 |
| R3045 or | C-R NET    | YCN104-330-JK | ( 1) | 43464C33004R1 |
| R3047    | C-CARBON R | RN72K1J-560JE | 1    | 435035604R1   |
| R3048    | C-CARBON R | RN72K1J-000JE | 1    | 435030004R1   |
| R3049    | C-CARBON R | RN72K1J-560JE | 1    | 435035604R1   |
| R3050    | C-CARBON R | RN72K1J-560JE | 1    | 435035604R1   |
| R3051    | C-CARBON R | RN72K1J-560JE | 1    | 435035604R1   |
| R3054    | C-CARBON R | RN72K1J-103JE | 1    | 435031034R1   |
| R3056    | C-CARBON R | RN72K1J-472JE | 1    | 435034724R1   |
| R3060    | C-CARBON R | RN72K1J-680JE | 1    | 435036804R1   |
| R3061    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3062    | C-CARBON R | RN72K1J-680JE | 1    | 435036804R1   |
| R3063    | C-CARBON R | RN72K1J-680JE | 1    | 435036804R1   |
| R3064    | C-CARBON R | RN72K1J-680JE | 1    | 435036804R1   |
| R3065    | C-CARBON R | RN72K1J-680JE | 1    | 435036804R1   |
| R3066    | C-CARBON R | RN72K1J-102JE | 1    | 435031024R1   |
| R3067    | C-CARBON R | RN72K1J-103JE | 1    | 435031034R1   |
| R3068    | C-CARBON R | RN72K1J-102JE | 1    | 435031024R1   |
| R3101    | C-CARBON R | RN72K1J-331JE | 1    | 435033314R1   |

|       |            |               |   |             |
|-------|------------|---------------|---|-------------|
| R3103 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R3104 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R3105 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R3106 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R3108 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R3109 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |
| R3111 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |
| R3113 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |
| R3115 | C-CARBON R | RN72K1J-332JE | 1 | 435033324R1 |
| R3117 | C-CARBON R | RN72K1J-332JE | 1 | 435033324R1 |
| R3119 | C-CARBON R | RN72K1J-332JE | 1 | 435033324R1 |
| R3122 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |
| R3123 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |
| R3124 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |
| R3125 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R3126 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R3127 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R3128 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |
| R3129 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R3130 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R3131 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R3132 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |
| R3133 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R3134 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |
| R3135 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |
| R3136 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |
| R3137 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |
| R3138 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |
| R3139 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |
| R3140 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R3141 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R3142 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |
| R3143 | C-CARBON R | RN72K1J-392JE | 1 | 435033924R1 |
| R3144 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |
| R3145 | C-CARBON R | RN72K1J-392JE | 1 | 435033924R1 |
| R3146 | C-CARBON R | RN72K1J-390JE | 1 | 435033904R1 |
| R3147 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |
| R3148 | C-CARBON R | RN72K1J-390JE | 1 | 435033904R1 |
| R3150 | C-CARBON R | RN72K1J-680JE | 1 | 435036804R1 |
| R3151 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |
| R3152 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |
| R3153 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |

|          |            |               |      |               |
|----------|------------|---------------|------|---------------|
| R3154    | C-CARBON R | RN72K1J-390JE | 1    | 435033904R1   |
| R3155    | C-CARBON R | RN72K1J-390JE | 1    | 435033904R1   |
| R3156    | C-CARBON R | RN72K1J-390JE | 1    | 435033904R1   |
| R3157    | C-CARBON R | RN72K1J-000JE | 1    | 435030004R1   |
| R3162    | C-CARBON R | RN72K1J-390JE | 1    | 435033904R1   |
| R3163    | C-CARBON R | RN72K1J-220JE | 1    | 435032204R1   |
| R3164    | C-CARBON R | RN72K1J-472JE | 1    | 435034724R1   |
| R3168    | C-CARBON R | RN72K1J-220JE | 1    | 435032204R1   |
| R3169    | C-CARBON R | RN72K1J-220JE | 1    | 435032204R1   |
| R3170    | C-CARBON R | RN72K1J-391FE | 1    | 435033912R1   |
| R3171    | C-CARBON R | RN72K1J-222FE | 1    | 435032222R1   |
| R3172    | C-CARBON R | RN72K1J-392FE | 1    | 435033922R1   |
| R3173    | C-CARBON R | RN72K1J-390JE | 1    | 435033904R1   |
| R3174    | C-CARBON R | RN72K1J-390JE | 1    | 435033904R1   |
| R3175    | C-CARBON R | RN72K1J-472JE | 1    | 435034724R1   |
| R3181    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3182    | C-CARBON R | RN72K1J-472JE | 1    | 435034724R1   |
| R3183    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3184    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3185    | C-CARBON R | RN72K1J-102JE | 1    | 435031024R1   |
| R3188    | C-CARBON R | RN72K1J-473JE | 1    | 435034734R1   |
| R3189    | C-CARBON R | RN72K1J-473JE | 1    | 435034734R1   |
| R3190    | C-CARBON R | RN72K1J-472JE | 1    | 435034724R1   |
| R3192    | C-CARBON R | RN72K1J-472JE | 1    | 435034724R1   |
| R3193    | C-CARBON R | RN72K1J-472JE | 1    | 435034724R1   |
| R3194    | C-CARBON R | RN72K1J-472JE | 1    | 435034724R1   |
| R3199    | C-CARBON R | RN72K1J-102JE | 1    | 435031024R1   |
| R3201    | C-R NET    | RM7LJ470X04   | 1    | 43484747004R2 |
| R3201 or | C-R NET    | YCN104-470-JK | ( 1) | 43464C47004R1 |
| R3202    | C-R NET    | RM7LJ470X04   | 1    | 43484747004R2 |
| R3202 or | C-R NET    | YCN104-470-JK | ( 1) | 43464C47004R1 |
| R3203    | C-R NET    | RM7LJ470X04   | 1    | 43484747004R2 |
| R3203 or | C-R NET    | YCN104-470-JK | ( 1) | 43464C47004R1 |
| R3204    | C-CARBON R | RN72K1J-472JE | 1    | 435034724R1   |
| R3205    | C-CARBON R | RN72K1J-472JE | 1    | 435034724R1   |
| R3207    | C-R NET    | RM7LJ470X04   | 1    | 43484747004R2 |
| R3207 or | C-R NET    | YCN104-470-JK | ( 1) | 43464C47004R1 |
| R3208    | C-CARBON R | RN72K1J-331JE | 1    | 435033314R1   |
| R3209    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3210    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3211    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3212    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |



|          |            |               |      |               |
|----------|------------|---------------|------|---------------|
| R3213    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3214    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3215    | C-CARBON R | RN72K1J-221JE | 1    | 435032214R1   |
| R3216    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3217    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3218    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3219    | C-CARBON R | RN72K1J-221JE | 1    | 435032214R1   |
| R3220    | C-CARBON R | RN72K1J-000JE | 1    | 435030004R1   |
| R3221    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3222    | C-CARBON R | RN72K1J-221JE | 1    | 435032214R1   |
| R3223    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3224    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3225    | C-CARBON R | RN72K1J-221JE | 1    | 435032214R1   |
| R3226    | C-R NET    | RM7LJ470X04   | 1    | 43484747004R2 |
| R3226 or | C-R NET    | YCN104-470-JK | ( 1) | 43464C47004R1 |
| R3227    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3228    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3229    | C-CARBON R | RN72K1J-221JE | 1    | 435032214R1   |
| R3230    | C-CARBON R | RN72K1J-221JE | 1    | 435032214R1   |
| R3231    | C-CARBON R | RN72K1J-221JE | 1    | 435032214R1   |
| R3232    | C-CARBON R | RN72K1J-221JE | 1    | 435032214R1   |
| R3233    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3234    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3235    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3236    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3237    | C-CARBON R | RN72K1J-221JE | 1    | 435032214R1   |
| R3238    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3239    | C-CARBON R | RN72K1J-221JE | 1    | 435032214R1   |
| R3240    | C-CARBON R | RN72K1J-000JE | 1    | 435030004R1   |
| R3241    | C-CARBON R | RN72K1J-221JE | 1    | 435032214R1   |
| R3242    | C-CARBON R | RN72K1J-221JE | 1    | 435032214R1   |
| R3244    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3246    | C-CARBON R | RN72K1J-103JE | 1    | 435031034R1   |
| R3247    | C-CARBON R | RN72K1J-331JE | 1    | 435033314R1   |
| R3251    | C-CARBON R | RN72K1J-331JE | 1    | 435033314R1   |
| R3257    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3260    | C-CARBON R | RN72K1J-331JE | 1    | 435033314R1   |
| R3266    | C-CARBON R | RN72K1J-332JE | 1    | 435033324R1   |
| R3268    | C-CARBON R | RN72K1J-390JE | 1    | 435033904R1   |
| R3269    | C-CARBON R | RN72K1J-472JE | 1    | 435034724R1   |
| R3272    | C-CARBON R | RN72K1J-470JE | 1    | 435034704R1   |
| R3274    | C-CARBON R | RN72K1J-390JE | 1    | 435033904R1   |

|          |            |                   |      |               |   |
|----------|------------|-------------------|------|---------------|---|
| R3277    | C-CARBON R | RN72K1J-470JE     | 1    | 435034704R1   |   |
| R3278    | C-CARBON R | RN72K1J-470JE     | 1    | 435034704R1   |   |
| R3279    | C-CARBON R | RN72K1J-470JE     | 1    | 435034704R1   |   |
| R3280    | C-CARBON R | RN72K1J-470JE     | 1    | 435034704R1   |   |
| R3281    | C-CARBON R | RN72K1J-472JE     | 1    | 435034724R1   |   |
| R3282    | C-CARBON R | RN72K1J-472JE     | 1    | 435034724R1   |   |
| R3283    | C-CARBON R | RN72K1J-472JE     | 1    | 435034724R1   |   |
| R3284    | C-CARBON R | RN72K1J-472JE     | 1    | 435034724R1   |   |
| R3285    | C-CARBON R | RN72K1J-332JE     | 1    | 435033324R1   |   |
| R3286    | C-CARBON R | RN72K1J-332JE     | 1    | 435033324R1   |   |
| R3351    | C-CARBON R | RN72K1J-331JE     | 1    | 435033314R1   |   |
| R3352    | C-CARBON R | RN72K1J-470JE     | 1    | 435034704R1   |   |
| R3353    | C-R NET    | RM7LJ221X04       | 1    | 43484722104R2 |   |
| R3353 or | C-R NET    | YCN104-221-JK     | ( 1) | 43464C22104R1 |   |
| R3354    | C-CARBON R | RN72K1J-470JE     | 1    | 435034704R1   |   |
| R3355    | C-CARBON R | RN72K1J-470JE     | 1    | 435034704R1   |   |
| R3356    | C-R NET    | RM7LJ221X04       | 1    | 43484722104R2 |   |
| R3356 or | C-R NET    | YCN104-221-JK     | ( 1) | 43464C22104R1 |   |
| R3357    | C-CARBON R | RN72K1J-470JE     | 1    | 435034704R1   |   |
| R3401    | C-CARBON R | RN72K1J-104JE     | 1    | 435031044R1   |   |
| R3402    | C-CARBON R | RN72K1J-473JE     | 1    | 435034734R1   |   |
| R3403    | C-CARBON R | RN72K1J-104JE     | 1    | 435031044R1   |   |
| R3404    | C-CARBON R | RN72K1J-103JE     | 1    | 435031034R1   |   |
| R3405    | C-CARBON R | RN72K1J-103FE     | 1    | 435031032R1   |   |
| R3406    | C-CARBON R | RN72K1J-824FE     | 1    | 435038242R1   |   |
| R3407    | C-CARBON R | RN72K1J-333FE     | 1    | 435033332R1   |   |
| R3409    | C-CARBON R | RN72K1J-104JE     | 1    | 435031044R1   |   |
| R3421    | C-CARBON R | RN72K1J-104JE     | 1    | 435031044R1   |   |
| R3422    | C-CARBON R | RN72K1J-223JE     | 1    | 435032234R1   |   |
| R3423    | C-CARBON R | RN72K1J-562JE     | 1    | 435035624R1   |   |
| R3425    | C-CARBON R | RN72K1J-103FE     | 1    | 435031032R1   |   |
| R3426    | C-CARBON R | RN72K1J-333FE     | 1    | 435033332R1   |   |
| R3427    | C-CARBON R | RN72K1J-223FE     | 1    | 435032232R1   |   |
| R3428    | C-CARBON R | RN72K1J-472JE     | 1    | 435034724R1   |   |
| R3429    | C-CARBON R | RN72K1J-102JE     | 1    | 435031024R1   |   |
| [SW TRM] |            |                   |      |               |   |
| P3002    | SOCKET     | NSCT-9P2472       | 1    | 25052575R2    |   |
| P3102A   | SOCKET     | NSCT-9P2472       | 1    | 25052575R2    |   |
| P3301A   | SOCKET     | NSCT-11P2474      | 1    | 25052577R2    |   |
| P3401A   | PLUG       | IMSA-9827B-70Y962 | 1    | 25056691R2    | N |

## ONKYO

### Onkyo Corporation

Technical Support, Service Department  
2-1, Nisshin-cho, Neyagawa-shi, OSAKA 572-8540, JAPAN  
Tel: 072-831-8023 Fax: 072-831-8163

### Onkyo U.S.A. Corporation

18 Park Way, Upper Saddle River, N.J. 07458, U.S.A.  
Tel: 800-229-1687, 201-785-2600 Fax: 201-785-2650  
<http://www.us.onkyo.com/>

### Onkyo Europe Electronics GmbH

Liegnitzerstrasse 6, 82194 Groebenzell, GERMANY  
Tel: +49-8142-4401-0 Fax: +49-8142-4208-213  
<http://www.eu.onkyo.com/>

### Onkyo Europe Electronics GmbH (UK Branch)

The Coach House 81A High Street, Marlow, Buckinghamshire, SL7 1AB, UK  
Tel: +44-(0)1628-473-350 Fax: +44-(0)1628-401-700

### Onkyo China Limited

Unit 1033, 10/F, Star House, No 3, Salisbury Road, Tsim Sha Tsui Kowloon, Hong Kong.  
Tel: 852-2429-3118 Fax: 852-2428-9039  
<http://www.onkyochina.com/>

### Onkyo China PRC

1301, 555 Tower, No.555 West NanJin Road, Jin an, Shanghai,  
China 200041, Tel: 86-21-52131366 Fax: 86-21-52130396  
<http://www.cn.onkyo.com/>