
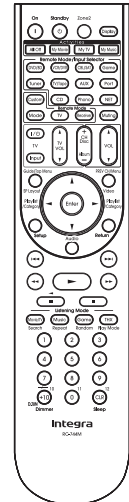


# Integra SERVICE MANUAL

## AV RECIEVER MODEL DTR-40.1

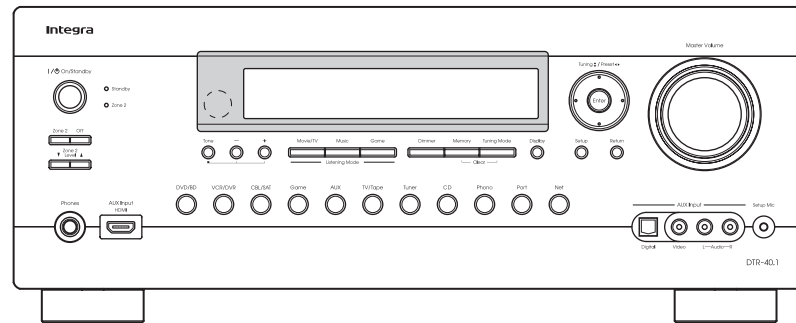

RC-744M

### Black model

|      |                     |
|------|---------------------|
| BMDD | 120V AC 60Hz        |
| BMMA | 220-240V AC 50/60Hz |


### SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK  ON THE SCHEMATIC DIAGRAM AND IN THE PARTS LIST ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE THESE COMPONENTS WITH ONKYO PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL.


MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.

# SERVICE PROCEDURE-1

## 1. Replacing the fuses



This symbol located near the fuse indicates that the fuse used is slow operating type, For continued protection against fire hazard, replace with same type fuse, For fuse rating, refer to the marking adjacent to the symbol.



Ce symbole indique que le fusible utilise est e lent. Pour une protection permanente, n'utiliser que des fusibles de meme type. Ce dernier est indique la qu le present symbol est appose.

### <Notes>

<DD> : DTR-40.1 North American model

<MA> : DTR-40.1 Australian model

| REF NO.  | PART NAME | DESCRIPTION    | PART NO. | REMARKS |
|----------|-----------|----------------|----------|---------|
| F4000    | FUSE      | 4A-UL/T-233    | 252325GR | !       |
| F4000 or | FUSE      | 4A-T/UL-ST2    | 252257GR | !       |
| F4001    | FUSE      | 4A-UL/T-233    | 252325GR | !       |
| F4001 or | FUSE      | 4A-T/UL-ST2    | 252257GR | !       |
| F6901    | FUSE      | 15A-TUL-250V   | 252303GR | !       |
| F6902    | FUSE      | 15A-TUL-250V   | 252303GR | !       |
| F901     | FUSE      | 10A-UL/T-233   | 252330GR | ! <DD>  |
| F901 or  | FUSE      | 10A-T/UL-ST2   | 252333GR | ! <DD>  |
| D901     | FUSE      | 5A-SE-EAK FUSE | 252078GR | ! <MA>  |
| F901 or  | FUSE      | 5A-SE-TL250V   | 252278GR | ! <MA>  |

## 2. To initialize the unit

1. Press and hold down VCR/DVR button, then press ON/STANDBY button when the unit is powered on.
2. After "Clear" is displayed, the preset memory and each mode stored in the memory are initialized and will return to the factory settings, and turn to Standby mode.

## 3. Safety check out

(U.S.A. model only)

After correcting the original service problem, perform the following safety check before releasing the unit to the customer.

### Leakage current Check

Measure the leakage current to a known earth ground (water pipe or conduct etc.) by connecting a leakage current tester between the earth ground and exposed metal parts of the unit (input/output ground terminals, screw heads or metal overlays etc.).

Plug the power supply cord directly into a 120Vac 60Hz wall socket and turn ON/STANDBY button on.

Any current measured must not exceed 0.5mA.

## 4. Memory Backup

This model uses a EE-PROM IC in order to retain radio presets and other settings. So, memory contents will be kept eternally with no care.

## SERVICE PROCEDURE-2

### 5. Replacing Power Amplifier Parts

When a power amplifier of certain channel is broken and goes into Protect mode, the following parts in the channel must be replaced at the sametime, because these parts also get damage in most cases.

| Front L ch  | Front R ch  | Center ch   | Surround L ch | Surround R ch | Surround Back L ch | Surround Back R ch |
|-------------|-------------|-------------|---------------|---------------|--------------------|--------------------|
| Q6000,Q6010 | Q6001,Q6011 | Q6002,Q6012 | Q6003,Q6013   | Q6004,Q6014   | Q6005,Q6015        | Q6006,Q6016        |
| Q6030,Q6040 | Q6031,Q6041 | Q6032,Q6042 | Q6033,Q6043   | Q6034,Q6044   | Q6035,Q6045        | Q6036,Q6046        |
| Q6100,Q6110 | Q6101,Q6111 | Q6052,Q6062 | Q6053,Q6063   | Q6054,Q6064   | Q6055,Q6065        | Q6056,Q6066        |
| Q6050,Q6060 | Q6051,Q6061 | Q6082,Q6092 | Q6083,Q6093   | Q6084,Q6094   | Q6085,Q6095        | Q6086,Q6096        |
| Q6070       | Q6071       | Q6072       | Q6073         | Q6074         | Q6075              | Q5096              |
| Q5000,Q5010 | Q5001,Q5010 | Q5002,Q5012 | Q5003,Q5013   | Q5004,Q5014   | Q5005,Q5015        | Q5006,Q5016        |
| Q5030,Q5040 | Q5031,Q5041 | Q5032,Q5042 | Q5033,Q5043   | Q5034,Q5044   | Q5035,Q5045        | Q5036,Q5046        |
| Q5050,Q5060 | Q5051,Q5061 | Q5052,Q5062 | Q5053,Q5063   | Q5054,Q5064   | Q5055,Q5065        | Q5056,Q5066        |
| Q5070       | Q5071       | Q5072       | Q8073         | Q8074         | Q8075              | Q8076              |

BAAMP-0072 and BACLA-0087 are electrically and mechanically full-compatible with each other, but idling readjustment is necessary.

BAAMP-0072 and BACLA-0087 are also electrically and mechanically full-compatible with each other, but idling readjustment is necessary.


The parts listed above include the following driver-stage components in each pcb.

## ADJUSTMENT PROCEDURE

## ADJUSTMENT OF IDLING CURRENT

- 1) Setting R6040 to R6046 to minimum position before power ON.
- 2) Setting the voltage at P6080 to P6086 to 3mV by adjusting R6040 to R6046, under the condition of no input signal and no load, immediately after power ON.

|                 |                      |                      |
|-----------------|----------------------|----------------------|
| L/C/R           |                      | SL/SR/SBL/ABR        |
| Below 4mV       | 4mV                  | 4mV                  |
| Between 4 ~ 6mV | Leave just as it is. | Leave just as it is. |
| Over 6mV        | 6mV                  | 6mV                  |

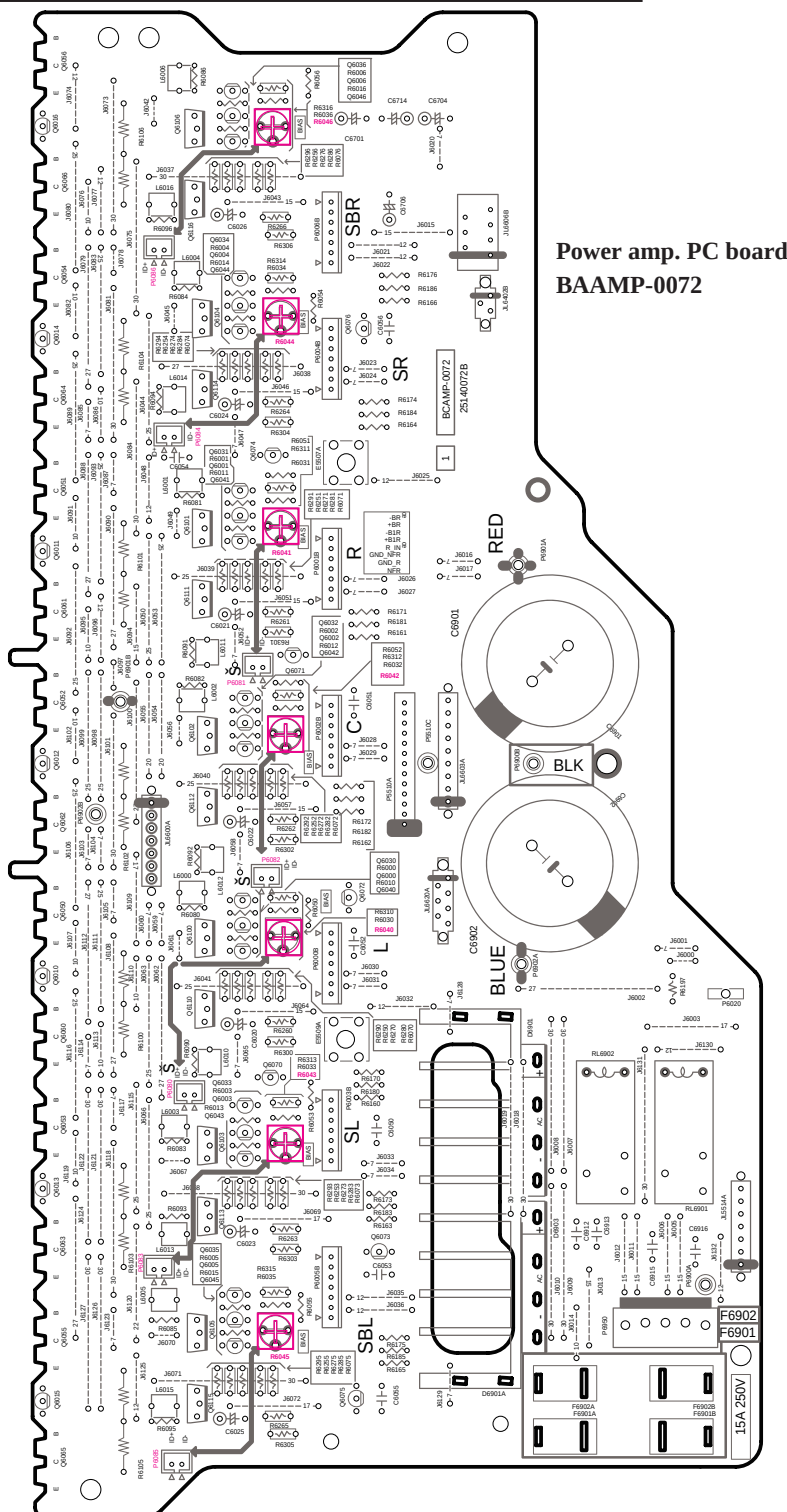



## EXPLODED VIEWS-1

## NOTES

<MDD> : North American model

<MMA> : Australian model


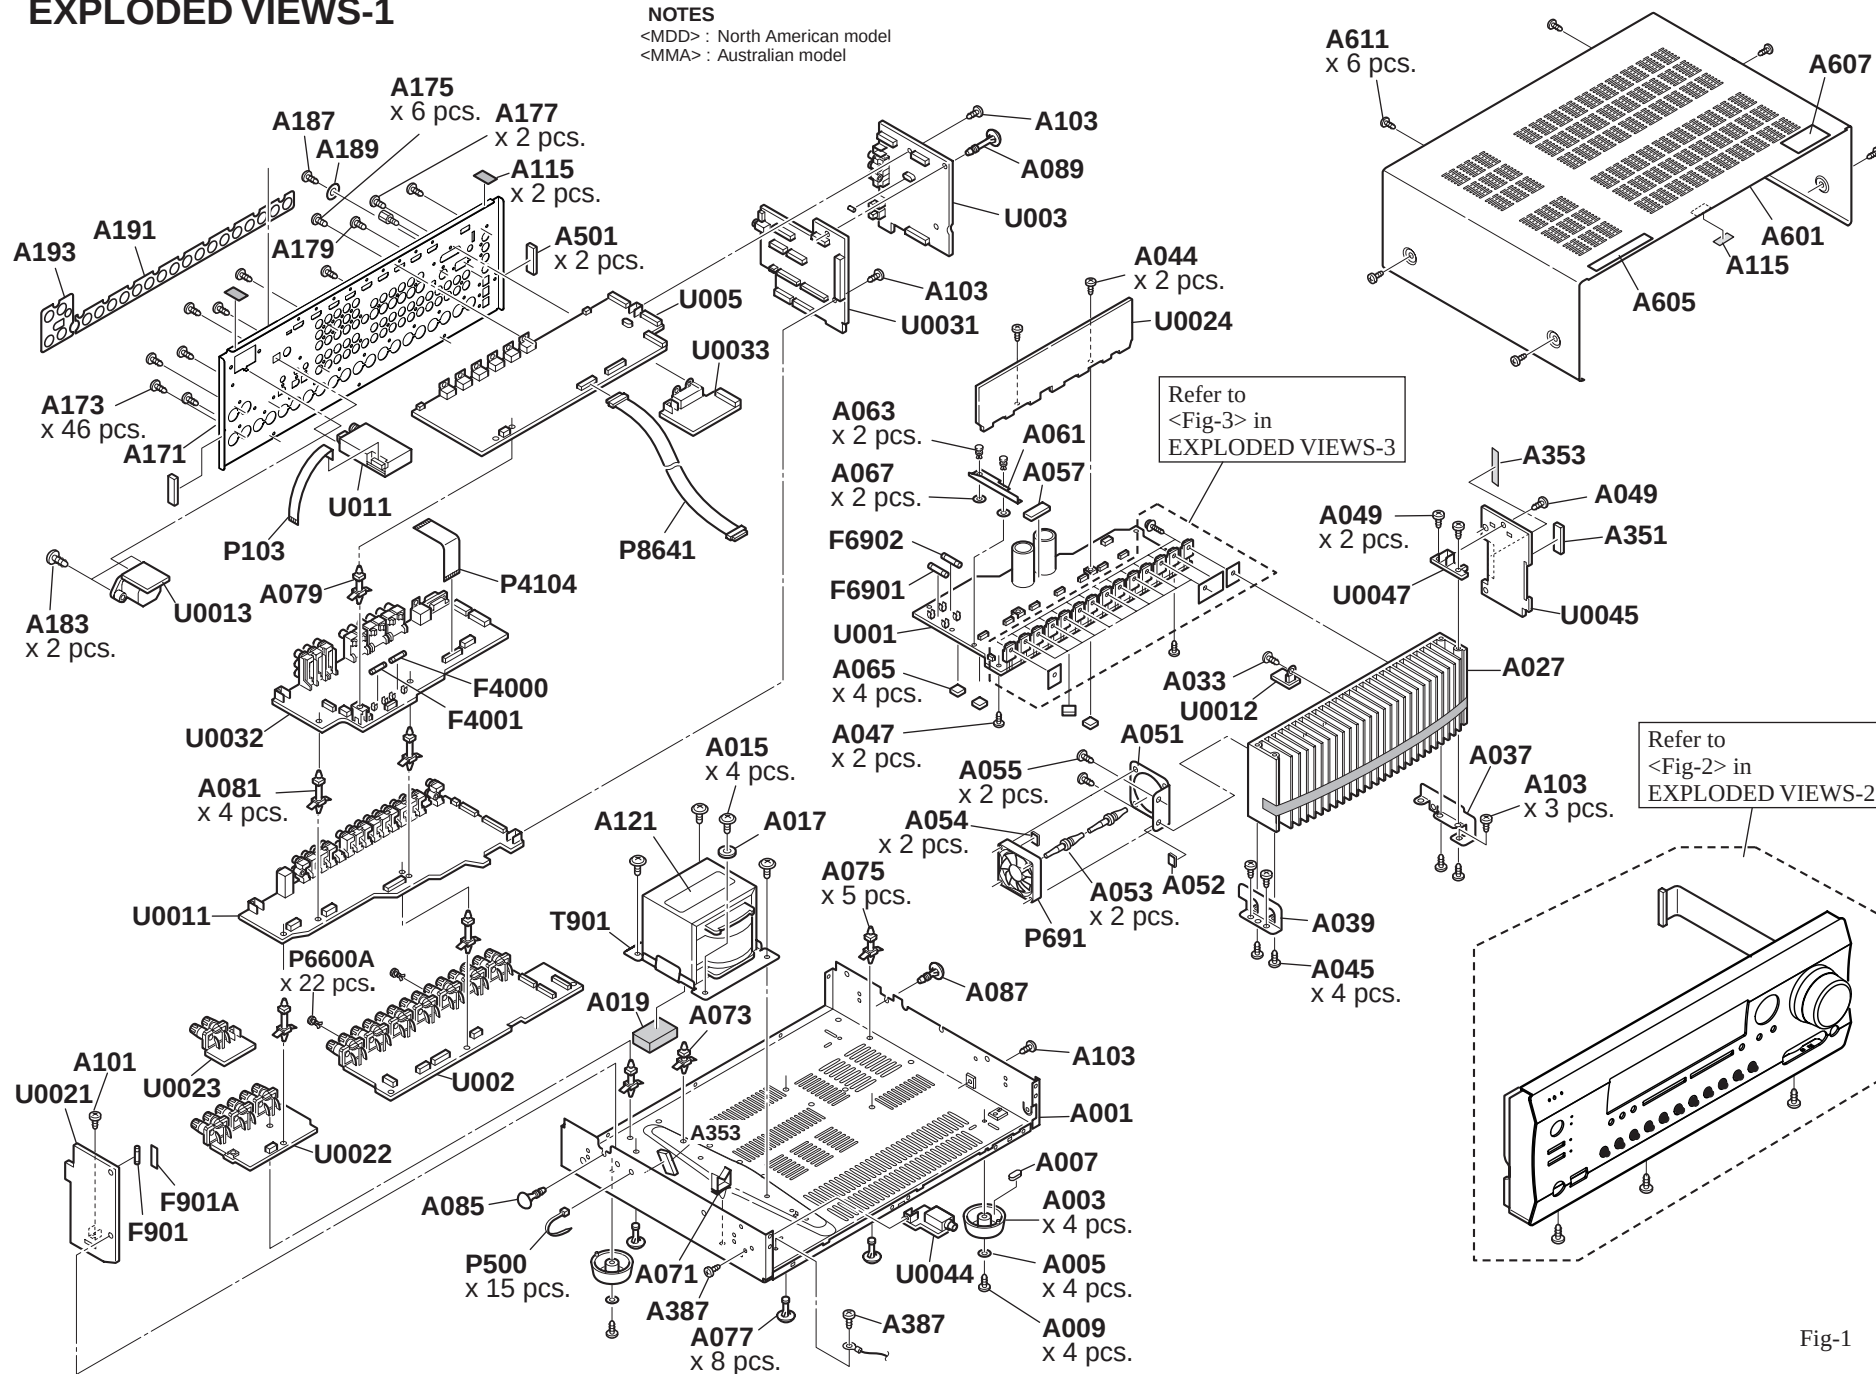


Fig-1


## EXPLODED VIEWS-2

&lt;Fig-2&gt;

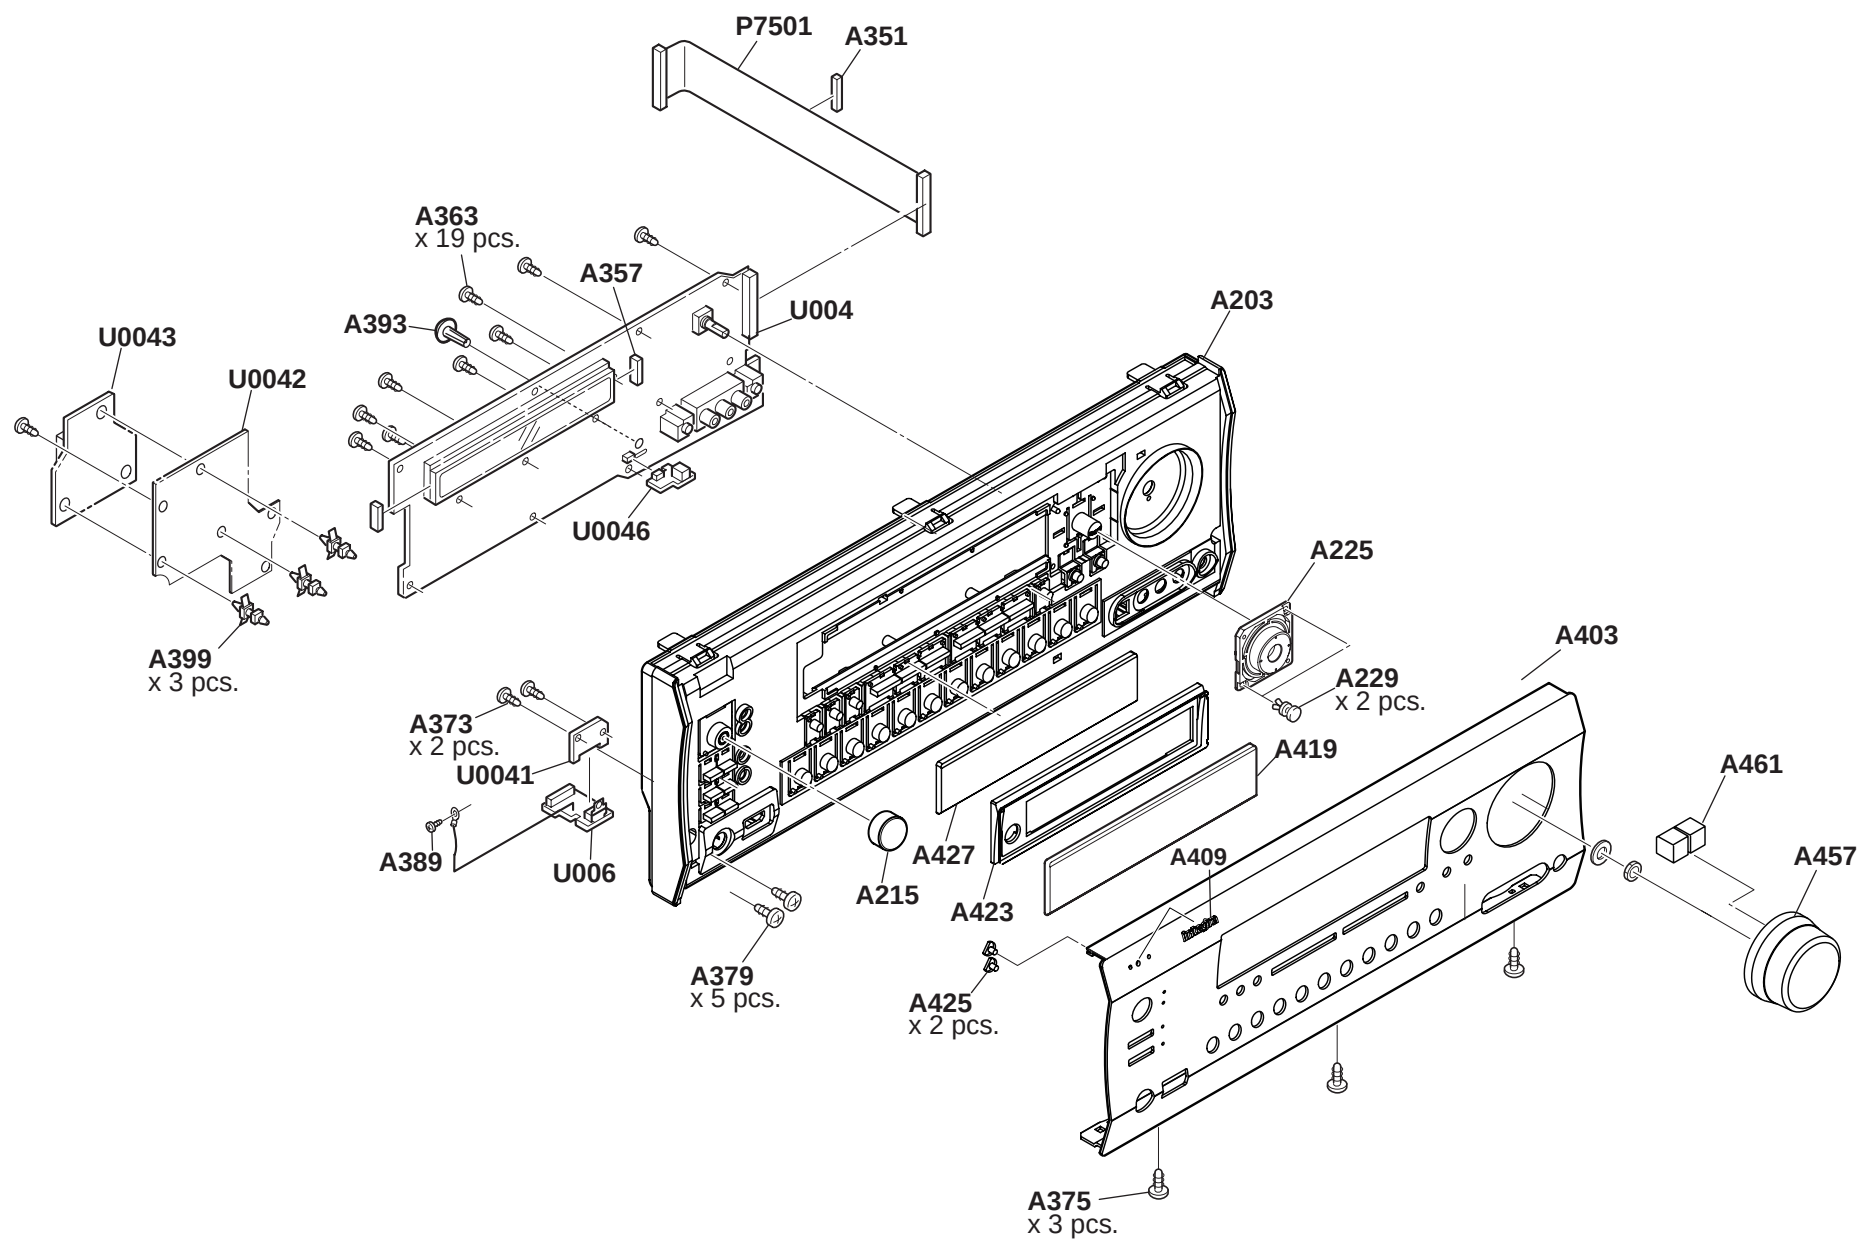


## EXPLODED VIEWS-3


&lt;Fig-3&gt;

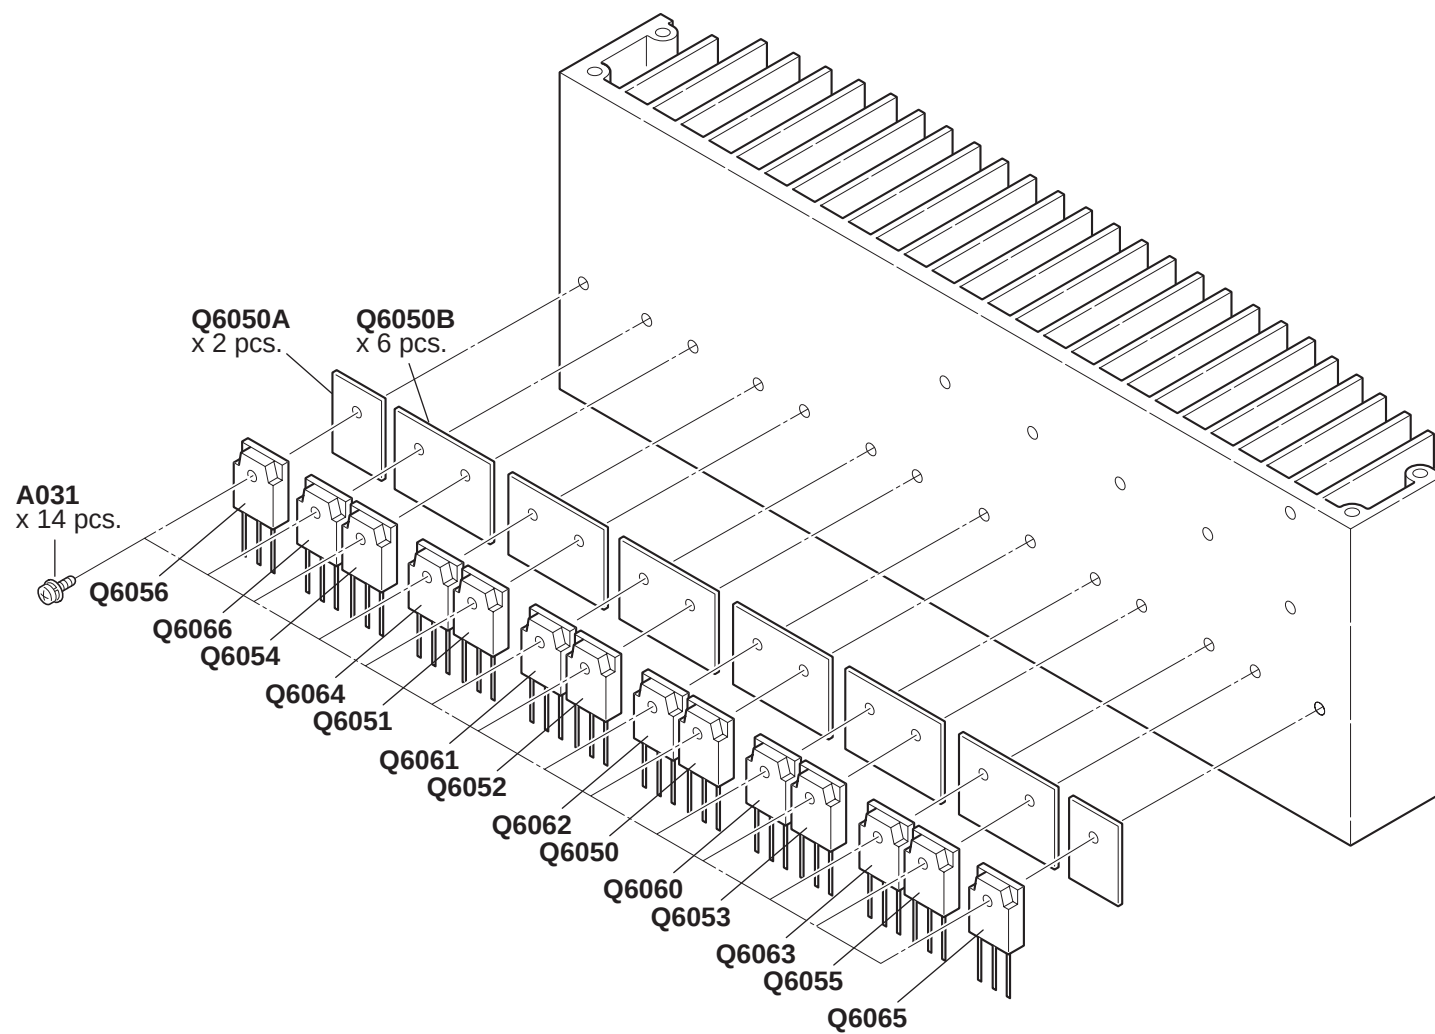

BLOCK DIAGRAM-1  
AUDIO Section ( PART-1 )

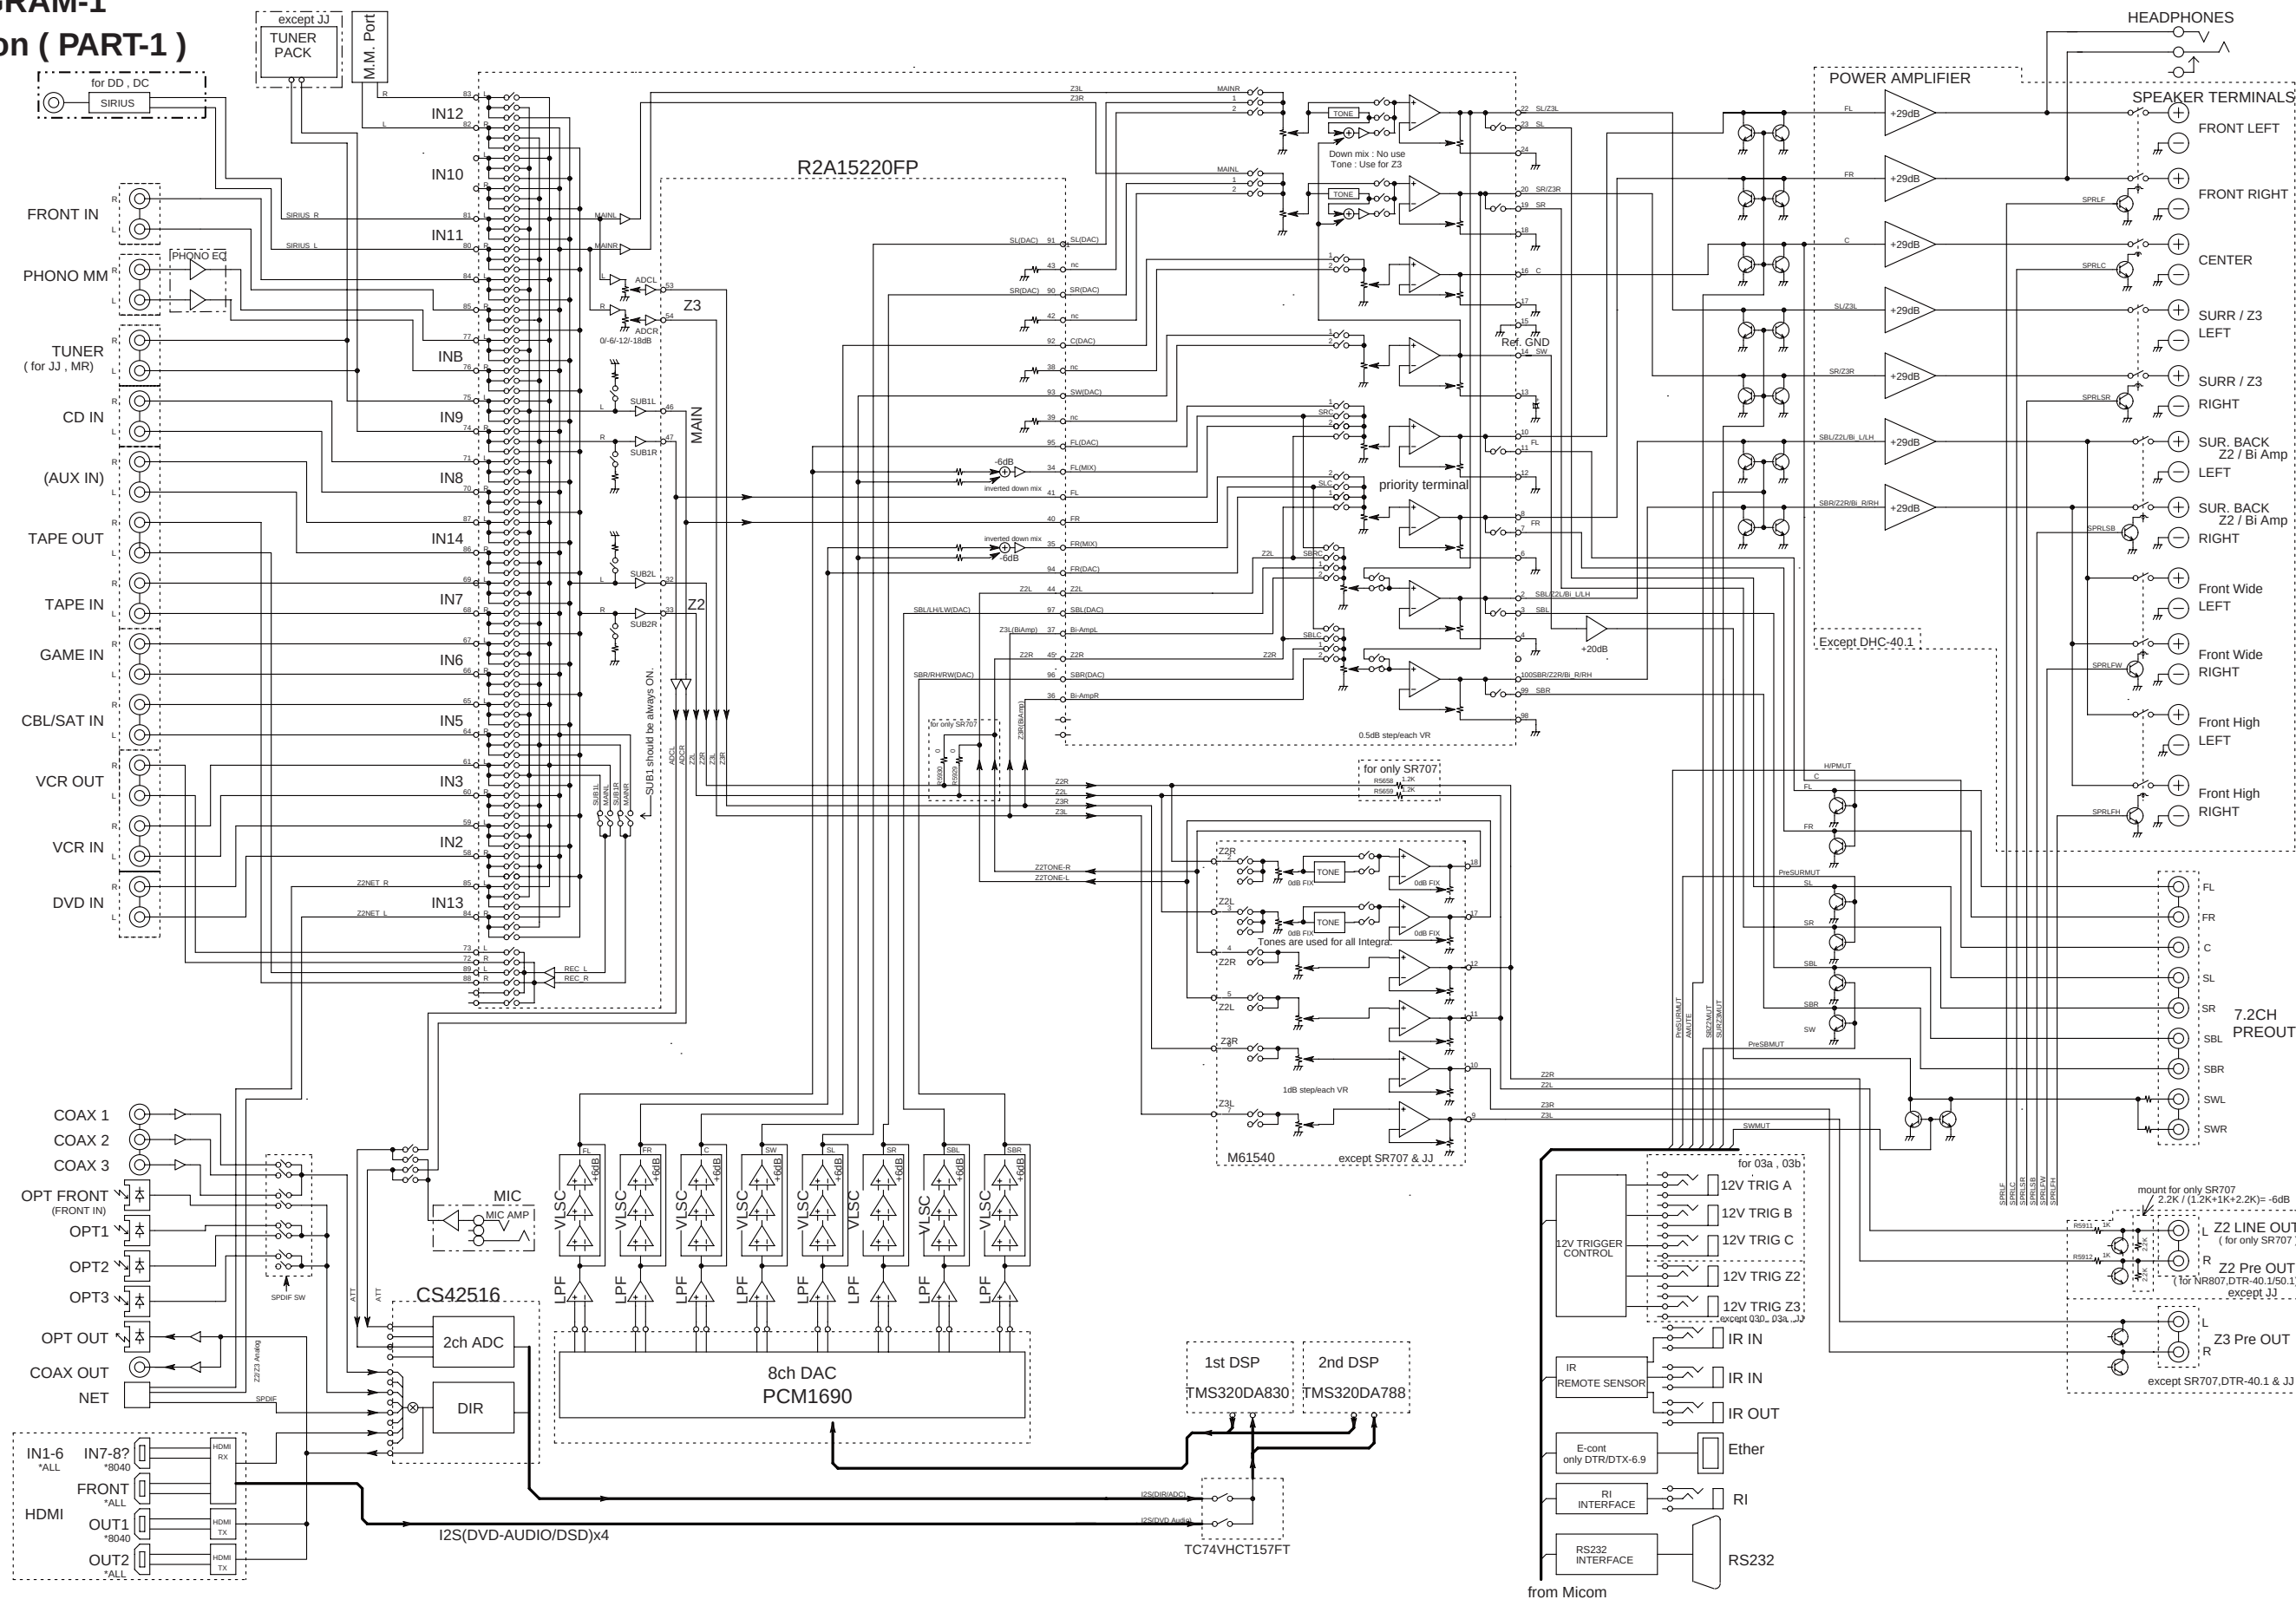

BLOCK DIAGRAM-2

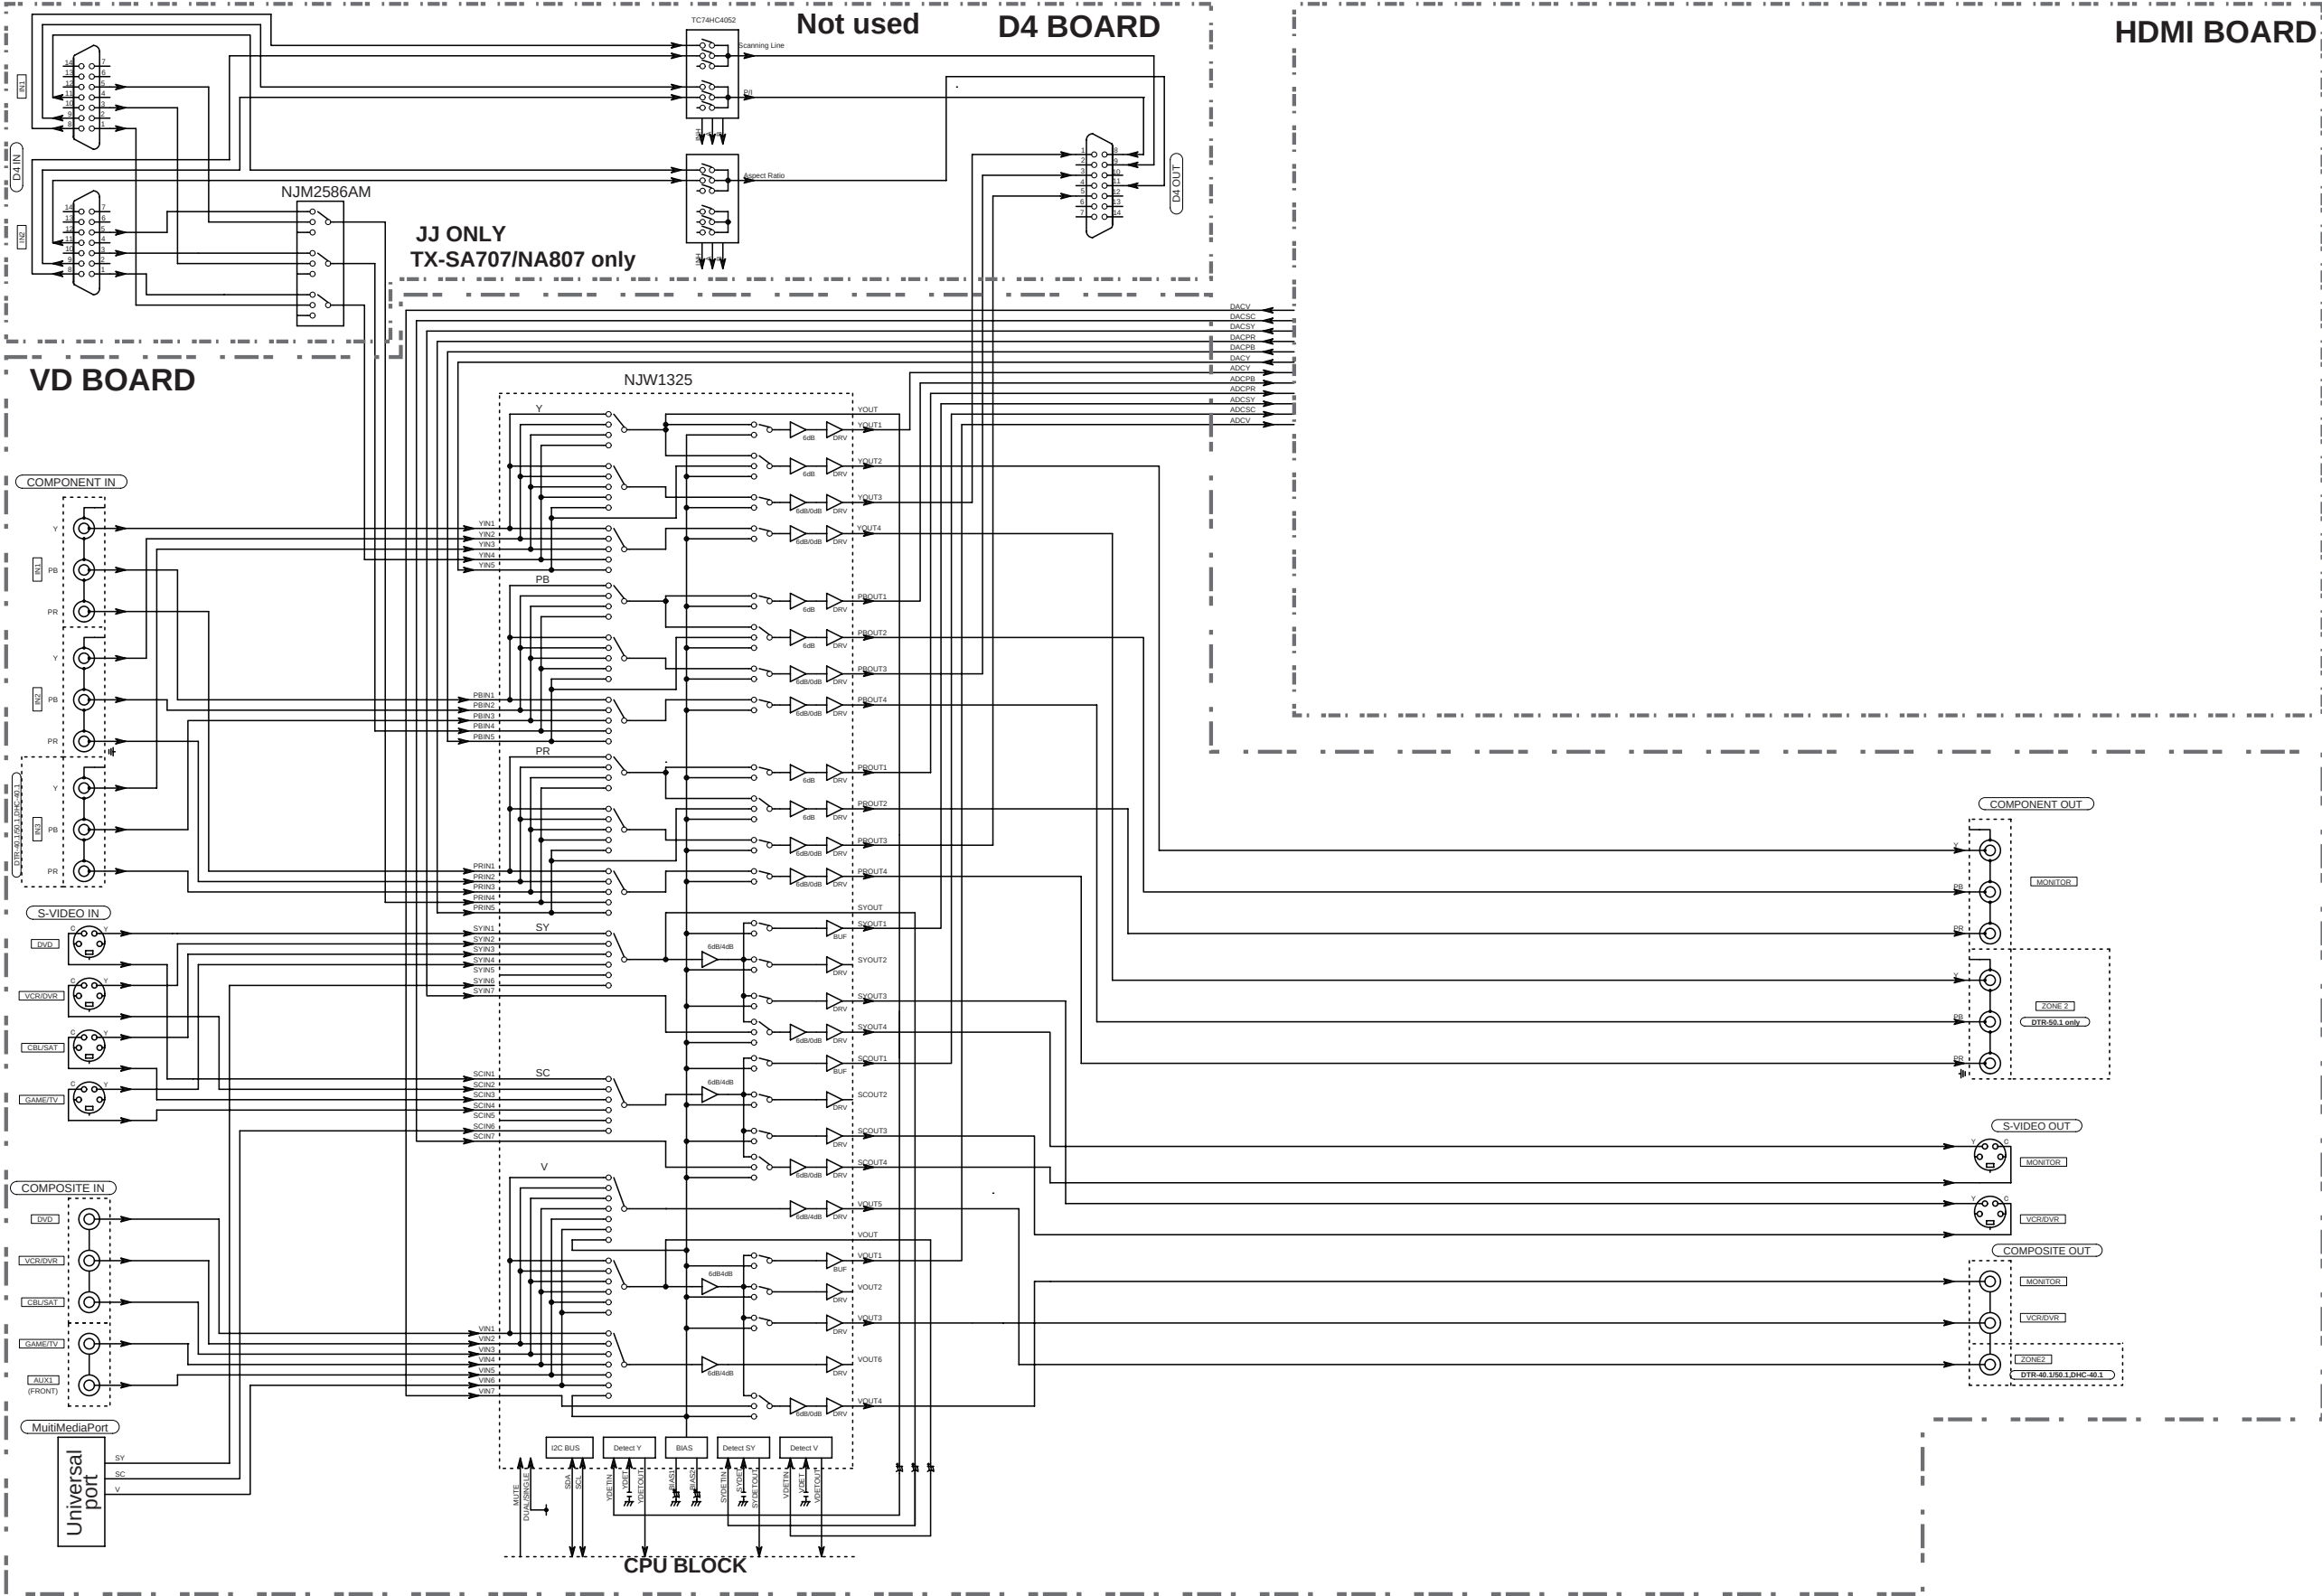




### BLOCK DIAGRAM-3


## HDMI SECTION

**(PART-3)**

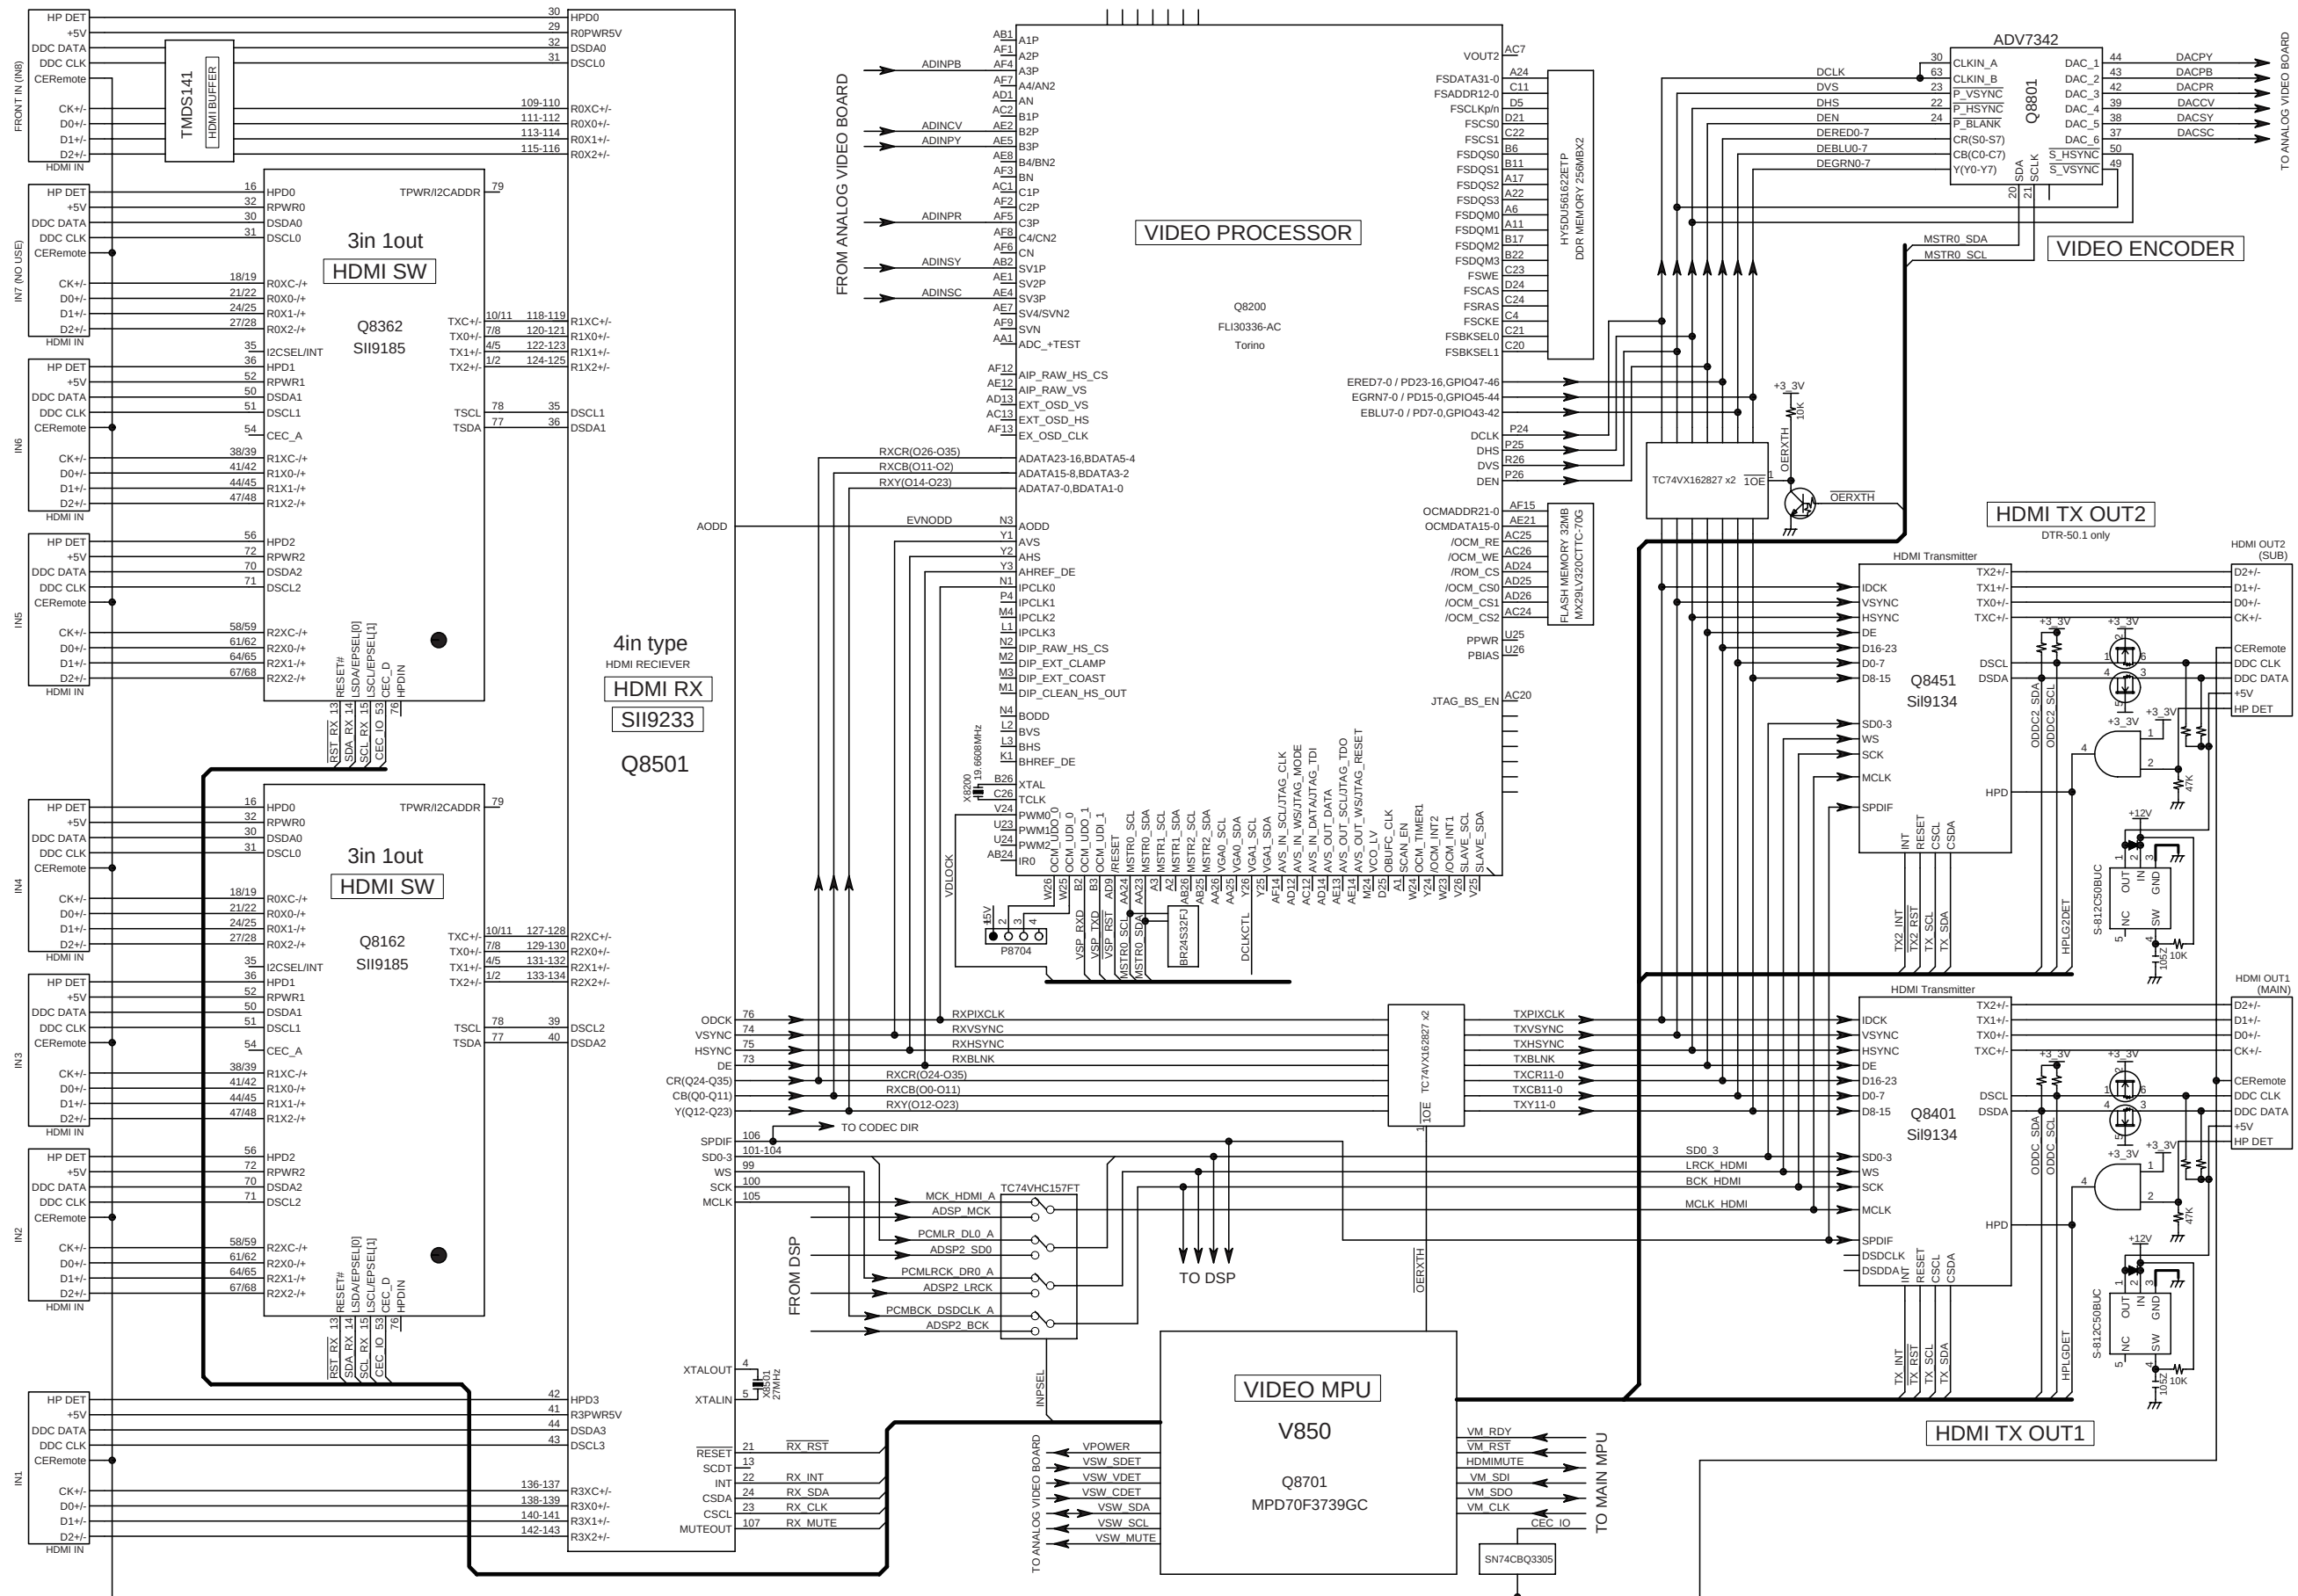


## BLOCK DIAGRAM-4

## DSP/ ETHER/ USB BLOCK

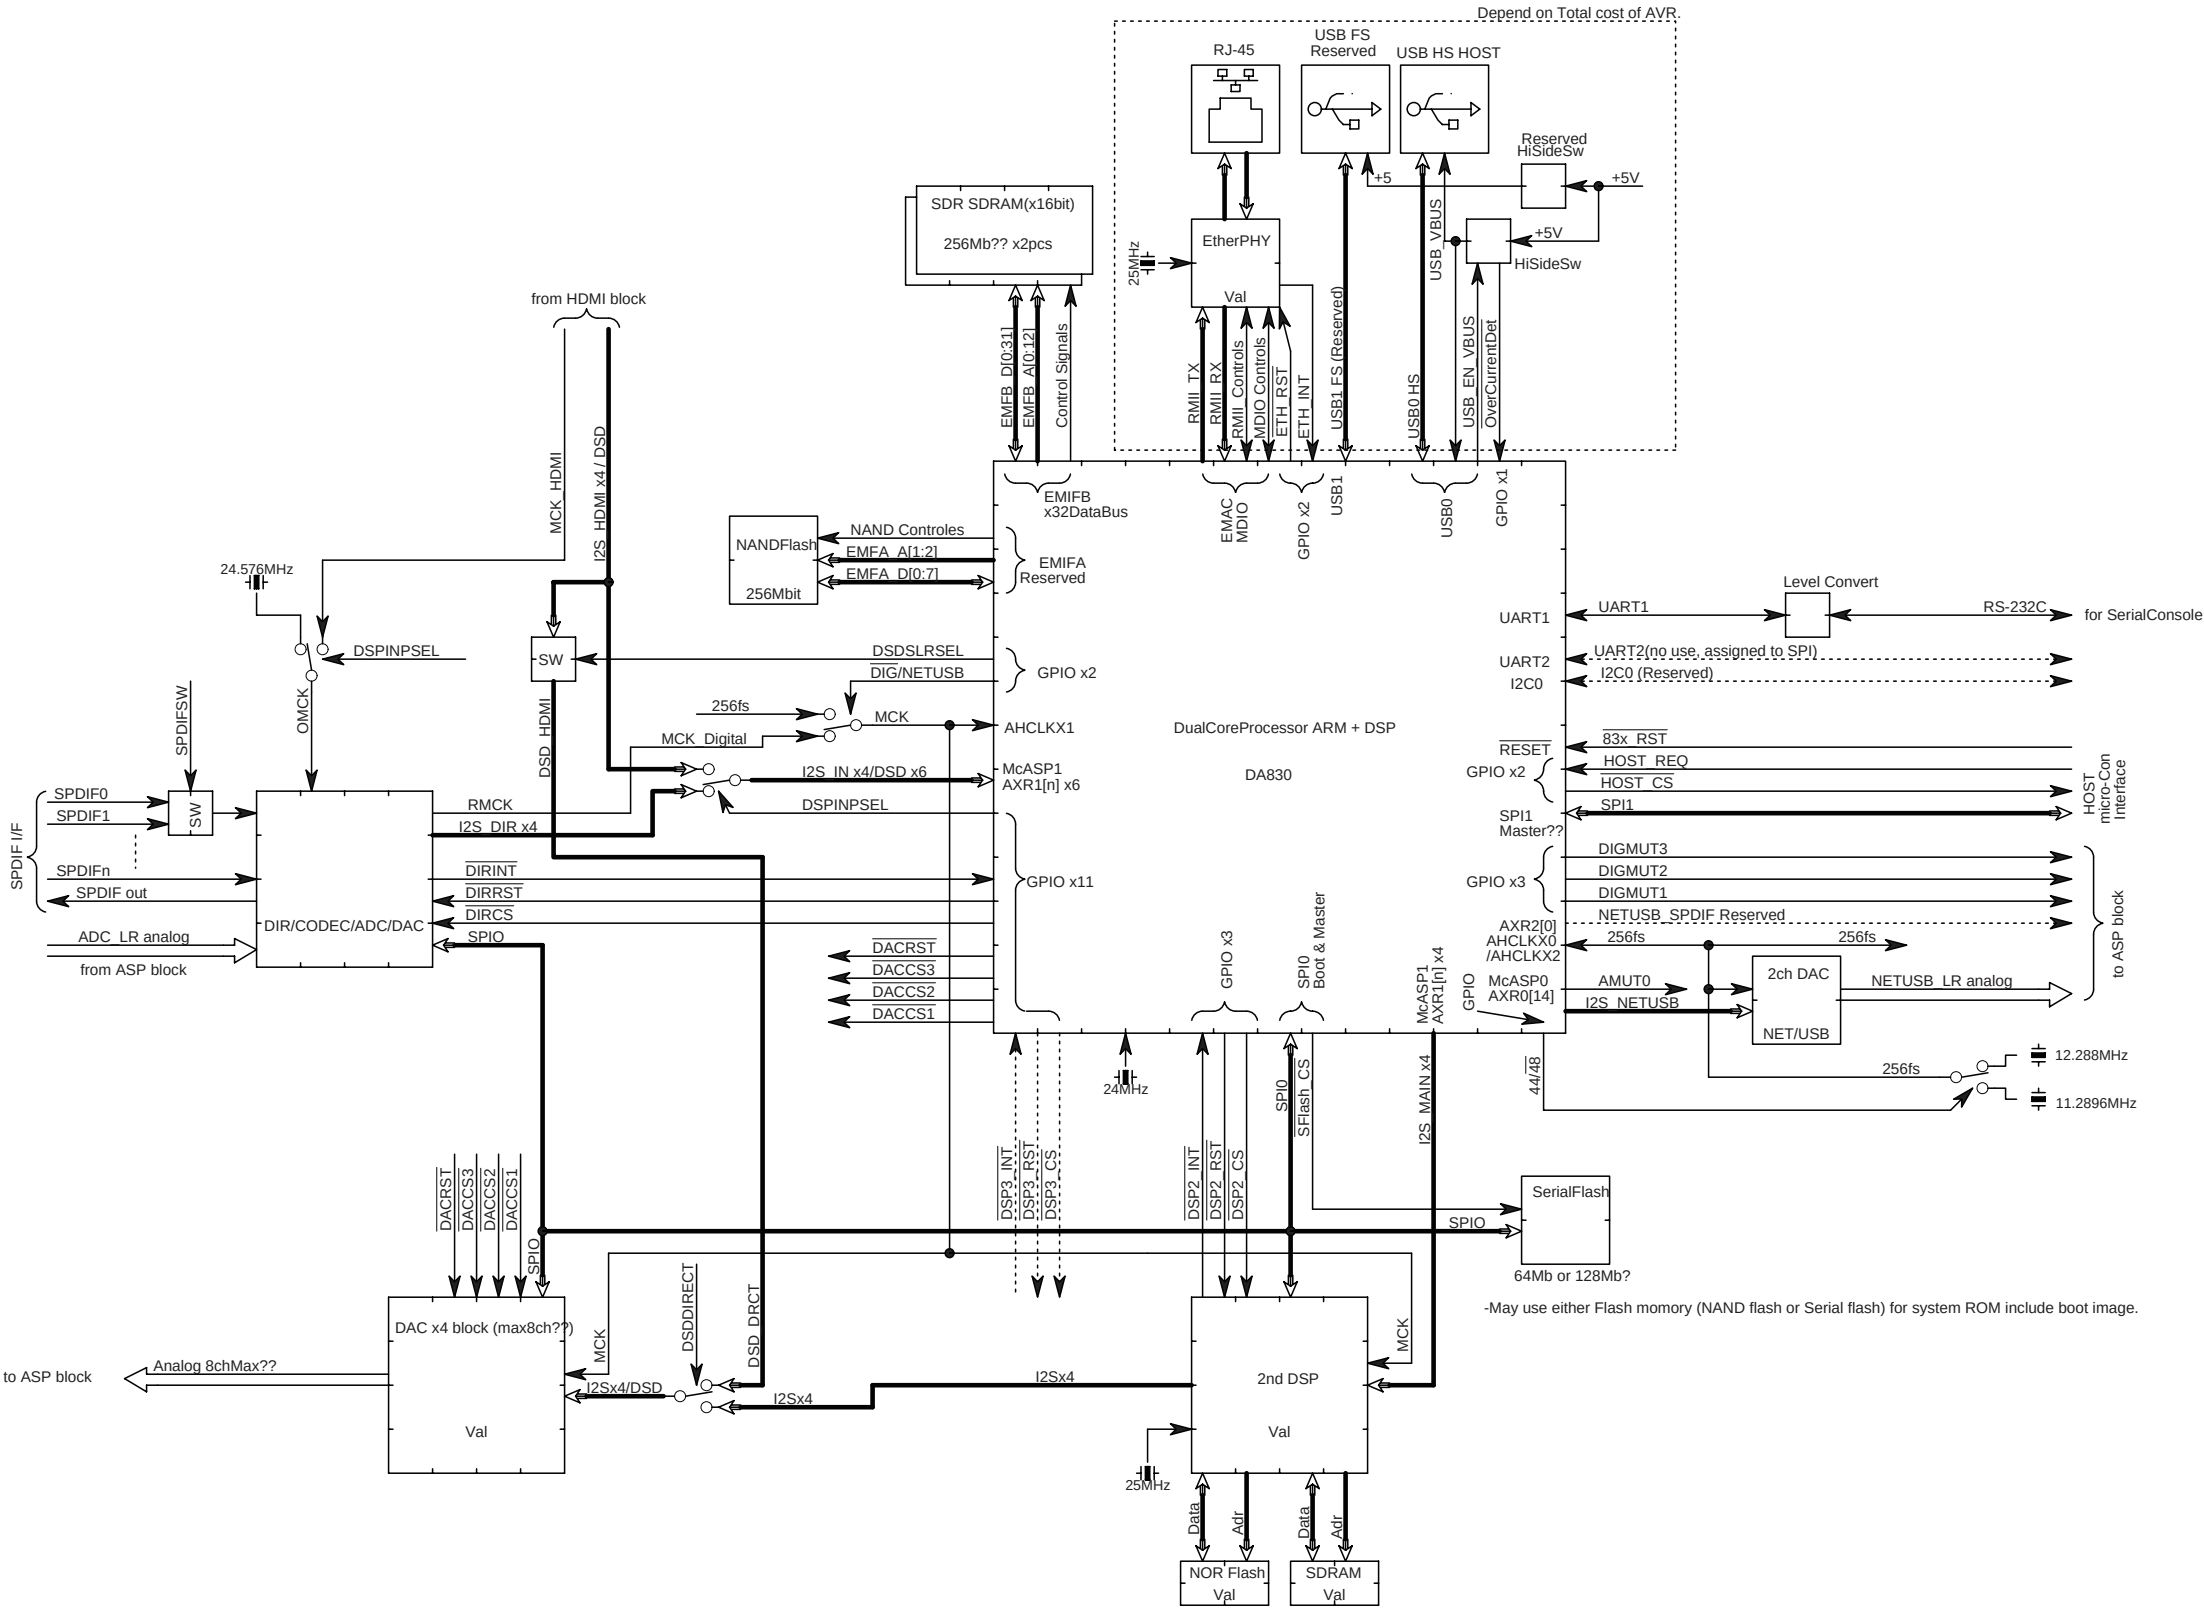

## AUDIO INPUT/OUTPUT SECTION

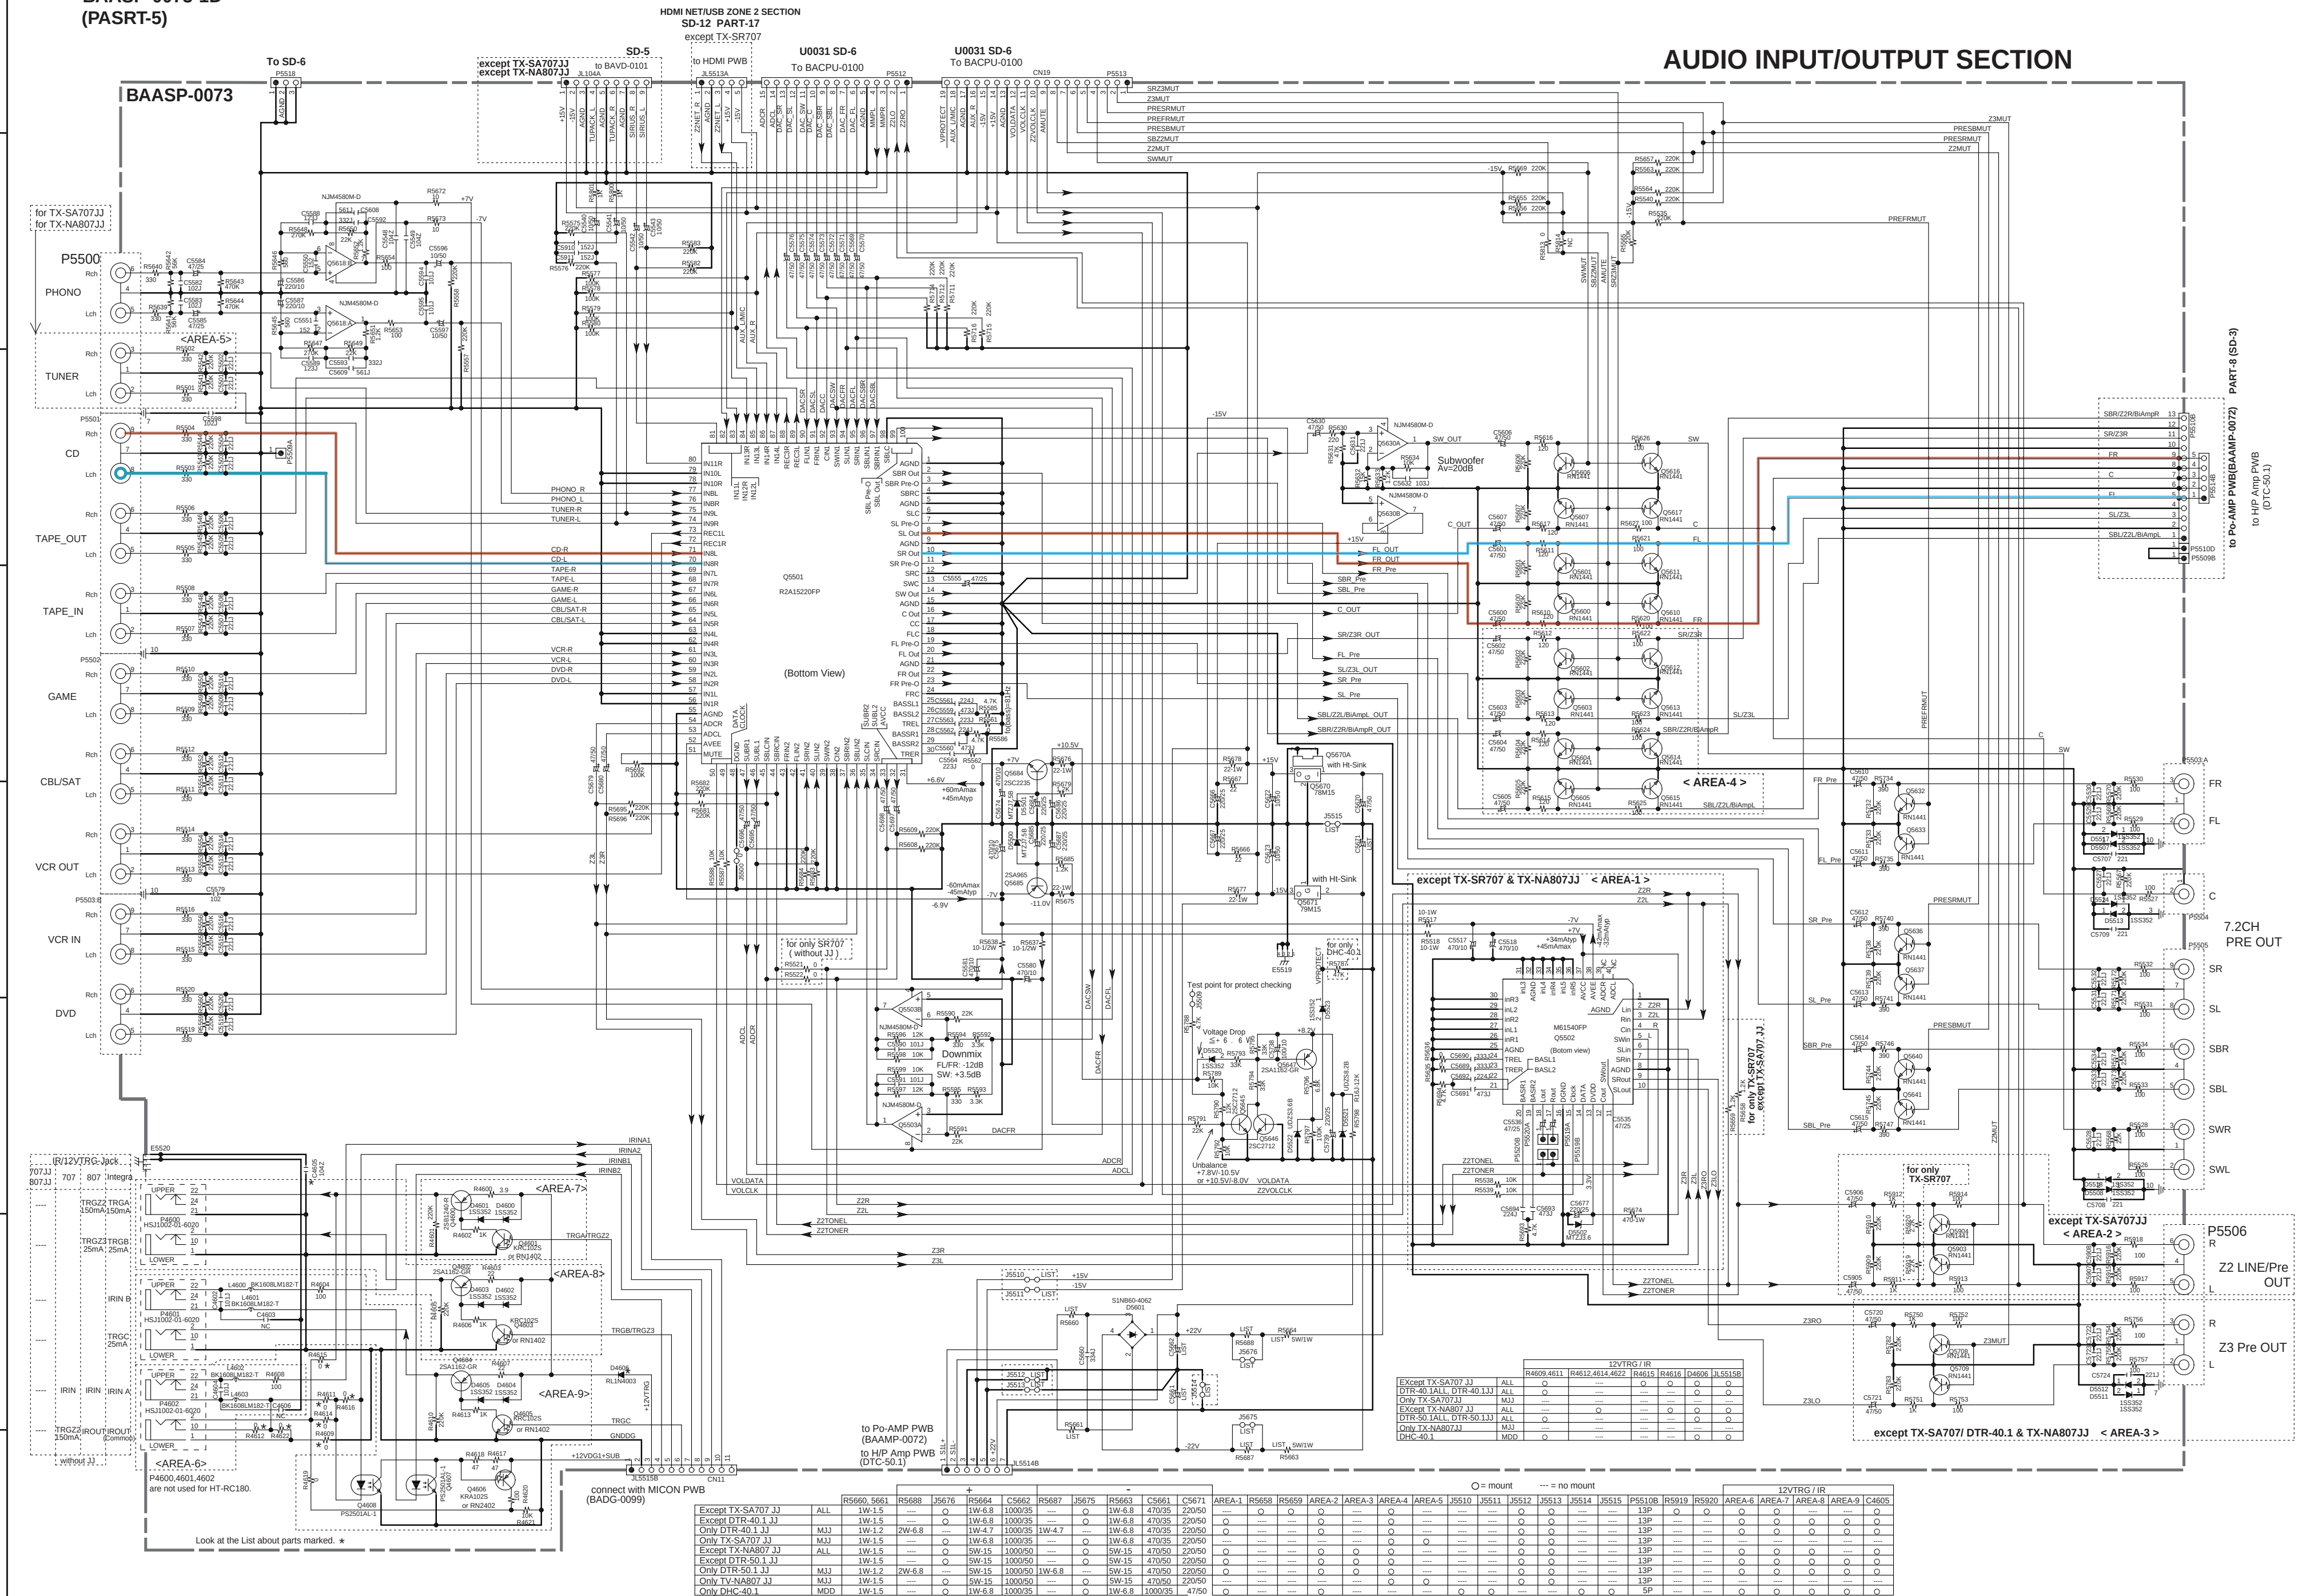



SCHEMATIC-DIAGRAM-2



U0024

AMP. INPUT CIRCUIT PC BOARD  
BACLA-0087-1B

(PART-6)

BACLA-0087

POWER AMP(input stage) SECTION

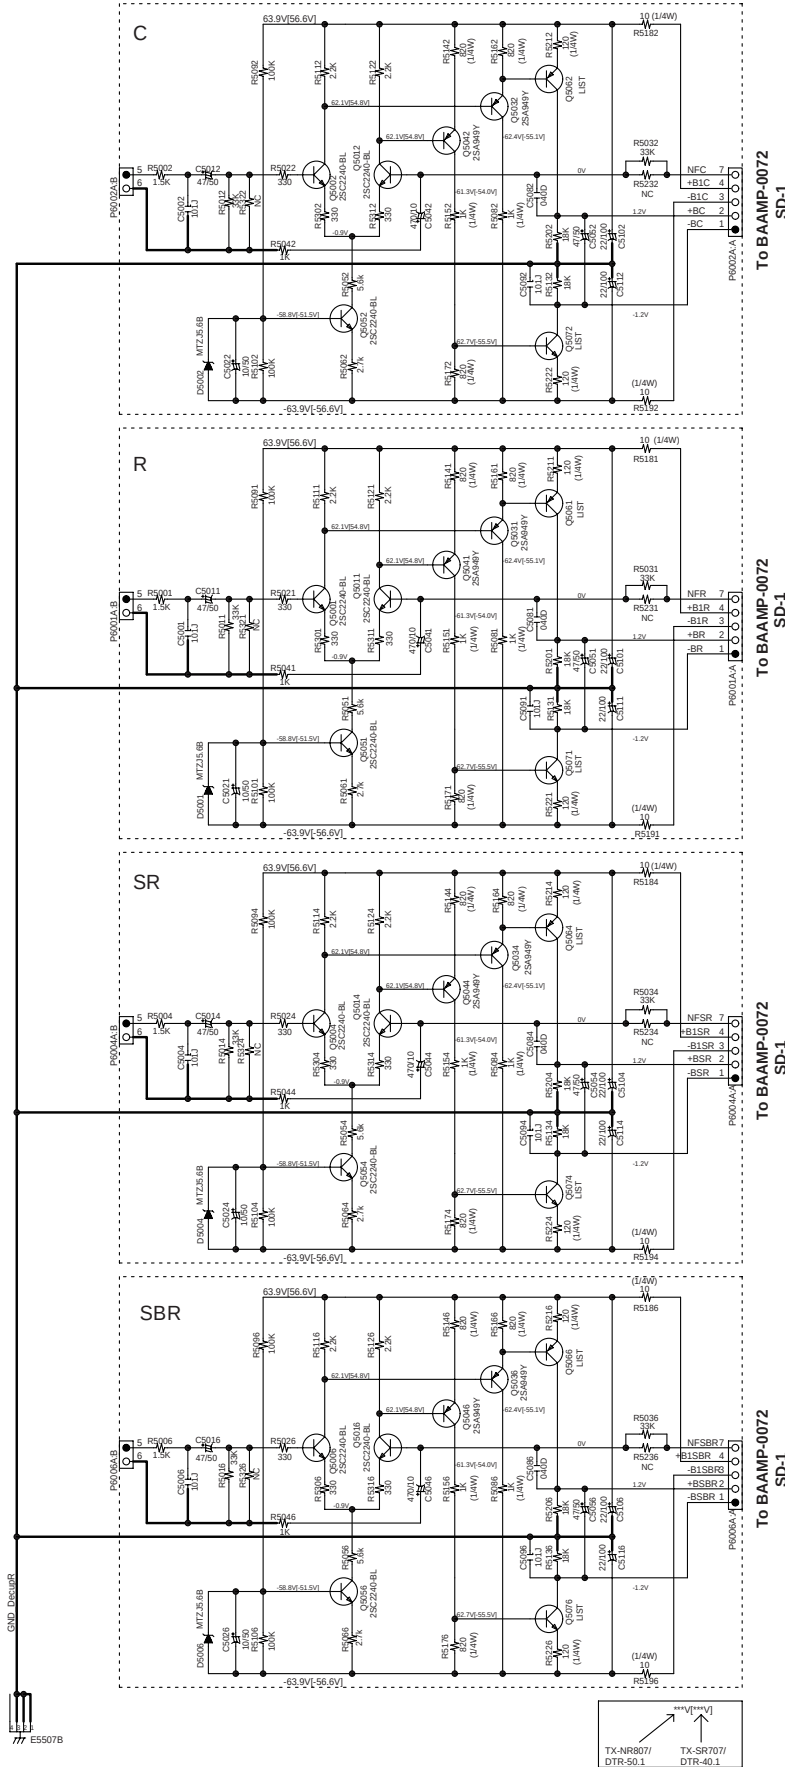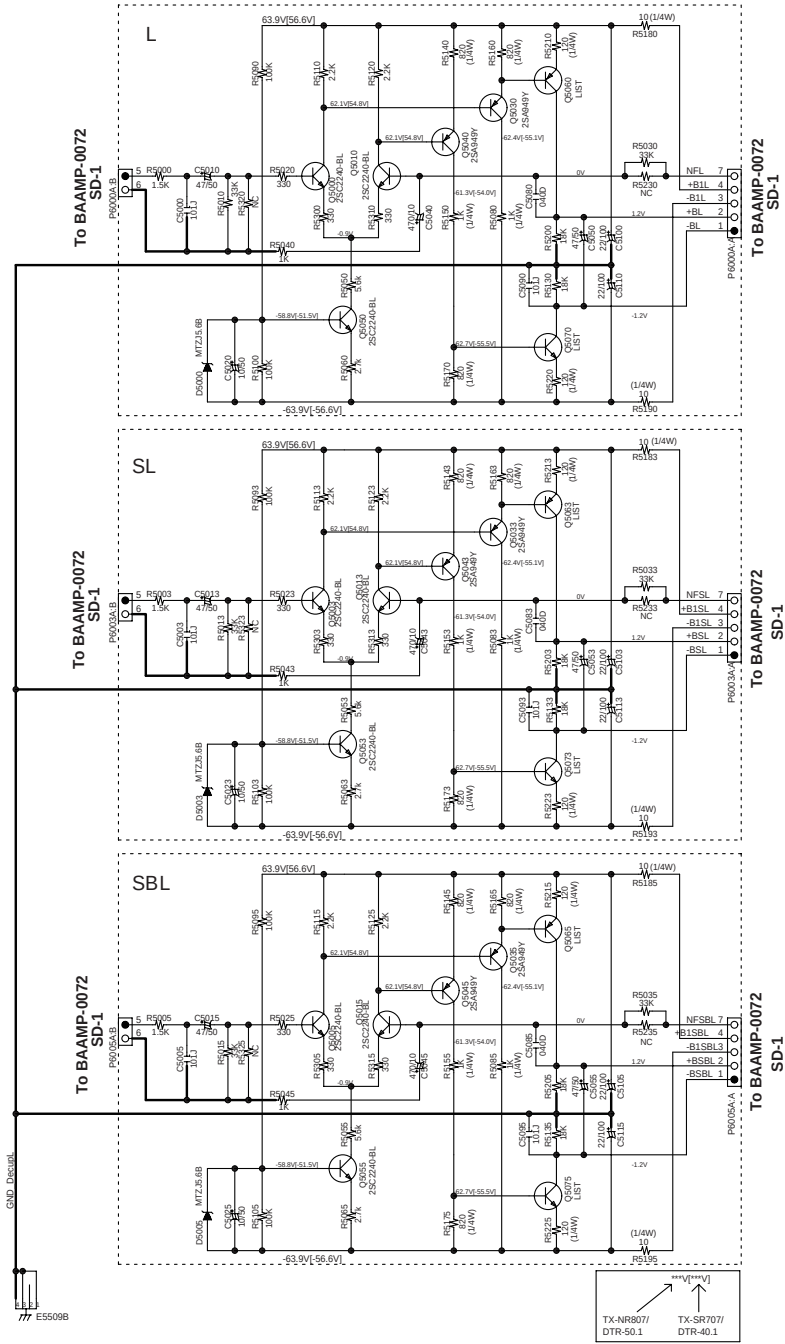

## SCHEMATIC DIAGRAM-3

**U001** POWER AMP. CIRCUIT PC BOARD  
BAAMP-0072-1D  
(PART-7)

## POWER AMP(Final Stage) SECTION


## BAAMP-0072

|               |                        |                       |
|---------------|------------------------|-----------------------|
|               | TX-SR707 /<br>DTR-40.1 | TX-NR807<br>DTR- 50.1 |
| Q6050 - Q6056 | 2SC5242                | TTC0001               |
| Q6060 - Q6066 | 2SA1962                | TTA0001               |


**U0013**

AC INLET TERMINAL PC BOARD  
BAETC-0089-1C

except TX-SR707 DC,DD,DF

**U0012**


THERMISTOR PC BOARD  
BAETC-0074




SD-4  
to SP Terminal board  
(PART 8)

FROM TRANS  
WHP

SD-1  
From ASP board  
(PART 5)

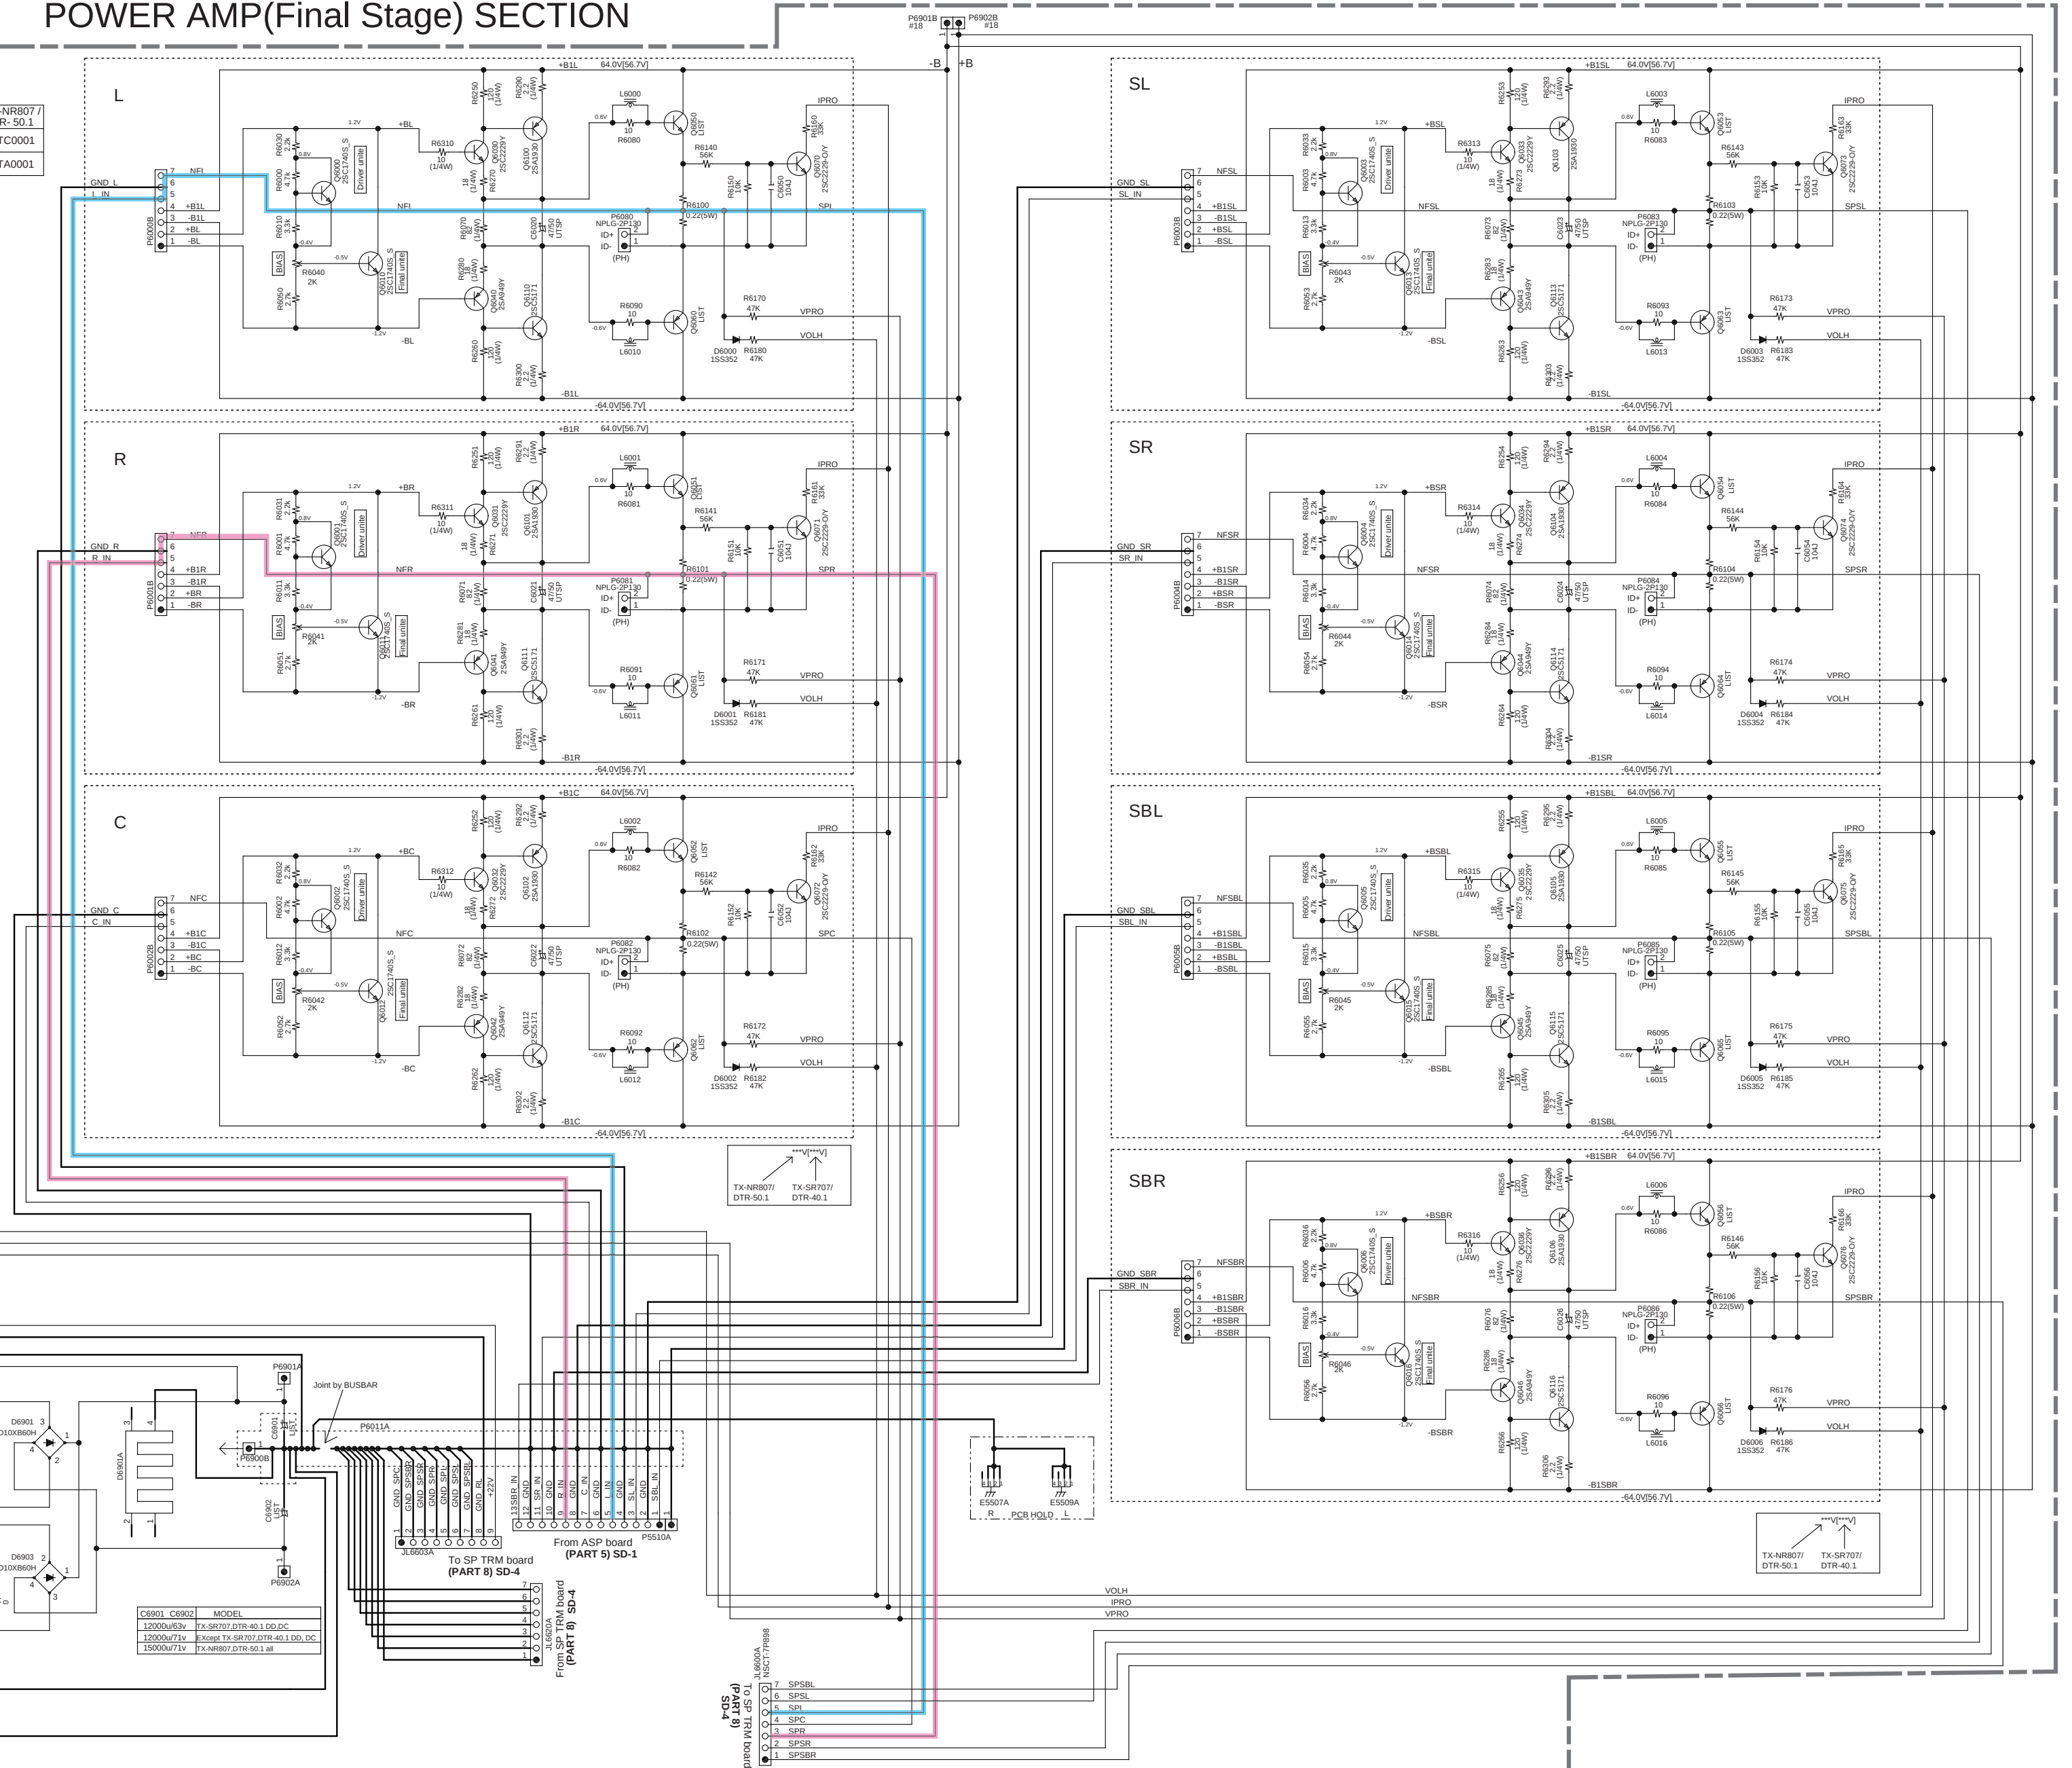

**U002** SPEAKER TERMINAL-1 PC BOARD  
BATRM-0083-1A (PART-8)

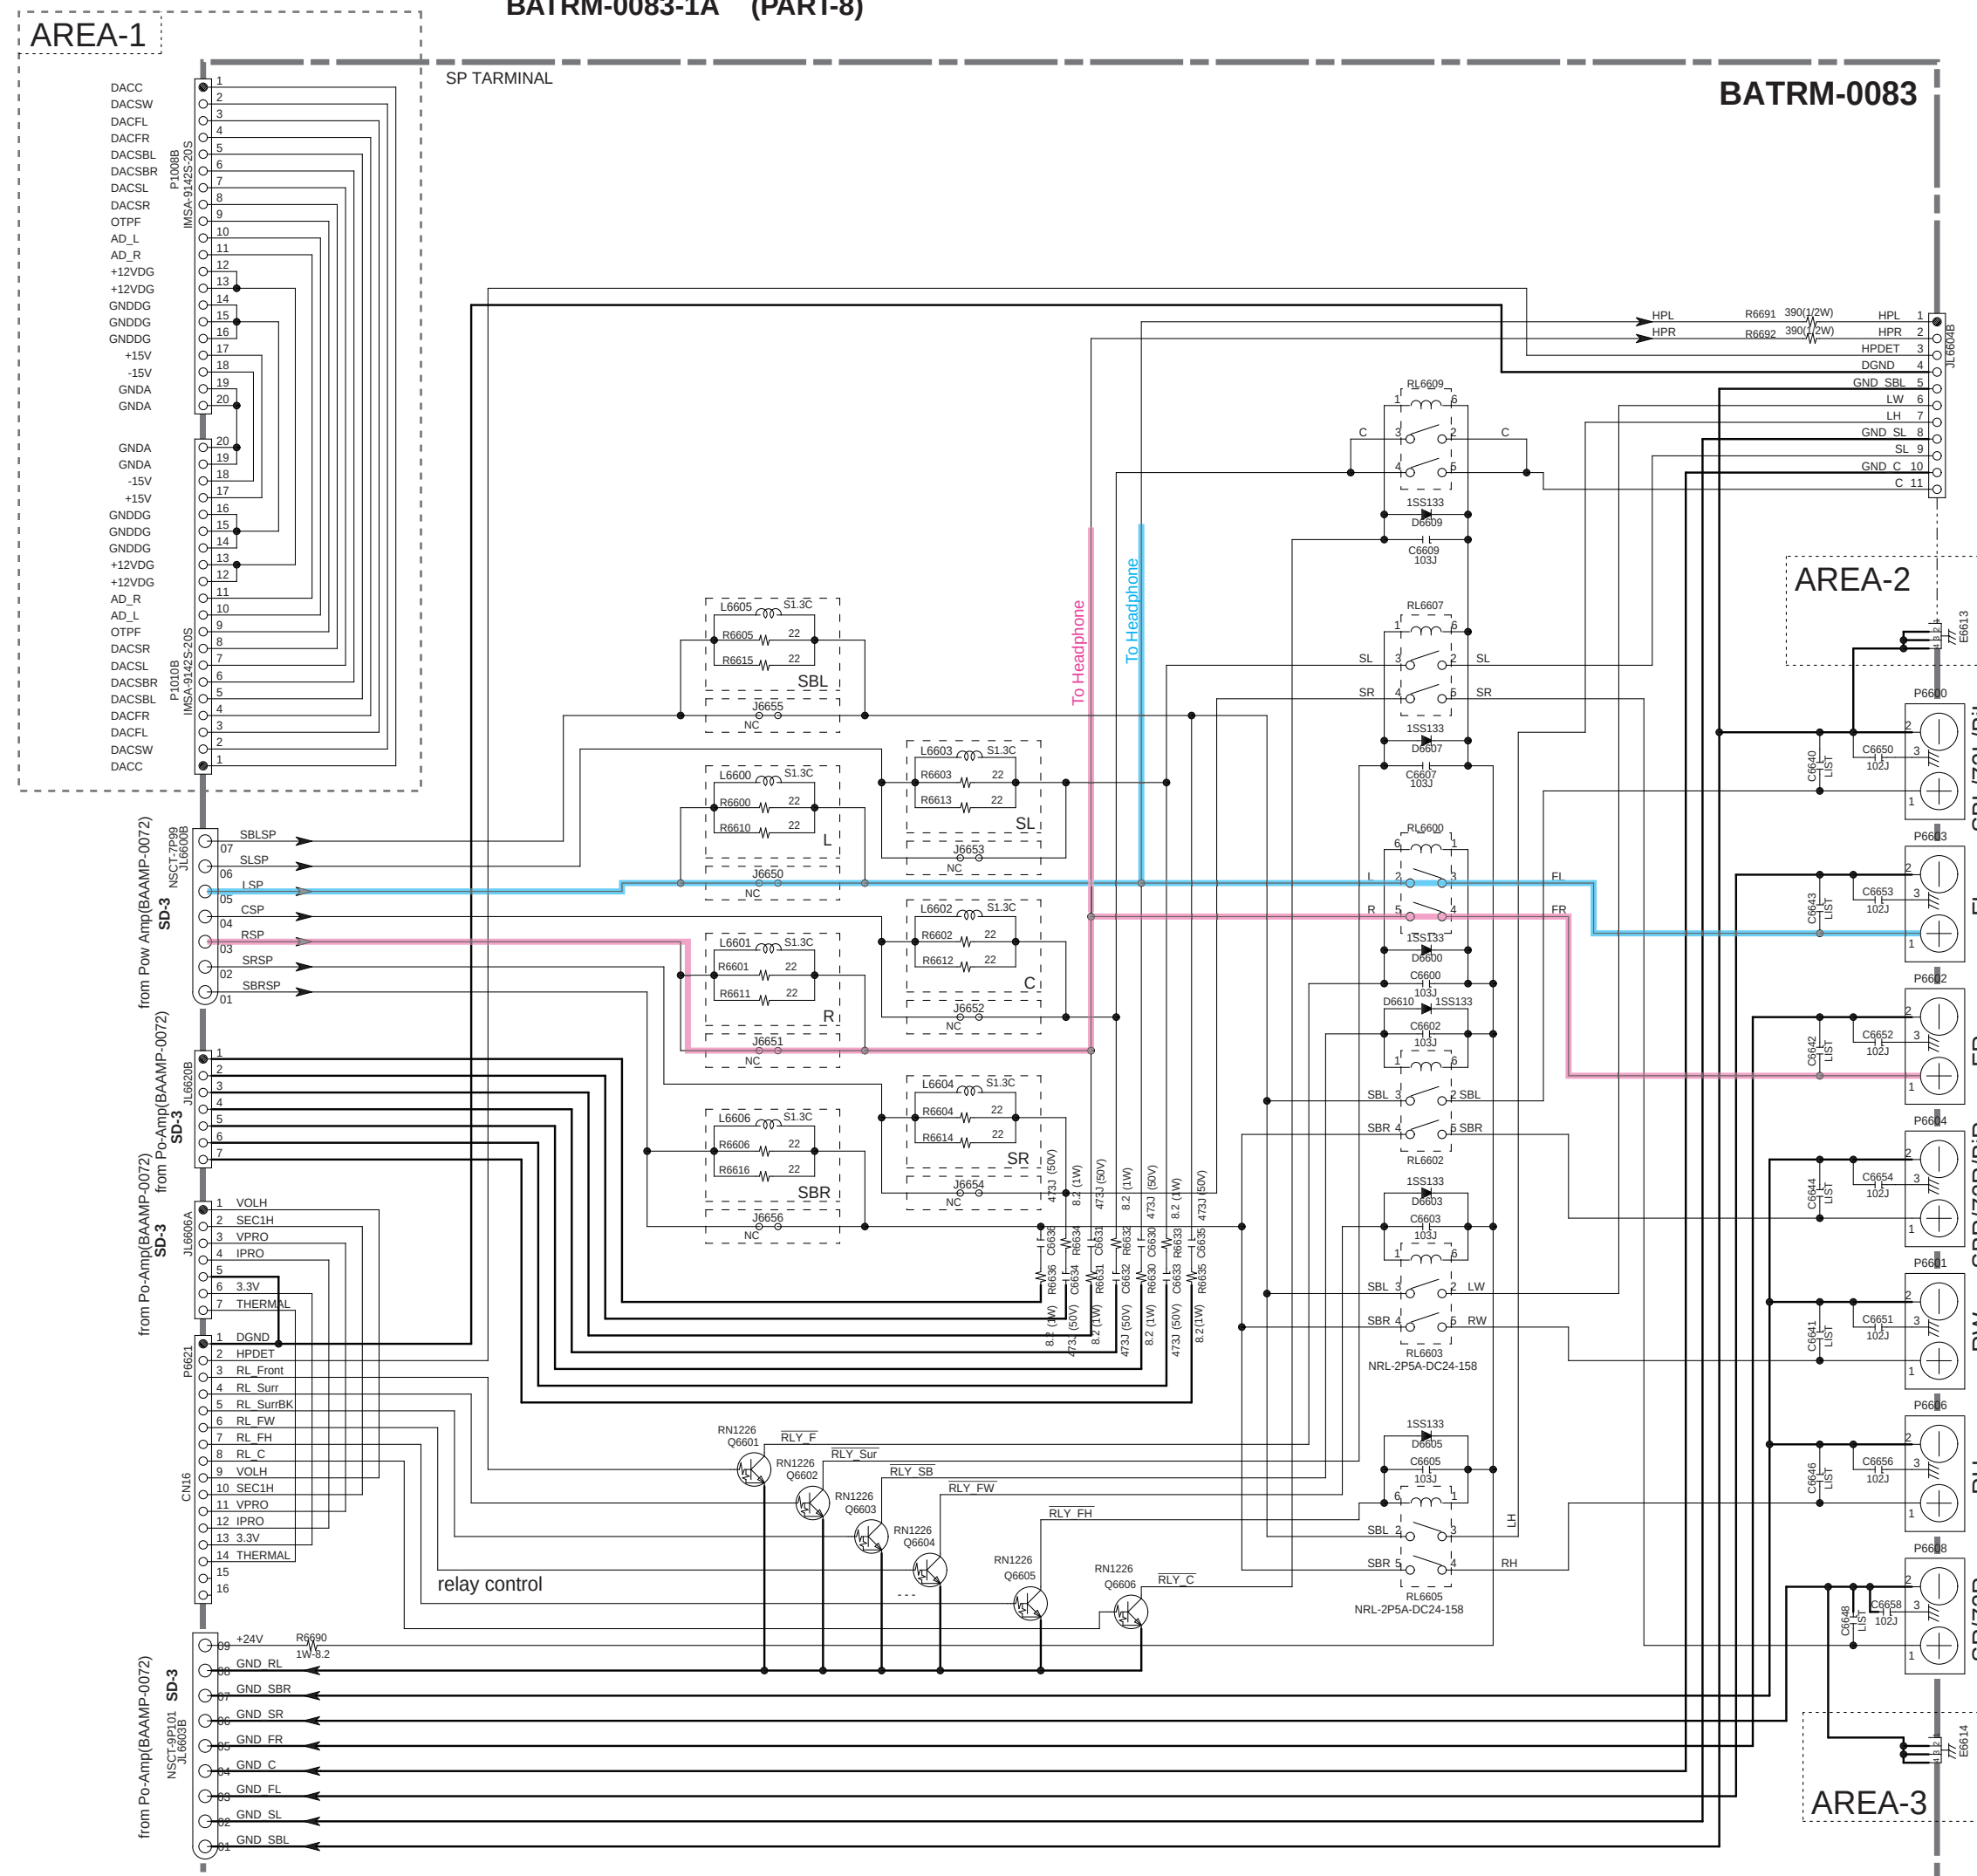


DHC-40.1 use only AREA-1, 2, 3, 4, 5 & 6.


| TYPE | T7    | A7  | T8    | A8  |
|------|-------|-----|-------|-----|
| D    | NC    | --- | NC    | --- |
| J    | ---   | NC  | ---   | NC  |
| M    | 472.1 | --- | 472.1 | --- |

| CODE | MODEL               |
|------|---------------------|
| T7   | TX-SR-707, DTR-40.1 |
| A7   | TX-SA707            |
| T8   | TX-NR807, DTR-50.1  |
| A8   | TX-NA807            |

- THE COMPONENTS IDENTIFIED BY MARK  ARE CRITICAL FOR SAFETY. REPLACE ONLY WITH PART NUMBER SPECIFIED.
- VOLTAGE (MEASURED WITH VOLTMETER)  IS DC VOLTAGE. (NO INPUT SIGNAL)
- ELECTROLYTIC CAPACITORS () ARE IN uFmV.
- ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.  
EX) 030 +3pF 330 +33pF 331+330pF 333 +0.03uF
- ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED.  
THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS.  
EX)  PRINTING SIDE
- CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

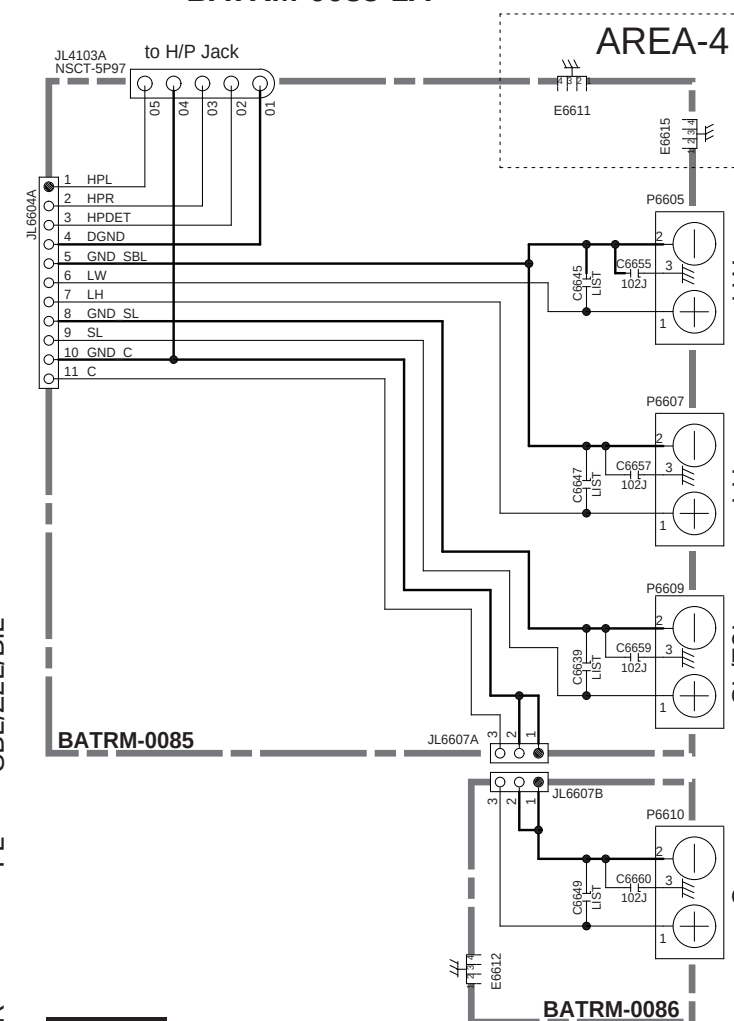



**U0021**  
PRIMARY POWER SUPPLY PC BOARD  
BAPS-0084-1A

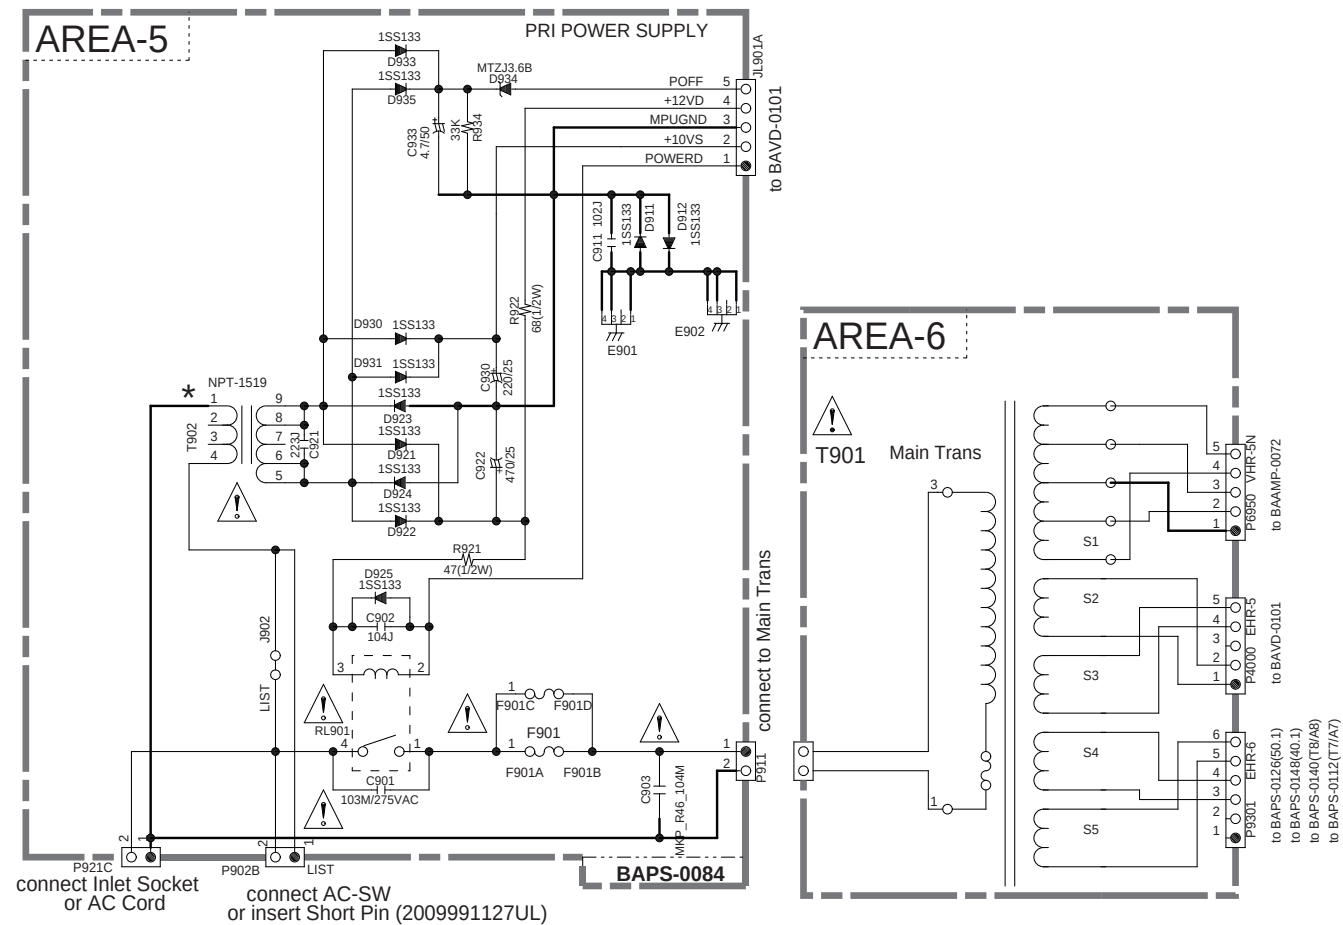


| J902                         |          |
|------------------------------|----------|
| TX-SR707, TX-SA707, DTR-40.1 | Mount    |
| TX-NR807, TX-NA807, DTR-50.1 | No mount |
| DHC-40.1                     | Mount    |

| TYPE | T7       | A7       | T8       | A8       | DHC-40.1 |
|------|----------|----------|----------|----------|----------|
| D    | 10A 125V | ---      | 12A 125V | ---      | 5A 125V  |
| J    | 10A 125V | 10A 125V | 15A 125V | 15A 125V | ---      |

| T902 |        |        |        |        |          |
|------|--------|--------|--------|--------|----------|
| TYPE | T7     | A7     | T8     | A8     | DHC-40.1 |
| D    | 1520JQ | ---    | 1520JQ | ---    | 1520JQ   |
| J    | ---    | 1520JQ | ---    | 1520JQ | ---      |
| M    | 1520GO | ---    | 1520GO | ---    | ---      |



THIS SYMBOL LOCATED NEAR THE FUSE INDICATES THAT THE FUSE USED IS SLOW OPERATING TYPE FOR CONTINUED PROTECTION AGAINST FIRE FUSE HAZARD, REPLACE WITH SAME TYPE FUSE. FOR FUSE RATING REFER TO THE MAKING ADJACENT TO THE SYMBOL.



**CAUTION**

FOR CONTINUED PROTECTION  
AGAINST FIRE HAZARD, REPLACE  
ONLY WITH FUSE OF SAME TYPE  
AND RATING INDICATED.



**ATTENTION**  
AFIN D'ASSURER UNE PROTECTION  
PERMANENTE CONTRE LES RISQUES  
D'INCENDIE, REMPLACER UNIQUEMENT  
PAR UN FUSIBLE DE MEME TYPE  
ET CALIBRATION COMME INDIQUE.



## SCHEMATIC DIAGRAM-5

U0032 VIDEO INPUT CIRCUIT PC BOARD  
BAVD-0101-1D (PART-9)

(JJ ONLY)

TO D Terminal PWB  
TO BAVD-0102 (Part-10 D Terminal Section)SD-9  
TO HDMI PWB  
TX-NR807/NA807-DHC-40.1-DTR-50.1-NSCT-31P2124


## ANALOG VIDEO &amp; PS Section

SD-6  
TO BACP0-0100 (Part-11 MICON Section)TO ASP PWB SD-1  
TO BAASP-0073 (Part-12 ASP Section)

(Except TX-SA707/NA807)


TO TUNER  
NCF7-111012RS-232C  
MDS-#P-V02GSRP

SIRIUS

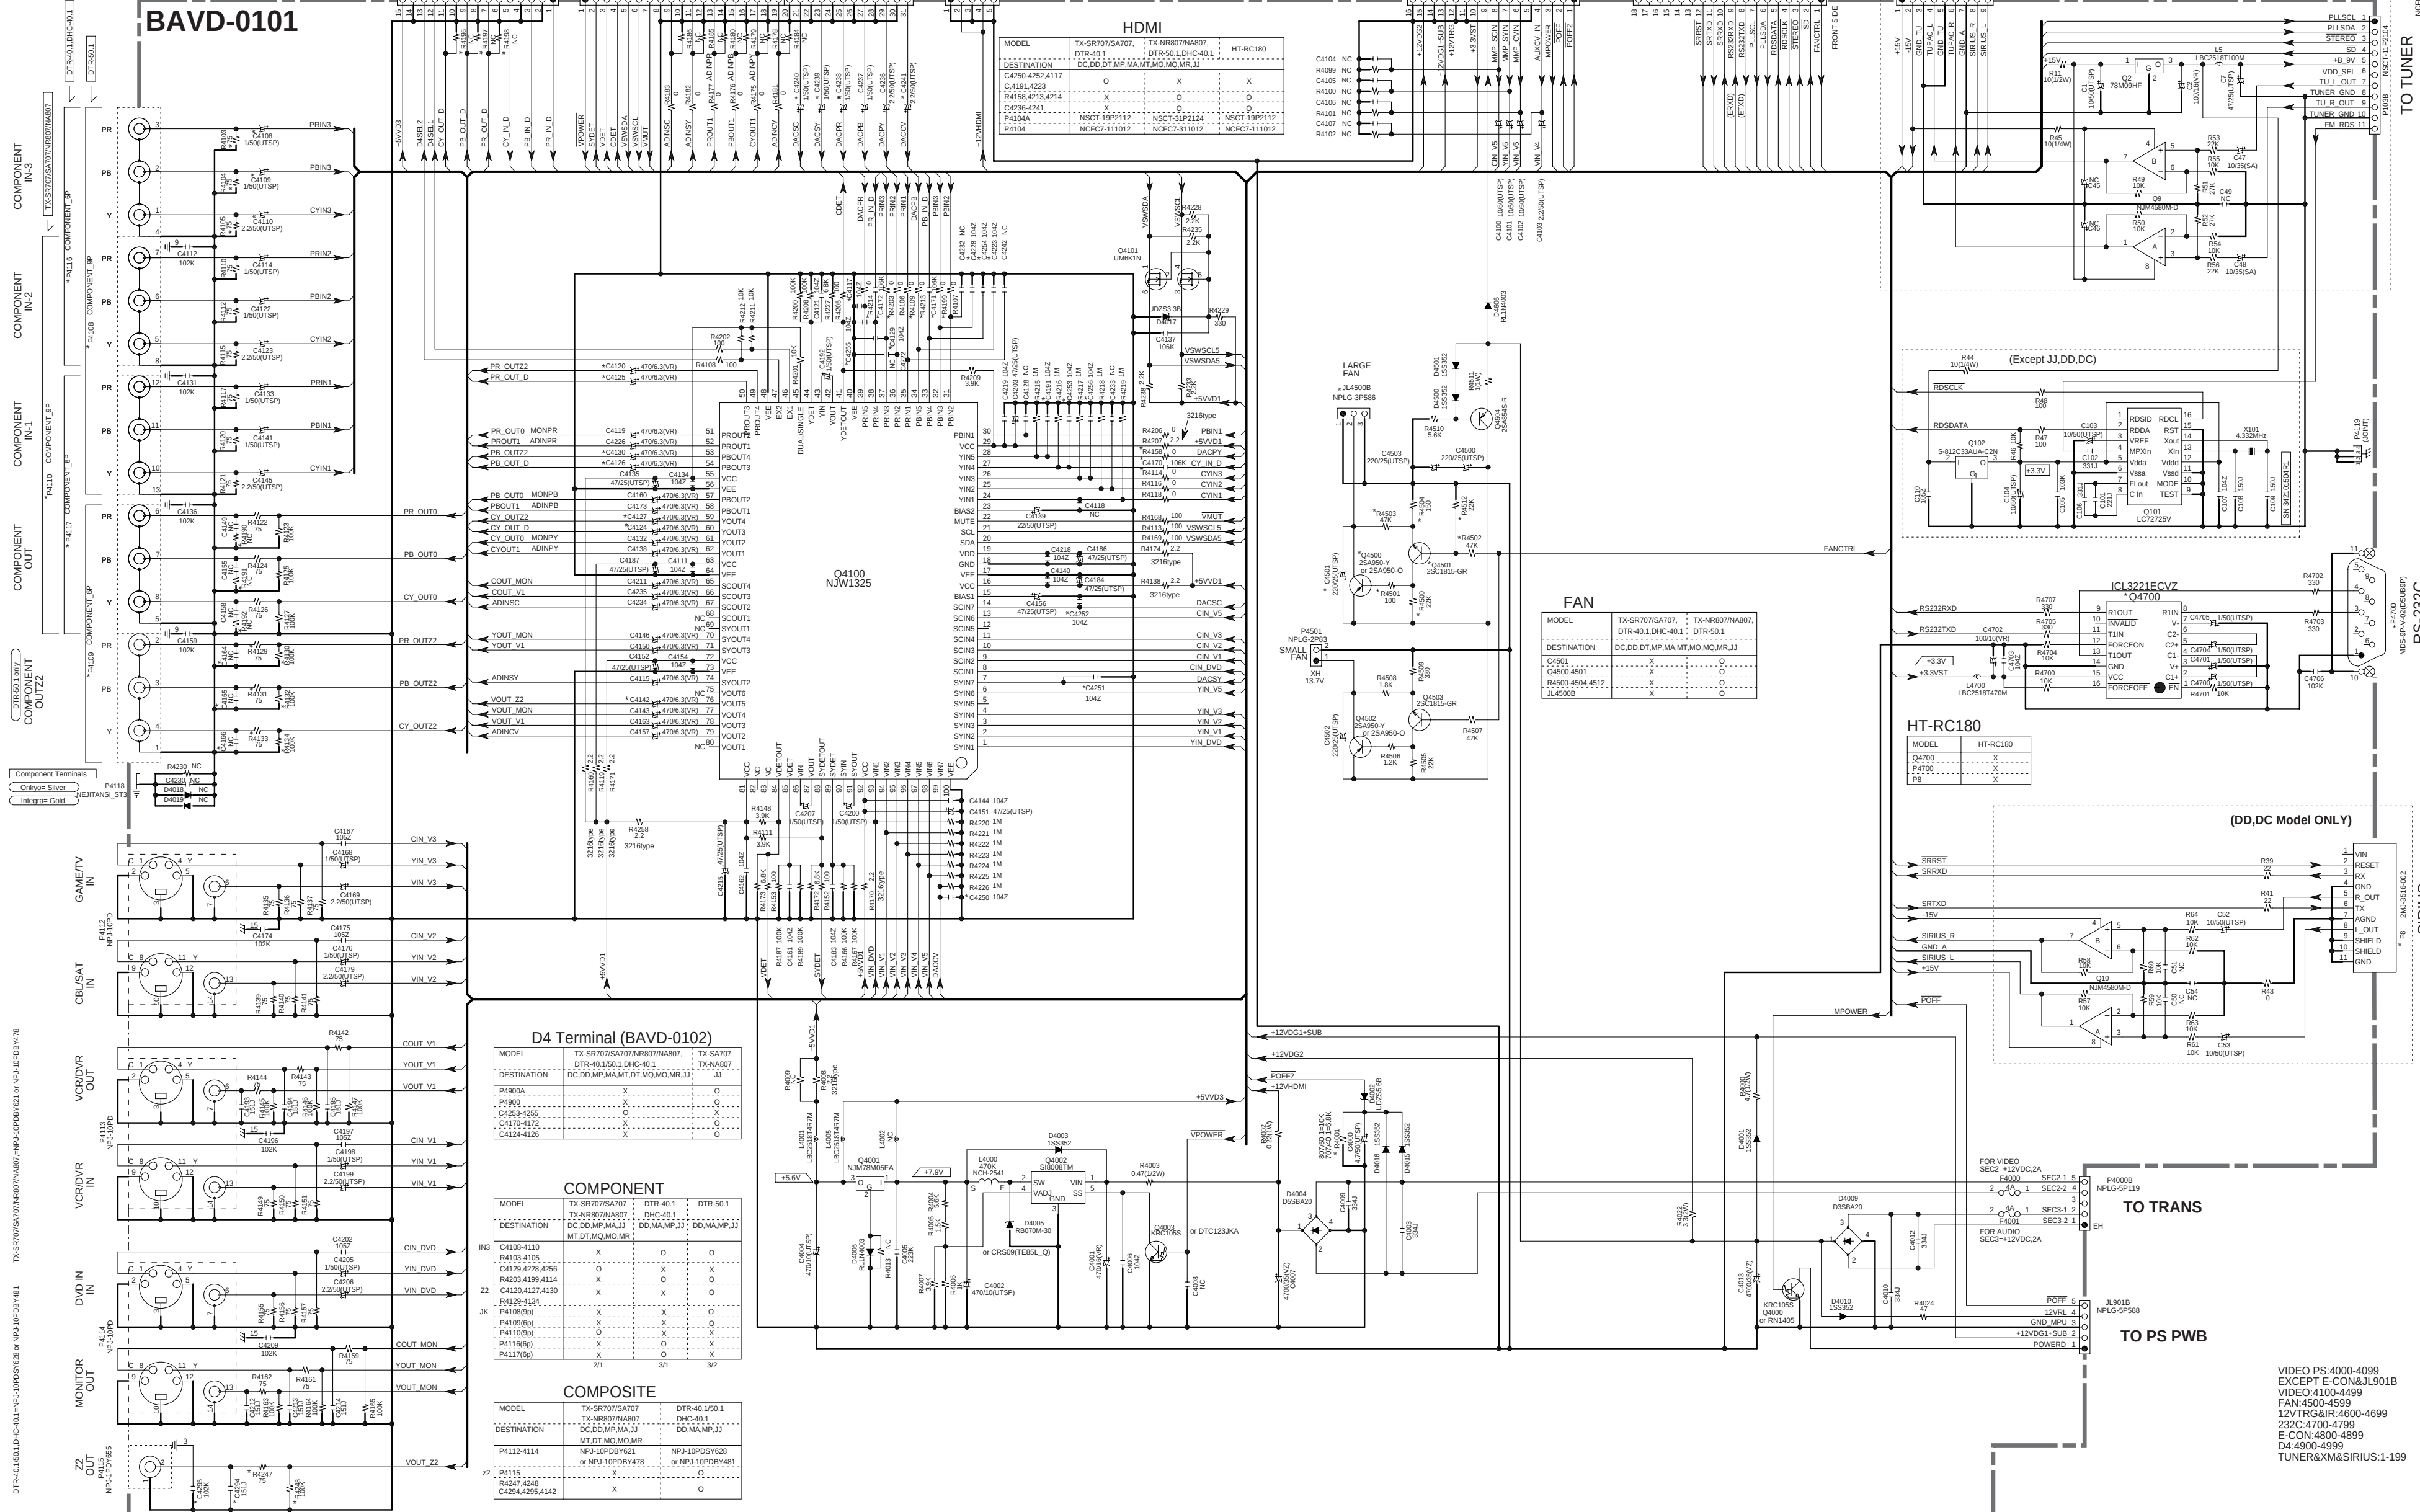VIDEO PS:4000-4099  
EXCEPT E-CON&JL9018  
VIDEO 4100-4499  
FAN:4500-4599  
12VTRG&IR:4600-4699  
232C:4700-4799  
E-CON:4800-4899  
D4:4900-4999  
TUNER&XM&SIRIUS:1-199



**U0031 CPU CIRCUIT PC BOARD BACPU-0100-1D**  
(PART-11)

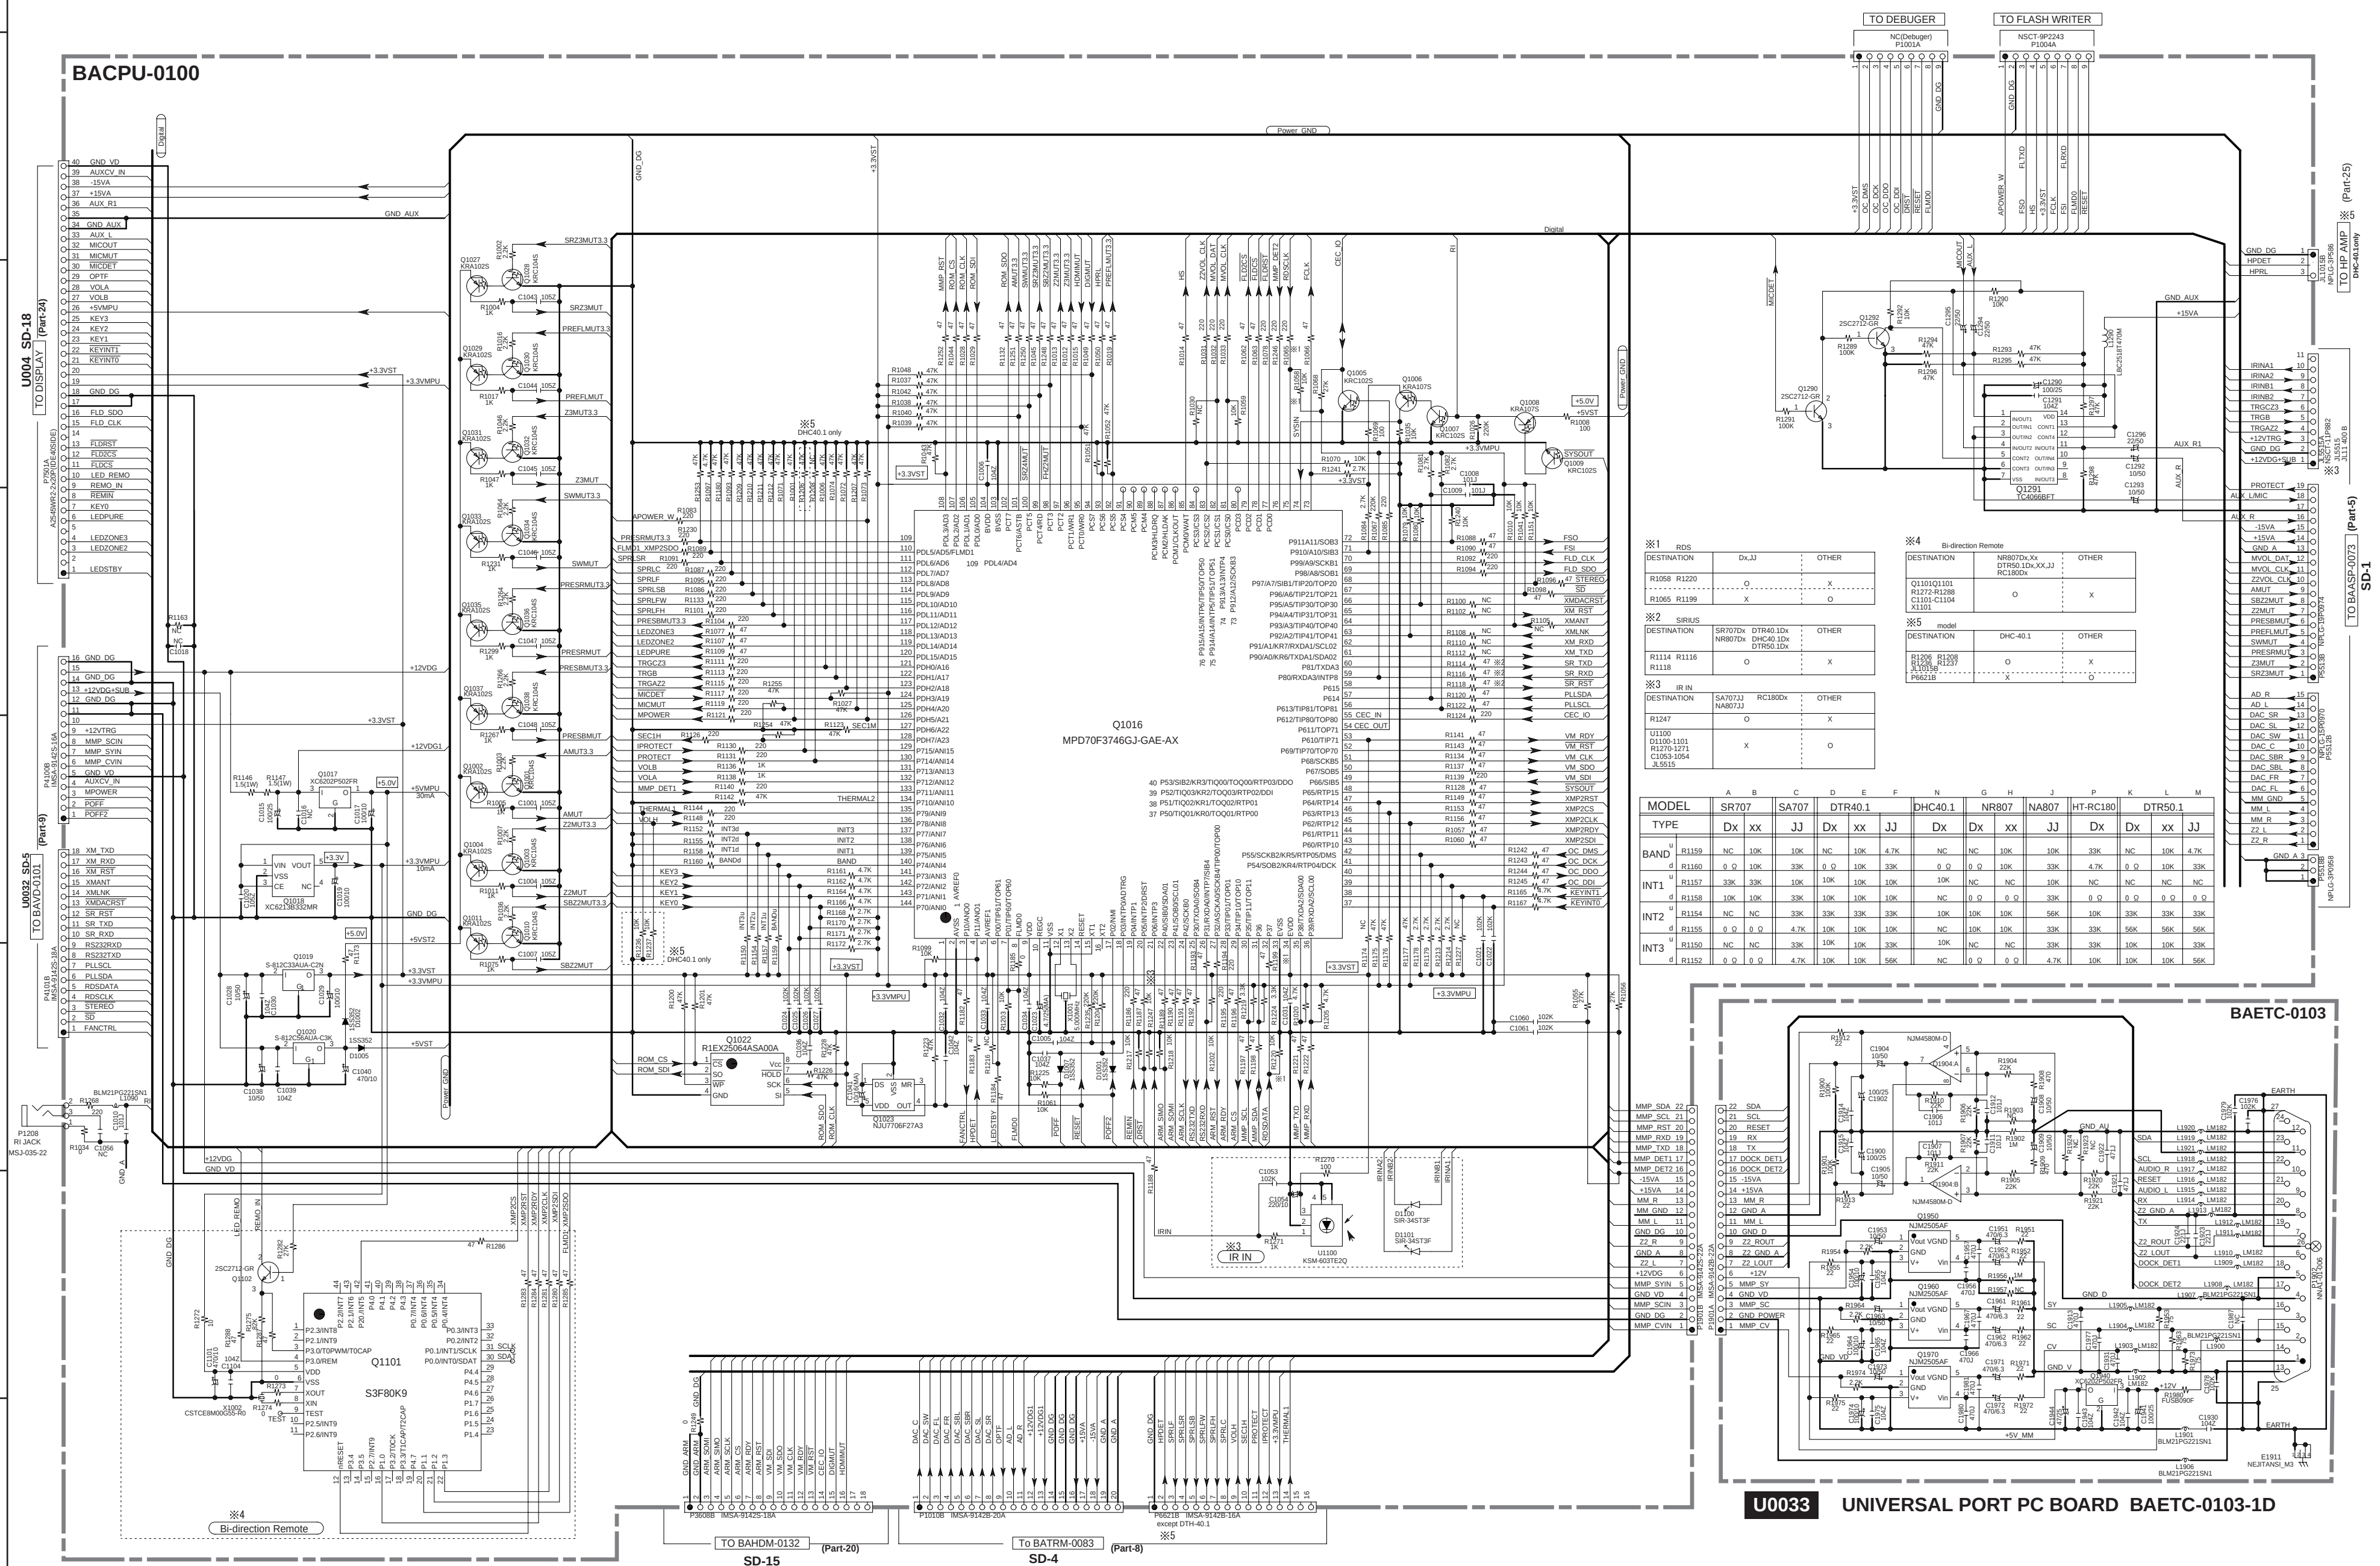


**U0033** UNIVERSAL PORT PC BOARD BAETC-0103-1D


|        |           |
|--------|-----------|
| uCOM   | 1000-1299 |
| U-port | 1900-1999 |



**U003** DIGITAL INPUT CIRCUIT PC BOARD  
BADG-0099-1D  
(PART-12)

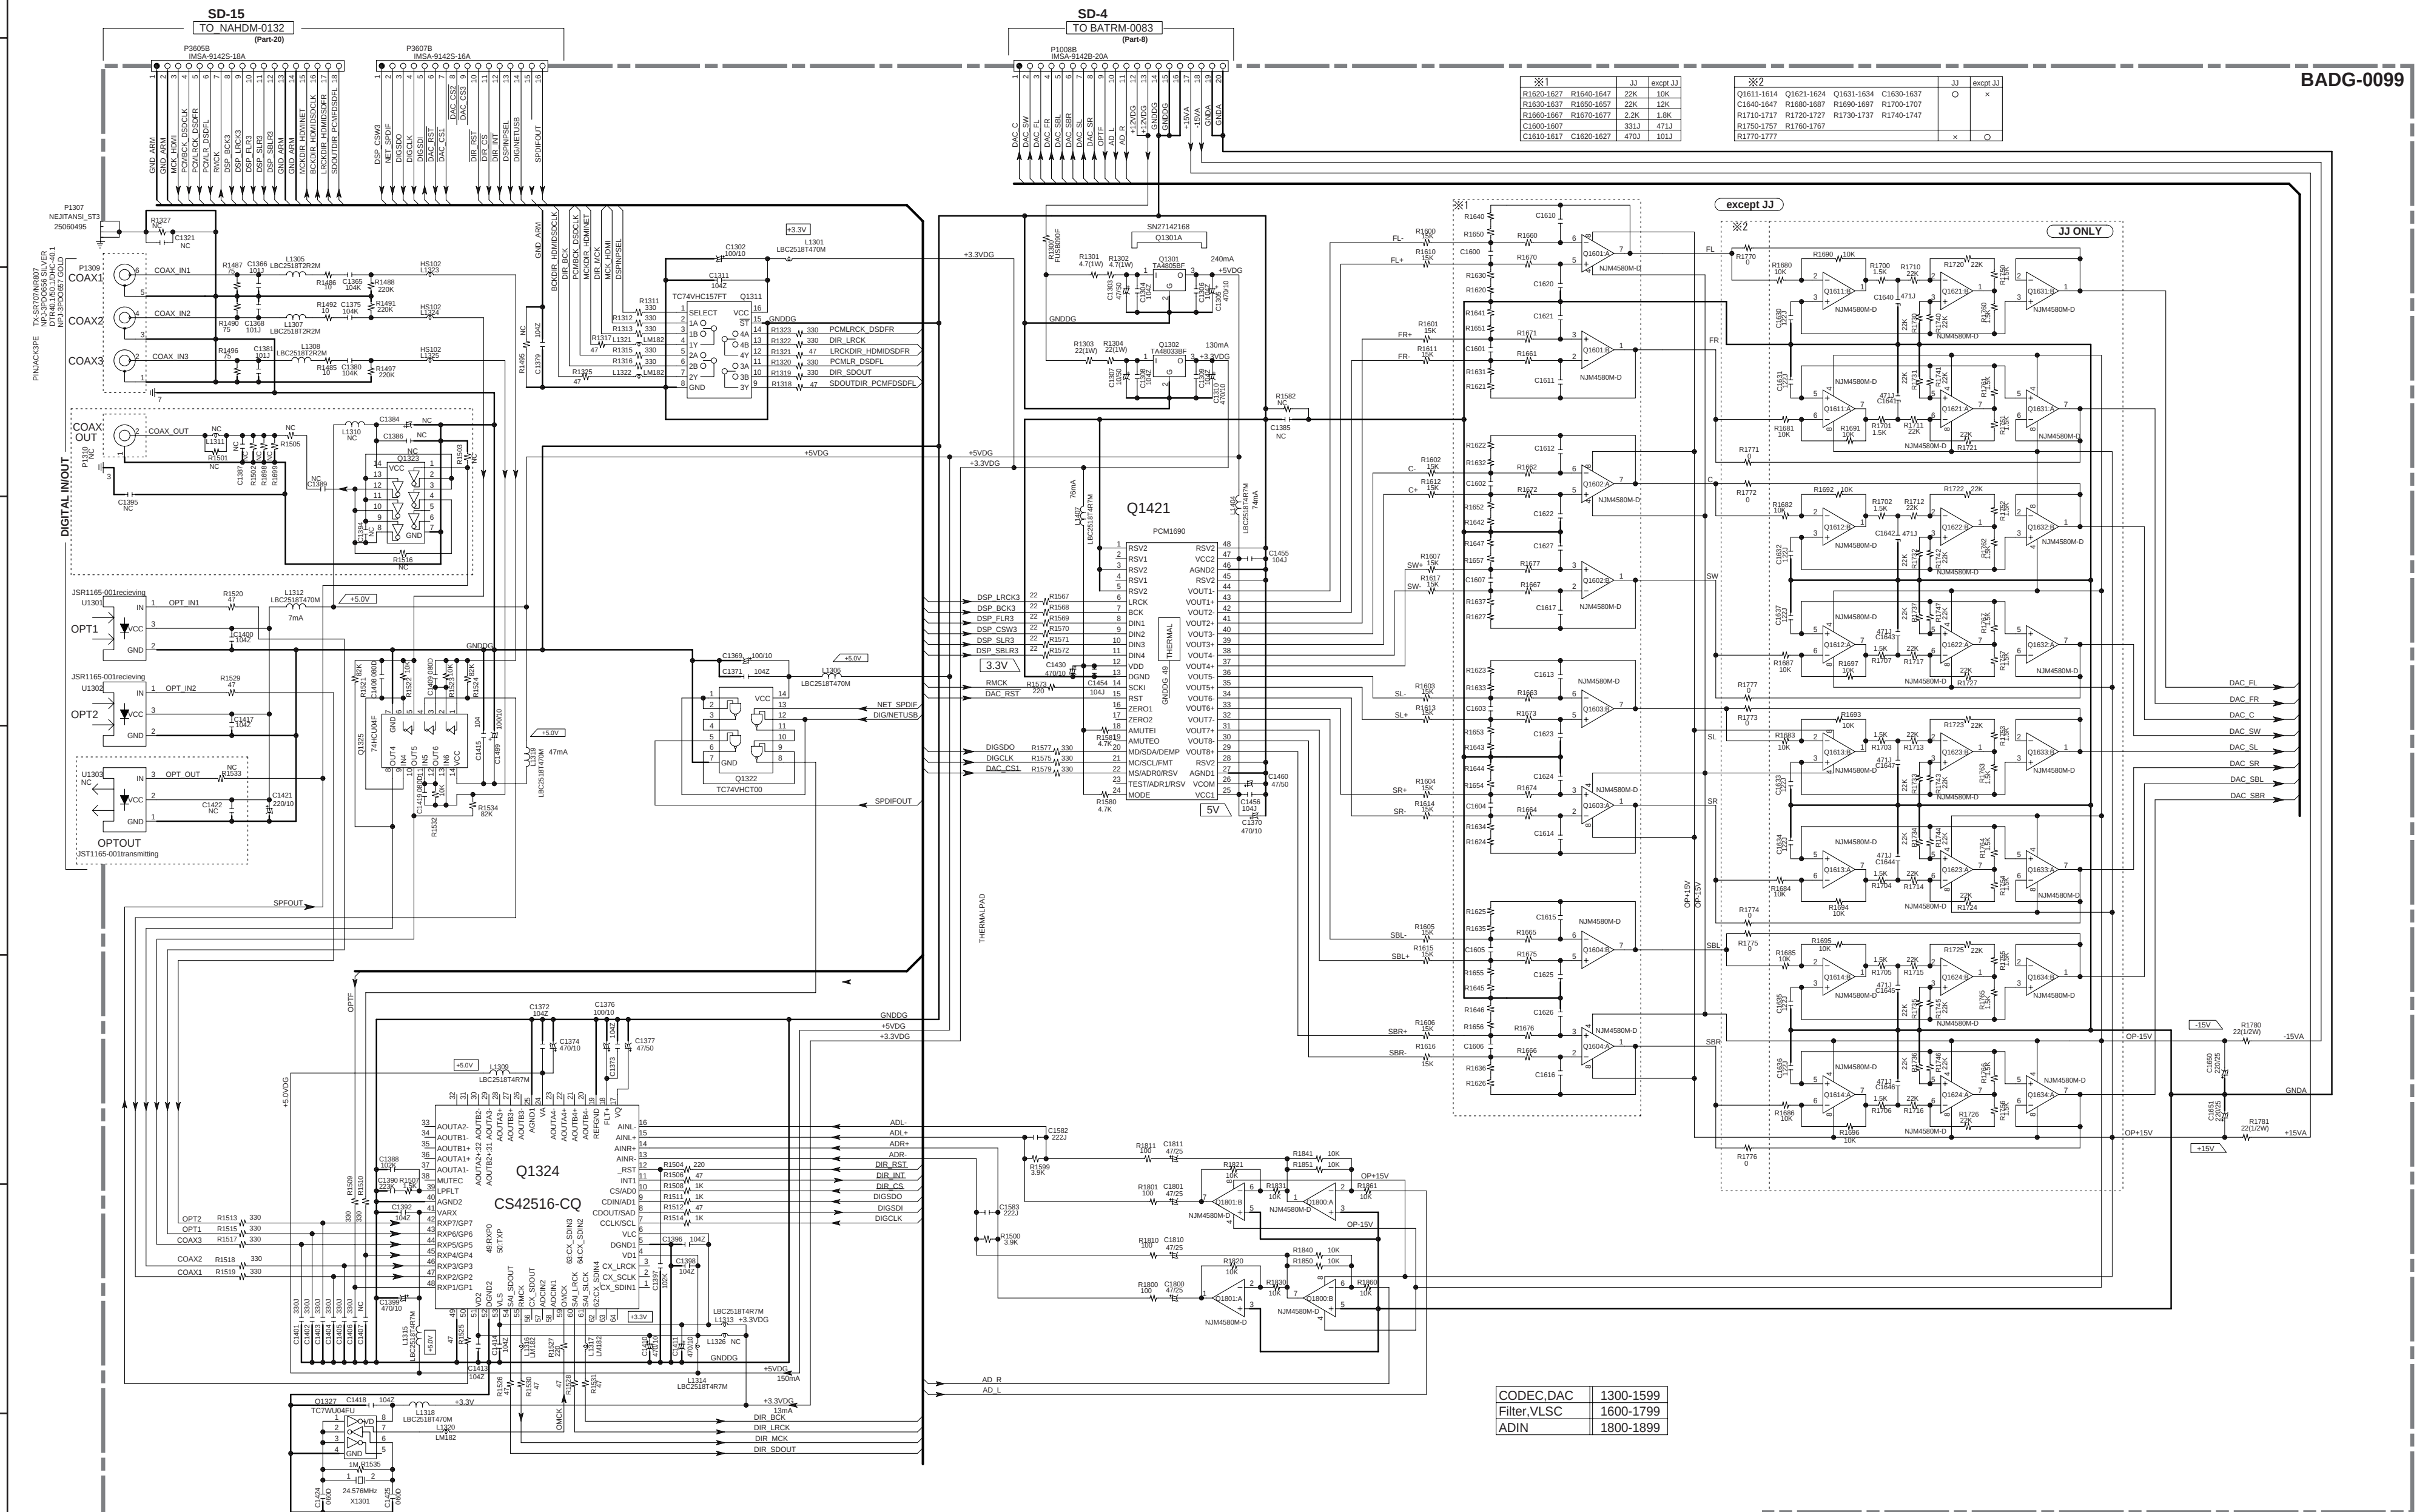


**U005** HDMI CIRCUIT PC BOARD BAHDM-0132-1D (-1)

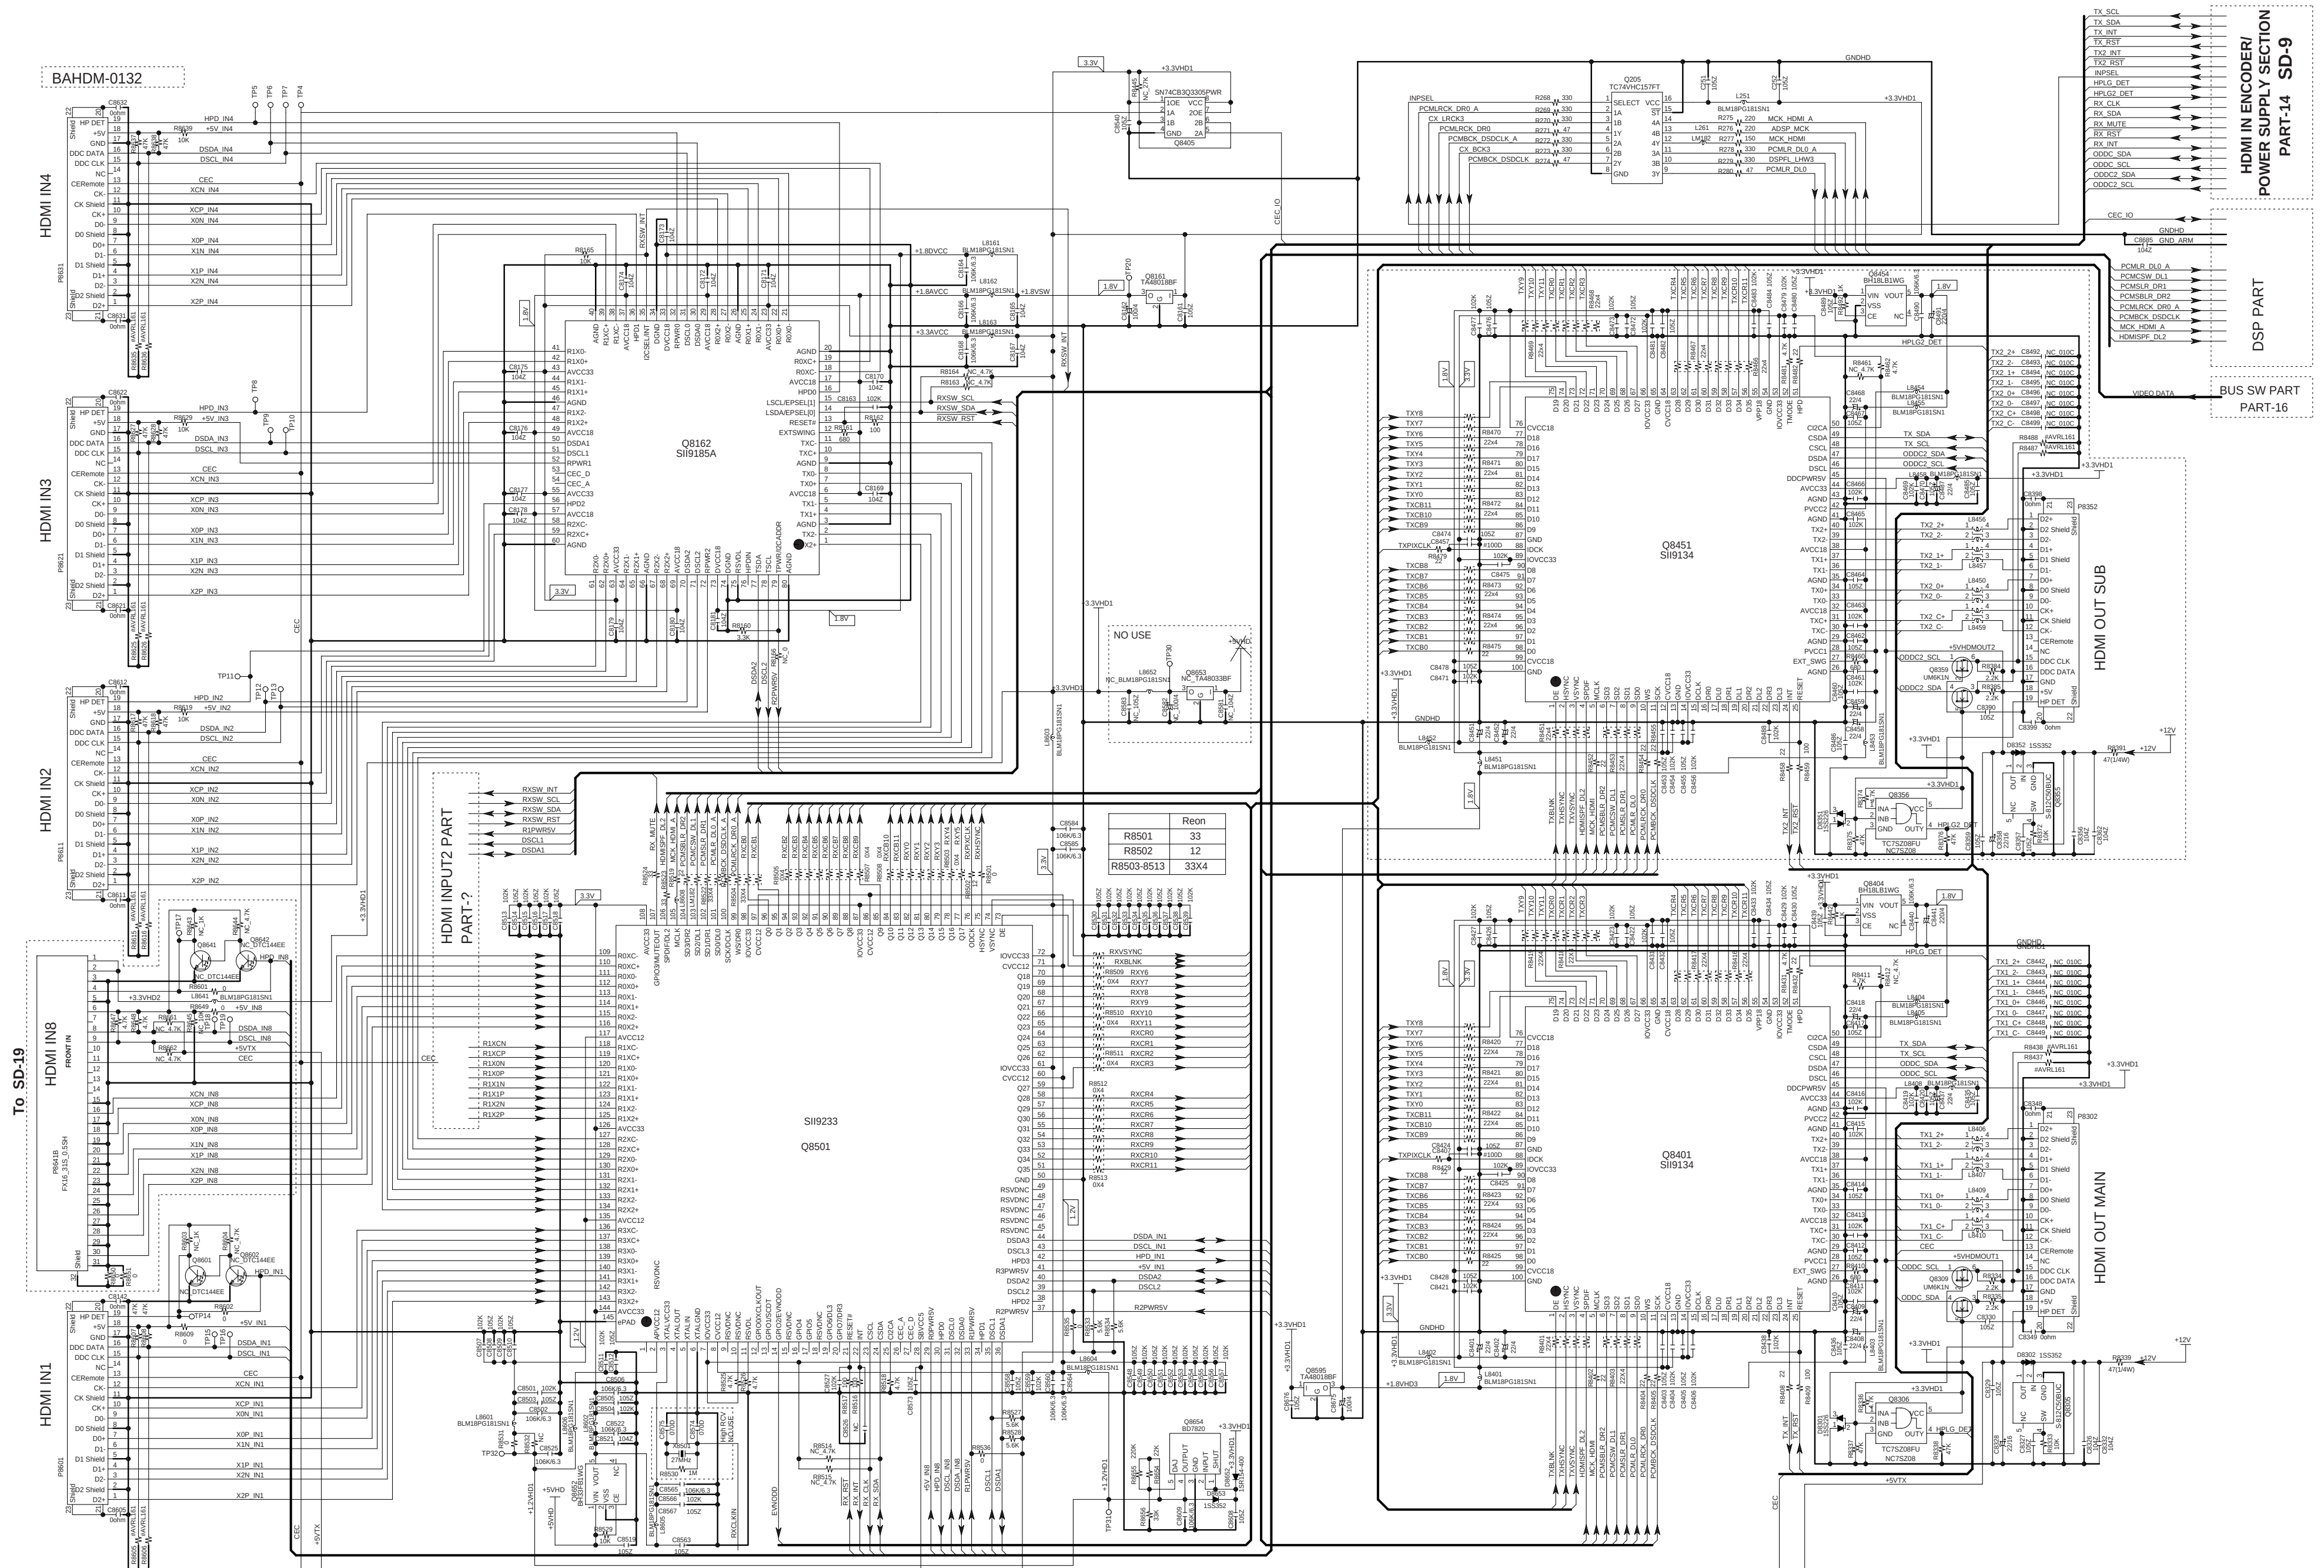



**U005** HDMI CIRCUIT PC BOARD BAHDM-0132-1D (-2)  
(PART-14)  
HDMI IN/ENCODER/POWER SUPPLY SECTION

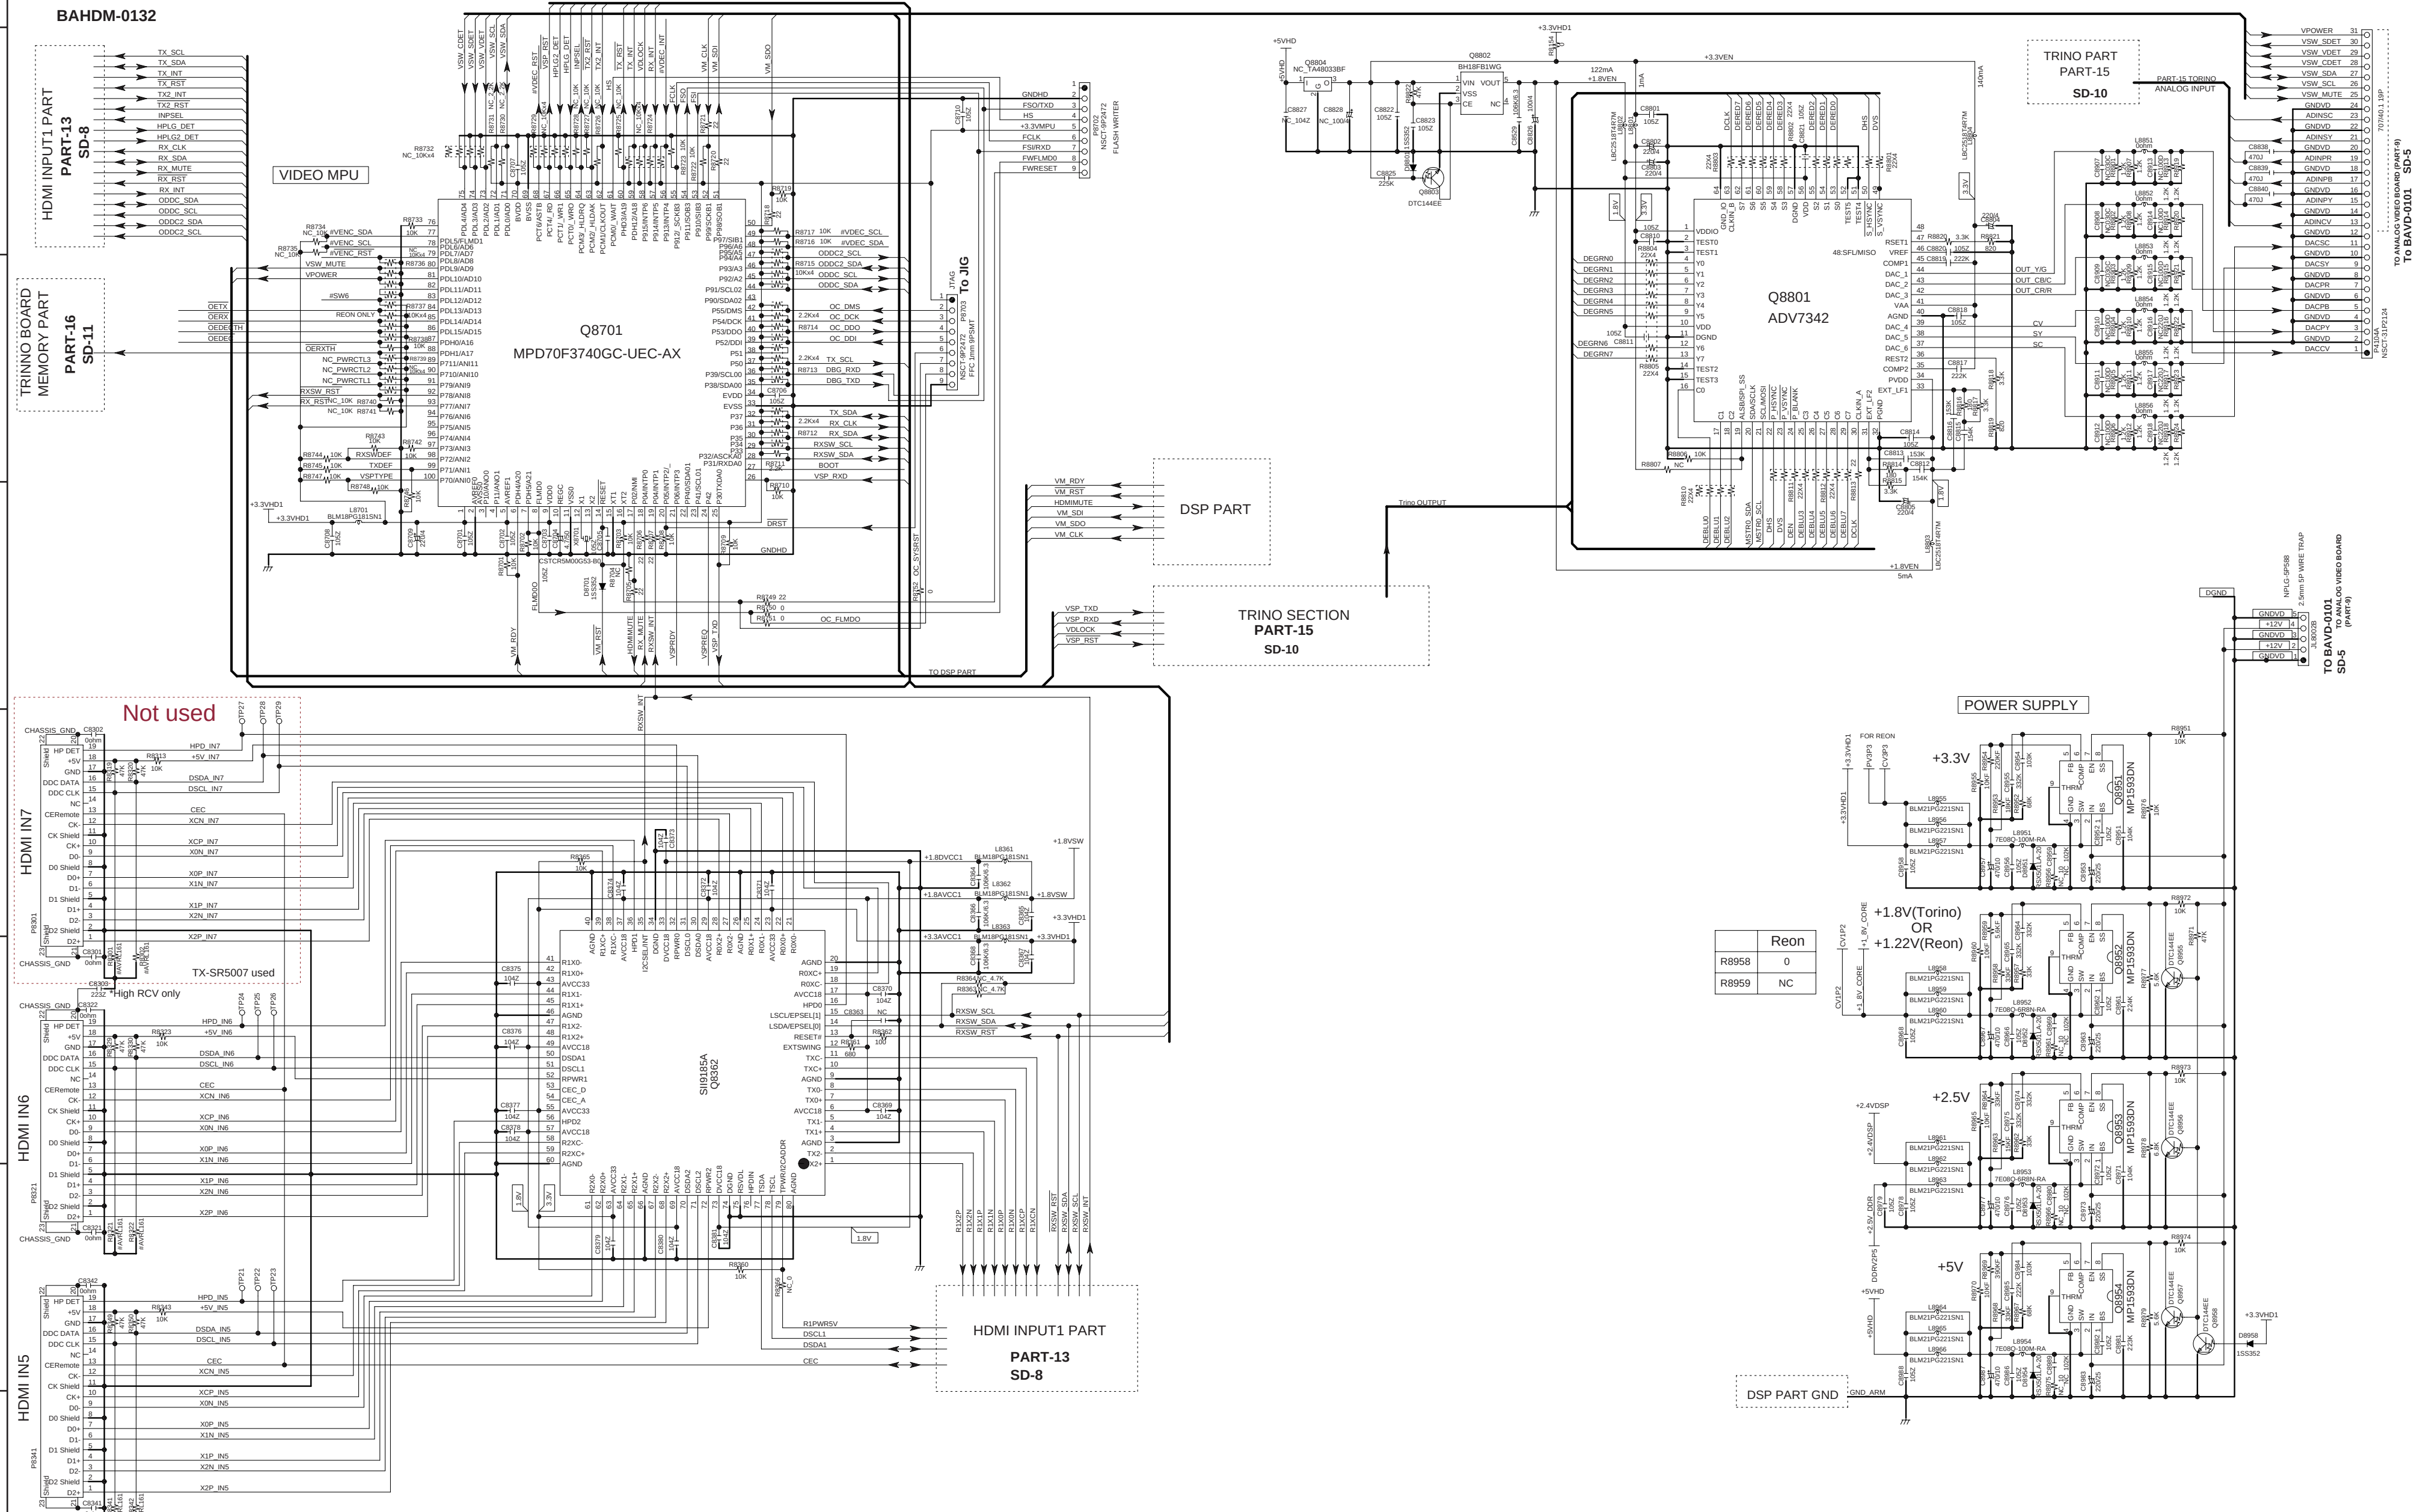

**U005** HDMI CIRCUIT PC BOARD BAHDM-0132-1D (-3)  
(PART-15)  
TRINO SECTION





SCHEMATIC DIAGRAM-11

U005 HDMI CIRCUIT PC BOARD BAHDM-0132-1D (-4)  
(PART-16) TRINO BOARD MEMORY SECTION

1

2

3

4

5

BAHDM-0132

TRINO SECTION

PART-15

SD-10

HDMI INPUT1 PART

PART-13

SD-8

HDMI INPUT2 PART

PART-14

SD-9







SCHEMATIC DIAGRAM-14

U005 HDMI CIRCUIT PC BOARD BAHDM-0132-1D (-6) (PART-19) DSP Memory Section


1

2

3

4

5

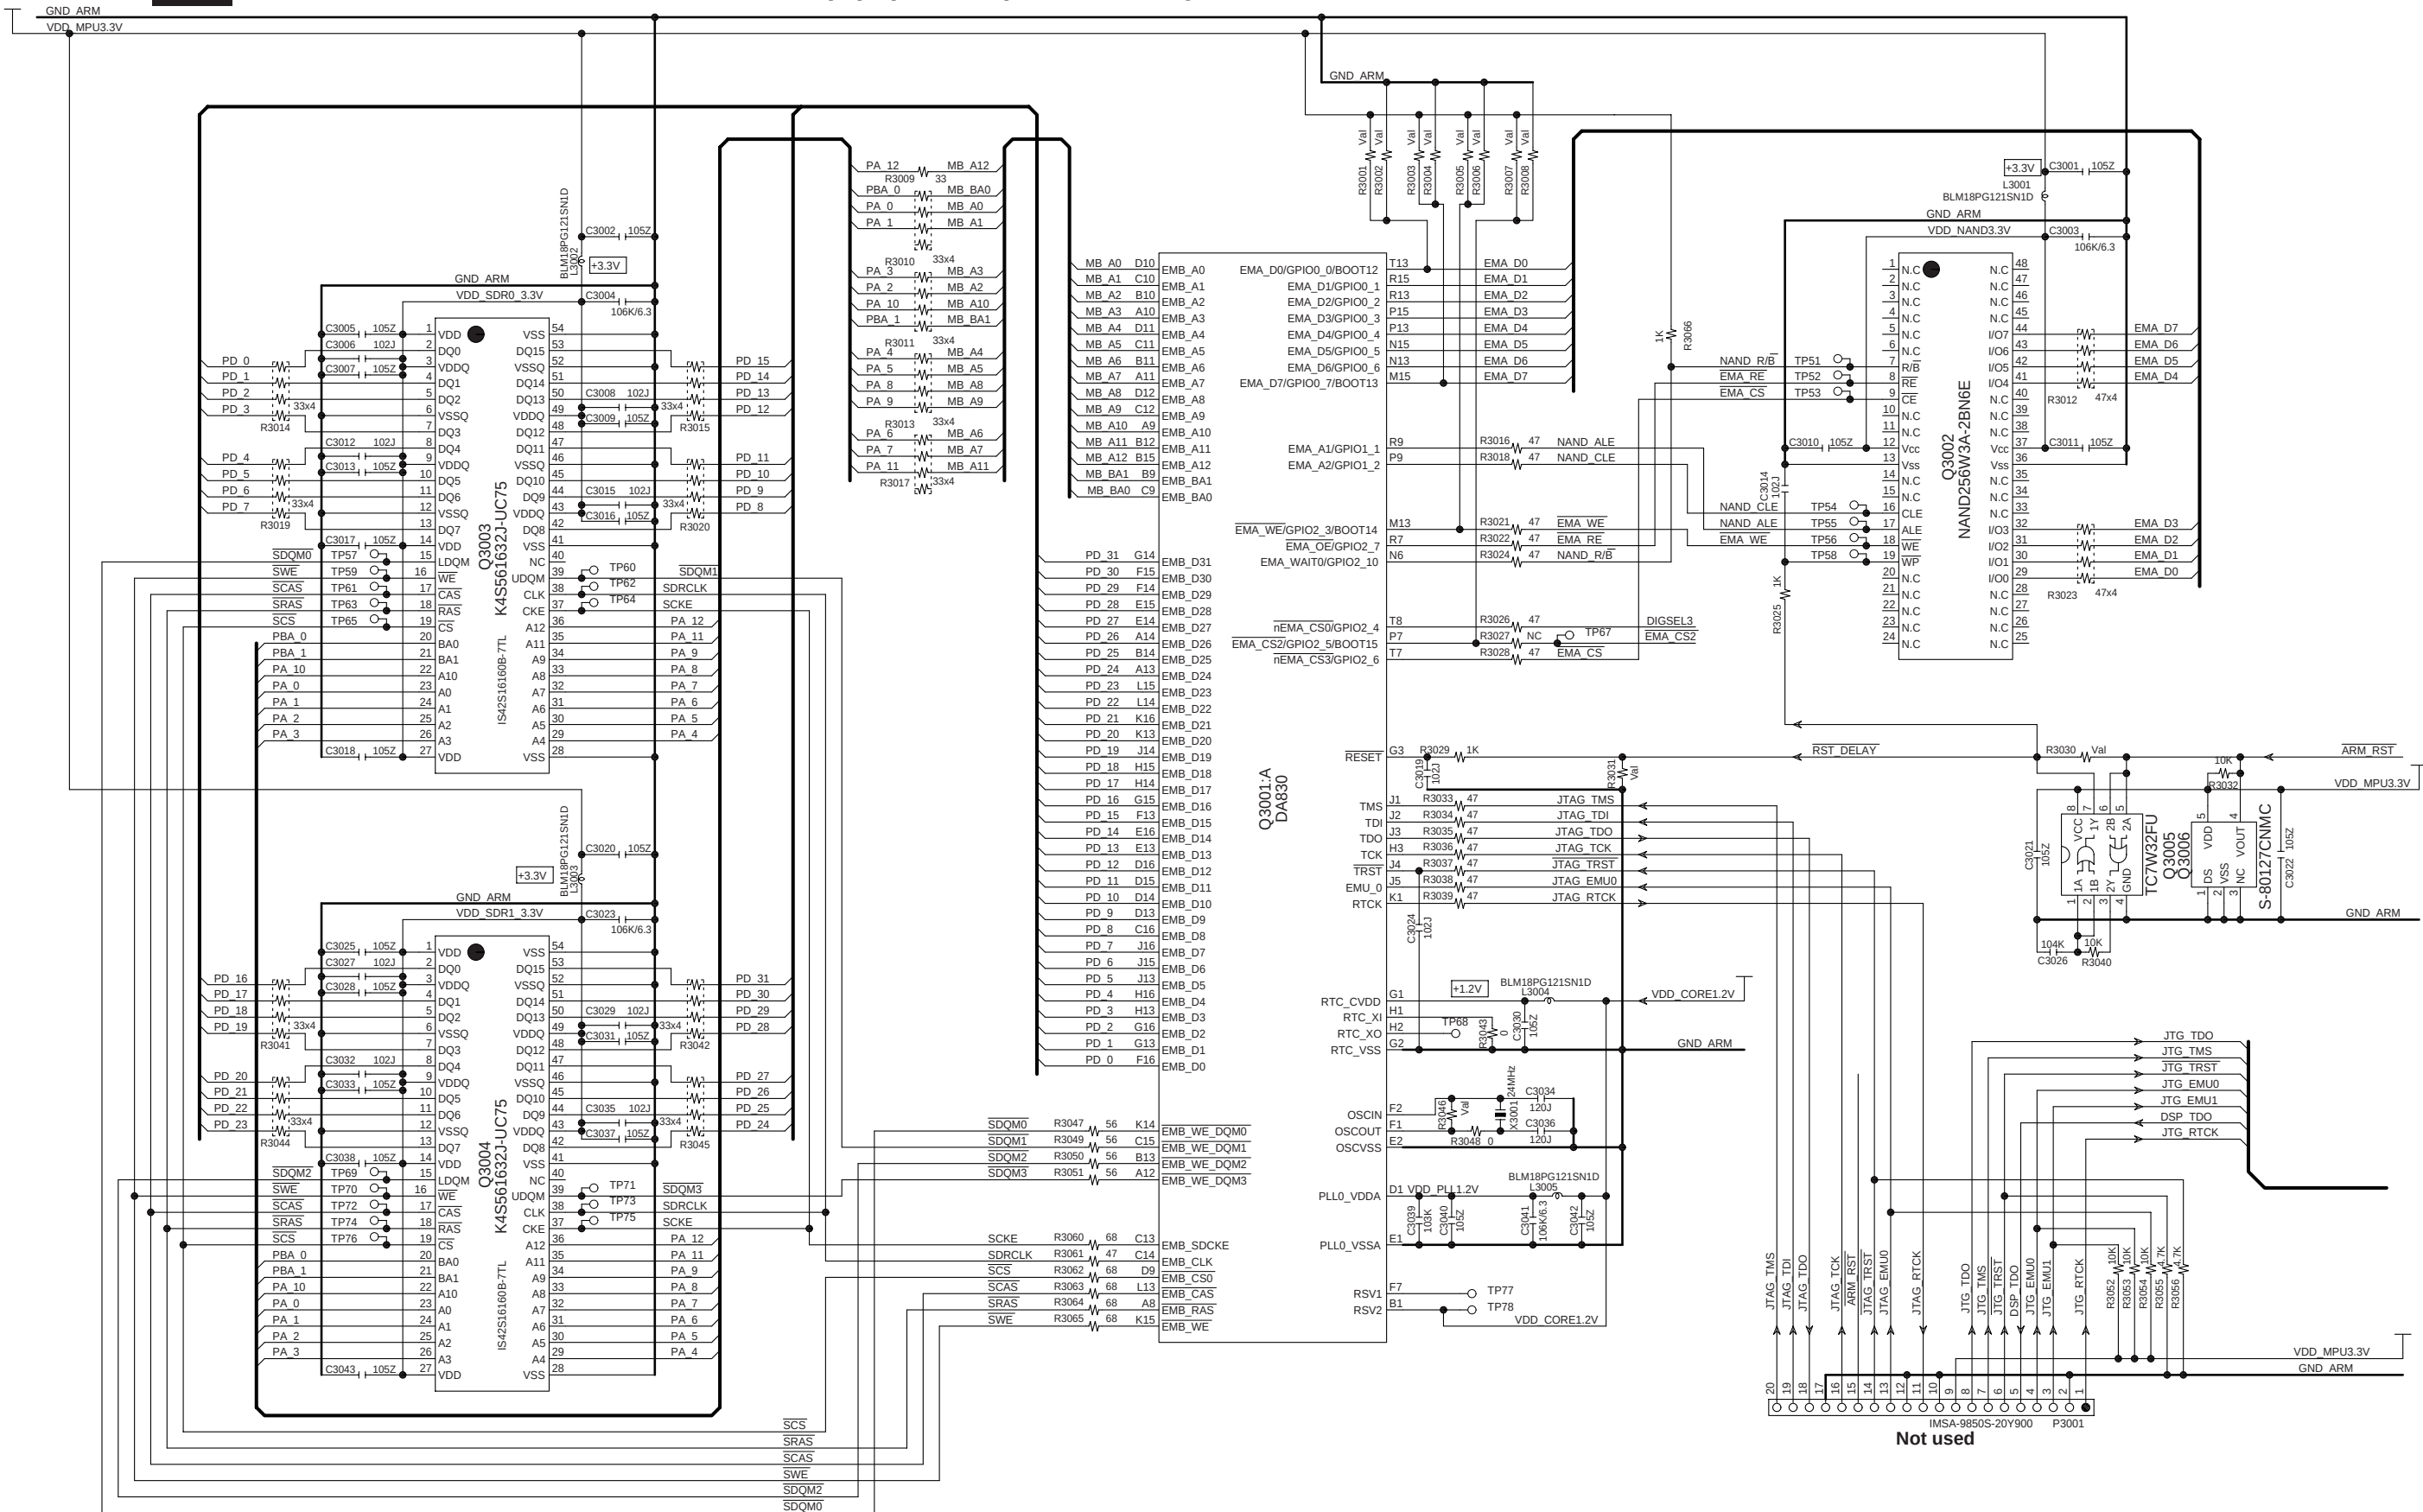

Not used

A

B

C

D

E

F

G


H

SCHEMATIC DIAGRAM-15

U005

HDMI CIRCUIT PC BOARD BAHDM-0132-1D (-7)

(PART-20) DSP CONNECT Section









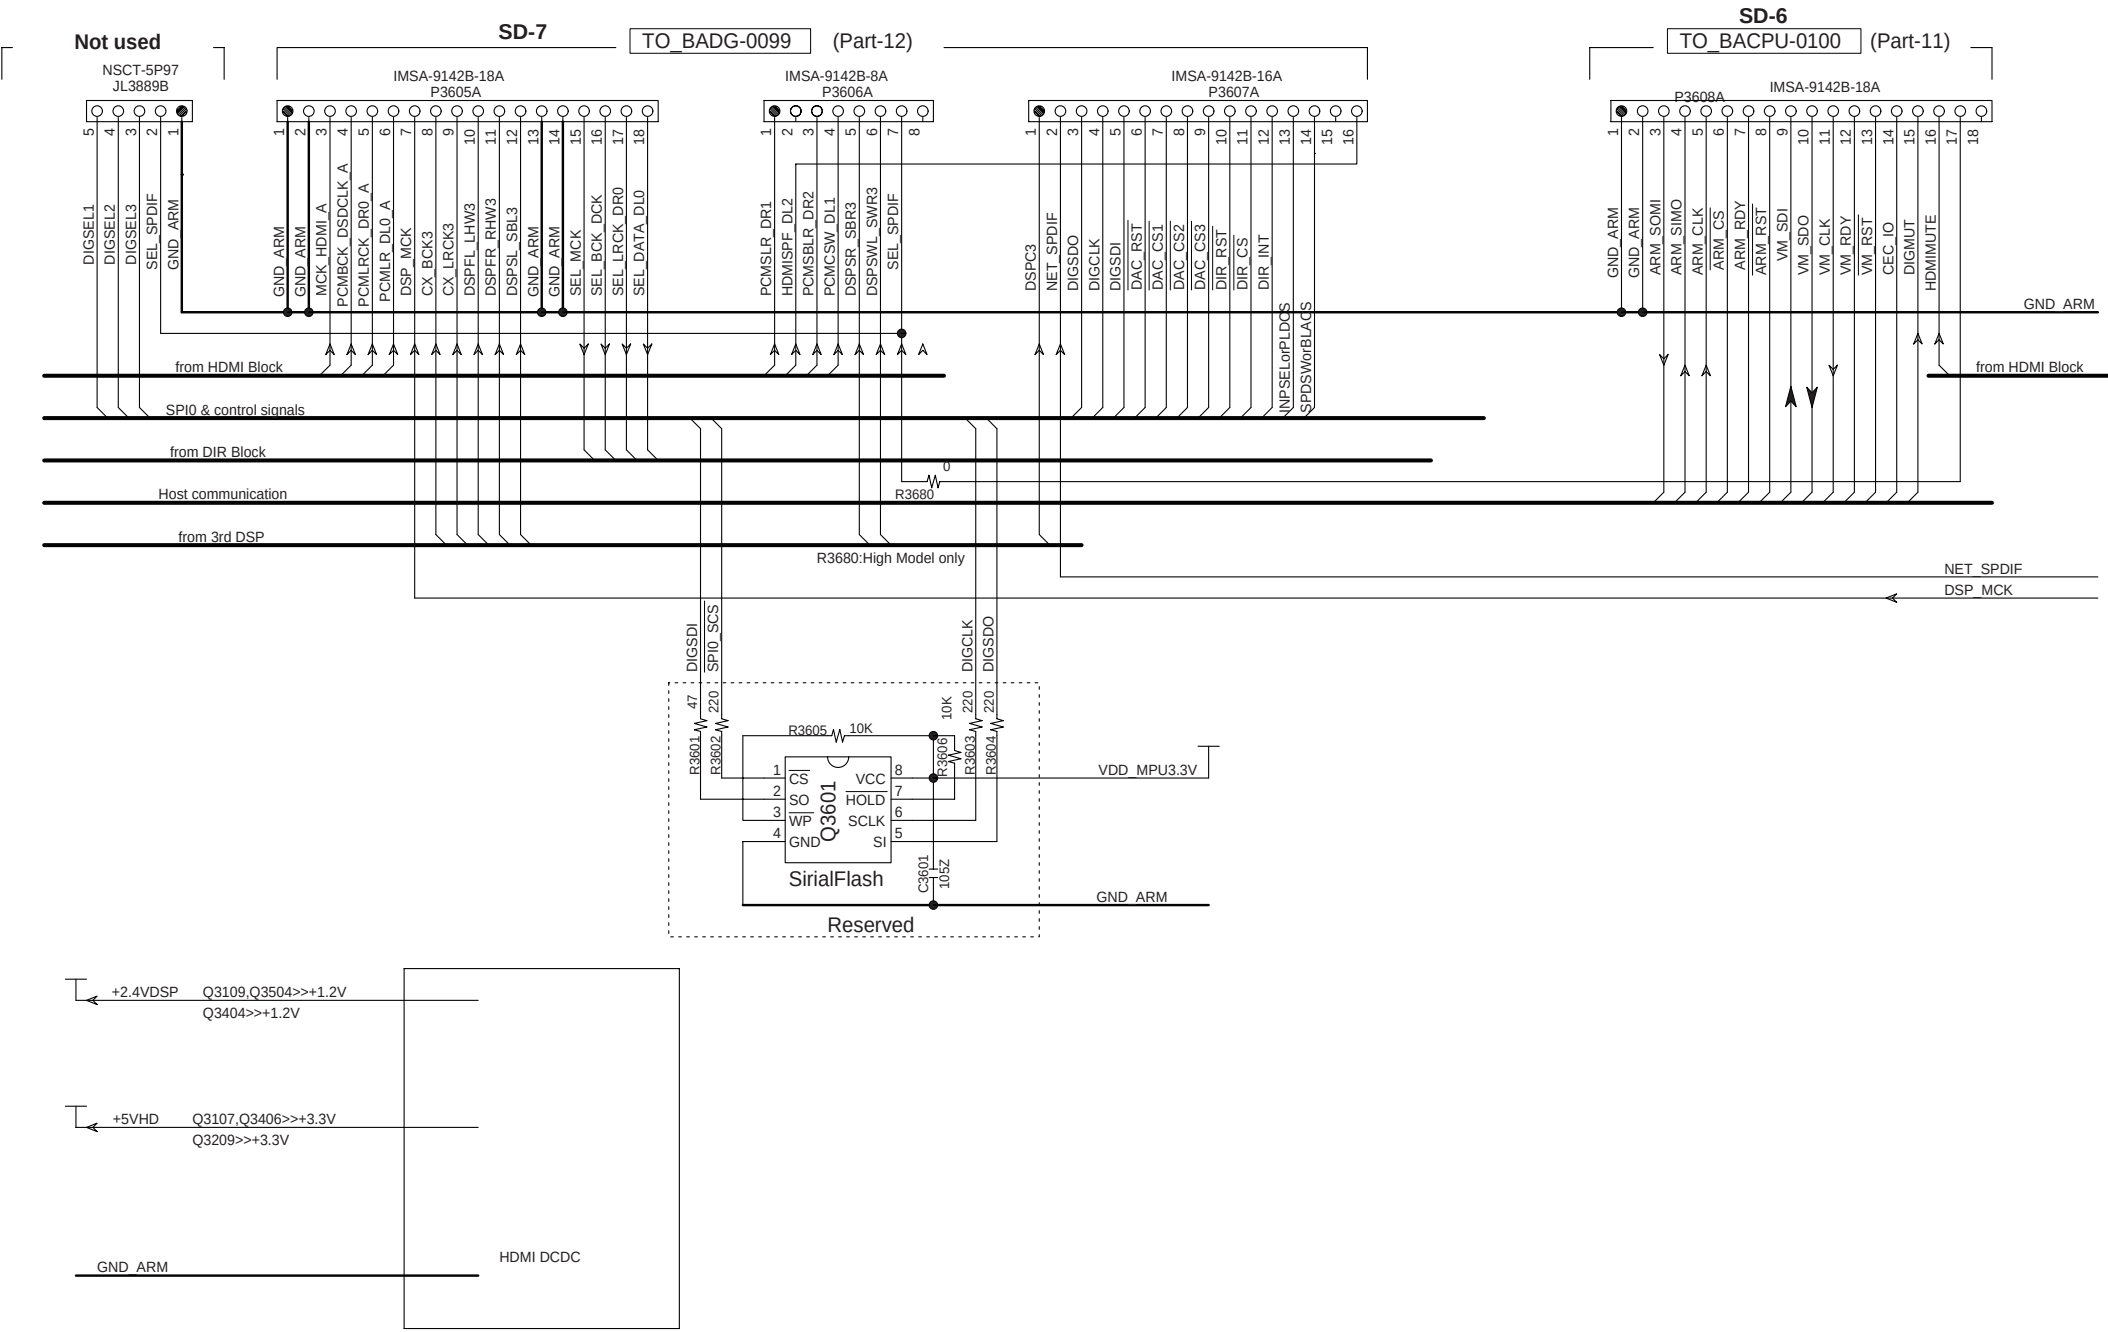









**U004** DISPLAY CIRCUIT PC BOARD BADIS-0146-1A (PART-24)

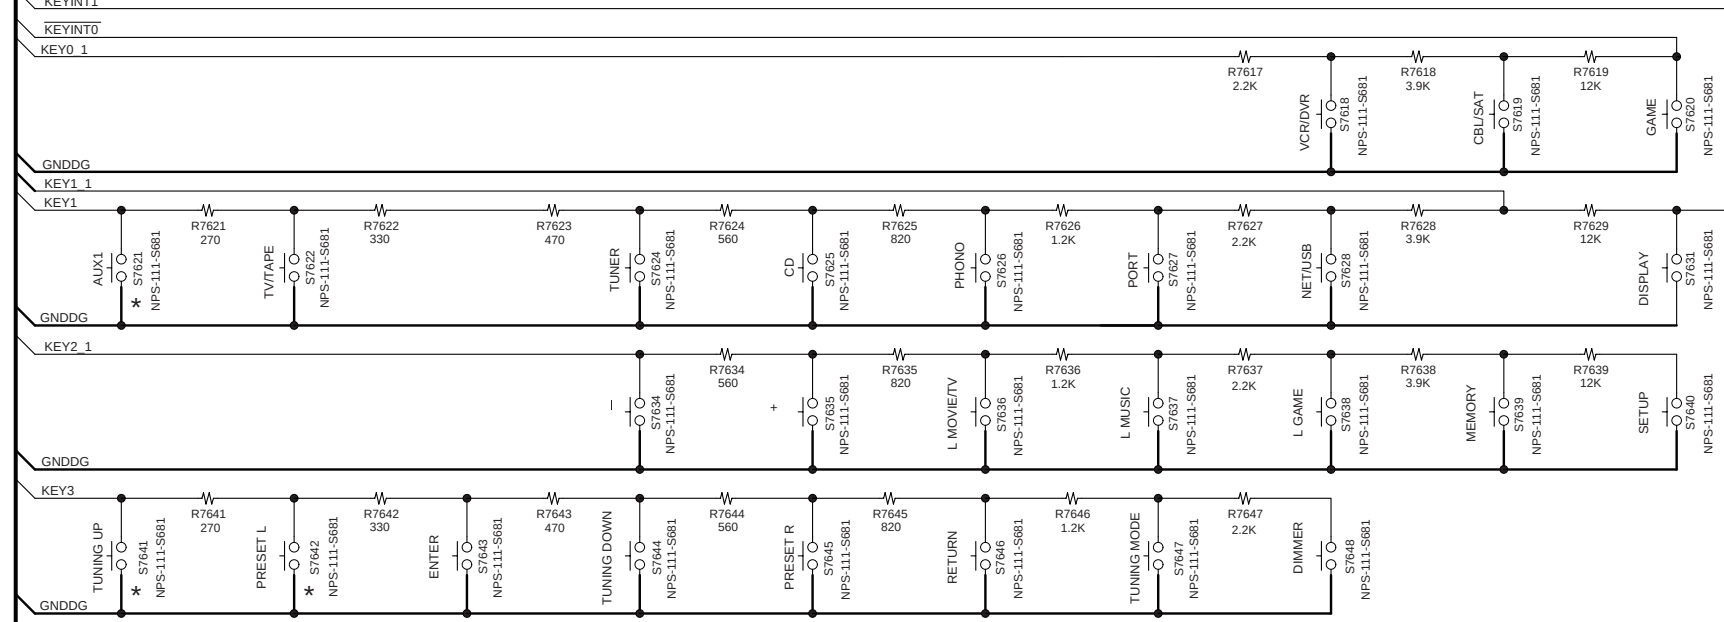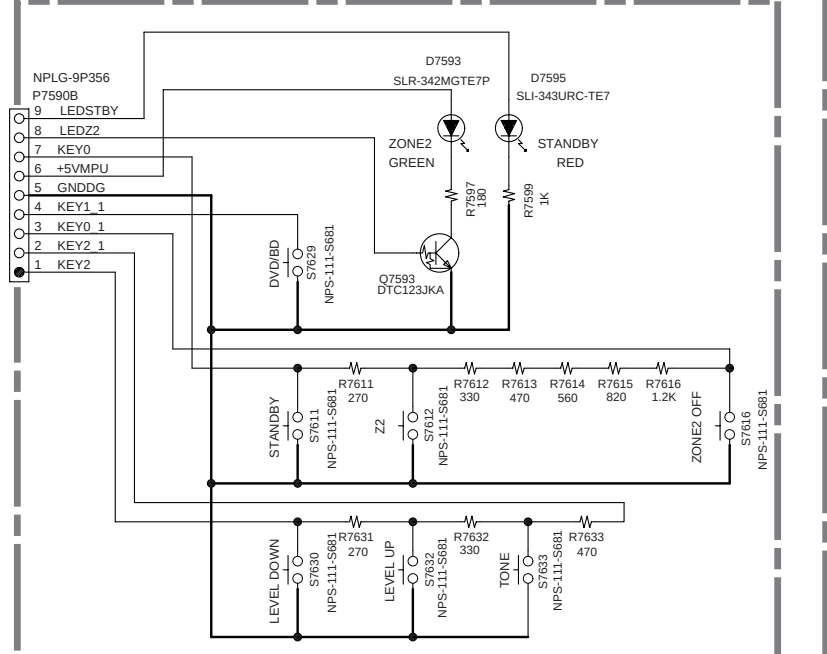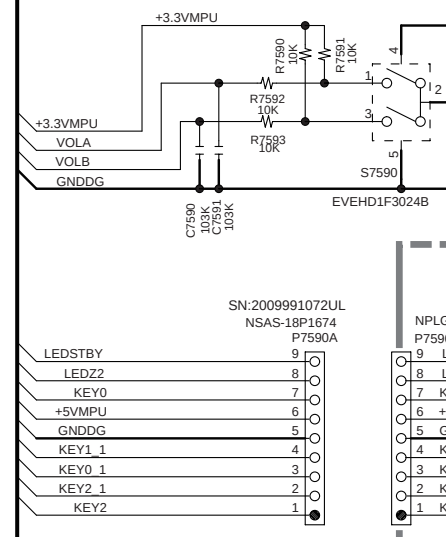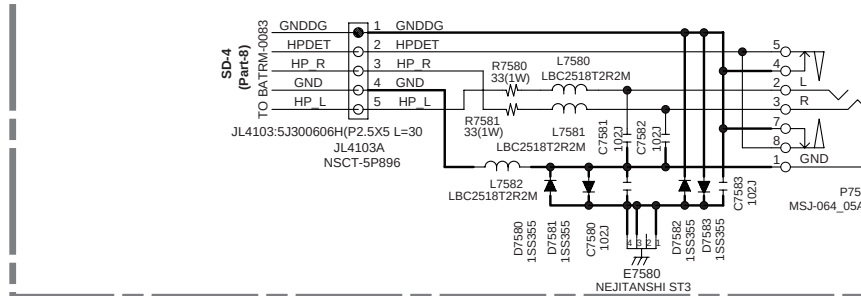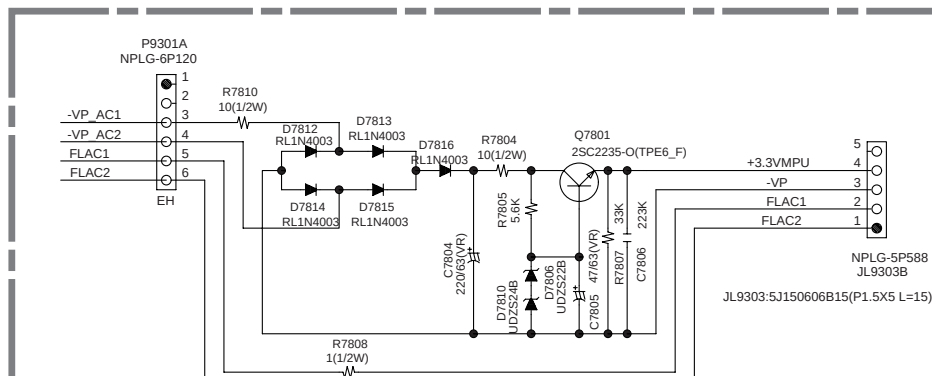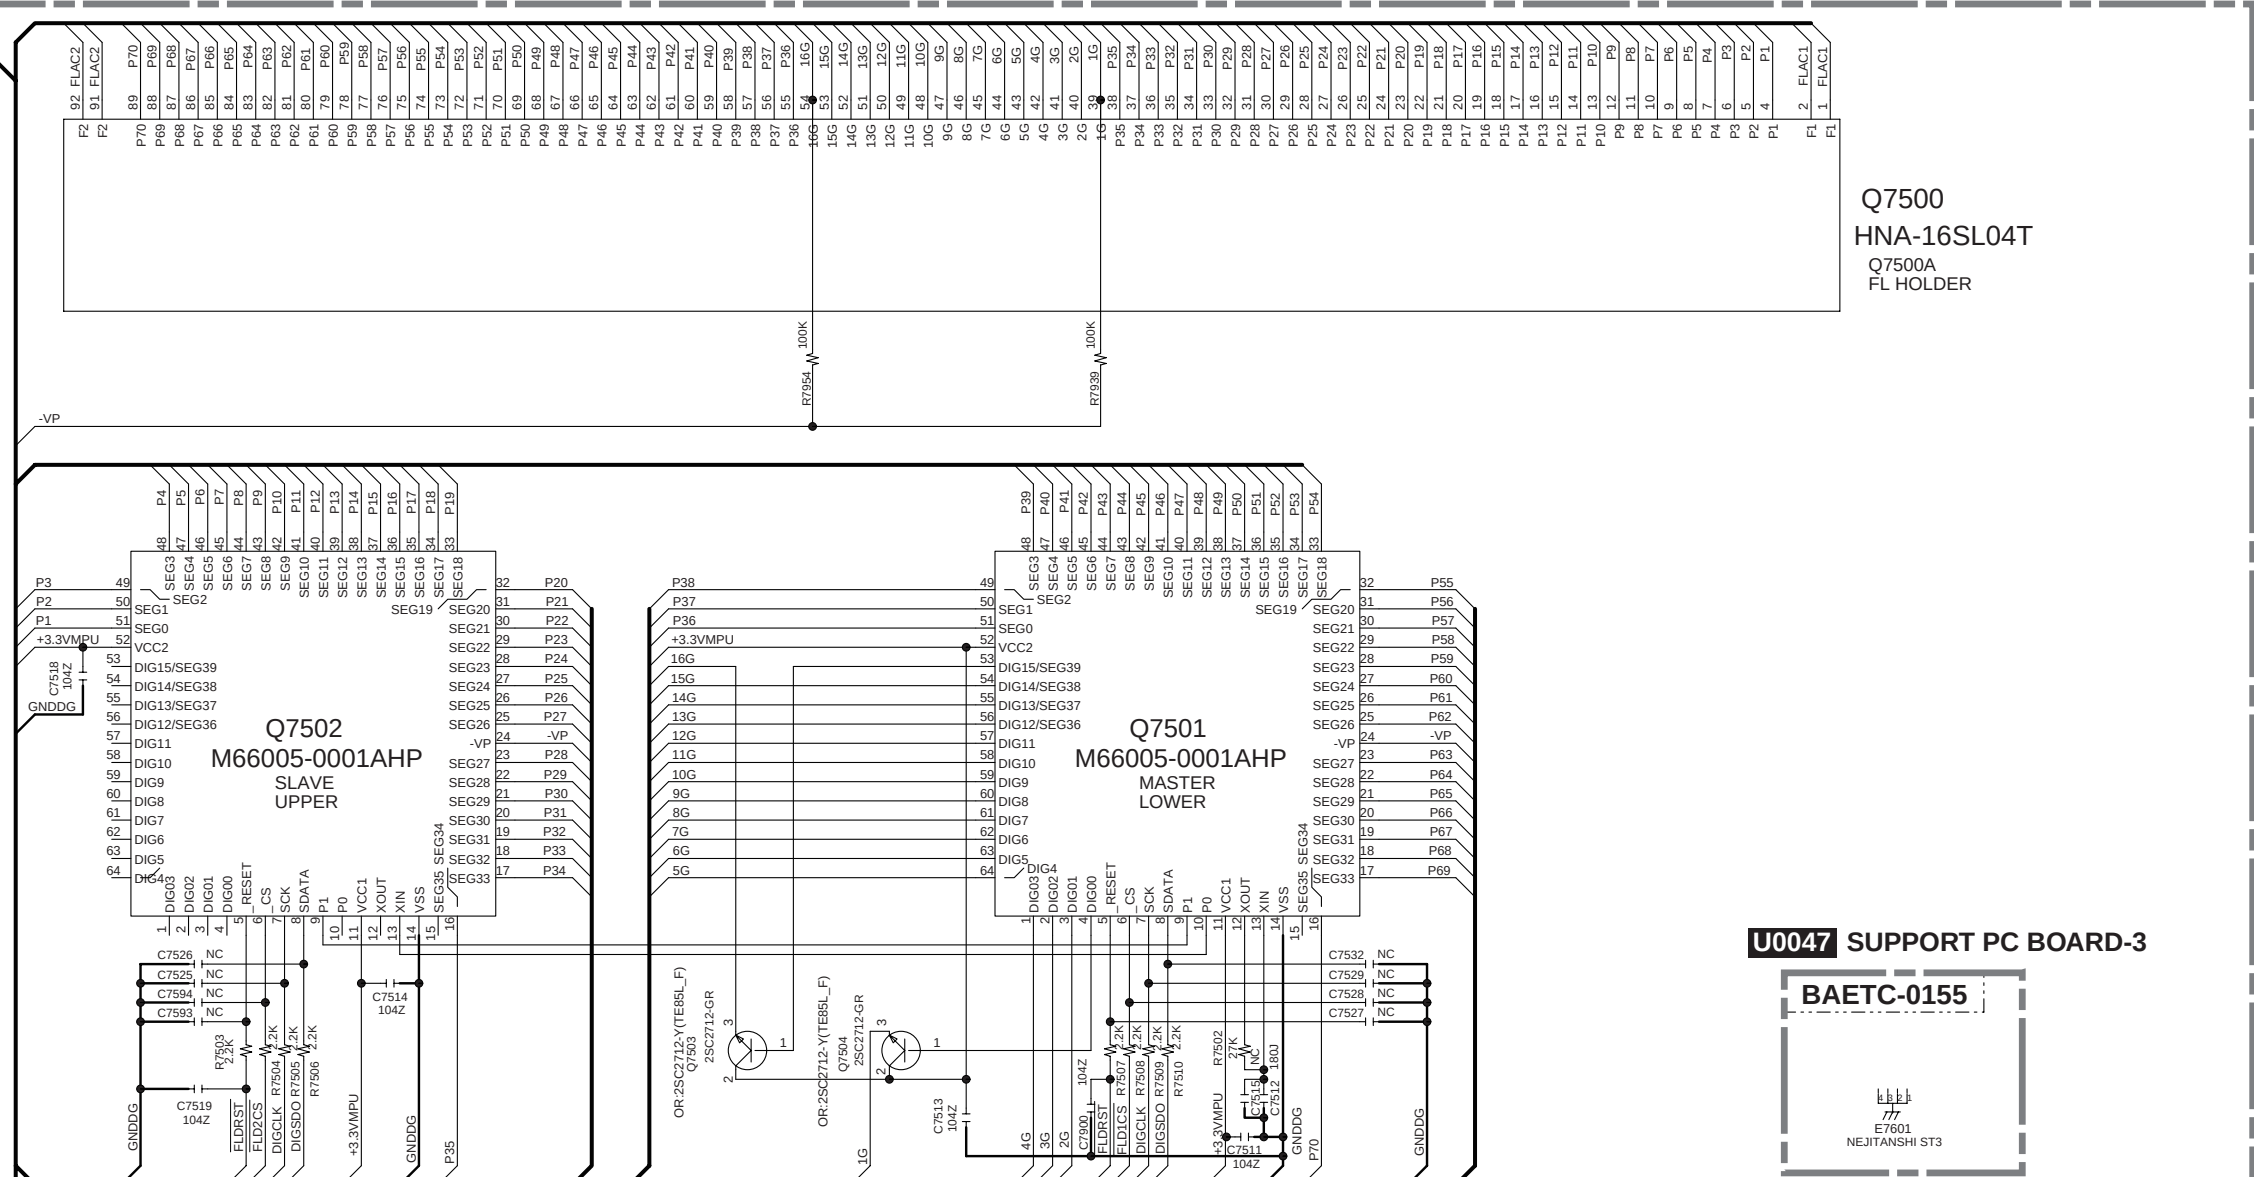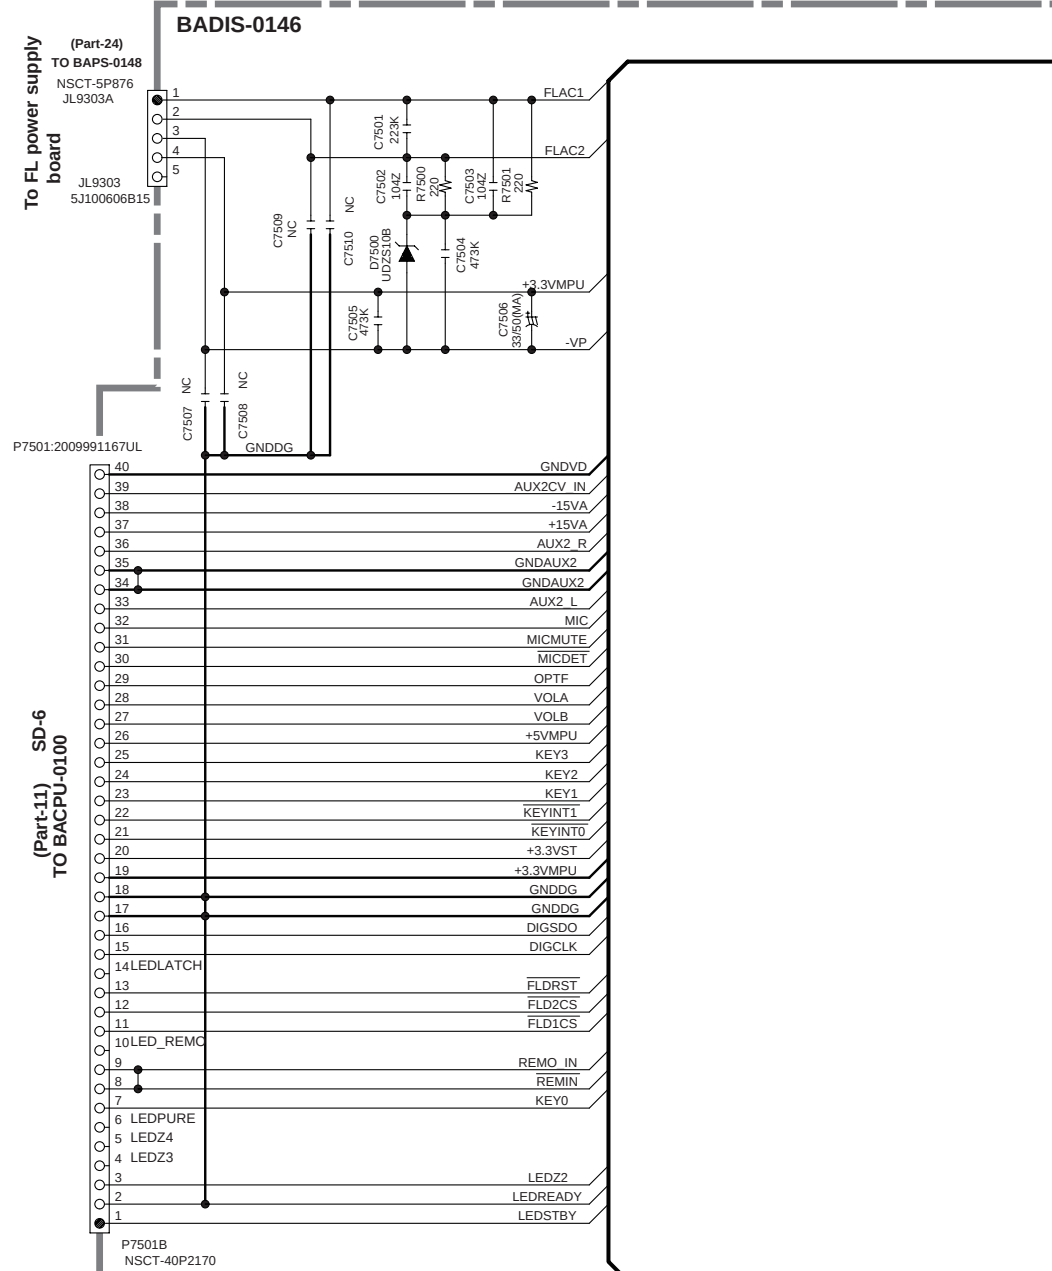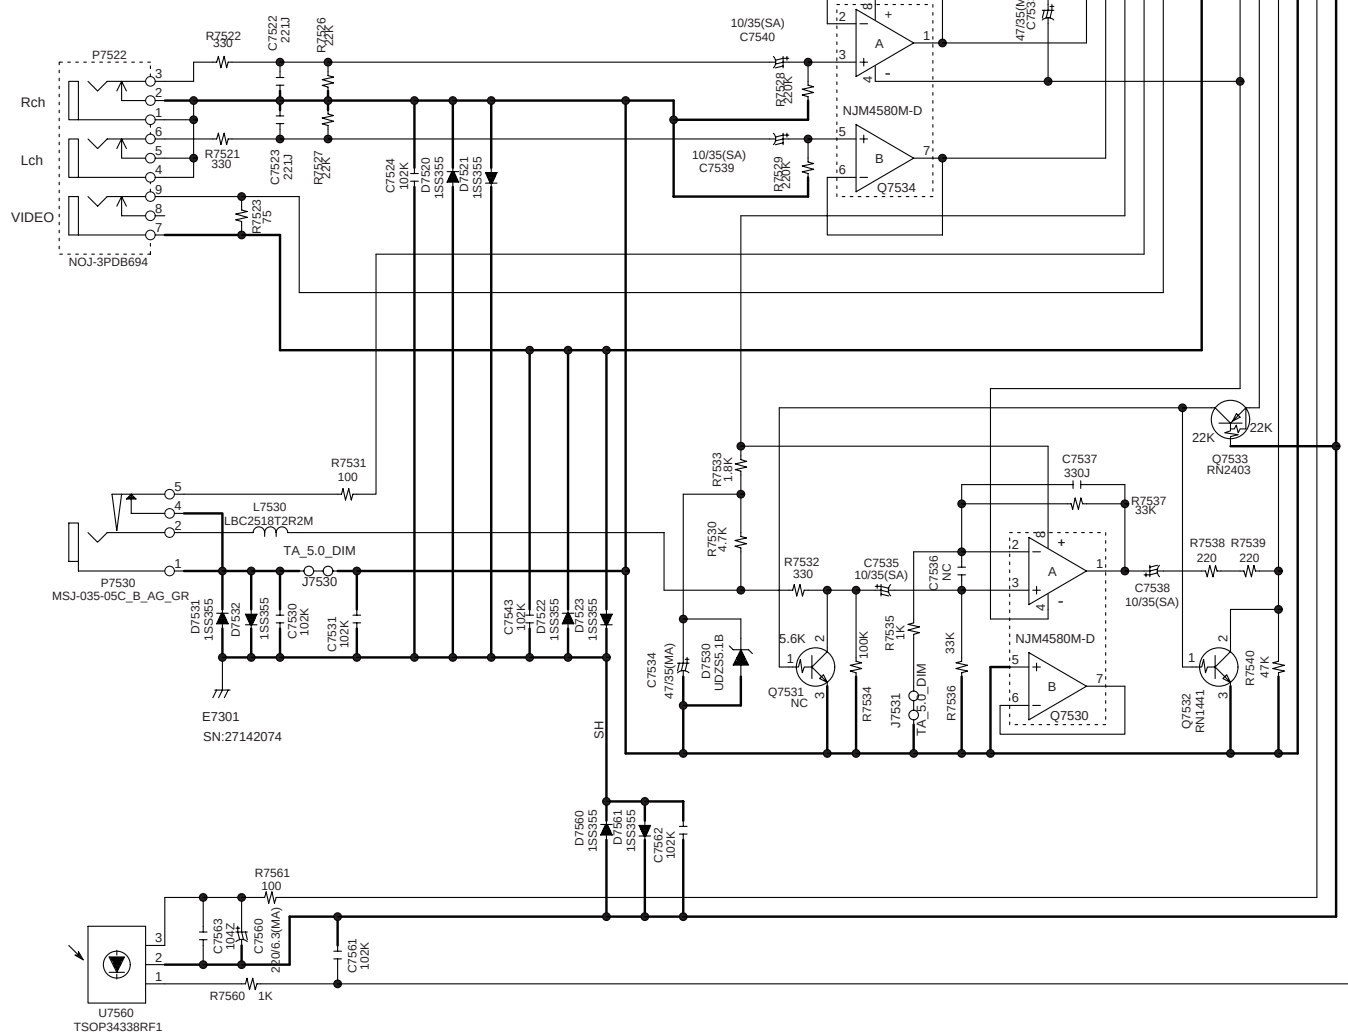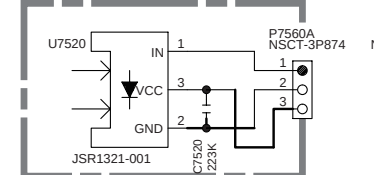

## U006


**FRONT HDMI TERMINAL PC BOARD BAHDM-0290-1A**  
**(PART-30)**

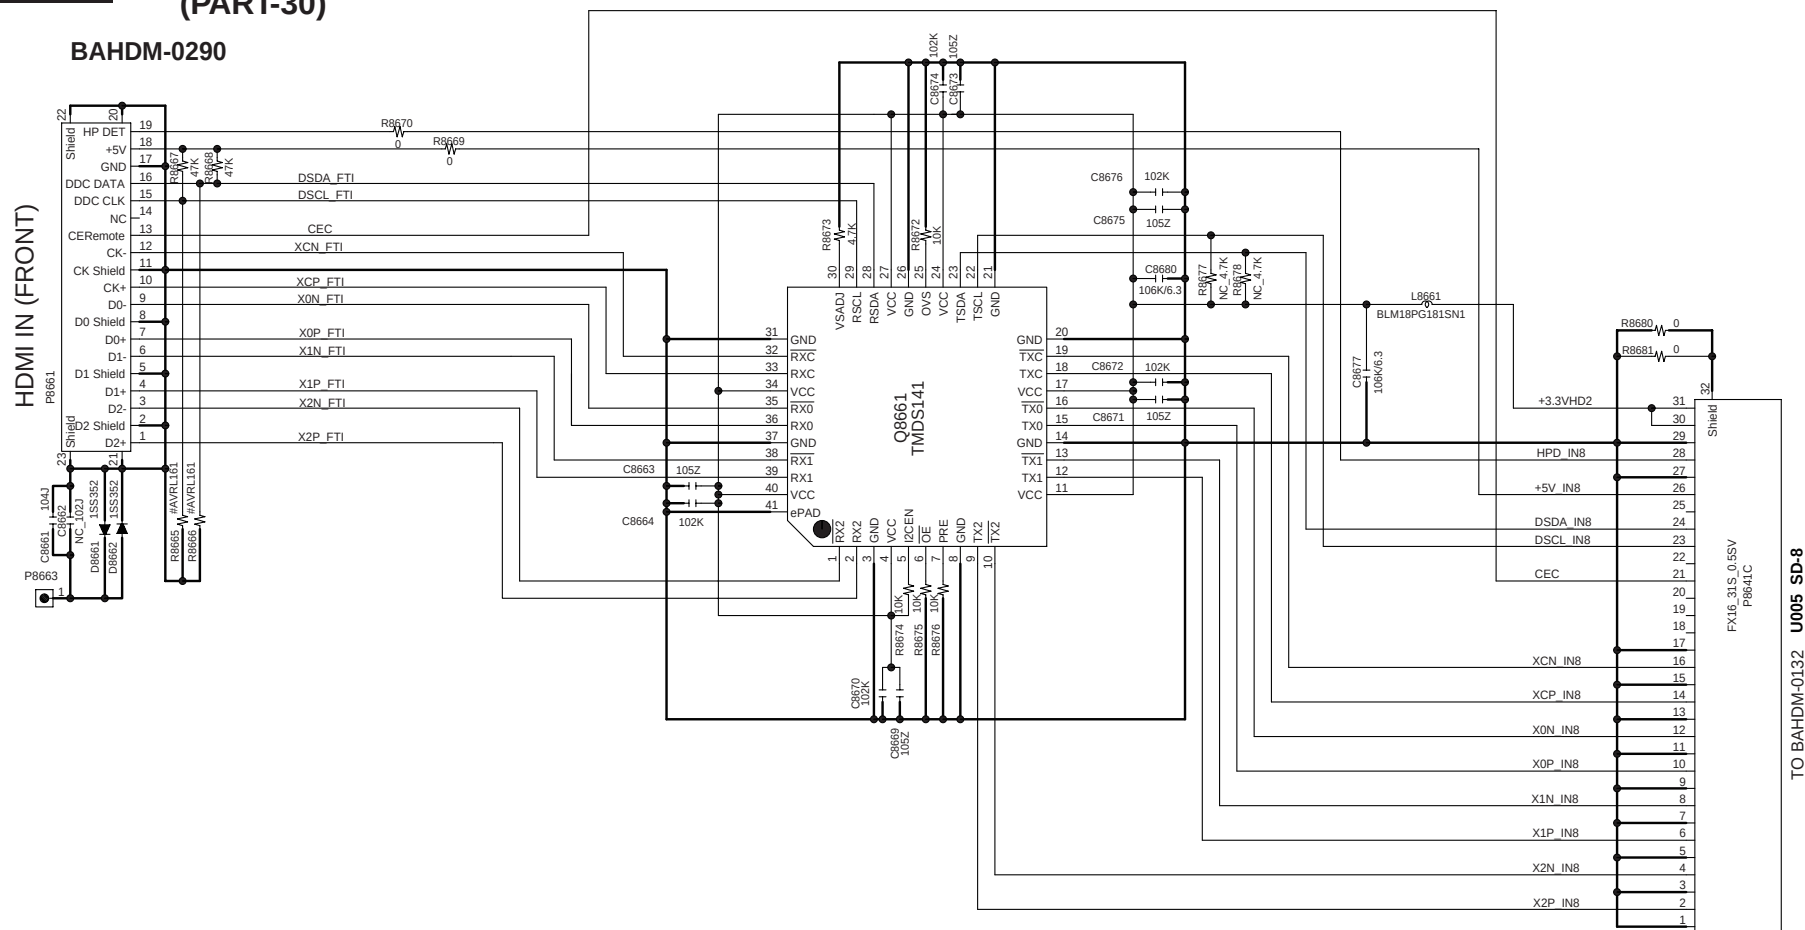




PRINTED CIRCUIT BOARD VIEW-1

U001  
AMPLIFIRE CIRCUIT  
PC BOARD  
BAAMP-0072

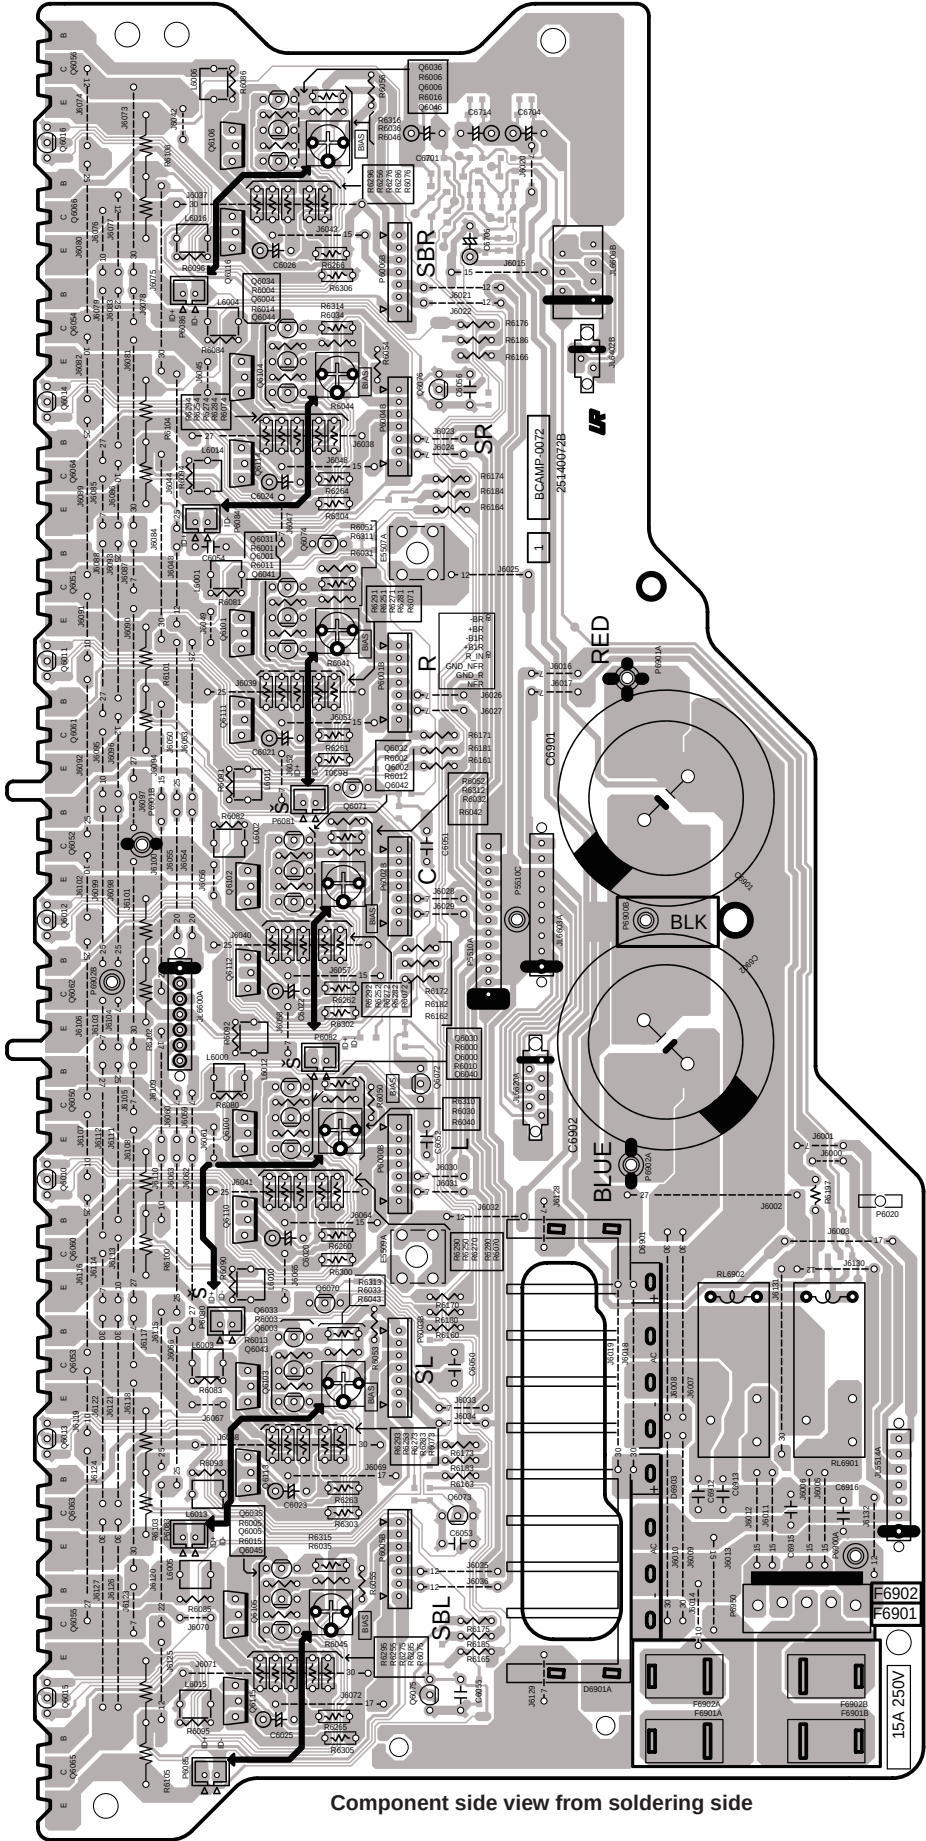



Component side view from soldering side

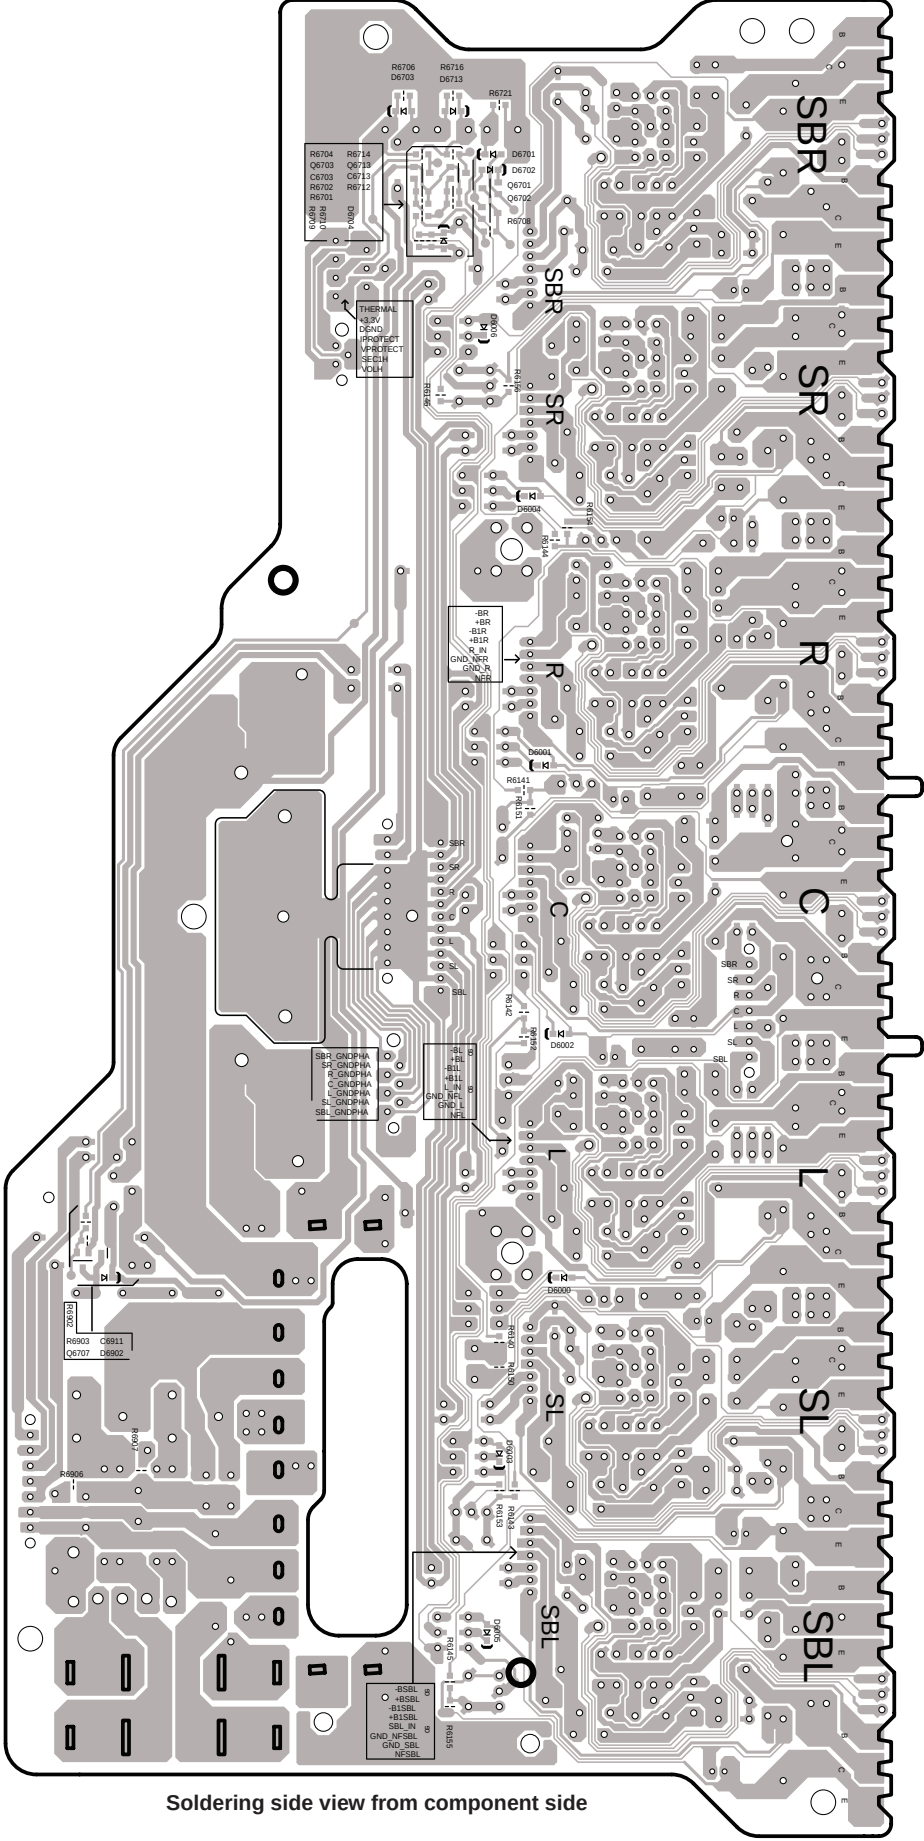

Soldering side view from component side


PRINTED CIRCUIT BOARD VIEW-2

**U0011** AUDIO IN/OUT CIRCUIT PC BOARD  
BAASP-0073

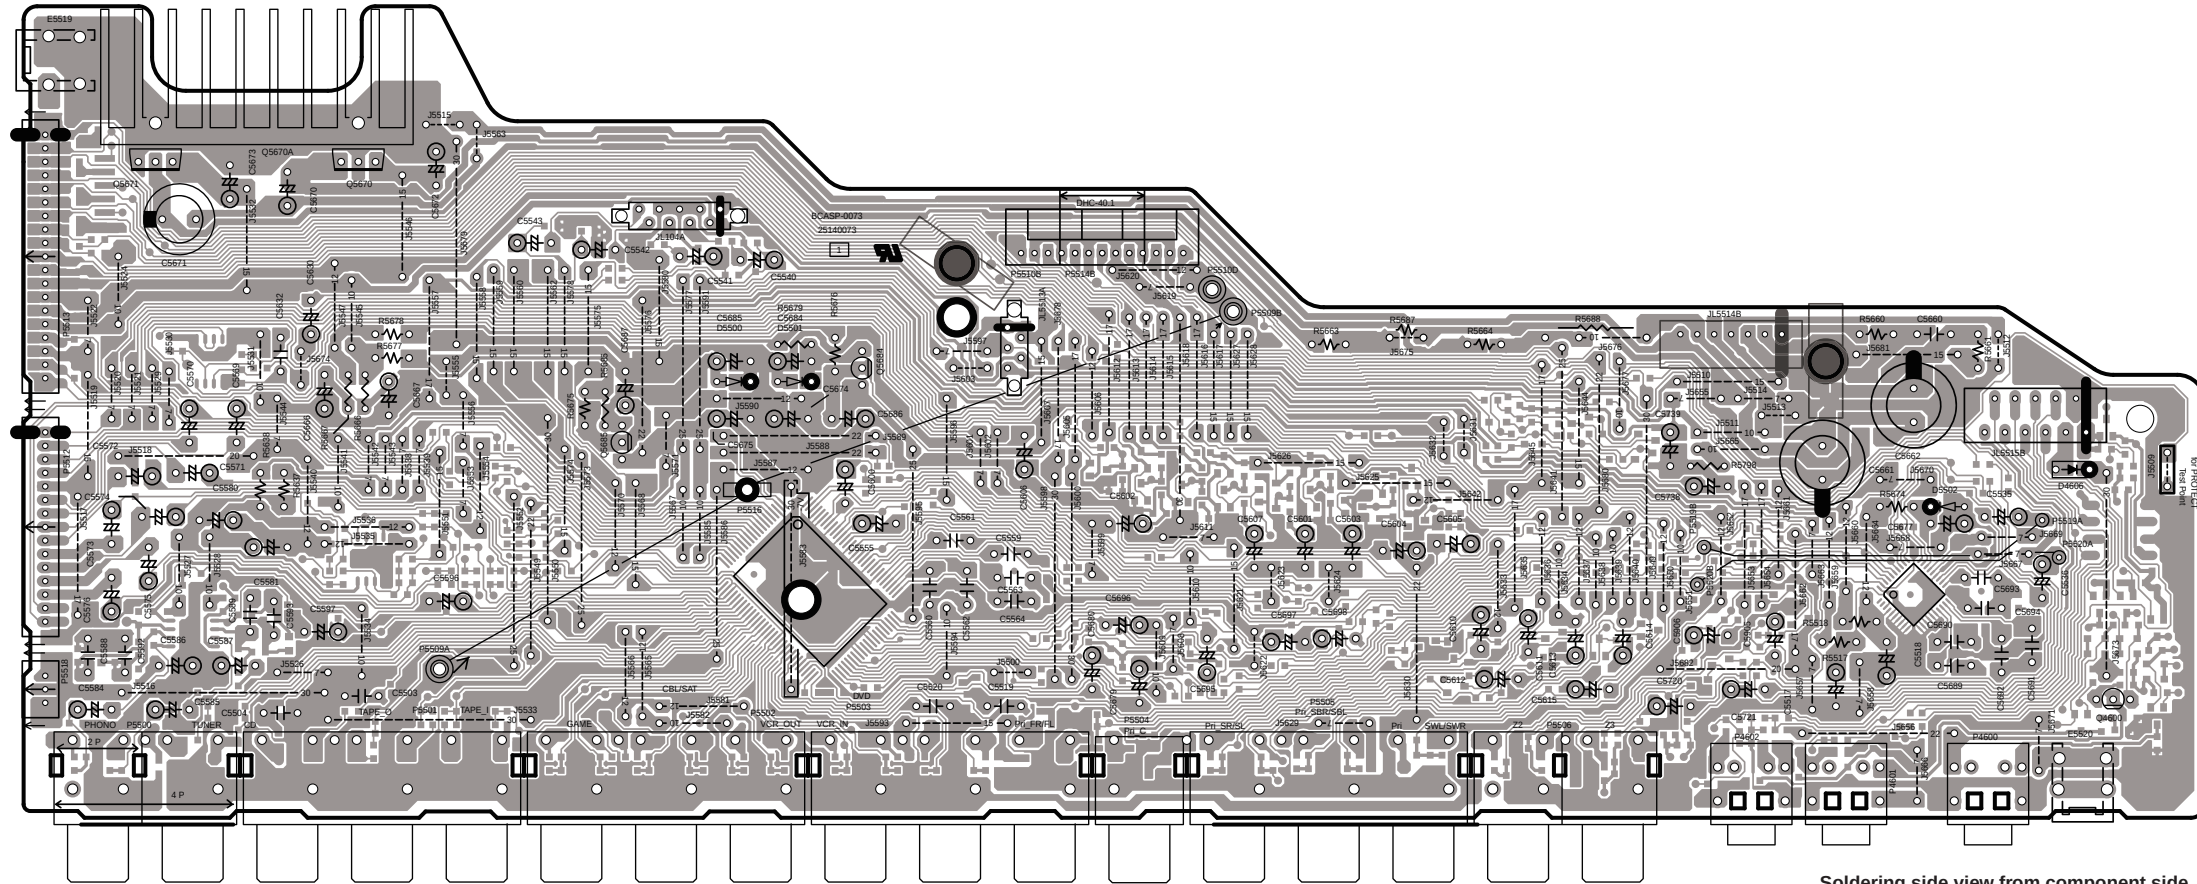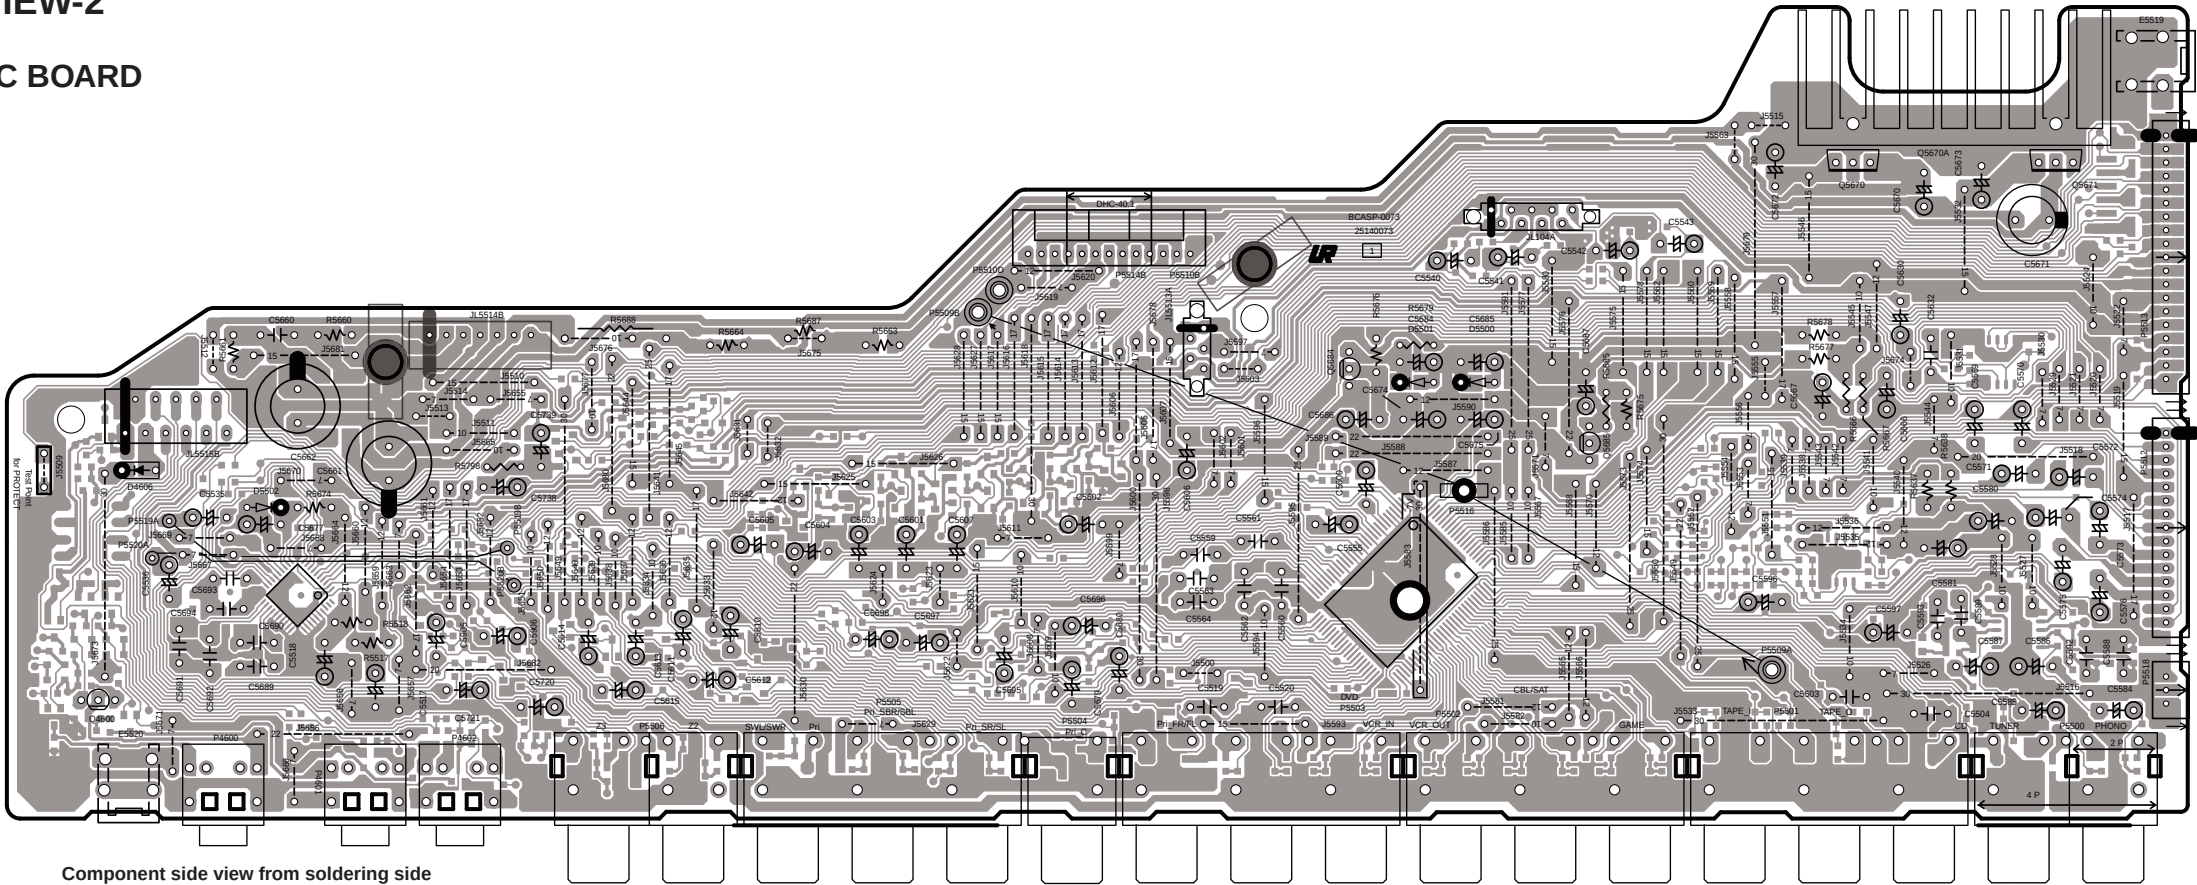




**U002** **SPEAKER TERMINAL-1 PC BOARD**  
**BATRM-0083**

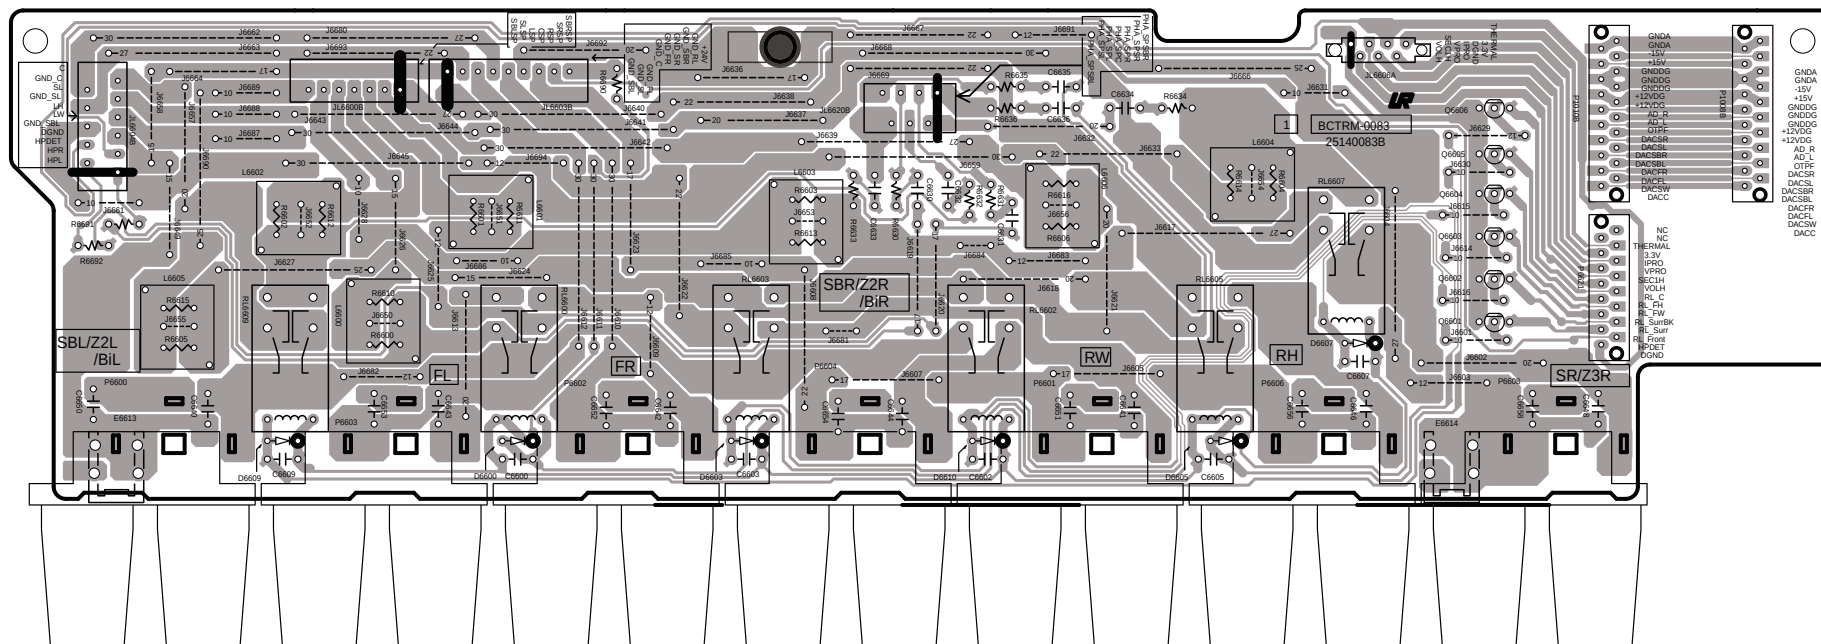

### Soldering side view



**U0024** AMP. INPUT CIRCUIT PC BOARD  
BACLA-0087




### Soldering side view

**Soldering side view**


## PRINTED CIRCUIT BOARD VIEW-5

**U0021** PRIMARY POWER SUPPLY PC BOARD  
BAPS-0084

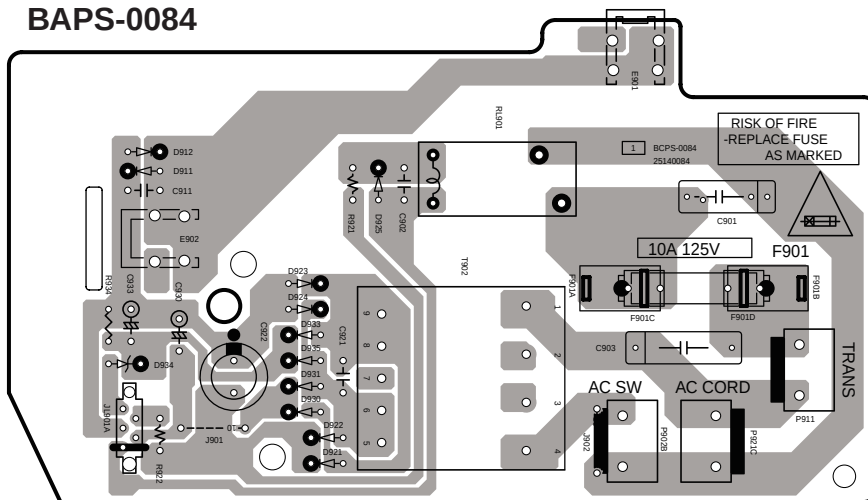


### Soldering side view

**U0022** SPEAKER TERMINAL-2 PC BOARD  
BATRM-0085

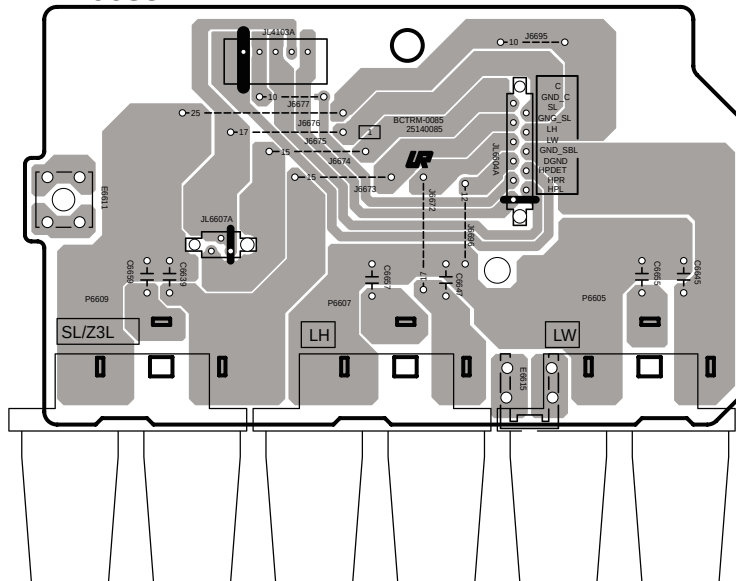

### Soldering side view


**U0023** SPEAKER TERMINAL-3 PC BOARD  
BATRM-0086

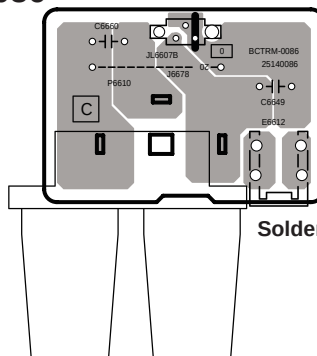


### Soldering side view

### PRINTED CIRCUIT BOARD VIEW-6

**U003**    **DIGITAL INPUT CIRCUIT PC BOARD**    **BADG-0099**

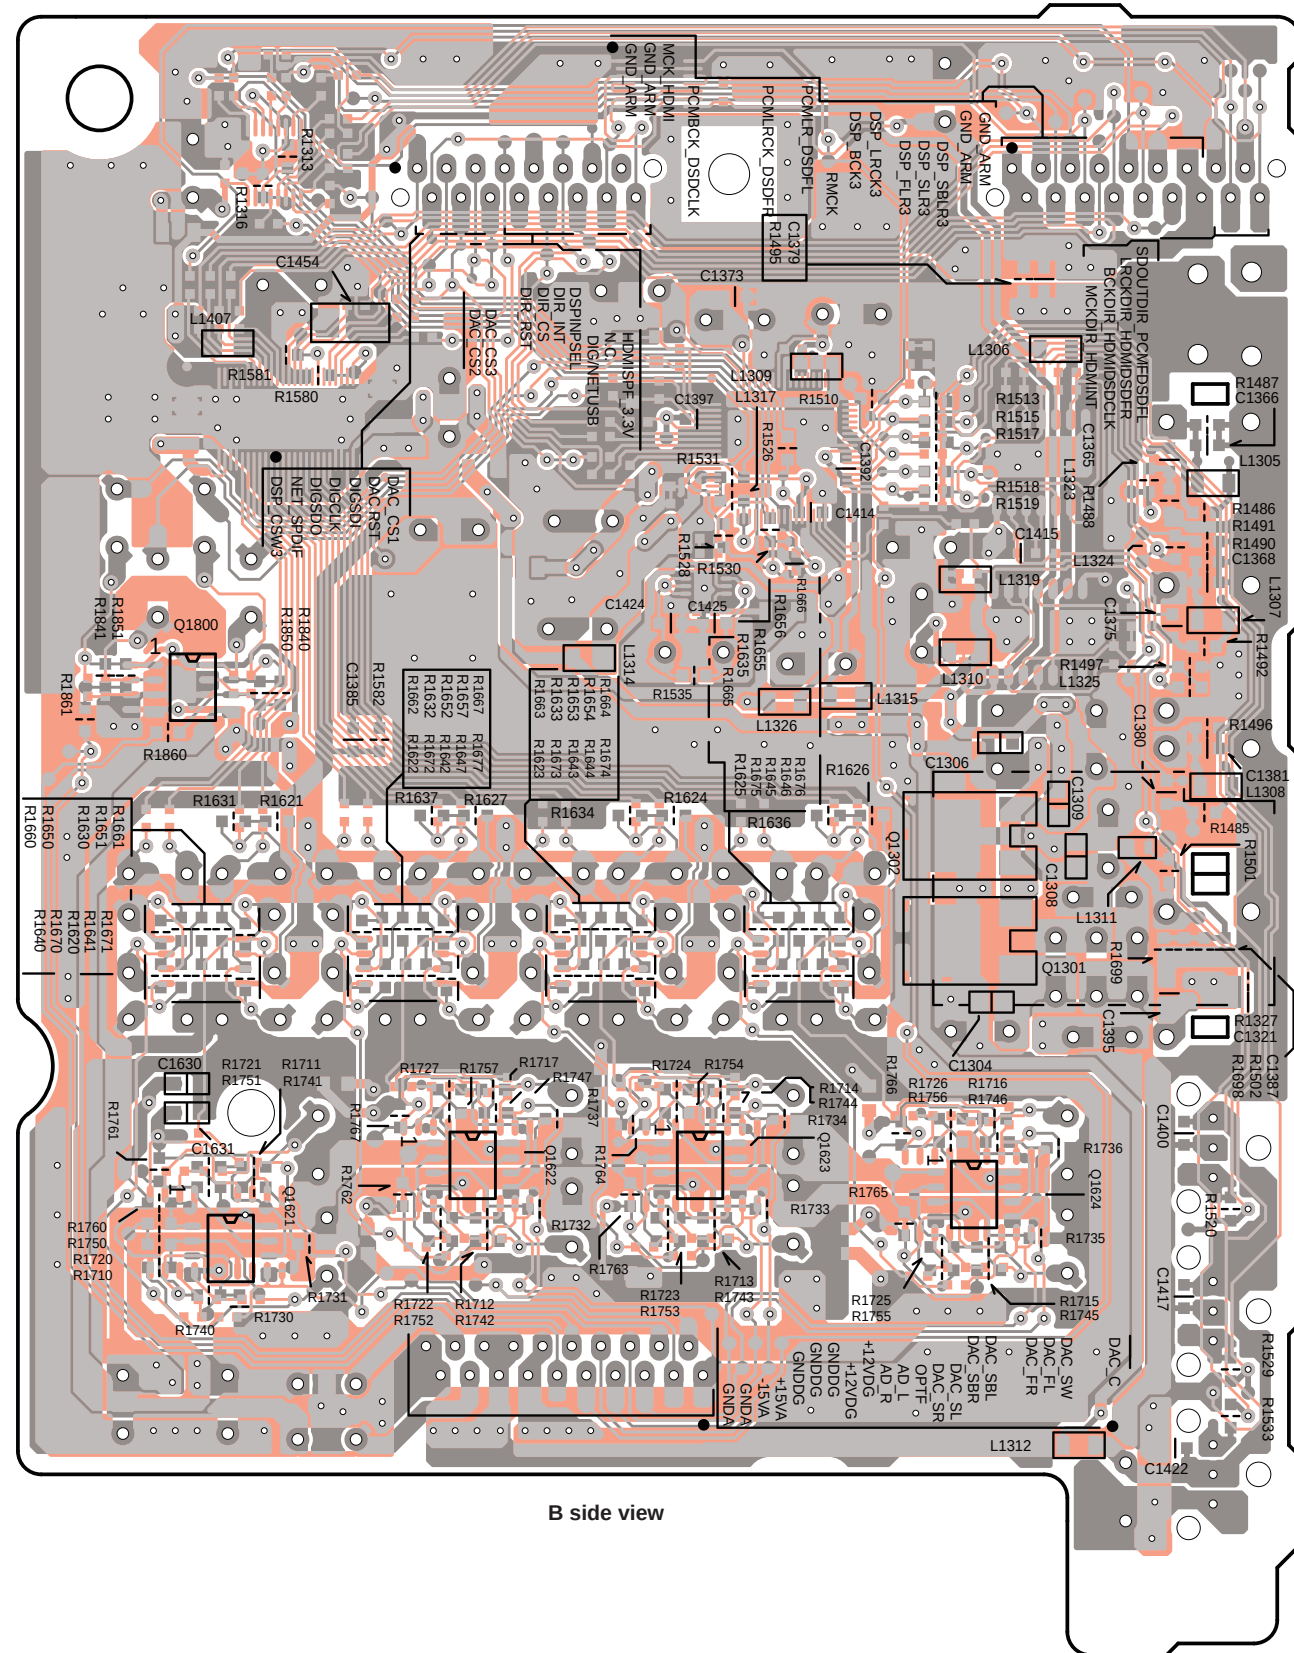

**B side view**


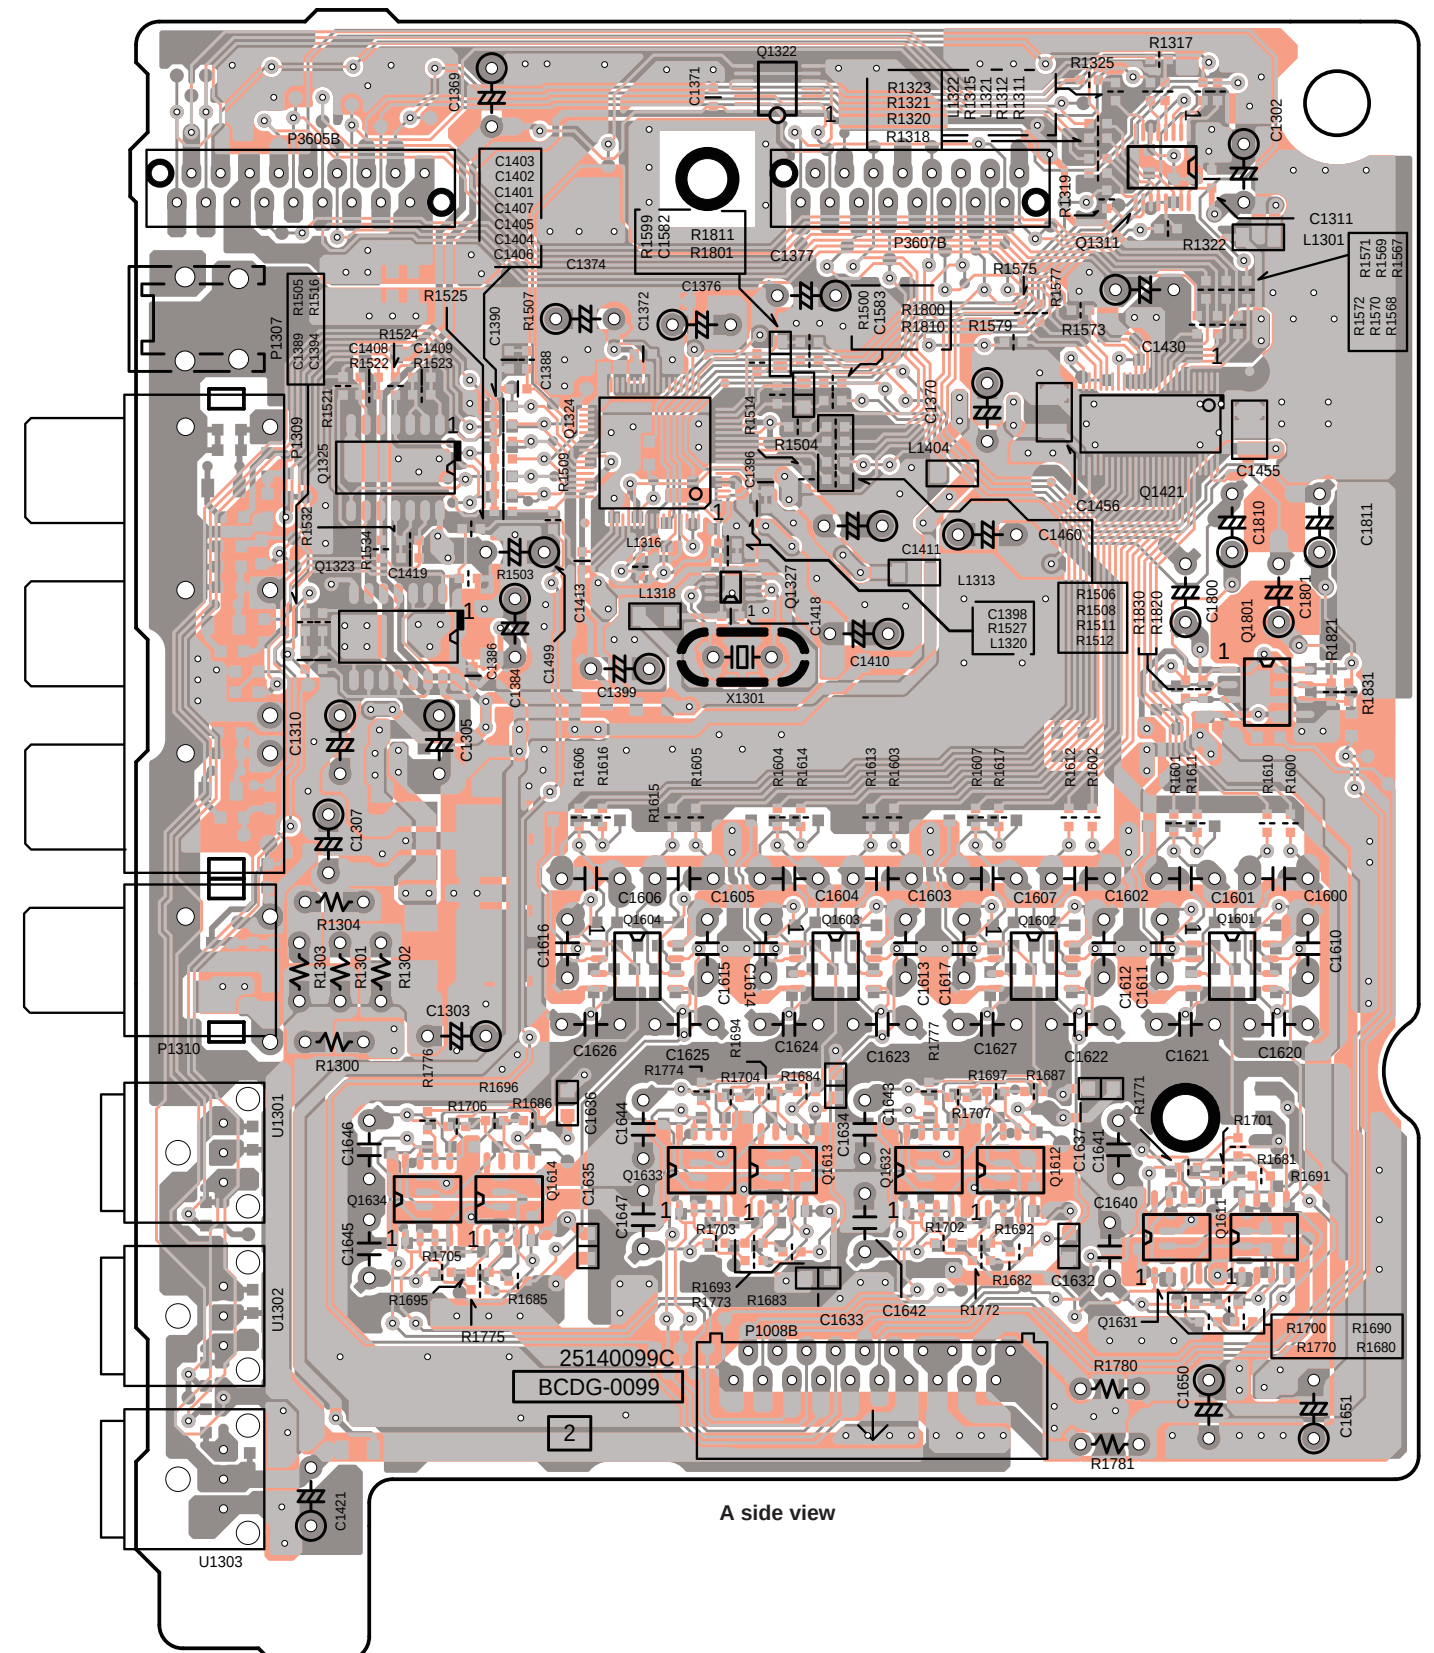


### A side view



### PRINTED CIRCUIT BOARD VIEW-7


**U0031 CPU CIRCUIT PC BOARD BACPU-0100**

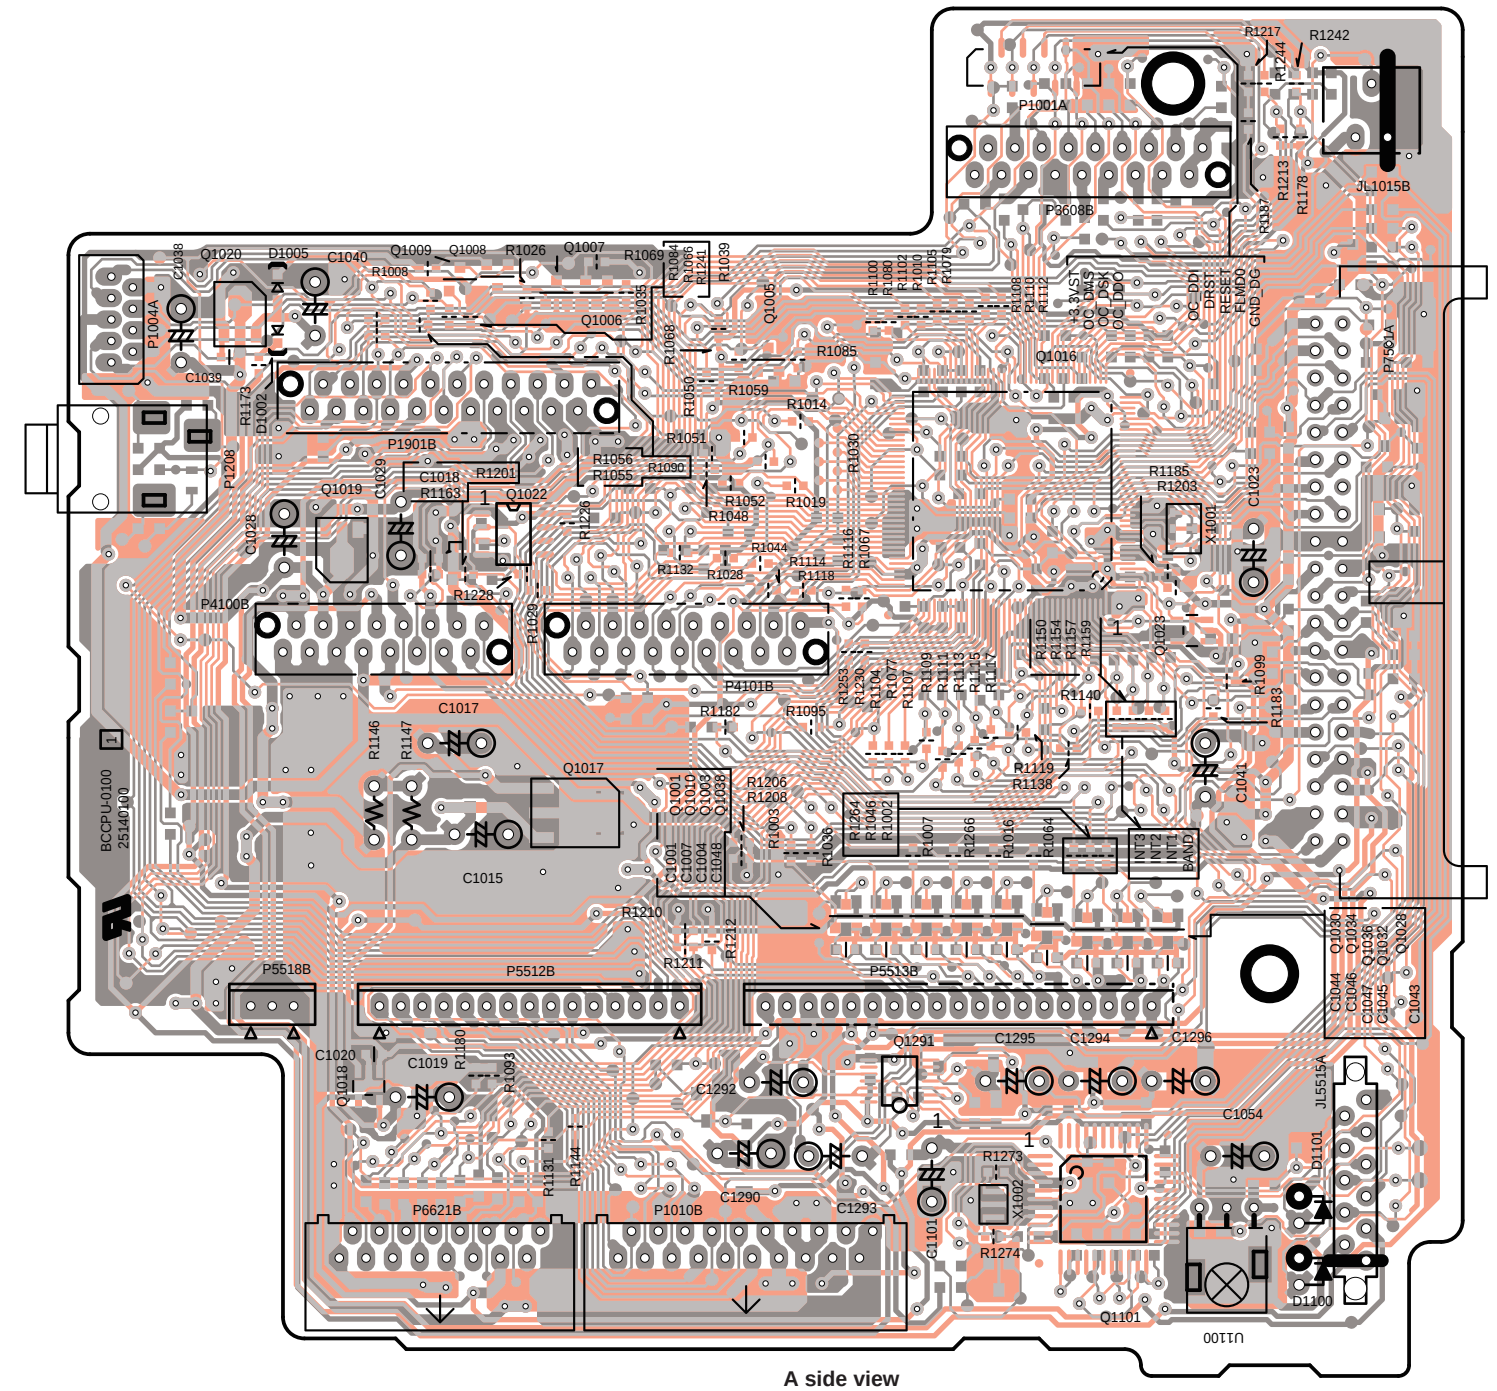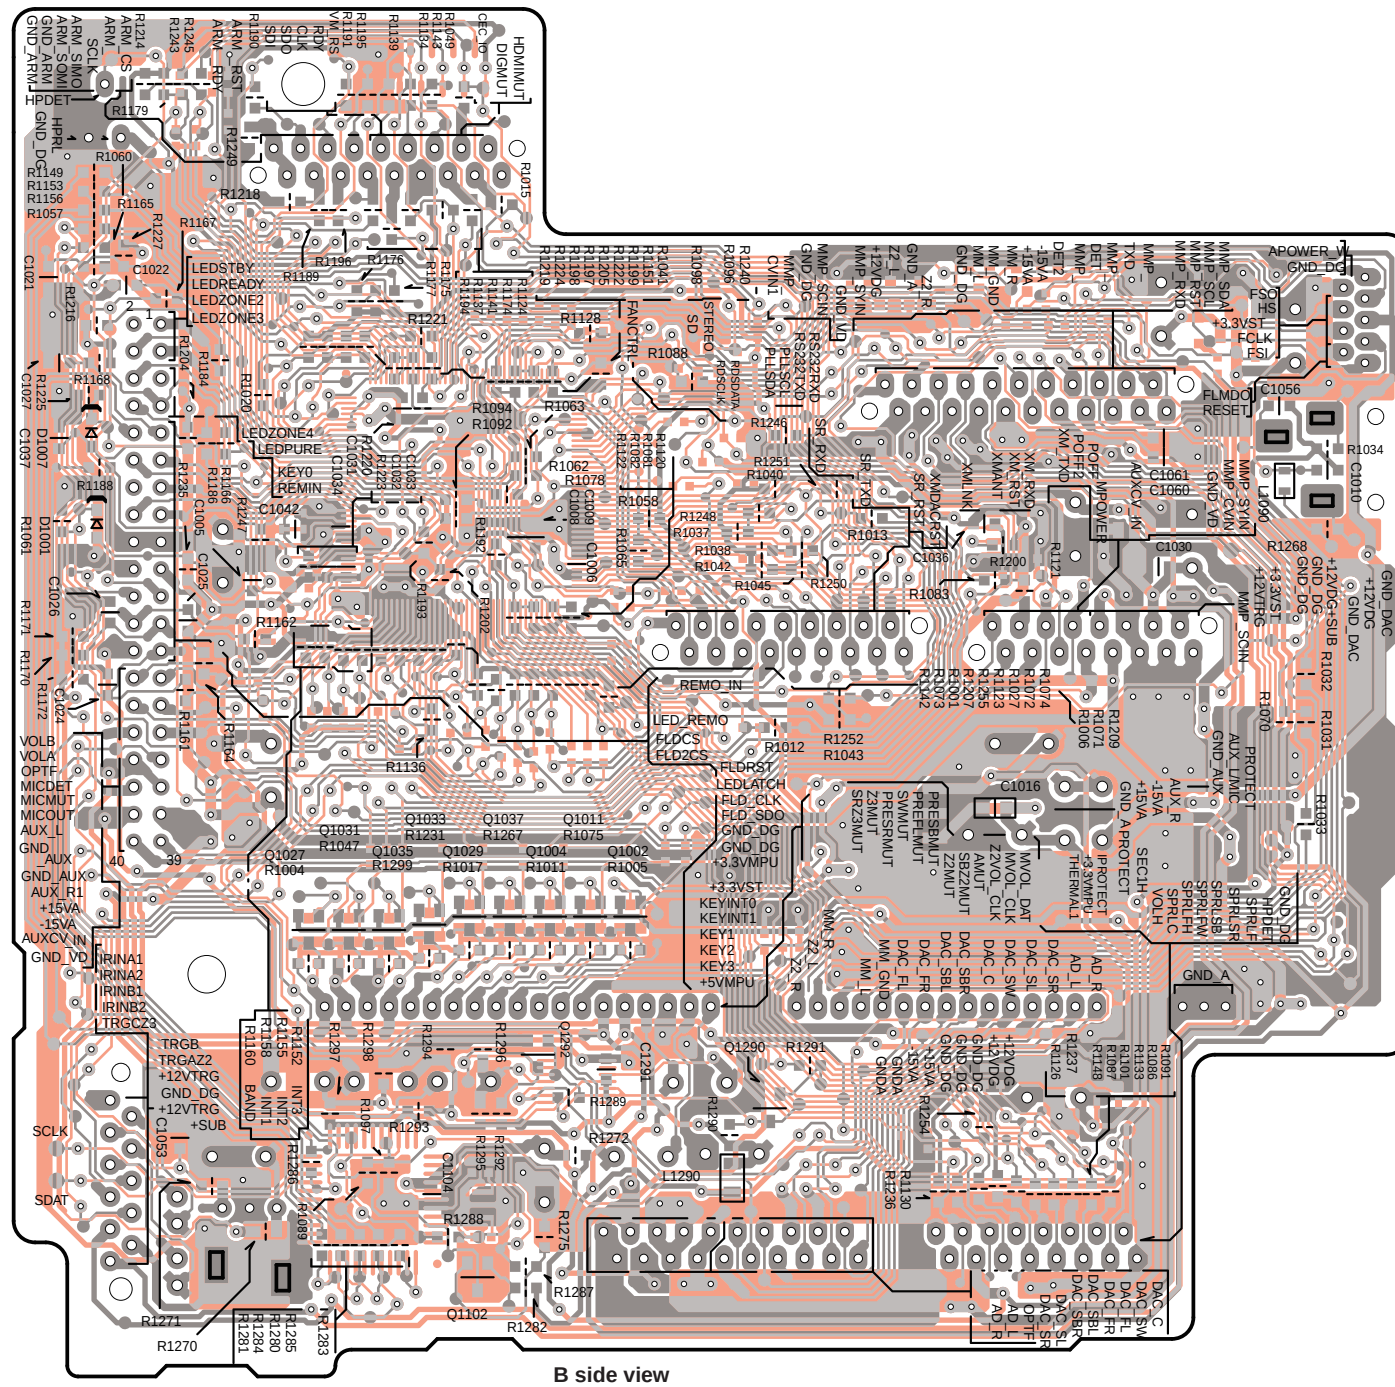




PRINTED CIRCUIT BOARD VIEW-8

U0032 VIDEO CIRCUIT PC BOARD  
BAVD-0101

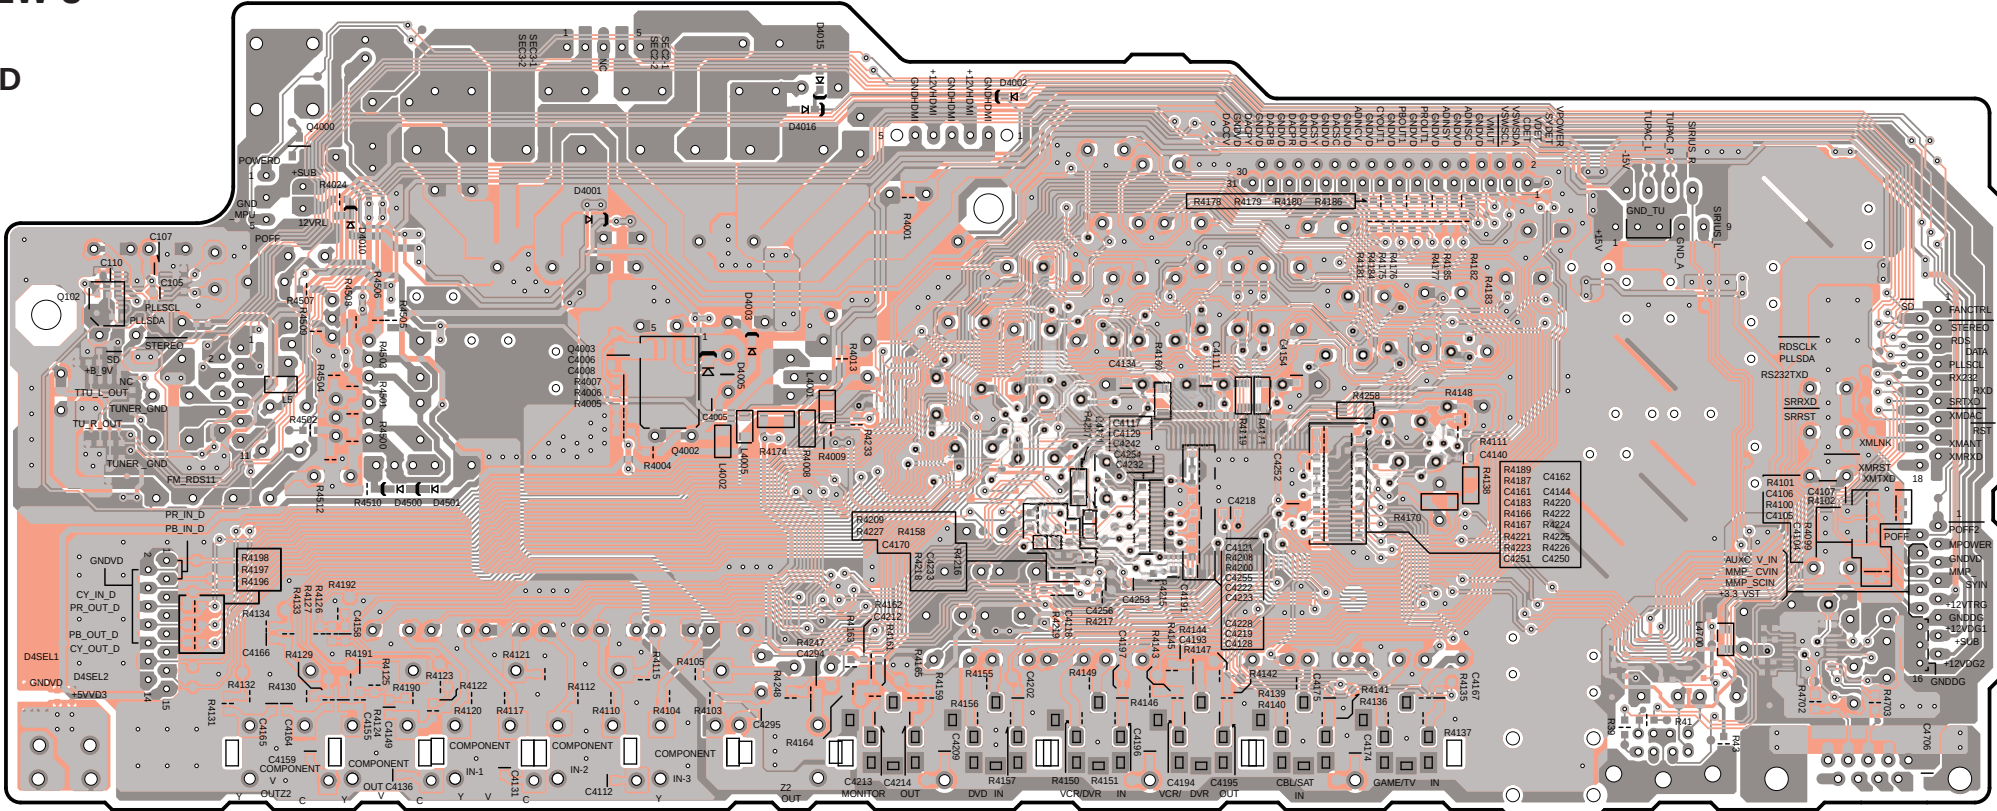

B side view

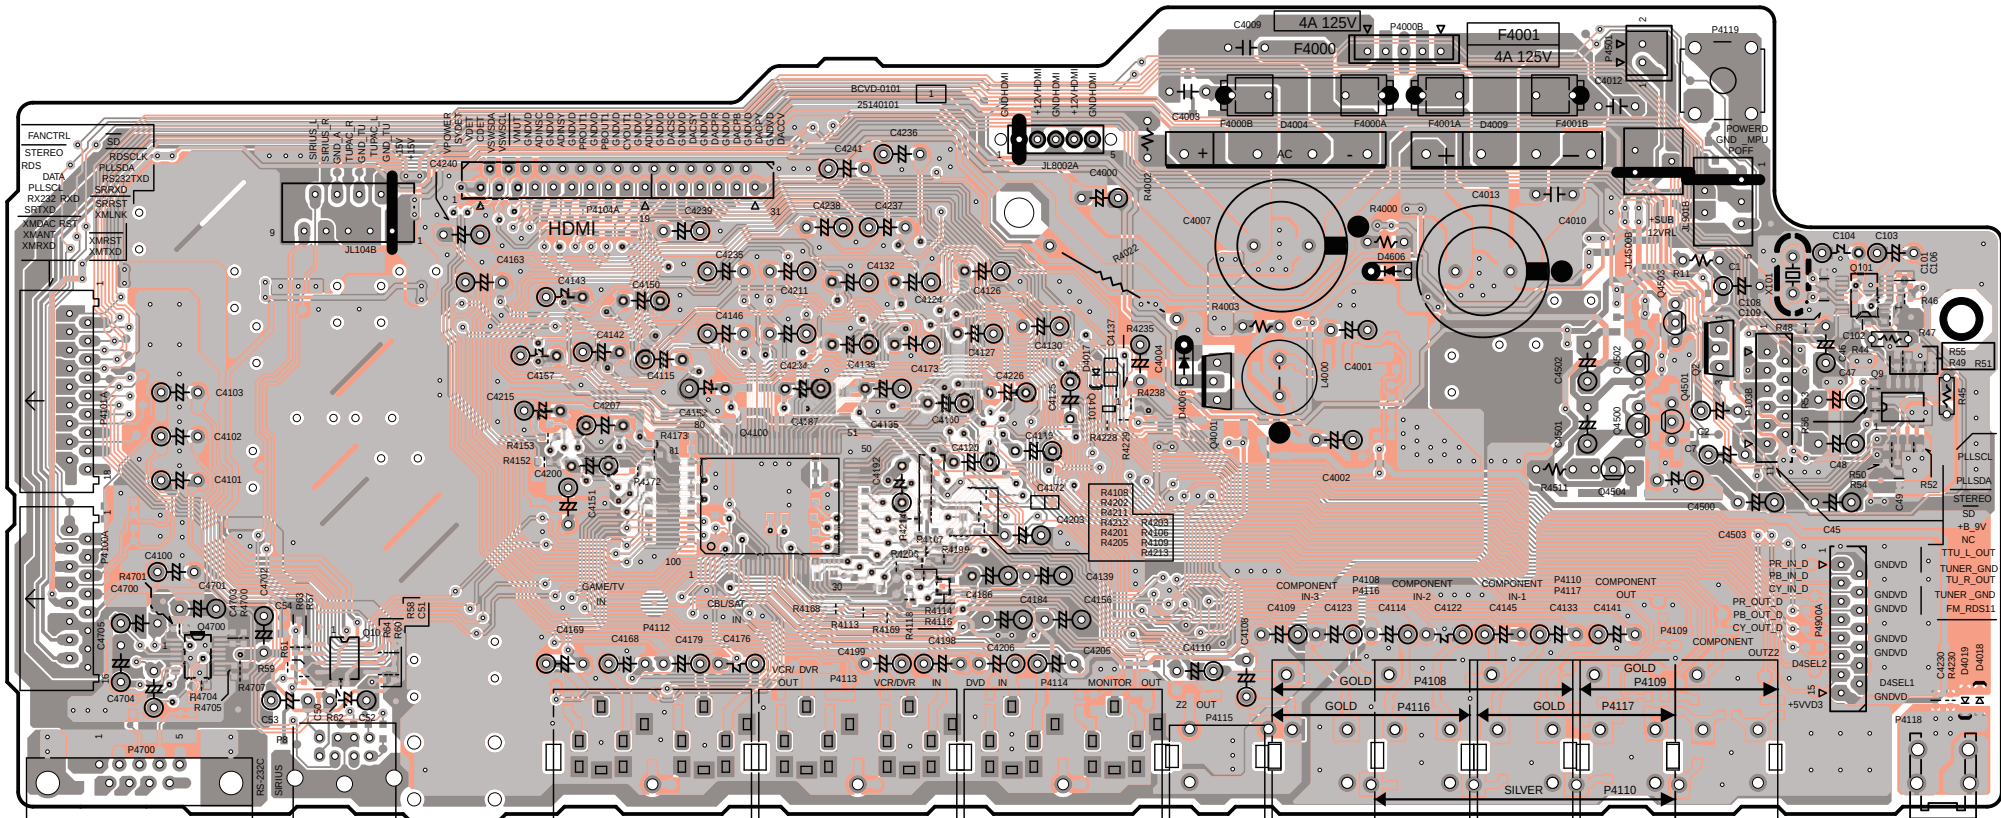

A side view



GAME/TV IN P4112 CBL/SAT IN VCR/ DVR OUT P4113 VCR/ DVR IN DVD IN P4114 MONITOR OUT Z2 OUT P4115 COMPONENT IN-3 P4116 COMPONENT IN-2 P4108 COMPONENT IN-1 P4110 COMPONENT OUT P4117 COMPONENT OUT P4109 OUTZ2






PRINTED CIRCUIT BOARD VIEW-10

U004 DISPLAY CIRCUIT PC BOARD BADIS-0146-A

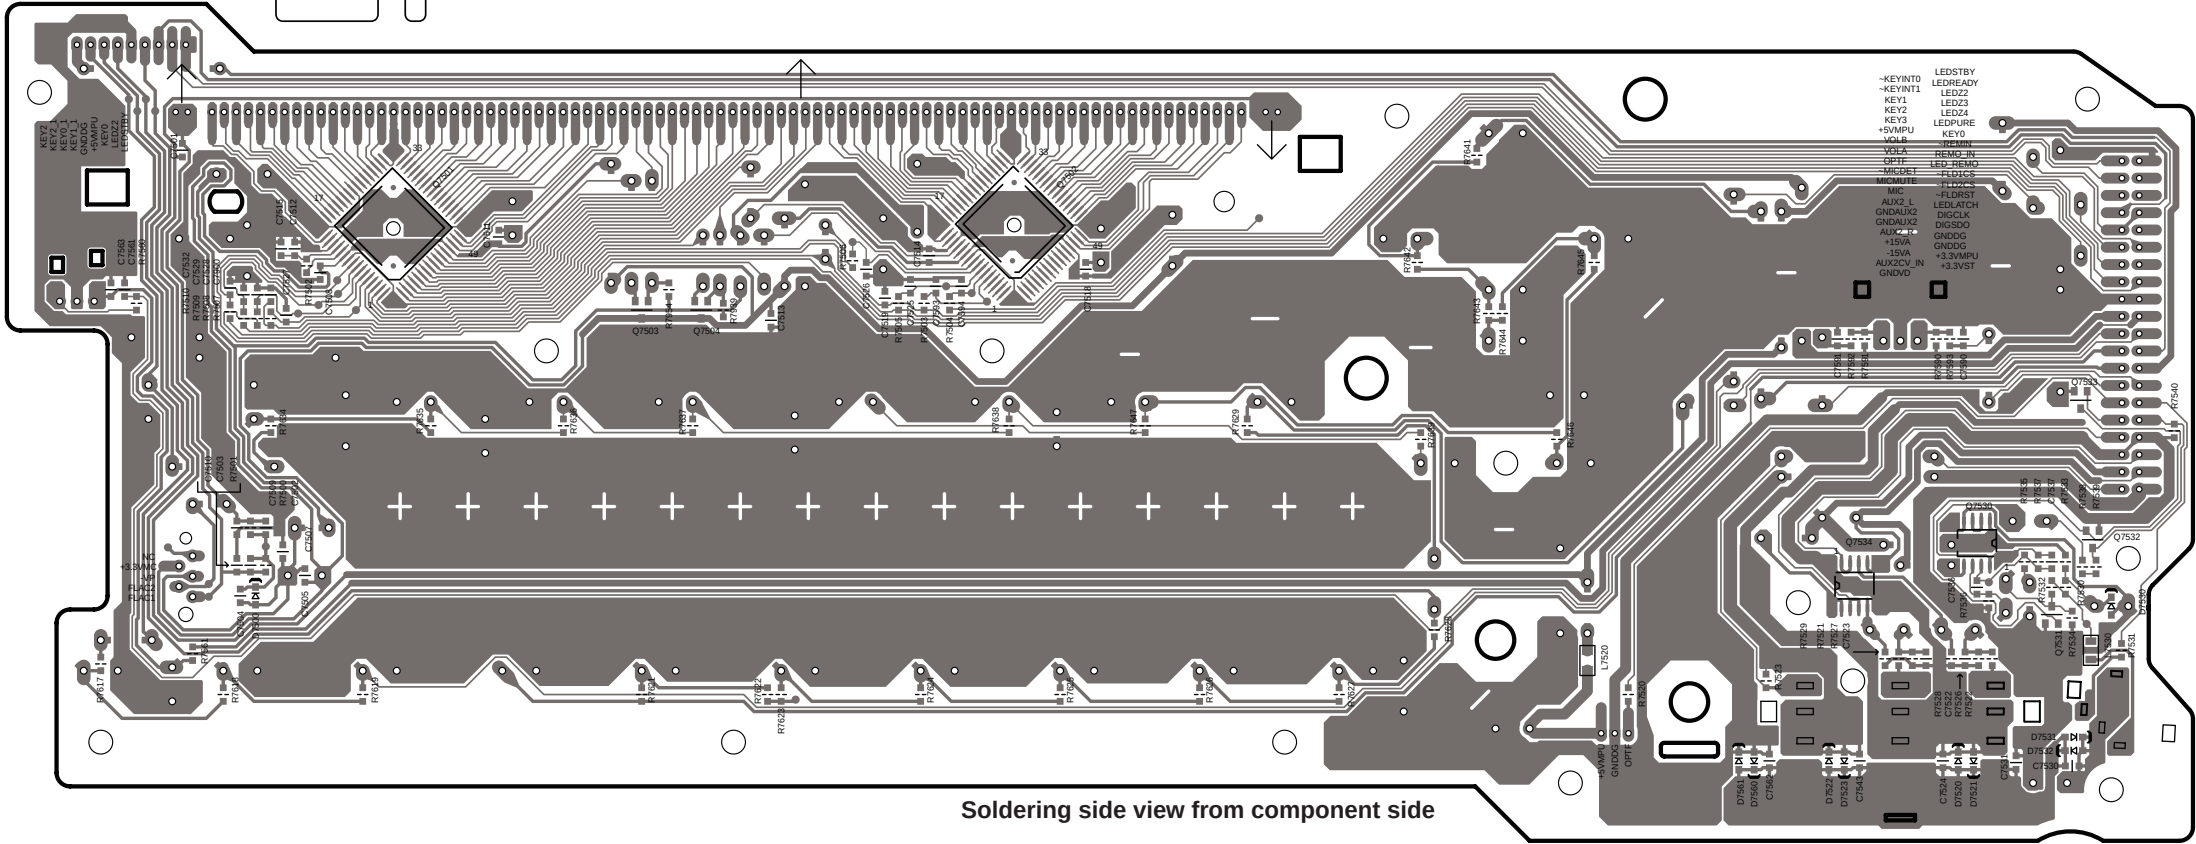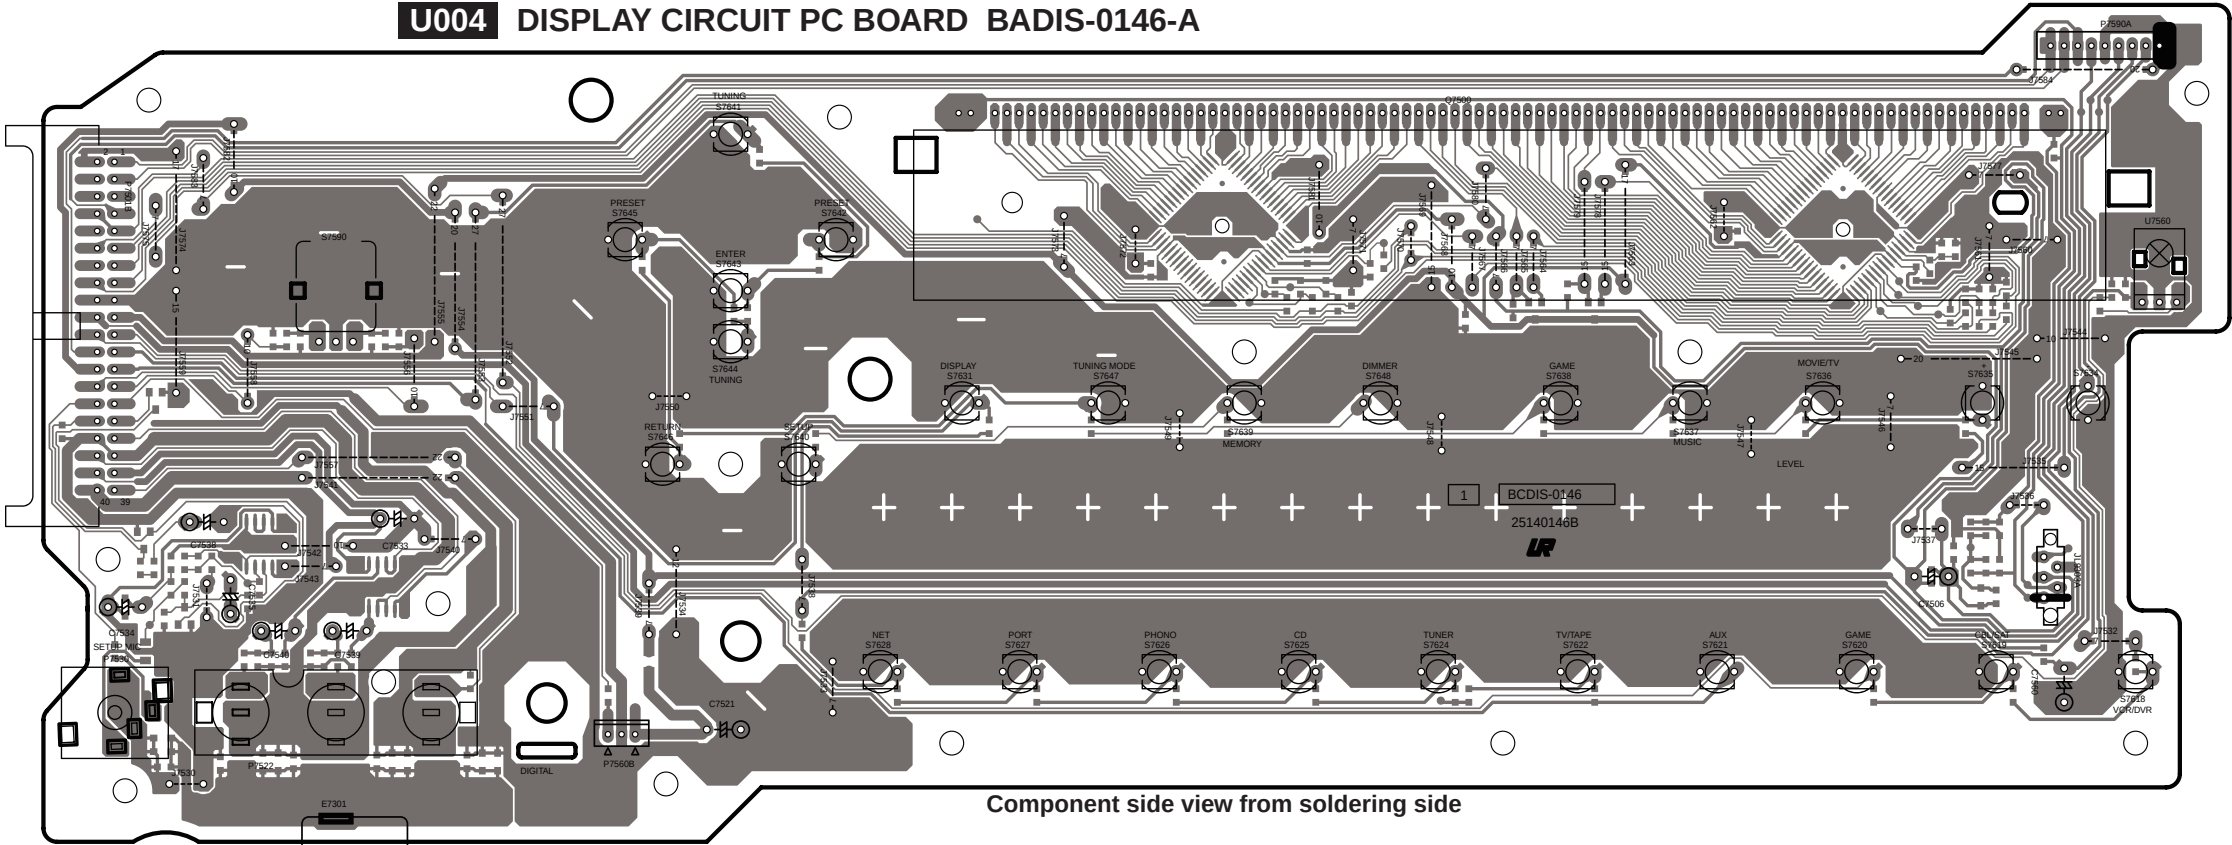


## PRINTED CIRCUIT BOARD VIEW-11

**U0042 STNDBY SWITCH PC BOARD BASW-0147-1A**

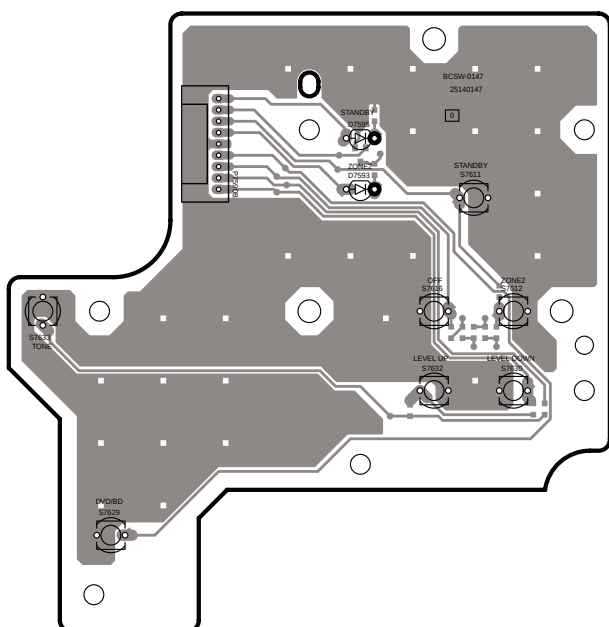


**Component side view from soldering side**

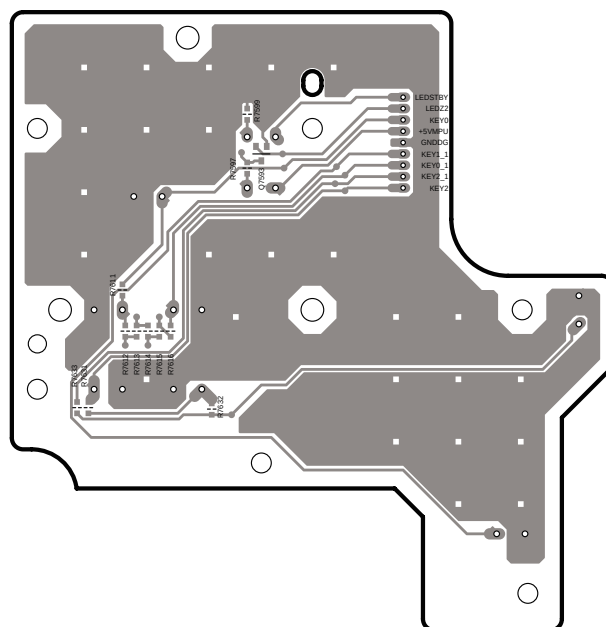


### Sodering side view from component side

**U0044 HEADPHONE TERMINAL PC BOARD BAETC-0149-1A**

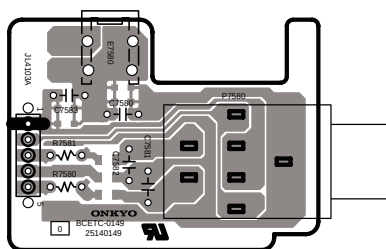


**Component side view from soldering side**

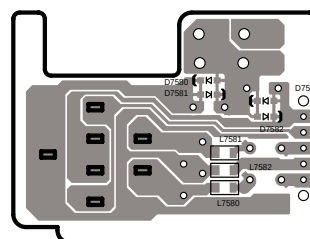


**Sodering side view from component side**

**U0043** FL POWER SUPPLY PC BOARD BAPS-0148-1A

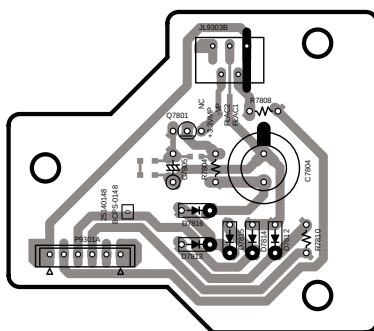


**Component side view from soldering side**

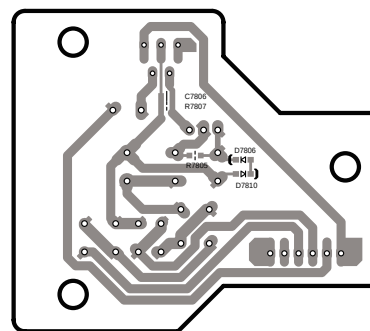


### Sodering side view from component side

## PRINTED CIRCUIT BOARD VIEW-12

**U0046** FRONT DIGITAL INPUT PC BOARD BAETC-0151-1A

Component side view from soldering side

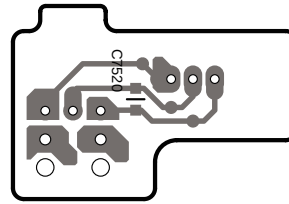


Soldering side view from component side



PRINTED CIRCUIT BOARD VIEW-13

U005 HDMI CIRCUIT PC BOARD BAHDM-0132-1A

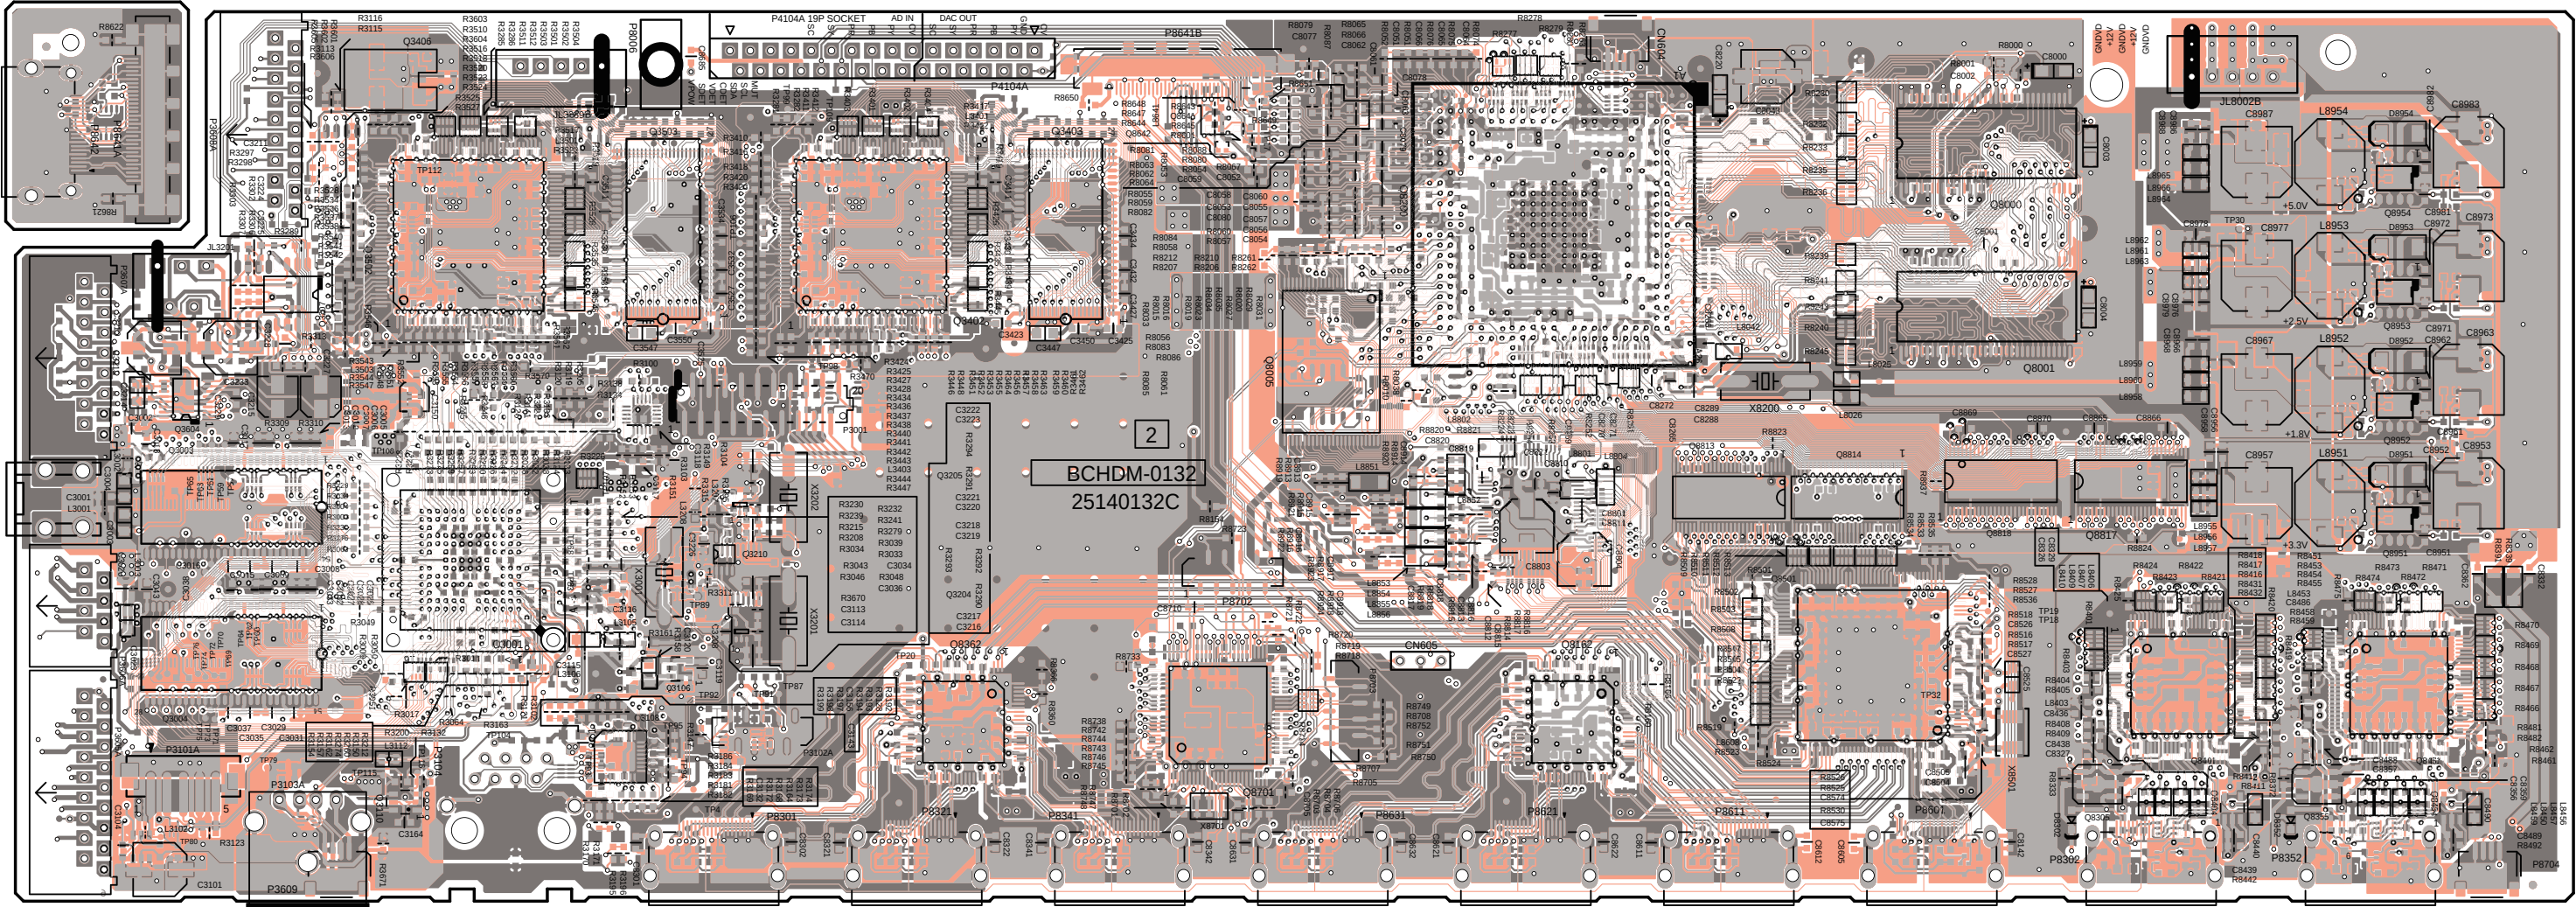

P8703A


A-side view

A side pattern color  
B side pattern color



## PRINTED CIRCUIT BOARD VIEW-14

**U005** HDMI CIRCUIT PC BOARD BAHDM-0132-1A

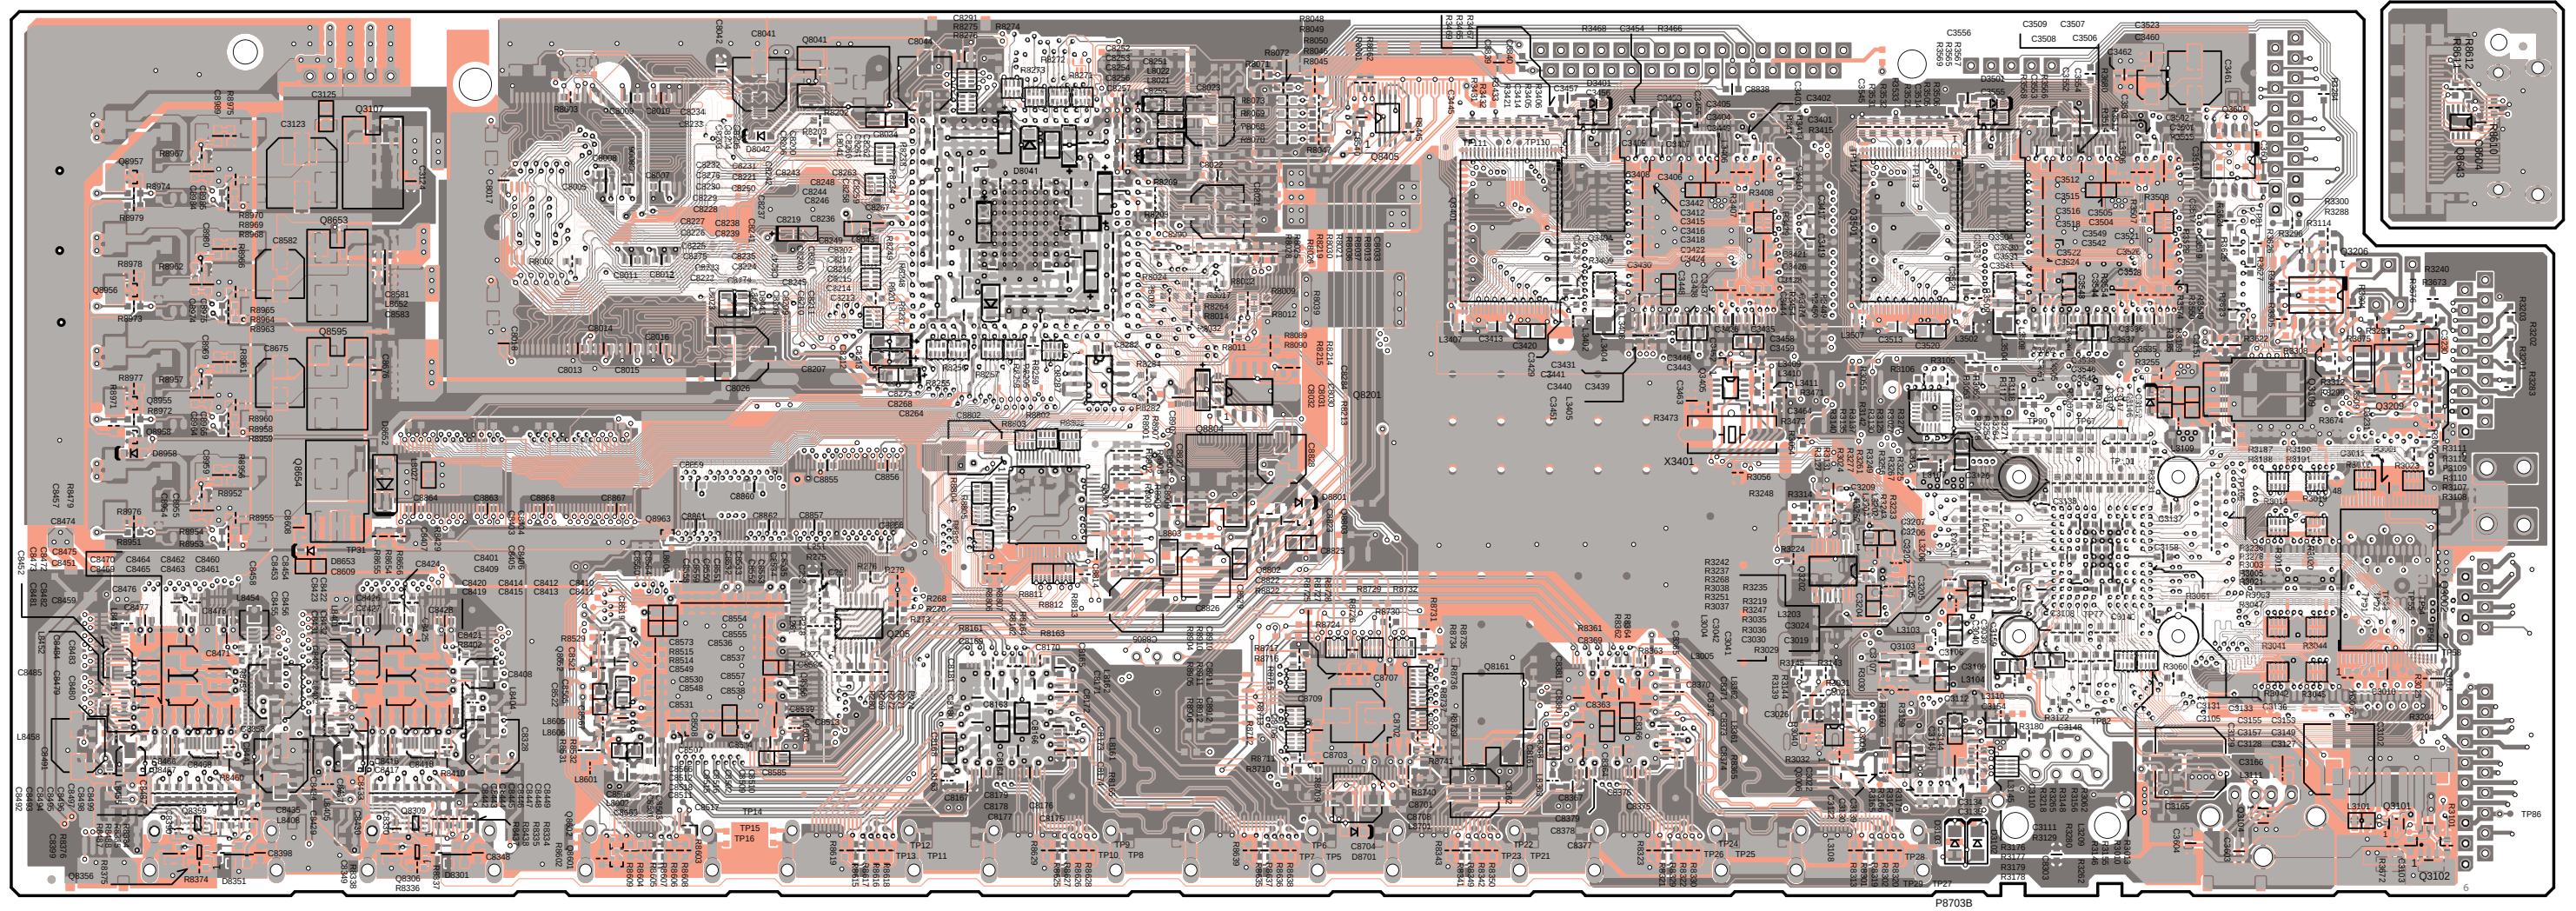

**B-side view**


A side pattern color

**B side pattern color**


### PRINTED CIRCUIT BOARD VIEW-15

U006

# FRONT HDMI TERMINAL PC BOARD BAHDM-0290-1A

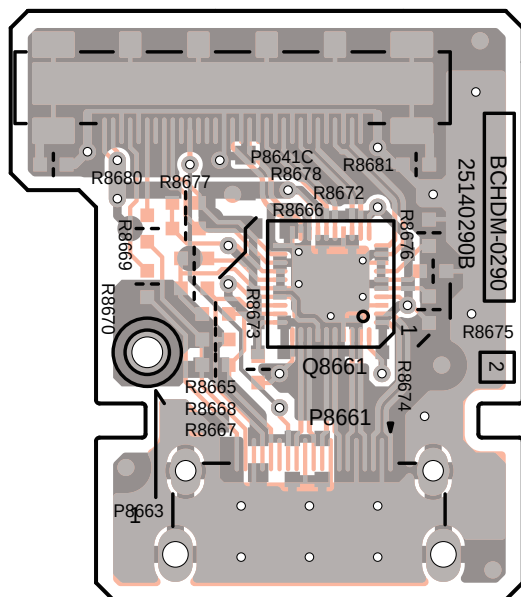


### A side view

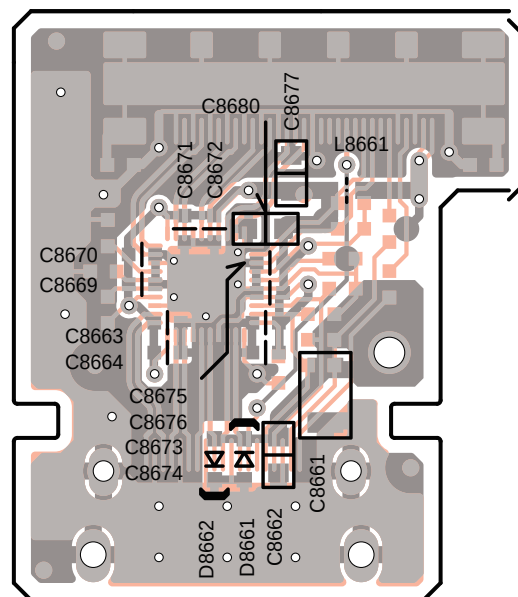

**B side view**



## PACKING PROCEDURE

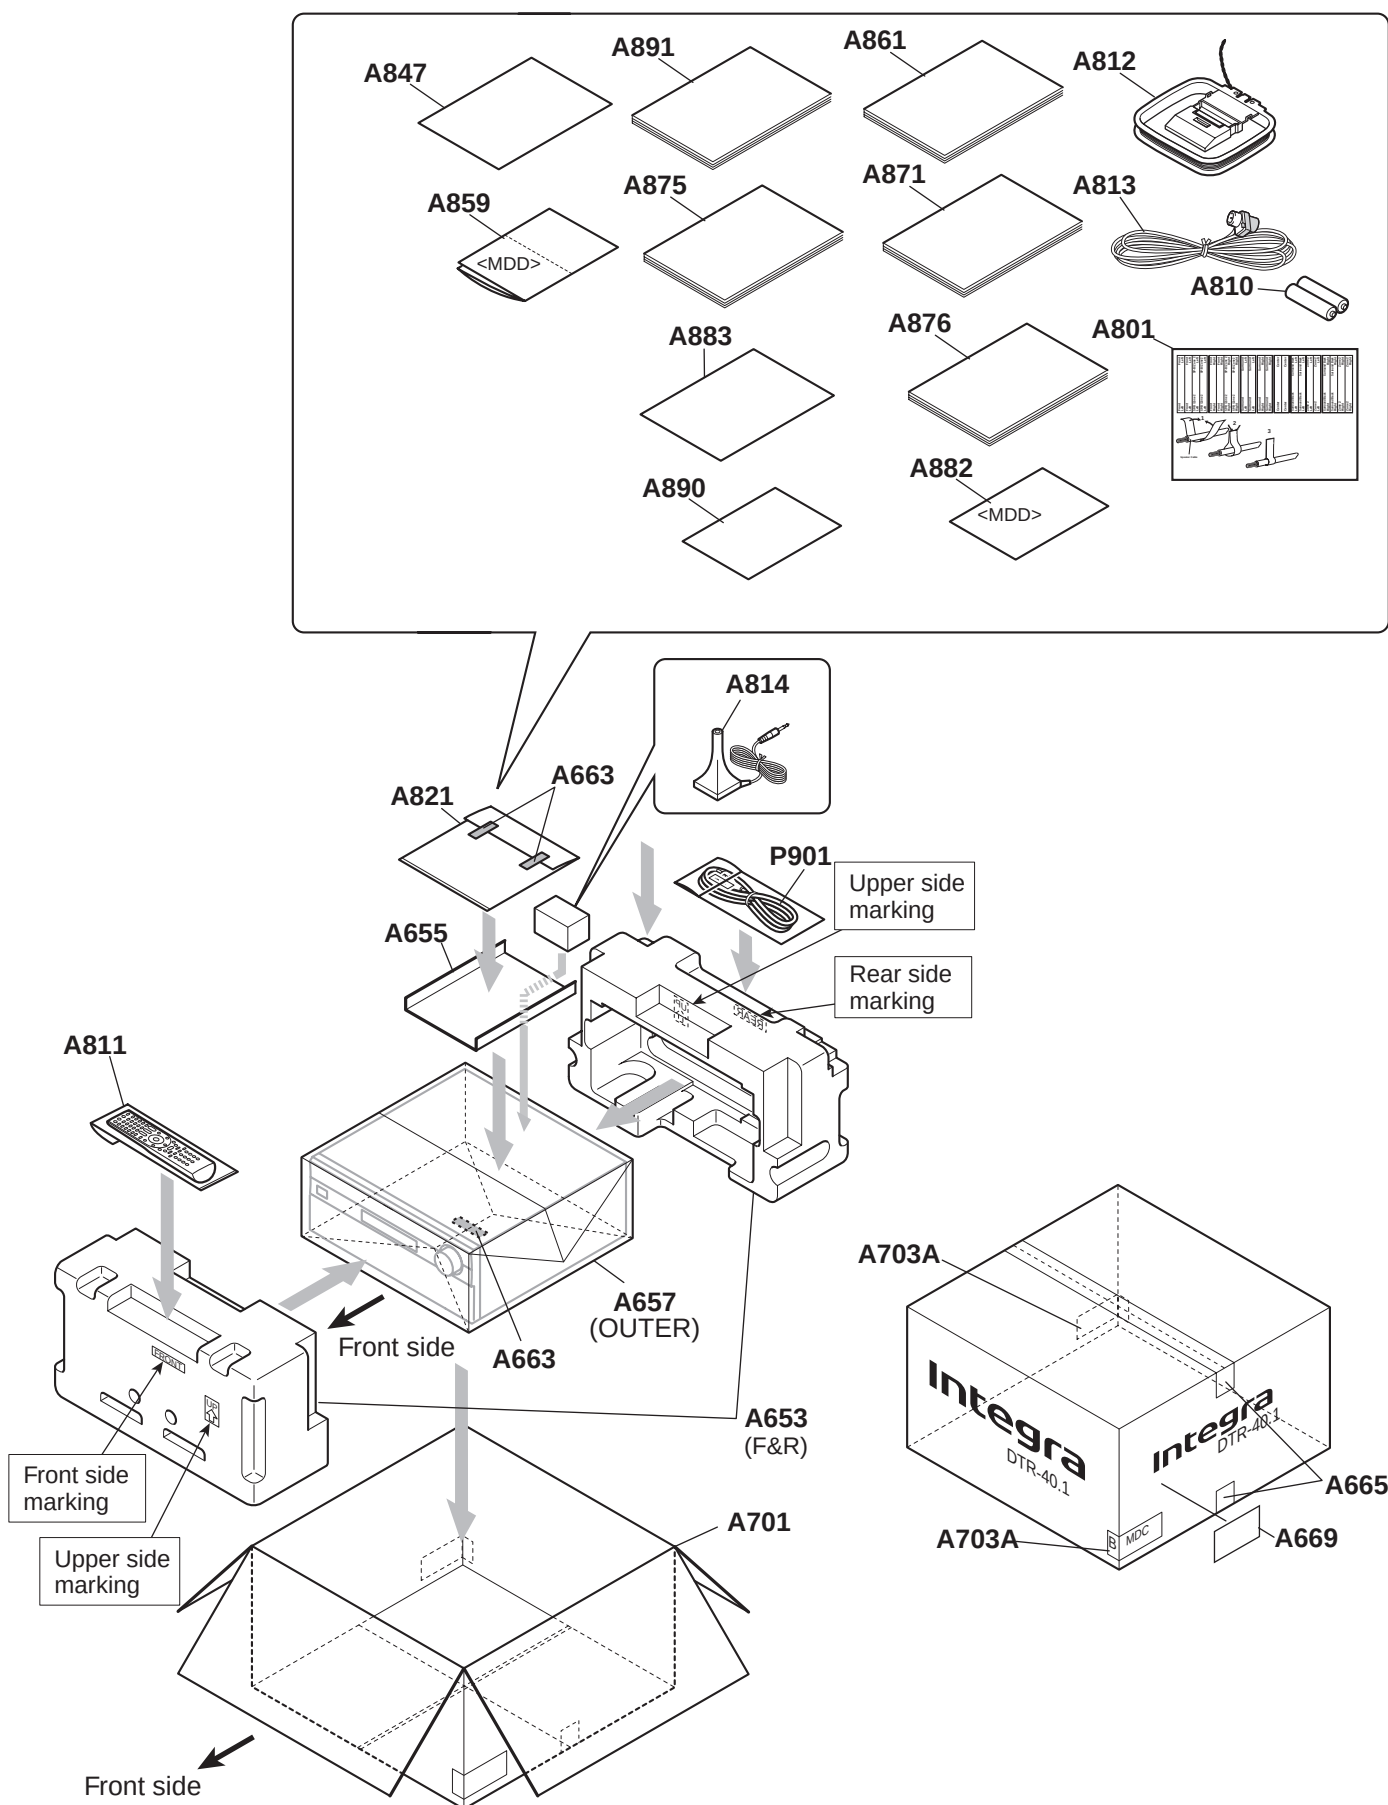

PARTS LIST

DTR-40.1

NOTE : THE COMPONENTS IDENTIFIED BY THE MARK  
! ARE CRITICAL FOR RISK OF FIRE AND  
ELECTRIC SHOCK. REPLACE ONLY WITH PART  
NUMBER SPECIFIED.

NOTE: B : Black color  
S : Silver color  
MMA : Australian model  
MDD : North American model

EXPLODED VIEW PARTS LIST

| REF. NO.                                                                                                                       | PART NAME | DESCRIPTION | Q'TY | PART NO. (SN) | REMARKS |
|--------------------------------------------------------------------------------------------------------------------------------|-----------|-------------|------|---------------|---------|
| [SEMI CONDUCTOR]                                                                                                               |           |             |      |               |         |
| <b>&lt;Note&gt;</b><br>Must use the same HFE rank mutually about the following parts.<br>Ref. No. : Q6050 - 6056, Q6060 - 6066 |           |             |      |               |         |
| ! Q6050                                                                                                                        | TR        | 2SC5242-O   | 1    | 2202843       | B       |
| ! Q6050A                                                                                                                       | ISO SHEET | AC238       | 2    | 223024        | B       |
| ! Q6050B                                                                                                                       | ISO SHEET | ISO SHEET   | 6    | 223041        | B       |
| ! Q6050or                                                                                                                      | TR        | 2SC5242-R   | ( 1) | 2202842       | B       |
| ! Q6051                                                                                                                        | TR        | 2SC5242-O   | 1    | 2202843       | B       |
| ! Q6051or                                                                                                                      | TR        | 2SC5242-R   | ( 1) | 2202842       | B       |
| ! Q6052                                                                                                                        | TR        | 2SC5242-O   | 1    | 2202843       | B       |
| ! Q6052or                                                                                                                      | TR        | 2SC5242-R   | ( 1) | 2202842       | B       |
| ! Q6053                                                                                                                        | TR        | 2SC5242-O   | 1    | 2202843       | B       |
| ! Q6053or                                                                                                                      | TR        | 2SC5242-R   | ( 1) | 2202842       | B       |
| ! Q6054                                                                                                                        | TR        | 2SC5242-O   | 1    | 2202843       | B       |
| ! Q6054or                                                                                                                      | TR        | 2SC5242-R   | ( 1) | 2202842       | B       |
| ! Q6055                                                                                                                        | TR        | 2SC5242-O   | 1    | 2202843       | B       |
| ! Q6055or                                                                                                                      | TR        | 2SC5242-R   | ( 1) | 2202842       | B       |
| ! Q6056                                                                                                                        | TR        | 2SC5242-O   | 1    | 2202843       | B       |
| ! Q6056or                                                                                                                      | TR        | 2SC5242-R   | ( 1) | 2202842       | B       |
| ! Q6060                                                                                                                        | TR        | 2SA1962-O   | 1    | 2202833       | B       |
| ! Q6060or                                                                                                                      | TR        | 2SA1962-R   | ( 1) | 2202832       | B       |
| ! Q6061                                                                                                                        | TR        | 2SA1962-O   | 1    | 2202833       | B       |
| ! Q6061or                                                                                                                      | TR        | 2SA1962-R   | ( 1) | 2202832       | B       |

|                 |         |           |                |      |              |       |
|-----------------|---------|-----------|----------------|------|--------------|-------|
| !               | Q6062   | TR        | 2SA1962-O      | 1    | 2202833      | B     |
| !               | Q6062or | TR        | 2SA1962-R      | ( 1) | 2202832      | B     |
| !               | Q6063   | TR        | 2SA1962-O      | 1    | 2202833      | B     |
| !               | Q6063or | TR        | 2SA1962-R      | ( 1) | 2202832      | B     |
| !               | Q6064   | TR        | 2SA1962-O      | 1    | 2202833      | B     |
| !               | Q6064or | TR        | 2SA1962-R      | ( 1) | 2202832      | B     |
| !               | Q6065   | TR        | 2SA1962-O      | 1    | 2202833      | B     |
| !               | Q6065or | TR        | 2SA1962-R      | ( 1) | 2202832      | B     |
| !               | Q6066   | TR        | 2SA1962-O      | 1    | 2202833      | B     |
| !               | Q6066or | TR        | 2SA1962-R      | ( 1) | 2202832      | B     |
| [TRANS COIL]    |         |           |                |      |              |       |
| !               | T901    | P TRANS   | NPT-1570D      | 1    | 2301931      | B MDD |
| !               | T901    | P TRANS   | NPT-1570M      | 1    | 2301932      | B MMA |
| [SW TRM]        |         |           |                |      |              |       |
| !               | F4000   | FUSE      | 4A-UL/T-233    | 1    | 252325GR     | B     |
| !               | F4000or | FUSE      | 4A-T/UL-ST2    | ( 1) | 252257GR     | B     |
| !               | F4001   | FUSE      | 4A-UL/T-233    | 1    | 252325GR     | B     |
| !               | F4001or | FUSE      | 4A-T/UL-ST2    | ( 1) | 252257GR     | B     |
| !               | F6901   | FUSE      | 15A-TUL-250V   | 1    | 252303GR     | B     |
| !               | F6902   | FUSE      | 15A-TUL-250V   | 1    | 252303GR     | B     |
| !               | F901    | FUSE      | 5A-SE-EAK FUSE | 1    | 252078GR     | B MMA |
| !               | F901or  | FUSE      | 5A-SE-TL250V   | ( 1) | 252278GR     | B MMA |
| !               | F901    | FUSE      | 10A-UL/T-233   | 1    | 252330GR     | B MDD |
| !               | F901or  | FUSE      | 10A-T/UL-ST2   | ( 1) | 252333GR     | B MDD |
| !               | F901A   | LABEL     | T5AL250V       | 1    | 29361938     | B MMA |
|                 | P103    | FFC       | NCFC7-111012   | 1    | 2047111012   | B     |
|                 | P4104   | FFC       | NCFC7-191012   | 1    | 2047191012   | B     |
|                 | P500    | WIRE TIE  | BSK-1          | 15   | 260208       | B     |
|                 | P6600A  | P RIVET   | JB-407A-C      | 22   | 880052       | B MMA |
|                 | P691    | FAN       | D05X-12TL      | 1    | 24502317     | B     |
|                 | P7501   | SOCKET AS | NSAS-80P1804   | 1    | 2009991167UL | B     |
|                 | P8641   | FFC       | NCFC7-31007    | 1    | 204D31007    | B     |
| [CHASSIS SCREW] |         |           |                |      |              |       |
|                 | A001    | CHASSIS   | ---            | 1    | 27100537A    | N B   |
|                 | A003    | LEG       | ---            | 4    | 27175419     | B     |
|                 | A005    | CUSHION   | (LEG)          | 4    | 28141660     | B     |
|                 | A007    | CUSHION   | (BUTYL)        | 1    | 28141748     | B     |
|                 | A009    | SCREW     | 3TTB+8B(3CM)SR | 4    | 801637       | B     |



|      |            |                   |    |             |            |
|------|------------|-------------------|----|-------------|------------|
| A015 | SCREW      | 4TTC+8C(3BC)      | 4  | 830440089GR | B          |
| A017 | SPACER     | ---               | 1  | 27270439    | B          |
| A019 | CUSHION    | T10*30*10EPT      | 1  | 28141822    | B          |
| A027 | HEAT SINK  | ---               | 1  | 27160609A   | B          |
| A031 | SCREW      | 3SMS8W.SW+14B(CU) | 14 | 801634      | B          |
| A033 | SCREW      | 3TTB+8B(3CM)SR    | 1  | 801637      | B          |
| A037 | RETAINER   | (HT-R7)           | 1  | 27142114    | B          |
| A039 | RETAINER   | (HT-L7)           | 1  | 27142113    | B          |
| A044 | SCREW      | 3TTB+8B(3CM)SR    | 2  | 801637      | B          |
| A045 | SCREW      | 3TTB+8B(3CM)SR    | 4  | 801637      | B          |
| A047 | SCREW      | 3TTB+8B(3CM)SR    | 2  | 801637      | B          |
| A049 | SCREW      | 3TTB+8B(3CM)SR    | 3  | 801637      | B          |
| A051 | BRACKET    | (FAN-S)           | 1  | 27131047    | B          |
| A052 | CUSHION    | T10*10*10EPT      | 1  | 28141813    | B          |
| A053 | BUSHING    | (FAN-S)           | 2  | 28170090    | B          |
| A054 | CUSHION    | ---               | 2  | 28141783    | B          |
| A055 | SCREW      | 3TTB+8B(3CM)SR    | 2  | 801637      | B          |
| A057 | IB CUSHION | W15*3t TAPE       | 1  | 28141585    | B          |
| A061 | RETAINER   | (PC)              | 1  | 27142125    | B          |
| A063 | RIVET      | P-RIVET NRP-345   | 2  | 880009      | B          |
| A065 | CUSHION    | ---               | 4  | 28141783    | B          |
| A067 | CUSHION    | (PCB)             | 2  | 28141789    | B          |
| A071 | CLAMP      | WS-2NS            | 1  | 27300833    | B          |
| A073 | HOLDER     | KGLS-4S           | 1  | 27190009    | B          |
| A075 | HOLDER     | HOLDER KGLS-8S    | 5  | 27190480    | B          |
| A077 | HOLDER     | KGPS-14RF         | 8  | 27190802    | B          |
| A079 | HOLDER     | KGLS-14S          | 1  | 27190164    | B          |
| A081 | HOLDER     | HOLDER KGLS-18S   | 4  | 27190470    | B          |
| A085 | HOLDER     | KGLS-12RT         | 1  | 27190266    | B          |
| A087 | HOLDER     | KGLS-10RT         | 1  | 27190428A   | B          |
| A089 | HOLDER     | KGLS-22RT         | 1  | 27190772    | B          |
| A101 | SCREW      | 3TTB+8B(3CM)SR    | 1  | 801637      | B          |
| A115 | TAPE       | TAPE(CLOTH-8U)    | 1  | 29110082    | B          |
| A121 | LABEL      | (PT)              | 1  | 29364345    | B          |
| A171 | REAR PANEL | DTR-40.1MDD       | 1  | 27124001A   | N B MDD    |
| A171 | REAR PANEL | DTR-40.1MMA       | 1  | 27124002B   | N B MMA    |
| A173 | SCREW      | 3TTB+8B(3BC)      | 46 | 838430088GR | B MDD, MMA |
| A175 | SCREW      | 3P+6FN(3BC)       | 6  | 82143006GR  | B MDD, MMA |

|           |            |                |    |             |            |
|-----------|------------|----------------|----|-------------|------------|
| A177      | SCREW      | 3P+6FN(3BC)    | 2  | 82143006GR  | B MDD, MMA |
| A179      | SCREW      | 3P+6FN(3BC)    | 1  | 82143006GR  | B MDD      |
| A183      | SCREW      | 4TTB+10B(3BC)  | 2  | 838440108GR | B MDD, MMA |
| A187      | SCREW      | 3TTB+8B(3CM)SR | 1  | 801637      | B MDD, MMA |
| A189      | WASHER     | W3*10F(3BC)    | 1  | 87643010GR  | B MDD, MMA |
| A191      | LABEL      | (SP1)          | 1  | 29390790    | B MDD, MMA |
| A193      | LABEL      | (SP2)          | 1  | 29390791    | B MDD, MMA |
| [CABINET] |            |                |    |             |            |
| A203      | F BRACKET  | (B)401         | 1  | 27111534B   | N B        |
| A215      | KNOB       | (STANDBY)      | 1  | 28325756    | B          |
| A225      | KNOB       | (CUR)B         | 1  | 28326682A   | B          |
| A229      | P RIVET    | P-3055B-8L     | 2  | 880048      | B          |
| A351      | CUSHION    | t5*30*5        | 3  | 28141562    | B          |
| A353      | CUSHION    | (T3*W35*D10)   | 1  | 28141741    | B          |
| A357      | IB CUSHION | W15*3t TAPE    | 1  | 28141585    | B          |
| A363      | SCREW      | 3TTB+8B(3CM)SR | 19 | 801637      | B          |
| A373      | SCREW      | 2.6TTB+8B(3BC) | 2  | 838426088GR | B          |
| A375      | SCREW      | 3TTB+8B(3BC)   | 3  | 838430088GR | B          |
| A379      | SCREW      | 3TTB+8B(3CM)SR | 5  | 801637      | B          |
| A387      | SCREW      | 3TTB+8B(3CM)SR | 1  | 801637      | B          |
| A389      | SCREW      | 3TTB+8B(3CM)SR | 1  | 801637      | B          |
| A393      | HOLDER     | KGPS-5RF       | 1  | 27191224    | B          |
| A399      | HOLDER     | KGLS-4S        | 3  | 27190009    | B          |
| A403      | F PANEL    | DTR-40.1(B)DD  | 1  | 27213221A   | N B MDD    |
| A403      | F PANEL    | DTR-40.1(B)MA  | 1  | 27213222A   | N B MMA    |
| A409      | BADGE      | ---            | 1  | 28135278    | B          |
| A419      | CLEAR PLT  | 401            | 1  | 28192232    | N B        |
| A423      | DECO FRM   | (B)            | 1  | 27215384    | B          |
| A425      | FACET      | ---            | 2  | 28198905    | B          |
| A427      | B PLATE    | ---            | 1  | 28133430    | B          |
| A457      | KNOB       | (VOL)AS        | 1  | 28326685A   | N B        |
| A461      | CUSHION    | t0.9*Φ48       | 1  | 28141824    | B          |
| A501      | CUSHION    | ---            | 2  | 28141799    | B          |
| A601      | COVER      | (B) (Bent)     | 1  | 28184972    | B          |
| A601      | COVER      | (B) (Not Bent) | 1  | 28184972Z   | B          |
| A605      | LABEL      | HOOKUP-INTEGRA | 1  | 29363195    | B MDD      |
| A607      | LABEL      | (COVER)        | 1  | 29364123    | B          |
| A611      | SCREW      | 3TTB+8B(3BC)   | 6  | 838430088GR | B          |

| [TUNER UNIT] |                                                           |                 |   |              |              |
|--------------|-----------------------------------------------------------|-----------------|---|--------------|--------------|
| U001         | U0010+U0011+U0012+U0013                                   | BAAMP-0072-1D * | 1 | 1B234572-1D  | N B MDD, MMA |
| U0010        | Power Amp. Circuit PC board a'ssy                         | BAAMP-0072-1D   | 1 | 1B2345072-1D | N            |
| U0011        | Audio input terminal PC board a'ssy                       | BAASP-0073-1D   | 1 | 1B2345073-1D | N            |
| U0012        | Thermister PC board a'ssy                                 | BAETC-0074-1D   | 1 | 1B2345074-1D | N            |
| U0013        | AC Inlet terminal PC board                                | BAETC-0089-1D   | 1 | 1B2345089-1D | N            |
| U002         | U0020+U0021+U0022+U0023+U0024                             | BATRM-0083-1A * | 1 | 1B234583-1A  | N B MDD      |
| U0020        | Speaker terminal-1 PC board a'ssy                         | BATRM-0083-1A   | 1 | 1B2345083-1A | N            |
| U0021        | Primary power supply PC board a'ssy                       | BAPS-0084-1A    | 1 | 1B2345084-1A | N            |
| U0022        | Speaker terminal-2 PC board a'ssy                         | BATRM-0085-1A   | 1 | 1B2345085-1A | N            |
| U0023        | Speaker terminal-3 PC board a'ssy                         | BATRM-0086-1A   | 1 | 1B2345086-1A | N            |
| U0024        | Amp. Input circuit PC board a'ssy                         | BACLA-0087-1A   | 1 | 1B2345087-1A | N            |
| U002         | U0020+U0021+U0022+U0023+U0024                             | BATRM-0083-1B * | 1 | 1B234583-1B  | N B MMA      |
| U0020        | Speaker terminal-1 PC board a'ssy                         | BATRM-0083-1B   | 1 | 1B2345083-1B | N            |
| U0021        | Primary power supply PC board a'ssy                       | BAPS-0084-1B    | 1 | 1B2345084-1B | N            |
| U0022        | Speaker terminal-2 PC board a'ssy                         | BATRM-0085-1B   | 1 | 1B2345085-1B | N            |
| U0023        | Speaker terminal-3 PC board a'ssy                         | BATRM-0086-1B   | 1 | 1B2345086-1B | N            |
| U0024        | Amp. Input circuit PC board a'ssy                         | BACLA-0087-1B   | 1 | 1B2345087-1B | N            |
| U003         | U0030+U0031+U0032+U0033                                   | BADG-0099-1D *  | 1 | 1B234599-1D  | N B MDD      |
| U0030        | Digital input circuit PC board a'ssy                      | BADG-0099-1D    | 1 | 1B2345099-1D | N            |
| U0031        | CPU circuit PC board a'ssy                                | BACPU-0100-1D   | 1 | 1B2345100-1D | N            |
| U0032        | Video input circuit PC board a'ssy                        | BAVD-0101-1D    | 1 | 1B2345101-1D | N            |
| U0033        | Universal port PC board a'ssy                             | BAETC-0103-1D   | 1 | 1B2345103-1D | N            |
| U003         | U0030+U0031+U0032+U0033                                   | BADG-0099-1E *  | 1 | 1B234599-1E  | N B MMA      |
| U0030        | Digital input circuit PC board a'ssy                      | BADG-0099-1E    | 1 | 1B2345099-1E | N            |
| U0031        | CPU circuit PC board a'ssy                                | BACPU-0100-1E   | 1 | 1B2345100-1E | N            |
| U0032        | Video input circuit PC board a'ssy                        | BAVD-0101-1E    | 1 | 1B2345101-1E | N            |
| U0033        | Universal port PC board a'ssy                             | BAETC-0103-1E   | 1 | 1B2345103-1E | N            |
| U004         | U0040+U0041+U0042+U0043+U0044<br>+U0045+U0046+U0047+U0048 | BADIS-0146-1A * |   | 1B234546-1A  | N B MDD, MMA |
| U0040        | Display circuit PC board a'ssy                            | BADIS-0146-1A   | 1 | 1B2345146-1A | N            |
| U0041        | Support PC board-1                                        | BAETC-0154-1A   | 1 | 1B2345154-1A | N            |
| U0042        | Stadby switch PC board a'ssy                              | BASW-0147-1A    | 1 | 1B2345147-1A | N            |
| U0043        | FL power supply PC board a'ssy                            | BAPS-0148-1A    | 1 | 1B2345148-1A | N            |
| U0044        | Headphone terminal PC board a'ssy                         | BAETC-0149-1A   | 1 | 1B2345149-1A | N            |
| U0045        | Support PC board-2                                        | BAETC-0150-1A   | 1 | 1B2345150-1A | N            |
| U0046        | Front digital input PC board a'ssy                        | BAETC-0151-1A   | 1 | 1B2345151-1A | N            |
| U0047        | Support PC board-3                                        | BAETC-0155-1A   | 1 | 1B2345155-1A | N            |
| U0048        | Support PC board-4                                        | BAETC-0156-1A   | 1 | 1B2345156-1A | N            |



|      |                                    |                 |   |             |            |
|------|------------------------------------|-----------------|---|-------------|------------|
| U005 | HDMI circuit PC board a'ssy        | BAHDM-0132-1D * | 1 | 1B234532-1D | B MDD, MMA |
| U006 | Front HDMI terminal PC board a'ssy | BAHDM-0290-1A * | 1 | 1B234590-1A | B MDD, MMA |
| U011 | TUNER UNIT                         | FAEH06-E01EX    | 1 | 240165      | B MMA      |
| U011 | TUNER UNIT                         | FAEH06-A01US    | 1 | 240166      | B MDD      |

# PACKING VIEW PARTS LIST

DTR-40.1

|             |            |                               |      |            |              |
|-------------|------------|-------------------------------|------|------------|--------------|
| [PACKING]   |            |                               |      |            |              |
| A653        | PAD        | ASTXSR707                     | 1    | 29092462A  | B            |
| A655        | SHEET      | (PAD)                         | 1    | 29096065A  | B            |
| A657        | SHEET      | 1300*650                      | 1    | 29095966   | B            |
| A663        | TAPE       | (SEROHAN)NITTO NO.29          | 1    | 29110149   | B            |
| A665        | PP TAPE    | W50 SBT-70                    | 1    | 29110200   | B            |
| A669        | LABEL      | (MMA)                         | 2    | 29390973   | N B MMA      |
| A701        | CARTON     | DTR-40.1(B)MDD                | 1    | 29055008A  | N B MDD, MMA |
| A703A       | UPC LABEL  | DTR-40.1B                     | { 1} | 29390794   | N B MDD      |
| A703A       | EAN LABEL  | DTR-40.1B                     | { 1} | 29390797   | N B MMA      |
| A891        | INS MANUAL | En(Pand/Rhap/InterSir_INTE)   | 1    | 29400168   | B MDD        |
| [ACCESSARY] |            |                               |      |            |              |
| A801        | LABEL      | (SPCABLE)2009                 | 1    | 29390881   | B            |
| A810        | BATTERY    | R6/AA(UM-3)                   | 2    | 3010194    | B            |
| A810or      | BATTERY    | R6/AA(UM-3)                   | ( 2) | 3010054    | B            |
| A811        | REMO CON   | RC-744M                       | 1    | 24140744   | B            |
| A812        | ANT COIL   | NMA-3057                      | 1    | 232140     | B            |
| A813        | FM ANT AS  | Type W                        | 1    | 292191     | B            |
| A814        | MIC        | MIC-7000                      | 1    | 245044     | B            |
| A821        | POLY BAG   | D250xd300xW300(t0.04)         | 1    | 29100256A  | B            |
| A847        | INST SHEET | WINDOWS7                      | 1    | 29355775   | B            |
| A859        | WRNTY CARD | (INTEGRA)                     | 1    | 29365136   | B MDD        |
| A861        | INS MANUAL | En(DTR-40.1)                  | 1    | 29400034   | N B          |
| A871        | INS MANUAL | En(QSS)(DTR-40.1)             | 1    | 29400036   | N B          |
| A875        | INS MANUAL | U9(RC736/737/738/739)         | 1    | 29344962   | B            |
| A876        | INS MANUAL | U2JaEn(Software_807/HT-RC180) | 1    | 29400164   | B            |
| A882        | HANDBILL   | (SIRIUS)                      | 1    | 29380149   | B MDD        |
| A883        | INST SHEET | En(2009E_RIHD)                | 1    | 29355745   | B            |
| A890        | HANDBILL   | (UP-A1)US                     | 1    | 29380155   | B MDD        |
| ! P901      | AC CORD    | AS-UC-2                       | 1    | 253352ATES | B MDD        |
| ! P901      | AC CORD    | AS-SAA                        | 1    | 253391VOL  | B MMA        |

|          |         |         |      |           |       |
|----------|---------|---------|------|-----------|-------|
| ! P901or | AC CORD | AS-UC-2 | ( 1) | 253297KAW | B MDD |
|----------|---------|---------|------|-----------|-------|

PRINTED CIRCUIT BOARD PARTS LIST

DTR-40.1

|       |                                     |                 |   |             |   |
|-------|-------------------------------------|-----------------|---|-------------|---|
| U001  | Power Amp. Circuit PC board a'ssy   | BAAMP-0072-1D * | 1 | 1B234572-1D | N |
| U0011 | Audio input terminal PC board a'ssy | BAASP-0073-1D   | 1 | 1B234573-1D | N |
| U0012 | Thermister PC board a'ssy           | BAETC-0074-1D   | 1 | 1B234574-1D | N |
| U0013 | AC Inlet terminal PC board          | BAETC-0089-1D   | 1 | 1B234589-1D |   |

| CIRCUIT. NO.     | PART NAME | DESCRIPTION | Q'TY | PART NO. (SN) | REMARKS |
|------------------|-----------|-------------|------|---------------|---------|
| [TUNER UNIT]     |           |             |      |               |         |
| Q4607            | PHT CP    | PS2501AL-1  | 1    | 24120141R2    |         |
| Q4608            | PHT CP    | PS2501AL-1  | 1    | 24120141R2    |         |
| [SEMI CONDUCTOR] |           |             |      |               |         |
| D4600            | C-DIODE   | 1SS352      | 1    | 223234R2      |         |
| D4601            | C-DIODE   | 1SS352      | 1    | 223234R2      |         |
| D4602            | C-DIODE   | 1SS352      | 1    | 223234R2      |         |
| D4603            | C-DIODE   | 1SS352      | 1    | 223234R2      |         |
| D4604            | C-DIODE   | 1SS352      | 1    | 223234R2      |         |
| D4605            | C-DIODE   | 1SS352      | 1    | 223234R2      |         |
| D4606            | DIODE     | RL1N4003    | 1    | 22380260T     |         |
| D5500            | ZENER D   | MTZJ7.5B    | 1    | 224470752T    |         |
| D5501            | ZENER D   | MTZJ7.5B    | 1    | 224470752T    |         |
| D5502            | ZENER D   | MTZJ3.6B    | 1    | 224470362T    |         |
| D5507            | C-DIODE   | 1SS352      | 1    | 223234R2      |         |
| D5507 or         | C-DIODE   | 1SS355      | ( 1) | 223269R2      |         |
| D5507 or         | C-DIODE   | KDS4148U    | ( 1) | 223283R2      |         |
| D5507 or         | C-DIODE   | MA2J1110GL  | ( 1) | 223302R2      |         |
| D5508            | C-DIODE   | 1SS352      | 1    | 223234R2      |         |
| D5508 or         | C-DIODE   | 1SS355      | ( 1) | 223269R2      |         |
| D5508 or         | C-DIODE   | KDS4148U    | ( 1) | 223283R2      |         |
| D5508 or         | C-DIODE   | MA2J1110GL  | ( 1) | 223302R2      |         |
| D5511            | C-DIODE   | 1SS352      | 1    | 223234R2      |         |
| D5512            | C-DIODE   | 1SS352      | 1    | 223234R2      |         |
| D5513            | C-DIODE   | 1SS352      | 1    | 223234R2      |         |
| D5514            | C-DIODE   | 1SS352      | 1    | 223234R2      |         |
| D5517            | C-DIODE   | 1SS352      | 1    | 223234R2      |         |
| D5517 or         | C-DIODE   | 1SS355      | ( 1) | 223269R2      |         |

|          |         |             |      |             |  |
|----------|---------|-------------|------|-------------|--|
| D5517 or | C-DIODE | KDS4148U    | ( 1) | 223283R2    |  |
| D5517 or | C-DIODE | MA2J1110GL  | ( 1) | 223302R2    |  |
| D5518    | C-DIODE | 1SS352      | 1    | 223234R2    |  |
| D5518 or | C-DIODE | 1SS355      | ( 1) | 223269R2    |  |
| D5518 or | C-DIODE | KDS4148U    | ( 1) | 223283R2    |  |
| D5518 or | C-DIODE | MA2J1110GL  | ( 1) | 223302R2    |  |
| D5520    | C-DIODE | 1SS352      | 1    | 223234R2    |  |
| D5521    | ZENER D | UDZS8.2B    | 1    | 224550820R2 |  |
| D5522    | ZENER D | UDZS3.6B    | 1    | 224550360R2 |  |
| D5523    | C-DIODE | 1SS352      | 1    | 223234R2    |  |
| D5601    | C-DIODE | S1NB60-4062 | 1    | 22380318R2  |  |
| D6000    | C-DIODE | 1SS352      | 1    | 223234R2    |  |
| D6000 or | C-DIODE | 1SS355      | ( 1) | 223269R2    |  |
| D6000 or | C-DIODE | KDS4148U    | ( 1) | 223283R2    |  |
| D6000 or | C-DIODE | MA2J1110GL  | ( 1) | 223302R2    |  |
| D6001    | C-DIODE | 1SS352      | 1    | 223234R2    |  |
| D6001 or | C-DIODE | 1SS355      | ( 1) | 223269R2    |  |
| D6001 or | C-DIODE | KDS4148U    | ( 1) | 223283R2    |  |
| D6001 or | C-DIODE | MA2J1110GL  | ( 1) | 223302R2    |  |
| D6002    | C-DIODE | 1SS352      | 1    | 223234R2    |  |
| D6002 or | C-DIODE | 1SS355      | ( 1) | 223269R2    |  |
| D6002 or | C-DIODE | KDS4148U    | ( 1) | 223283R2    |  |
| D6002 or | C-DIODE | MA2J1110GL  | ( 1) | 223302R2    |  |
| D6003    | C-DIODE | 1SS352      | 1    | 223234R2    |  |
| D6003 or | C-DIODE | 1SS355      | ( 1) | 223269R2    |  |
| D6003 or | C-DIODE | KDS4148U    | ( 1) | 223283R2    |  |
| D6003 or | C-DIODE | MA2J1110GL  | ( 1) | 223302R2    |  |
| D6004    | C-DIODE | 1SS352      | 1    | 223234R2    |  |
| D6004 or | C-DIODE | 1SS355      | ( 1) | 223269R2    |  |
| D6004 or | C-DIODE | KDS4148U    | ( 1) | 223283R2    |  |
| D6004 or | C-DIODE | MA2J1110GL  | ( 1) | 223302R2    |  |
| D6005    | C-DIODE | 1SS352      | 1    | 223234R2    |  |
| D6005 or | C-DIODE | 1SS355      | ( 1) | 223269R2    |  |
| D6005 or | C-DIODE | KDS4148U    | ( 1) | 223283R2    |  |
| D6005 or | C-DIODE | MA2J1110GL  | ( 1) | 223302R2    |  |
| D6006    | C-DIODE | 1SS352      | 1    | 223234R2    |  |
| D6006 or | C-DIODE | 1SS355      | ( 1) | 223269R2    |  |
| D6006 or | C-DIODE | KDS4148U    | ( 1) | 223283R2    |  |



|          |           |                |      |             |   |
|----------|-----------|----------------|------|-------------|---|
| D6006 or | C-DIODE   | MA2J1110GL     | ( 1) | 223302R2    |   |
| D6701    | C-DIODE   | 1SS352         | 1    | 223234R2    |   |
| D6701 or | C-DIODE   | 1SS355         | ( 1) | 223269R2    |   |
| D6701 or | C-DIODE   | KDS4148U       | ( 1) | 223283R2    |   |
| D6701 or | C-DIODE   | MA2J1110GL     | ( 1) | 223302R2    |   |
| D6702    | C-DIODE   | 1SS352         | 1    | 223234R2    |   |
| D6702 or | C-DIODE   | 1SS355         | ( 1) | 223269R2    |   |
| D6702 or | C-DIODE   | KDS4148U       | ( 1) | 223283R2    |   |
| D6702 or | C-DIODE   | MA2J1110GL     | ( 1) | 223302R2    |   |
| D6703    | ZENER D   | UDZS3.6B       | 1    | 224550360R2 |   |
| D6704    | ZENER D   | UDZS3.6B       | 1    | 224550360R2 |   |
| D6713    | ZENER D   | UDZS3.6B       | 1    | 224550360R2 |   |
| D6901    | DIODE     | D10XB60H       | 1    | 22380337    |   |
| D6901A   | HEAT SINK | RAD-196        | 1    | 27160545    |   |
| D6901B   | TAPE      | TAPE(CLOTH-8U) | 1    | 29110082    |   |
| D6901C   | SCREW     | 3P+10FN(3BC)   | 2    | 82143010GR  |   |
| D6902    | C-DIODE   | 1SS352         | 1    | 223234R2    |   |
| D6902 or | C-DIODE   | 1SS355         | ( 1) | 223269R2    |   |
| D6902 or | C-DIODE   | KDS4148U       | ( 1) | 223283R2    |   |
| D6902 or | C-DIODE   | MA2J1110GL     | ( 1) | 223302R2    |   |
| D6903    | DIODE     | D10XB60H       | 1    | 22380337    |   |
| Q4600    | TR        | 2SB1240-R      | 1    | 2213794T    |   |
| Q4601    | TR        | KRC102S        | 1    | 2216190R2   |   |
| Q4602    | TR        | 2SA1162-GR     | 1    | 2214375R2   |   |
| Q4603    | TR        | KRC102S        | 1    | 2216190R2   |   |
| Q4604    | TR        | 2SA1162-GR     | 1    | 2214375R2   |   |
| Q4605    | TR        | KRC102S        | 1    | 2216190R2   |   |
| Q4606    | TR        | KRA102S        | 1    | 2216220R2   |   |
| Q5501    | IC        | R2A15220FP     | 1    | 22242600R3  | N |
| Q5502    | IC        | M61540FP       | 1    | 22242497R2  |   |
| Q5503    | IC        | NJM4580M-D     | 1    | 22241448R2  |   |
| Q5600    | TR        | RN1441         | 1    | 2215410R2   |   |
| Q5601    | TR        | RN1441         | 1    | 2215410R2   |   |
| Q5602    | TR        | RN1441         | 1    | 2215410R2   |   |
| Q5603    | TR        | RN1441         | 1    | 2215410R2   |   |
| Q5604    | TR        | RN1441         | 1    | 2215410R2   |   |
| Q5605    | TR        | RN1441         | 1    | 2215410R2   |   |
| Q5606    | TR        | RN1441         | 1    | 2215410R2   |   |

|          |           |                     |      |              |   |
|----------|-----------|---------------------|------|--------------|---|
| Q5607    | TR        | RN1441              | 1    | 2215410R2    |   |
| Q5610    | TR        | RN1441              | 1    | 2215410R2    |   |
| Q5611    | TR        | RN1441              | 1    | 2215410R2    |   |
| Q5612    | TR        | RN1441              | 1    | 2215410R2    |   |
| Q5613    | TR        | RN1441              | 1    | 2215410R2    |   |
| Q5614    | TR        | RN1441              | 1    | 2215410R2    |   |
| Q5615    | TR        | RN1441              | 1    | 2215410R2    |   |
| Q5616    | TR        | RN1441              | 1    | 2215410R2    |   |
| Q5617    | TR        | RN1441              | 1    | 2215410R2    |   |
| Q5618    | IC        | NJM4580M-D          | 1    | 22241448R2   |   |
| Q5630    | IC        | NJM4580M-D          | 1    | 22241448R2   |   |
| Q5632    | TR        | RN1441              | 1    | 2215410R2    |   |
| Q5633    | TR        | RN1441              | 1    | 2215410R2    |   |
| Q5636    | TR        | RN1441              | 1    | 2215410R2    |   |
| Q5637    | TR        | RN1441              | 1    | 2215410R2    |   |
| Q5640    | TR        | RN1441              | 1    | 2215410R2    |   |
| Q5641    | TR        | RN1441              | 1    | 2215410R2    |   |
| Q5645    | TR        | 2SC2712-GR          | 1    | 2213145R2    |   |
| Q5646    | TR        | 2SC2712-GR          | 1    | 2213145R2    |   |
| Q5647    | TR        | 2SA1162-GR          | 1    | 2214375R2    |   |
| Q5670    | IC        | 78M15HF(NJM78M15FA) | 1    | 222780155JRC |   |
| Q5670 or | IC        | UPC78M15AHF-AZ      | ( 1) | 222780155NEC |   |
| Q5670A   | HEAT SINK | RAD-252             | 1    | 27160641     | N |
| Q5670B   | SCREW     | 3P+10FN(3BC)        | 2    | 82143010GR   |   |
| Q5671    | IC        | 79M15HF(NJM79M15FA) | 1    | 222790155JRC |   |
| Q5671 or | IC        | 79M15F(AN79M15F)    | ( 1) | 222790155MAT |   |
| Q5671 or | IC        | UPC79M15HF-AZ       | ( 1) | 222790155NEC |   |
| Q5684    | TR        | 2SC2235-O(TPE6_F)   | 1    | 2211653T     |   |
| Q5685    | TR        | 2SA965-O(TPE6_F)    | 1    | 2211643T     |   |
| Q5903    | TR        | RN1441              | 1    | 2215410R2    |   |
| Q5904    | TR        | RN1441              | 1    | 2215410R2    |   |
| Q6000    | TR        | 2SC1740S-S          | 1    | 2213285T     |   |
| Q6001    | TR        | 2SC1740S-S          | 1    | 2213285T     |   |
| Q6002    | TR        | 2SC1740S-S          | 1    | 2213285T     |   |
| Q6003    | TR        | 2SC1740S-S          | 1    | 2213285T     |   |
| Q6004    | TR        | 2SC1740S-S          | 1    | 2213285T     |   |
| Q6005    | TR        | 2SC1740S-S          | 1    | 2213285T     |   |
| Q6006    | TR        | 2SC1740S-S          | 1    | 2213285T     |   |

|          |    |                   |      |          |  |
|----------|----|-------------------|------|----------|--|
| Q6010    | TR | 2SC1740S-S        | 1    | 2213285T |  |
| Q6011    | TR | 2SC1740S-S        | 1    | 2213285T |  |
| Q6012    | TR | 2SC1740S-S        | 1    | 2213285T |  |
| Q6013    | TR | 2SC1740S-S        | 1    | 2213285T |  |
| Q6014    | TR | 2SC1740S-S        | 1    | 2213285T |  |
| Q6015    | TR | 2SC1740S-S        | 1    | 2213285T |  |
| Q6016    | TR | 2SC1740S-S        | 1    | 2213285T |  |
| Q6030    | TR | 2SC2229-Y(TPE6_F) | 1    | 2211634T |  |
| Q6030 or | TR | 2SC2229-O(TPE6_F) | ( 1) | 2211633T |  |
| Q6031    | TR | 2SC2229-Y(TPE6_F) | 1    | 2211634T |  |
| Q6031 or | TR | 2SC2229-O(TPE6_F) | ( 1) | 2211633T |  |
| Q6032    | TR | 2SC2229-Y(TPE6_F) | 1    | 2211634T |  |
| Q6032 or | TR | 2SC2229-O(TPE6_F) | ( 1) | 2211633T |  |
| Q6033    | TR | 2SC2229-Y(TPE6_F) | 1    | 2211634T |  |
| Q6033 or | TR | 2SC2229-O(TPE6_F) | ( 1) | 2211633T |  |
| Q6034    | TR | 2SC2229-Y(TPE6_F) | 1    | 2211634T |  |
| Q6034 or | TR | 2SC2229-O(TPE6_F) | ( 1) | 2211633T |  |
| Q6035    | TR | 2SC2229-Y(TPE6_F) | 1    | 2211634T |  |
| Q6035 or | TR | 2SC2229-O(TPE6_F) | ( 1) | 2211633T |  |
| Q6036    | TR | 2SC2229-Y(TPE6_F) | 1    | 2211634T |  |
| Q6036 or | TR | 2SC2229-O(TPE6_F) | ( 1) | 2211633T |  |
| Q6040    | TR | 2SA949-O(TPE6_F)  | 1    | 2211353T |  |
| Q6040 or | TR | 2SA949-Y(TPE6_F)  | ( 1) | 2211354T |  |
| Q6041    | TR | 2SA949-O(TPE6_F)  | 1    | 2211353T |  |
| Q6041 or | TR | 2SA949-Y(TPE6_F)  | ( 1) | 2211354T |  |
| Q6042    | TR | 2SA949-O(TPE6_F)  | 1    | 2211353T |  |
| Q6042 or | TR | 2SA949-Y(TPE6_F)  | ( 1) | 2211354T |  |
| Q6043    | TR | 2SA949-O(TPE6_F)  | 1    | 2211353T |  |
| Q6043 or | TR | 2SA949-Y(TPE6_F)  | ( 1) | 2211354T |  |
| Q6044    | TR | 2SA949-O(TPE6_F)  | 1    | 2211353T |  |
| Q6044 or | TR | 2SA949-Y(TPE6_F)  | ( 1) | 2211354T |  |
| Q6045    | TR | 2SA949-O(TPE6_F)  | 1    | 2211353T |  |
| Q6045 or | TR | 2SA949-Y(TPE6_F)  | ( 1) | 2211354T |  |
| Q6046    | TR | 2SA949-O(TPE6_F)  | 1    | 2211353T |  |
| Q6046 or | TR | 2SA949-Y(TPE6_F)  | ( 1) | 2211354T |  |
| Q6070    | TR | 2SC2229-O(TPE6_F) | 1    | 2211633T |  |
| Q6070 or | TR | 2SC2229-Y(TPE6_F) | ( 1) | 2211634T |  |
| Q6071    | TR | 2SC2229-O(TPE6_F) | 1    | 2211633T |  |



|          |    |                   |      |          |
|----------|----|-------------------|------|----------|
| Q6071 or | TR | 2SC2229-Y(TPE6_F) | ( 1) | 2211634T |
| Q6072    | TR | 2SC2229-O(TPE6_F) | 1    | 2211633T |
| Q6072 or | TR | 2SC2229-Y(TPE6_F) | ( 1) | 2211634T |
| Q6073    | TR | 2SC2229-O(TPE6_F) | 1    | 2211633T |
| Q6073 or | TR | 2SC2229-Y(TPE6_F) | ( 1) | 2211634T |
| Q6074    | TR | 2SC2229-O(TPE6_F) | 1    | 2211633T |
| Q6074 or | TR | 2SC2229-Y(TPE6_F) | ( 1) | 2211634T |
| Q6075    | TR | 2SC2229-O(TPE6_F) | 1    | 2211633T |
| Q6075 or | TR | 2SC2229-Y(TPE6_F) | ( 1) | 2211634T |
| Q6076    | TR | 2SC2229-O(TPE6_F) | 1    | 2211633T |
| Q6076 or | TR | 2SC2229-Y(TPE6_F) | ( 1) | 2211634T |
| Q6100    | TR | 2SA1930(ONK_Q)    | 1    | 2203000  |
| Q6100 or | TR | 2SA2140-Q_P       | ( 1) | 2217151  |
| Q6101    | TR | 2SA1930(ONK_Q)    | 1    | 2203000  |
| Q6101 or | TR | 2SA2140-Q_P       | ( 1) | 2217151  |
| Q6102    | TR | 2SA1930(ONK_Q)    | 1    | 2203000  |
| Q6102 or | TR | 2SA2140-Q_P       | ( 1) | 2217151  |
| Q6103    | TR | 2SA1930(ONK_Q)    | 1    | 2203000  |
| Q6103 or | TR | 2SA2140-Q_P       | ( 1) | 2217151  |
| Q6104    | TR | 2SA1930(ONK_Q)    | 1    | 2203000  |
| Q6104 or | TR | 2SA2140-Q_P       | ( 1) | 2217151  |
| Q6105    | TR | 2SA1930(ONK_Q)    | 1    | 2203000  |
| Q6105 or | TR | 2SA2140-Q_P       | ( 1) | 2217151  |
| Q6106    | TR | 2SA1930(ONK_Q)    | 1    | 2203000  |
| Q6106 or | TR | 2SA2140-Q_P       | ( 1) | 2217151  |
| Q6110    | TR | 2SC5171(ONK_Q)    | 1    | 2203010  |
| Q6110 or | TR | 2SC5993-Q_P       | ( 1) | 2217161  |
| Q6111    | TR | 2SC5171(ONK_Q)    | 1    | 2203010  |
| Q6111 or | TR | 2SC5993-Q_P       | ( 1) | 2217161  |
| Q6112    | TR | 2SC5171(ONK_Q)    | 1    | 2203010  |
| Q6112 or | TR | 2SC5993-Q_P       | ( 1) | 2217161  |
| Q6113    | TR | 2SC5171(ONK_Q)    | 1    | 2203010  |
| Q6113 or | TR | 2SC5993-Q_P       | ( 1) | 2217161  |
| Q6114    | TR | 2SC5171(ONK_Q)    | 1    | 2203010  |
| Q6114 or | TR | 2SC5993-Q_P       | ( 1) | 2217161  |
| Q6115    | TR | 2SC5171(ONK_Q)    | 1    | 2203010  |
| Q6115 or | TR | 2SC5993-Q_P       | ( 1) | 2217161  |
| Q6116    | TR | 2SC5171(ONK_Q)    | 1    | 2203010  |

|              |          |                     |      |             |  |
|--------------|----------|---------------------|------|-------------|--|
| Q6116 or     | TR       | 2SC5993-Q_P         | ( 1) | 2217161     |  |
| Q6380        | IC       | LM61CIZ             | 1    | 22242212    |  |
| Q6380A       | RETAINER | (PTH)               | 1    | 27141884-1  |  |
| Q6701        | TR       | 2SC2712-GR          | 1    | 2213145R2   |  |
| Q6701 or     | TR       | KTC3875-GR          | ( 1) | 2216175R2   |  |
| Q6702        | TR       | 2SC2712-GR          | 1    | 2213145R2   |  |
| Q6702 or     | TR       | KTC3875-GR          | ( 1) | 2216175R2   |  |
| Q6703        | TR       | 2SA1163-BL(TE85L_F) | 1    | 2216756R2   |  |
| Q6707        | TR       | 2SC2712-GR          | 1    | 2213145R2   |  |
| Q6707 or     | TR       | KTC3875-GR          | ( 1) | 2216175R2   |  |
| Q6713        | TR       | 2SA1163-BL(TE85L_F) | 1    | 2216756R2   |  |
| [TRANS COIL] |          |                     |      |             |  |
| L4600        | EMIFIL   | BK1608LM182-T       | 1    | 230958R1    |  |
| L4601        | EMIFIL   | BK1608LM182-T       | 1    | 230958R1    |  |
| L4602        | EMIFIL   | BK1608LM182-T       | 1    | 230958R1    |  |
| L4603        | EMIFIL   | BK1608LM182-T       | 1    | 230958R1    |  |
| L6000        | FR CORE  | *                   | 1    | 5597-45502  |  |
| L6001        | FR CORE  | *                   | 1    | 5597-45502  |  |
| L6002        | FR CORE  | *                   | 1    | 5597-45502  |  |
| L6003        | FR CORE  | *                   | 1    | 5597-45502  |  |
| L6004        | FR CORE  | *                   | 1    | 5597-45502  |  |
| L6005        | FR CORE  | *                   | 1    | 5597-45502  |  |
| L6006        | FR CORE  | *                   | 1    | 5597-45502  |  |
| L6010        | FR CORE  | *                   | 1    | 5597-45502  |  |
| L6011        | FR CORE  | *                   | 1    | 5597-45502  |  |
| L6012        | FR CORE  | *                   | 1    | 5597-45502  |  |
| L6013        | FR CORE  | *                   | 1    | 5597-45502  |  |
| L6014        | FR CORE  | *                   | 1    | 5597-45502  |  |
| L6015        | FR CORE  | *                   | 1    | 5597-45502  |  |
| L6016        | FR CORE  | *                   | 1    | 5597-45502  |  |
| [CAPACITOR]  |          |                     |      |             |  |
| C4602        | C-CERA C | CC725CH1H-101J1     | 1    | 342101014R1 |  |
| C4604        | C-CERA C | CC725CH1H-101J1     | 1    | 342101014R1 |  |
| C4605        | C-CERA C | CK725F1E-104Z1      | 1    | 332161040R1 |  |
| C5503        | UPZ C    | 2AUPZTF221JE        | 1    | 376332214T  |  |
| C5504        | UPZ C    | 2AUPZTF221JE        | 1    | 376332214T  |  |
| C5505        | C-CERA C | CC725CH1H-221J1     | 1    | 342102214R1 |  |
| C5506        | C-CERA C | CC725CH1H-221J1     | 1    | 342102214R1 |  |

|       |          |                     |   |             |  |
|-------|----------|---------------------|---|-------------|--|
| C5507 | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |  |
| C5508 | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |  |
| C5509 | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |  |
| C5510 | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |  |
| C5511 | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |  |
| C5512 | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |  |
| C5513 | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |  |
| C5514 | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |  |
| C5515 | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |  |
| C5516 | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |  |
| C5517 | UTSP C   | CE04W10V-470M(UTSP) | 1 | 397534717T  |  |
| C5518 | UTSP C   | CE04W10V-470M(UTSP) | 1 | 397534717T  |  |
| C5519 | UPZ C    | 2AUPZTF221JE        | 1 | 376332214T  |  |
| C5520 | UPZ C    | 2AUPZTF221JE        | 1 | 376332214T  |  |
| C5527 | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |  |
| C5528 | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |  |
| C5529 | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |  |
| C5530 | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |  |
| C5531 | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |  |
| C5532 | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |  |
| C5533 | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |  |
| C5534 | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |  |
| C5535 | UTSP C   | CE04W25V-47M(UTSP)  | 1 | 397554707T  |  |
| C5536 | UTSP C   | CE04W25V-47M(UTSP)  | 1 | 397554707T  |  |
| C5540 | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  |  |
| C5541 | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  |  |
| C5542 | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  |  |
| C5543 | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  |  |
| C5548 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |  |
| C5549 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |  |
| C5550 | C-CERA C | CK725B1H-152K1      | 1 | 332101525R1 |  |
| C5551 | C-CERA C | CK725B1H-152K1      | 1 | 332101525R1 |  |
| C5555 | UTSP C   | CE04W25V-47M(UTSP)  | 1 | 397554707T  |  |
| C5559 | TF C     | ECQ-V50V-473J       | 1 | 374724734T  |  |
| C5560 | TF C     | ECQ-V50V-473J       | 1 | 374724734T  |  |
| C5561 | TF C     | ECQ-V50V-224J       | 1 | 374722244T  |  |
| C5562 | TF C     | ECQ-V50V-224J       | 1 | 374722244T  |  |
| C5563 | TF C     | ECQ-V50V-223J       | 1 | 374722234T  |  |

|       |          |                     |   |             |  |
|-------|----------|---------------------|---|-------------|--|
| C5564 | TF C     | ECQ-V50V-223J       | 1 | 374722234T  |  |
| C5569 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5570 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5571 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5572 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5573 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5574 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5575 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5576 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5579 | C-CERA C | CC725CH1H-102J1     | 1 | 342101024R1 |  |
| C5580 | UTSP C   | CE04W10V-470M(UTSP) | 1 | 397534717T  |  |
| C5581 | UTSP C   | CE04W10V-470M(UTSP) | 1 | 397534717T  |  |
| C5582 | C-CERA C | CC725CH1H-102J1     | 1 | 342101024R1 |  |
| C5583 | C-CERA C | CC725CH1H-102J1     | 1 | 342101024R1 |  |
| C5584 | UTSP C   | CE04W25V-47M(UTSP)  | 1 | 397554707T  |  |
| C5585 | UTSP C   | CE04W25V-47M(UTSP)  | 1 | 397554707T  |  |
| C5586 | UTSP C   | CE04W10V-220M(UTSP) | 1 | 397532217T  |  |
| C5587 | UTSP C   | CE04W10V-220M(UTSP) | 1 | 397532217T  |  |
| C5588 | TF C     | ECQ-V50V-123J       | 1 | 374721234T  |  |
| C5589 | TF C     | ECQ-V50V-123J       | 1 | 374721234T  |  |
| C5590 | C-CERA C | CC725CH1H-101J1     | 1 | 342101014R1 |  |
| C5591 | C-CERA C | CC725CH1H-101J1     | 1 | 342101014R1 |  |
| C5592 | MKT C    | B32529C0332J289     | 1 | 376493324T  |  |
| C5593 | MKT C    | B32529C0332J289     | 1 | 376493324T  |  |
| C5594 | C-CERA C | CC725CH1H-101J1     | 1 | 342101014R1 |  |
| C5595 | C-CERA C | CC725CH1H-101J1     | 1 | 342101014R1 |  |
| C5596 | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  |  |
| C5597 | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  |  |
| C5598 | C-CERA C | CC725CH1H-102J1     | 1 | 342101024R1 |  |
| C5600 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5601 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5602 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5603 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5604 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5605 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5606 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5607 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5608 | C-FILM C | ECHU50V-561J        | 1 | 373025614R2 |  |



|       |          |                     |   |             |  |
|-------|----------|---------------------|---|-------------|--|
| C5609 | C-FILM C | ECHU50V-561J        | 1 | 373025614R2 |  |
| C5610 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5611 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5612 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5613 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5614 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5615 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5630 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5631 | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |  |
| C5632 | TF C     | ECQ-V50V-103J       | 1 | 374721034T  |  |
| C5660 | MMT C    | MMT50V-334J         | 1 | 375523344T  |  |
| C5661 | VR C     | CE04W35V-470M(VR)   | 1 | 394664717T  |  |
| C5662 | VR C     | CE04W35V-1000M(VR)  | 1 | 394661027S  |  |
| C5666 | UTSP C   | CE04W25V-220M(UTSP) | 1 | 397552217T  |  |
| C5667 | UTSP C   | CE04W25V-220M(UTSP) | 1 | 397552217T  |  |
| C5670 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5671 | UTSP C   | CE04W50V-220M(UTSP) | 1 | 397582217T  |  |
| C5672 | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  |  |
| C5673 | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  |  |
| C5674 | UTSP C   | CE04W10V-470M(UTSP) | 1 | 397534717T  |  |
| C5675 | UTSP C   | CE04W10V-470M(UTSP) | 1 | 397534717T  |  |
| C5677 | UTSP C   | CE04W25V-220M(UTSP) | 1 | 397552217T  |  |
| C5679 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5680 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5684 | UTSP C   | CE04W25V-220M(UTSP) | 1 | 397552217T  |  |
| C5685 | UTSP C   | CE04W25V-220M(UTSP) | 1 | 397552217T  |  |
| C5686 | UTSP C   | CE04W25V-220M(UTSP) | 1 | 397552217T  |  |
| C5687 | UTSP C   | CE04W25V-220M(UTSP) | 1 | 397552217T  |  |
| C5689 | TF C     | ECQ-V50V-333J       | 1 | 374723334T  |  |
| C5690 | TF C     | ECQ-V50V-333J       | 1 | 374723334T  |  |
| C5691 | TF C     | ECQ-V50V-473J       | 1 | 374724734T  |  |
| C5692 | TF C     | ECQ-V50V-224J       | 1 | 374722244T  |  |
| C5693 | TF C     | ECQ-V50V-473J       | 1 | 374724734T  |  |
| C5694 | TF C     | ECQ-V50V-224J       | 1 | 374722244T  |  |
| C5695 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5696 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5697 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |
| C5698 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |  |

|       |          |                     |   |             |
|-------|----------|---------------------|---|-------------|
| C5707 | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |
| C5708 | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |
| C5709 | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |
| C5724 | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |
| C5738 | UTSP C   | CE04W10V-100M(UTSP) | 1 | 397531017T  |
| C5739 | UTSP C   | CE04W25V-220M(UTSP) | 1 | 397552217T  |
| C5905 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |
| C5906 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |
| C5907 | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |
| C5908 | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |
| C5910 | C-CERA C | CK725B1H-152K1      | 1 | 332101525R1 |
| C5911 | C-CERA C | CK725B1H-152K1      | 1 | 332101525R1 |
| C6020 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |
| C6021 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |
| C6022 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |
| C6023 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |
| C6024 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |
| C6025 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |
| C6026 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |
| C6050 | TF C     | ECQ-V50V-104J       | 1 | 374721044T  |
| C6051 | TF C     | ECQ-V50V-104J       | 1 | 374721044T  |
| C6052 | TF C     | ECQ-V50V-104J       | 1 | 374721044T  |
| C6053 | TF C     | ECQ-V50V-104J       | 1 | 374721044T  |
| C6054 | TF C     | ECQ-V50V-104J       | 1 | 374721044T  |
| C6055 | TF C     | ECQ-V50V-104J       | 1 | 374721044T  |
| C6056 | TF C     | ECQ-V50V-104J       | 1 | 374721044T  |
| C6701 | UTSP C   | CE04W10V-220M(UTSP) | 1 | 397532217T  |
| C6703 | C-CERA C | CK725F1H-104Z1      | 1 | 332151040R1 |
| C6704 | UTSP C   | CE04W50V-1M(UTSP)   | 1 | 397580107T  |
| C6706 | UTSP C   | CE04W25V-47M(UTSP)  | 1 | 397554707T  |
| C6710 | C-CERA C | CK725F1A-105Z1      | 1 | 332181050R1 |
| C6713 | C-CERA C | CK725F1H-104Z1      | 1 | 332151040R1 |
| C6714 | UTSP C   | CE04W50V-2.2M(UTSP) | 1 | 397580227T  |
| C6901 | ELECT C  | CE69W71V-12000M     | 1 | 3504460A    |
| C6902 | ELECT C  | CE69W71V-12000M     | 1 | 3504460A    |
| C6911 | C-CERA C | CC725CH1H-102J1     | 1 | 342101024R1 |
| C6912 | TF C     | ECQ-V100V-334J      | 1 | 374733344T  |
| C6913 | TF C     | ECQ-V100V-334J      | 1 | 374733344T  |

|            |            |               |   |             |  |
|------------|------------|---------------|---|-------------|--|
| C6915      | TF C       | ECQ-V50V-104J | 1 | 374721044T  |  |
| C6916      | TF C       | ECQ-V50V-104J | 1 | 374721044T  |  |
| [RESISTOR] |            |               |   |             |  |
| R4600      | C-CARBON R | RN72K1J-039JE | 1 | 435030394R1 |  |
| R4601      | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R4602      | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |  |
| R4603      | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R4604      | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R4605      | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R4606      | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |  |
| R4607      | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R4608      | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R4609      | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R4610      | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R4611      | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R4613      | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |  |
| R4617      | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R4618      | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R4619      | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R4620      | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R4621      | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R5503      | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R5504      | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R5505      | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R5506      | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R5507      | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R5508      | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R5509      | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R5510      | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R5511      | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R5512      | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R5513      | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R5514      | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R5515      | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R5516      | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R5517      | METAL O R  | RS1WBJ-10     | 1 | 443621004T  |  |
| R5518      | METAL O R  | RS1WBJ-10     | 1 | 443621004T  |  |
| R5519      | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |

|       |            |               |   |             |  |
|-------|------------|---------------|---|-------------|--|
| R5520 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R5526 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R5527 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R5528 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R5529 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R5530 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R5531 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R5532 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R5533 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R5534 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R5535 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5538 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R5539 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R5540 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5543 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5544 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5545 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5546 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5547 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5548 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5549 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5550 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5551 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5552 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5553 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5554 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5555 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5556 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5557 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5558 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5559 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5560 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5561 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5562 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5563 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5564 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5565 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5567 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |



|       |            |               |   |             |  |
|-------|------------|---------------|---|-------------|--|
| R5568 | C-CARBON R | RN72K1J-223JE | 1 | 435032234R1 |  |
| R5569 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5570 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5571 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5572 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5573 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5574 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5575 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5576 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5577 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |  |
| R5578 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |  |
| R5579 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |  |
| R5580 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |  |
| R5582 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5583 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5585 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |  |
| R5586 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |  |
| R5587 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R5588 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R5590 | C-CARBON R | RN72K1J-223JE | 1 | 435032234R1 |  |
| R5591 | C-CARBON R | RN72K1J-223JE | 1 | 435032234R1 |  |
| R5592 | C-CARBON R | RN72K1J-332JE | 1 | 435033324R1 |  |
| R5593 | C-CARBON R | RN72K1J-332JE | 1 | 435033324R1 |  |
| R5594 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R5595 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R5596 | C-CARBON R | RN72K1J-123JE | 1 | 435031234R1 |  |
| R5597 | C-CARBON R | RN72K1J-123JE | 1 | 435031234R1 |  |
| R5598 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R5599 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R5600 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5601 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5602 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5603 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5604 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5605 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5606 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5607 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5608 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |

|       |            |               |   |             |  |
|-------|------------|---------------|---|-------------|--|
| R5609 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5610 | C-CARBON R | RN72K1J-121JE | 1 | 435031214R1 |  |
| R5611 | C-CARBON R | RN72K1J-121JE | 1 | 435031214R1 |  |
| R5612 | C-CARBON R | RN72K1J-121JE | 1 | 435031214R1 |  |
| R5613 | C-CARBON R | RN72K1J-121JE | 1 | 435031214R1 |  |
| R5614 | C-CARBON R | RN72K1J-121JE | 1 | 435031214R1 |  |
| R5615 | C-CARBON R | RN72K1J-121JE | 1 | 435031214R1 |  |
| R5616 | C-CARBON R | RN72K1J-121JE | 1 | 435031214R1 |  |
| R5617 | C-CARBON R | RN72K1J-121JE | 1 | 435031214R1 |  |
| R5620 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R5621 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R5622 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R5623 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R5624 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R5625 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R5626 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R5627 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R5630 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |  |
| R5631 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |  |
| R5632 | C-CARBON R | RN72K1J-153JE | 1 | 435031534R1 |  |
| R5633 | C-CARBON R | RN72K1J-122JE | 1 | 435031224R1 |  |
| R5634 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R5635 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5636 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5637 | METAL O R  | RS1/2WBJ-10   | 1 | 443521004T  |  |
| R5638 | METAL O R  | RS1/2WBJ-10   | 1 | 443521004T  |  |
| R5639 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R5640 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R5641 | C-CARBON R | RN72K1J-563JE | 1 | 435035634R1 |  |
| R5642 | C-CARBON R | RN72K1J-563JE | 1 | 435035634R1 |  |
| R5643 | C-CARBON R | RN72K1J-474JE | 1 | 435034744R1 |  |
| R5644 | C-CARBON R | RN72K1J-474JE | 1 | 435034744R1 |  |
| R5645 | C-CARBON R | RN72K1J-561JE | 1 | 435035614R1 |  |
| R5646 | C-CARBON R | RN72K1J-561JE | 1 | 435035614R1 |  |
| R5647 | C-CARBON R | RN72K1J-274JE | 1 | 435032744R1 |  |
| R5648 | C-CARBON R | RN72K1J-274JE | 1 | 435032744R1 |  |
| R5649 | C-CARBON R | RN72K1J-223JE | 1 | 435032234R1 |  |
| R5650 | C-CARBON R | RN72K1J-223JE | 1 | 435032234R1 |  |

|       |            |               |   |             |  |
|-------|------------|---------------|---|-------------|--|
| R5651 | C-CARBON R | RN72K1J-122JE | 1 | 435031224R1 |  |
| R5652 | C-CARBON R | RN72K1J-122JE | 1 | 435031224R1 |  |
| R5653 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R5654 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R5655 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5656 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5657 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5660 | METAL R    | RNU1WCJ-1.5   | 1 | 453630154T  |  |
| R5661 | METAL R    | RNU1WCJ-1.5   | 1 | 453630154T  |  |
| R5663 | METAL R    | RNU1WCJ-6.8   | 1 | 453630684T  |  |
| R5664 | METAL R    | RNU1WCJ-6.8   | 1 | 453630684T  |  |
| R5666 | CARBON R   | R16J-22       | 1 | 417342204T  |  |
| R5667 | CARBON R   | R16J-22       | 1 | 417342204T  |  |
| R5669 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5672 | C-CARBON R | RN72K1J-100JE | 1 | 435031004R1 |  |
| R5673 | C-CARBON R | RN72K1J-100JE | 1 | 435031004R1 |  |
| R5674 | METAL O R  | RS1WBJ-470    | 1 | 443624714T  |  |
| R5675 | METAL O R  | RS1WBJ-22     | 1 | 443622204T  |  |
| R5676 | METAL O R  | RS1WBJ-22     | 1 | 443622204T  |  |
| R5677 | METAL O R  | RS1WBJ-22     | 1 | 443622204T  |  |
| R5678 | METAL O R  | RS1WBJ-22     | 1 | 443622204T  |  |
| R5679 | CARBON R   | R16J-1.2K     | 1 | 417341224T  |  |
| R5681 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5682 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5683 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5684 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5685 | CARBON R   | R16J-1.2K     | 1 | 417341224T  |  |
| R5692 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |  |
| R5693 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |  |
| R5694 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |  |
| R5695 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5696 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5711 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5712 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5714 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5715 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5716 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5732 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |

|       |            |               |   |             |  |
|-------|------------|---------------|---|-------------|--|
| R5733 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5734 | C-CARBON R | RN72K1J-391JE | 1 | 435033914R1 |  |
| R5735 | C-CARBON R | RN72K1J-391JE | 1 | 435033914R1 |  |
| R5738 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5739 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5740 | C-CARBON R | RN72K1J-391JE | 1 | 435033914R1 |  |
| R5741 | C-CARBON R | RN72K1J-391JE | 1 | 435033914R1 |  |
| R5744 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5745 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5746 | C-CARBON R | RN72K1J-391JE | 1 | 435033914R1 |  |
| R5747 | C-CARBON R | RN72K1J-391JE | 1 | 435033914R1 |  |
| R5788 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |  |
| R5789 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R5790 | C-CARBON R | RN72K1J-123JE | 1 | 435031234R1 |  |
| R5791 | C-CARBON R | RN72K1J-223JE | 1 | 435032234R1 |  |
| R5792 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R5793 | C-CARBON R | RN72K1J-333JE | 1 | 435033334R1 |  |
| R5794 | C-CARBON R | RN72K1J-333JE | 1 | 435033334R1 |  |
| R5795 | C-CARBON R | RN72K1J-333JE | 1 | 435033334R1 |  |
| R5796 | C-CARBON R | RN72K1J-682JE | 1 | 435036824R1 |  |
| R5797 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |  |
| R5798 | CARBON R   | R16J-12K      | 1 | 417341234T  |  |
| R5800 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |  |
| R5801 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |  |
| R5813 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5815 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5816 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5817 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5818 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5819 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5820 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5821 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5822 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5823 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5824 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5825 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5826 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5827 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |



|       |            |               |   |             |  |
|-------|------------|---------------|---|-------------|--|
| R5828 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5829 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5830 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5831 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5832 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5833 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5834 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5835 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5836 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5839 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5840 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5841 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5842 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5843 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5844 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5845 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5846 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5847 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5848 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5849 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5850 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5851 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5852 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5853 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5854 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5855 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5856 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5857 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5858 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5859 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5860 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5861 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5863 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5864 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5865 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5866 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5867 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5868 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |

|       |            |               |   |             |  |
|-------|------------|---------------|---|-------------|--|
| R5871 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5872 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5873 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5874 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5875 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5876 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5877 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5878 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5879 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5880 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5881 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5883 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5884 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5885 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5886 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5887 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5889 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5890 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5892 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5893 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5902 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5904 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5905 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5906 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5907 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5908 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5909 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5910 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5911 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |  |
| R5912 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |  |
| R5913 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R5914 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R5915 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5916 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R5917 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R5918 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R5921 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5922 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |

|       |            |               |   |             |  |
|-------|------------|---------------|---|-------------|--|
| R5923 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5924 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5925 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5928 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5929 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5930 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5931 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5932 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5933 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5934 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5935 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5936 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5937 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5938 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5939 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5940 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5941 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5942 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R5943 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R6000 | CARBON R   | R16J-4.7K     | 1 | 417344724T  |  |
| R6001 | CARBON R   | R16J-4.7K     | 1 | 417344724T  |  |
| R6002 | CARBON R   | R16J-4.7K     | 1 | 417344724T  |  |
| R6003 | CARBON R   | R16J-4.7K     | 1 | 417344724T  |  |
| R6004 | CARBON R   | R16J-4.7K     | 1 | 417344724T  |  |
| R6005 | CARBON R   | R16J-4.7K     | 1 | 417344724T  |  |
| R6006 | CARBON R   | R16J-4.7K     | 1 | 417344724T  |  |
| R6010 | CARBON R   | R16J-3.3K     | 1 | 417343324T  |  |
| R6011 | CARBON R   | R16J-3.3K     | 1 | 417343324T  |  |
| R6012 | CARBON R   | R16J-3.3K     | 1 | 417343324T  |  |
| R6013 | CARBON R   | R16J-3.3K     | 1 | 417343324T  |  |
| R6014 | CARBON R   | R16J-3.3K     | 1 | 417343324T  |  |
| R6015 | CARBON R   | R16J-3.3K     | 1 | 417343324T  |  |
| R6016 | CARBON R   | R16J-3.3K     | 1 | 417343324T  |  |
| R6030 | CARBON R   | R16J-2.2K     | 1 | 417342224T  |  |
| R6031 | CARBON R   | R16J-2.2K     | 1 | 417342224T  |  |
| R6032 | CARBON R   | R16J-2.2K     | 1 | 417342224T  |  |
| R6033 | CARBON R   | R16J-2.2K     | 1 | 417342224T  |  |
| R6034 | CARBON R   | R16J-2.2K     | 1 | 417342224T  |  |

|       |             |               |   |            |  |
|-------|-------------|---------------|---|------------|--|
| R6035 | CARBON R    | R16J-2.2K     | 1 | 417342224T |  |
| R6036 | CARBON R    | R16J-2.2K     | 1 | 417342224T |  |
| R6040 | TRIM R      | N06HR2KBC     | 1 | 5210390T   |  |
| R6041 | TRIM R      | N06HR2KBC     | 1 | 5210390T   |  |
| R6042 | TRIM R      | N06HR2KBC     | 1 | 5210390T   |  |
| R6043 | TRIM R      | N06HR2KBC     | 1 | 5210390T   |  |
| R6044 | TRIM R      | N06HR2KBC     | 1 | 5210390T   |  |
| R6045 | TRIM R      | N06HR2KBC     | 1 | 5210390T   |  |
| R6046 | TRIM R      | N06HR2KBC     | 1 | 5210390T   |  |
| R6050 | CARBON R    | R16J-2.7K     | 1 | 417342724T |  |
| R6051 | CARBON R    | R16J-2.7K     | 1 | 417342724T |  |
| R6052 | CARBON R    | R16J-2.7K     | 1 | 417342724T |  |
| R6053 | CARBON R    | R16J-2.7K     | 1 | 417342724T |  |
| R6054 | CARBON R    | R16J-2.7K     | 1 | 417342724T |  |
| R6055 | CARBON R    | R16J-2.7K     | 1 | 417342724T |  |
| R6056 | CARBON R    | R16J-2.7K     | 1 | 417342724T |  |
| R6070 | NF CARBON R | R25J-82       | 1 | 415478204T |  |
| R6071 | NF CARBON R | R25J-82       | 1 | 415478204T |  |
| R6072 | NF CARBON R | R25J-82       | 1 | 415478204T |  |
| R6073 | NF CARBON R | R25J-82       | 1 | 415478204T |  |
| R6074 | NF CARBON R | R25J-82       | 1 | 415478204T |  |
| R6075 | NF CARBON R | R25J-82       | 1 | 415478204T |  |
| R6076 | NF CARBON R | R25J-82       | 1 | 415478204T |  |
| R6080 | CARBON R    | R16J-10       | 1 | 417341004T |  |
| R6081 | CARBON R    | R16J-10       | 1 | 417341004T |  |
| R6082 | CARBON R    | R16J-10       | 1 | 417341004T |  |
| R6083 | CARBON R    | R16J-10       | 1 | 417341004T |  |
| R6084 | CARBON R    | R16J-10       | 1 | 417341004T |  |
| R6085 | CARBON R    | R16J-10       | 1 | 417341004T |  |
| R6086 | CARBON R    | R16J-10       | 1 | 417341004T |  |
| R6090 | CARBON R    | R16J-10       | 1 | 417341004T |  |
| R6091 | CARBON R    | R16J-10       | 1 | 417341004T |  |
| R6092 | CARBON R    | R16J-10       | 1 | 417341004T |  |
| R6093 | CARBON R    | R16J-10       | 1 | 417341004T |  |
| R6094 | CARBON R    | R16J-10       | 1 | 417341004T |  |
| R6095 | CARBON R    | R16J-10       | 1 | 417341004T |  |
| R6096 | CARBON R    | R16J-10       | 1 | 417341004T |  |
| R6100 | METAL PR    | MPR5W+5W 0R22 | 1 | 4000233    |  |



|          |            |               |      |             |
|----------|------------|---------------|------|-------------|
| R6100 or | METAL PR   | RGC55 0.22    | ( 1) | 4000132     |
| R6101    | METAL PR   | MPR5W+5W 0R22 | 1    | 4000233     |
| R6101 or | METAL PR   | RGC55 0.22    | ( 1) | 4000132     |
| R6102    | METAL PR   | MPR5W+5W 0R22 | 1    | 4000233     |
| R6102 or | METAL PR   | RGC55 0.22    | ( 1) | 4000132     |
| R6103    | METAL PR   | MPR5W+5W 0R22 | 1    | 4000233     |
| R6103 or | METAL PR   | RGC55 0.22    | ( 1) | 4000132     |
| R6104    | METAL PR   | MPR5W+5W 0R22 | 1    | 4000233     |
| R6104 or | METAL PR   | RGC55 0.22    | ( 1) | 4000132     |
| R6105    | METAL PR   | MPR5W+5W 0R22 | 1    | 4000233     |
| R6105 or | METAL PR   | RGC55 0.22    | ( 1) | 4000132     |
| R6106    | METAL PR   | MPR5W+5W 0R22 | 1    | 4000233     |
| R6106 or | METAL PR   | RGC55 0.22    | ( 1) | 4000132     |
| R6140    | C-CARBON R | RN72K1J-563JE | 1    | 435035634R1 |
| R6141    | C-CARBON R | RN72K1J-563JE | 1    | 435035634R1 |
| R6142    | C-CARBON R | RN72K1J-563JE | 1    | 435035634R1 |
| R6143    | C-CARBON R | RN72K1J-563JE | 1    | 435035634R1 |
| R6144    | C-CARBON R | RN72K1J-563JE | 1    | 435035634R1 |
| R6145    | C-CARBON R | RN72K1J-563JE | 1    | 435035634R1 |
| R6146    | C-CARBON R | RN72K1J-563JE | 1    | 435035634R1 |
| R6150    | C-CARBON R | RN72K1J-103JE | 1    | 435031034R1 |
| R6151    | C-CARBON R | RN72K1J-103JE | 1    | 435031034R1 |
| R6152    | C-CARBON R | RN72K1J-103JE | 1    | 435031034R1 |
| R6153    | C-CARBON R | RN72K1J-103JE | 1    | 435031034R1 |
| R6154    | C-CARBON R | RN72K1J-103JE | 1    | 435031034R1 |
| R6155    | C-CARBON R | RN72K1J-103JE | 1    | 435031034R1 |
| R6156    | C-CARBON R | RN72K1J-103JE | 1    | 435031034R1 |
| R6160    | CARBON R   | R16J-33K      | 1    | 417343334T  |
| R6161    | CARBON R   | R16J-33K      | 1    | 417343334T  |
| R6162    | CARBON R   | R16J-33K      | 1    | 417343334T  |
| R6163    | CARBON R   | R16J-33K      | 1    | 417343334T  |
| R6164    | CARBON R   | R16J-33K      | 1    | 417343334T  |
| R6165    | CARBON R   | R16J-33K      | 1    | 417343334T  |
| R6166    | CARBON R   | R16J-33K      | 1    | 417343334T  |
| R6170    | CARBON R   | R16J-47K      | 1    | 417344734T  |
| R6171    | CARBON R   | R16J-47K      | 1    | 417344734T  |
| R6172    | CARBON R   | R16J-47K      | 1    | 417344734T  |
| R6173    | CARBON R   | R16J-47K      | 1    | 417344734T  |

|       |             |             |   |            |  |
|-------|-------------|-------------|---|------------|--|
| R6174 | CARBON R    | R16J-47K    | 1 | 417344734T |  |
| R6175 | CARBON R    | R16J-47K    | 1 | 417344734T |  |
| R6176 | CARBON R    | R16J-47K    | 1 | 417344734T |  |
| R6180 | CARBON R    | R16J-47K    | 1 | 417344734T |  |
| R6181 | CARBON R    | R16J-47K    | 1 | 417344734T |  |
| R6182 | CARBON R    | R16J-47K    | 1 | 417344734T |  |
| R6183 | CARBON R    | R16J-47K    | 1 | 417344734T |  |
| R6184 | CARBON R    | R16J-47K    | 1 | 417344734T |  |
| R6185 | CARBON R    | R16J-47K    | 1 | 417344734T |  |
| R6186 | CARBON R    | R16J-47K    | 1 | 417344734T |  |
| R6197 | METAL O R   | RS1/2WBJ-33 | 1 | 443523304T |  |
| R6250 | NF CARBON R | R25J-120    | 1 | 415471214T |  |
| R6251 | NF CARBON R | R25J-120    | 1 | 415471214T |  |
| R6252 | NF CARBON R | R25J-120    | 1 | 415471214T |  |
| R6253 | NF CARBON R | R25J-120    | 1 | 415471214T |  |
| R6254 | NF CARBON R | R25J-120    | 1 | 415471214T |  |
| R6255 | NF CARBON R | R25J-120    | 1 | 415471214T |  |
| R6256 | NF CARBON R | R25J-120    | 1 | 415471214T |  |
| R6260 | NF CARBON R | R25J-120    | 1 | 415471214T |  |
| R6261 | NF CARBON R | R25J-120    | 1 | 415471214T |  |
| R6262 | NF CARBON R | R25J-120    | 1 | 415471214T |  |
| R6263 | NF CARBON R | R25J-120    | 1 | 415471214T |  |
| R6264 | NF CARBON R | R25J-120    | 1 | 415471214T |  |
| R6265 | NF CARBON R | R25J-120    | 1 | 415471214T |  |
| R6266 | NF CARBON R | R25J-120    | 1 | 415471214T |  |
| R6270 | NF CARBON R | R25J-18     | 1 | 415471804T |  |
| R6271 | NF CARBON R | R25J-18     | 1 | 415471804T |  |
| R6272 | NF CARBON R | R25J-18     | 1 | 415471804T |  |
| R6273 | NF CARBON R | R25J-18     | 1 | 415471804T |  |
| R6274 | NF CARBON R | R25J-18     | 1 | 415471804T |  |
| R6275 | NF CARBON R | R25J-18     | 1 | 415471804T |  |
| R6276 | NF CARBON R | R25J-18     | 1 | 415471804T |  |
| R6280 | NF CARBON R | R25J-18     | 1 | 415471804T |  |
| R6281 | NF CARBON R | R25J-18     | 1 | 415471804T |  |
| R6282 | NF CARBON R | R25J-18     | 1 | 415471804T |  |
| R6283 | NF CARBON R | R25J-18     | 1 | 415471804T |  |
| R6284 | NF CARBON R | R25J-18     | 1 | 415471804T |  |
| R6285 | NF CARBON R | R25J-18     | 1 | 415471804T |  |

|          |             |                  |   |             |  |
|----------|-------------|------------------|---|-------------|--|
| R6286    | NF CARBON R | R25J-18          | 1 | 415471804T  |  |
| R6290    | NF CARBON R | R25J-2.2         | 1 | 415470224T  |  |
| R6291    | NF CARBON R | R25J-2.2         | 1 | 415470224T  |  |
| R6292    | NF CARBON R | R25J-2.2         | 1 | 415470224T  |  |
| R6293    | NF CARBON R | R25J-2.2         | 1 | 415470224T  |  |
| R6294    | NF CARBON R | R25J-2.2         | 1 | 415470224T  |  |
| R6295    | NF CARBON R | R25J-2.2         | 1 | 415470224T  |  |
| R6296    | NF CARBON R | R25J-2.2         | 1 | 415470224T  |  |
| R6300    | NF CARBON R | R25J-2.2         | 1 | 415470224T  |  |
| R6301    | NF CARBON R | R25J-2.2         | 1 | 415470224T  |  |
| R6302    | NF CARBON R | R25J-2.2         | 1 | 415470224T  |  |
| R6303    | NF CARBON R | R25J-2.2         | 1 | 415470224T  |  |
| R6304    | NF CARBON R | R25J-2.2         | 1 | 415470224T  |  |
| R6305    | NF CARBON R | R25J-2.2         | 1 | 415470224T  |  |
| R6306    | NF CARBON R | R25J-2.2         | 1 | 415470224T  |  |
| R6310    | NF CARBON R | R25J-10          | 1 | 415471004T  |  |
| R6311    | NF CARBON R | R25J-10          | 1 | 415471004T  |  |
| R6312    | NF CARBON R | R25J-10          | 1 | 415471004T  |  |
| R6313    | NF CARBON R | R25J-10          | 1 | 415471004T  |  |
| R6314    | NF CARBON R | R25J-10          | 1 | 415471004T  |  |
| R6315    | NF CARBON R | R25J-10          | 1 | 415471004T  |  |
| R6316    | NF CARBON R | R25J-10          | 1 | 415471004T  |  |
| R6701    | C-CARBON R  | RN72K1J-223JE    | 1 | 435032234R1 |  |
| R6702    | C-CARBON R  | RN72K1J-103JE    | 1 | 435031034R1 |  |
| R6704    | C-CARBON R  | RN72K1J-473JE    | 1 | 435034734R1 |  |
| R6706    | C-CARBON R  | RN72K1J-224JE    | 1 | 435032244R1 |  |
| R6708    | C-CARBON R  | RN72K1J-333JE    | 1 | 435033334R1 |  |
| R6709    | C-CARBON R  | RN72K1J-392JE    | 1 | 435033924R1 |  |
| R6710    | C-CARBON R  | RN72K1J-123JE    | 1 | 435031234R1 |  |
| R6712    | C-CARBON R  | RN72K1J-103JE    | 1 | 435031034R1 |  |
| R6714    | C-CARBON R  | RN72K1J-333JE    | 1 | 435033334R1 |  |
| R6716    | C-CARBON R  | RN72K1J-563JE    | 1 | 435035634R1 |  |
| R6902    | C-CARBON R  | RN72K1J-102JE    | 1 | 435031024R1 |  |
| R6903    | C-CARBON R  | RN72K1J-473JE    | 1 | 435034734R1 |  |
| R6907    | C-CARBON R  | RN72K1J-000JE    | 1 | 435030004R1 |  |
| [SW TRM] |             |                  |   |             |  |
| E5507A   | TRM         | NTM-1P232(M1700) | 1 | 25060301    |  |
| E5509A   | TRM         | NTM-1P232(M1700) | 1 | 25060301    |  |

|         |                |                 |      |              |   |
|---------|----------------|-----------------|------|--------------|---|
| E5519   | TRM-423(SCREW) | NEJITANSI ST3   | 1    | 25060495     |   |
| E5520   | TRM-423(SCREW) | NEJITANSI ST3   | 1    | 25060495     |   |
| F6901A  | FUSE HOLDER    | SN5051          | 1    | 250113       |   |
| F6901B  | FUSE HOLDER    | SN5051          | 1    | 250113       |   |
| F6902A  | FUSE HOLDER    | SN5051          | 1    | 250113       |   |
| F6902B  | FUSE HOLDER    | SN5051          | 1    | 250113       |   |
| JL104A  | WIRE HOL       | NSCT-9P880      | 1    | 25051093     |   |
| JL5513A | WIRE HOL       | NSCT-5P876      | 1    | 25051089     |   |
| JL5514A | WIRE HOL       | NSCT-7P898      | 1    | 25051111     |   |
| JL5514B | SOCKET         | NSCT-7P99       | 1    | 25050271     |   |
| JL5515B | WIRE TRAP      | NPLG-11P594     | 1    | 25055632     |   |
| JL6402A | WIRE HOL       | NSCT-3P874      | 1    | 25051087     |   |
| JL6402B | WIRE HOL       | NSCT-3P874      | 1    | 25051087     |   |
| JL6600A | WIRE HOL       | NSCT-7P898      | 1    | 25051111     |   |
| JL6603A | WIRE HOL       | NSCT-9P900      | 1    | 25051113     |   |
| JL6606B | WIRE TRAP      | NPLG-7P590      | 1    | 25055628     |   |
| JL6620A | WIRE HOL       | NSCT-7P878      | 1    | 25051091     |   |
| P001    | PWB            | BCAMP-0072      | 1    | 25140072B    | N |
| P002    | PWB            | BCASP-0073      | { 1} | 25140073     | N |
| P003    | PWB            | BCETC-0074      | { 1} | 25140074     | N |
| P006    | PWB            | BCETC-0089      | { 1} | 25140089     |   |
| P4600   | ST JACK        | HSJ1002-01-6020 | 1    | 25045647     |   |
| P4601   | ST JACK        | HSJ1002-01-6020 | 1    | 25045647     |   |
| P4602   | ST JACK        | HSJ1002-01-6020 | 1    | 25045647     |   |
| P5500   | PIN JACK       | NPJ-2PDWR583    | 1    | 25045803     |   |
| P5501   | PIN JACK       | NPJ-6PDRW665    | 1    | 25045894     |   |
| P5502   | PIN JACK       | NPJ-6PDRW665    | 1    | 25045894     |   |
| P5503   | PIN JACK       | NPJ-6PDRW665    | 1    | 25045894     |   |
| P5504   | PIN JACK       | NPJ-1PDG700     | 1    | 25045934     | N |
| P5505   | PIN JACK       | NPJ-6PDLENT702  | 1    | 25045936     | N |
| P5506   | PIN JACK       | NPJ-2PDWR583    | 1    | 25045803     |   |
| P5509   | CRIMP AS       | CRIMP AS        | 1    | 2069925170UL |   |
| P5510A  | SOCKET AS      | NSAS-26P1742    | 1    | 2009991118UL |   |
| P5510B  | PLUG           | NPLG-13P360     | 1    | 25055377     |   |
| P5510C  | CRIMP AS       | CRIMP SR805_2   | 1    | 20799170UL   |   |
| P5510D  | CRIMP AS       | CRIMP SR805_1   | 1    | 20799169UL   |   |
| P5512   | SOCKET         | NSCT-15P2195    | 1    | 25052298     |   |
| P5513   | SOCKET         | NSCT-19P2199    | 1    | 25052302     |   |



|        |           |                    |   |              |  |
|--------|-----------|--------------------|---|--------------|--|
| P5516  | HOLDER    | HOLDER(CLAMP)      | 1 | 27190540-1   |  |
| P5518  | SOCKET    | NSCT-3P2183        | 1 | 25052286     |  |
| P6000B | PLUG      | NPLG-7P0962        | 1 | 25056012     |  |
| P6001B | PLUG      | NPLG-7P0962        | 1 | 25056012     |  |
| P6002B | PLUG      | NPLG-7P0962        | 1 | 25056012     |  |
| P6003B | PLUG      | NPLG-7P0962        | 1 | 25056012     |  |
| P6004B | PLUG      | NPLG-7P0962        | 1 | 25056012     |  |
| P6005B | PLUG      | NPLG-7P0962        | 1 | 25056012     |  |
| P6006B | PLUG      | NPLG-7P0962        | 1 | 25056012     |  |
| P6011A | RETAINER  | (BUS-D)            | 1 | 27142115A    |  |
| P6020  | HOLDER    | HOLDER(CLAMP)      | 1 | 27190540-1   |  |
| P6080  | PLUG      | NPLG-2P130         | 1 | 25055146     |  |
| P6081  | PLUG      | NPLG-2P130         | 1 | 25055146     |  |
| P6082  | PLUG      | NPLG-2P130         | 1 | 25055146     |  |
| P6083  | PLUG      | NPLG-2P130         | 1 | 25055146     |  |
| P6084  | PLUG      | NPLG-2P130         | 1 | 25055146     |  |
| P6085  | PLUG      | NPLG-2P130         | 1 | 25055146     |  |
| P6086  | PLUG      | NPLG-2P130         | 1 | 25055146     |  |
| P6900  | CRIMP AS  | CRIMP AS           | 1 | 2069925170UL |  |
| P6901  | CRIMP AS  | CRIMP AS           | 1 | 2069925142UL |  |
| P6902  | CRIMP AS  | CRIMP AS           | 1 | 2069925208UL |  |
| P6950  | PLUG      | NPLG-5P152         | 1 | 25055168     |  |
| P907   | AC INLET  | NPLG-2P913         | 1 | 25055960     |  |
| P921   | SOCKET AS | NSAS-2P1796        | 1 | 2009991162UL |  |
| RL6901 | RELAY     | NRL-1P10A-DC12-140 | 1 | 25065584     |  |
| RL6902 | RELAY     | NRL-1P10A-DC12-140 | 1 | 25065584     |  |

PRINTED CIRCUIT BOARD PARTS LIST

DTR-40.1

|       |                                     |                 |             |         |
|-------|-------------------------------------|-----------------|-------------|---------|
| U002  | Speaker terminal-1 PC board a'ssy   | BATRM-0083-1A * | 1B234583-1A | N B MDD |
| U0021 | Primary power supply PC board a'ssy | BAPS-0084-1A    | 1B234584-1A | N B MDD |
| U0022 | Speaker terminal-2 PC board a'ssy   | BATRM-0085-1A   | 1B234585-1A | N B MDD |
| U0023 | Speaker terminal-3 PC board a'ssy   | BATRM-0086-1A   | 1B234586-1A | N B MDD |
| U0024 | Amp. Input circuit PC board a'ssy   | BACLA-0087-1A   | 1B234587-1A | N B MDD |
| U002  | Speaker terminal-1 PC board a'ssy   | BATRM-0083-1B * | 1B234583-1B | N B MMA |
| U0021 | Primary power supply PC board a'ssy | BAPS-0084-1B    | 1B234584-1B | N B MMA |
| U0022 | Speaker terminal-2 PC board a'ssy   | BATRM-0085-1B   | 1B234585-1B | N B MMA |
| U0023 | Speaker terminal-3 PC board a'ssy   | BATRM-0086-1B   | 1B234586-1B | N B MMA |

U0024

Amp. Input circuit PC board a'ssy

BACLA-0087-1B

1B234587-1B

N B MMA

| CIRCUIT. NO.     | PART NAME | DESCRIPTION        | Q'TY | PART NO. (SN) | REMARKS |
|------------------|-----------|--------------------|------|---------------|---------|
| [SEMI CONDUCTOR] |           |                    |      |               |         |
| D5000            | ZENER D   | MTZJ5.6B           | 1    | 224470562T    |         |
| D5001            | ZENER D   | MTZJ5.6B           | 1    | 224470562T    |         |
| D5002            | ZENER D   | MTZJ5.6B           | 1    | 224470562T    |         |
| D5003            | ZENER D   | MTZJ5.6B           | 1    | 224470562T    |         |
| D5004            | ZENER D   | MTZJ5.6B           | 1    | 224470562T    |         |
| D5005            | ZENER D   | MTZJ5.6B           | 1    | 224470562T    |         |
| D5006            | ZENER D   | MTZJ5.6B           | 1    | 224470562T    |         |
| D6600            | DIODE     | 1SS133             | 1    | 223163T       |         |
| D6603            | DIODE     | 1SS133             | 1    | 223163T       |         |
| D6605            | DIODE     | 1SS133             | 1    | 223163T       |         |
| D6607            | DIODE     | 1SS133             | 1    | 223163T       |         |
| D6609            | DIODE     | 1SS133             | 1    | 223163T       |         |
| D6610            | DIODE     | 1SS133             | 1    | 223163T       |         |
| D911             | DIODE     | 1SS133             | 1    | 223163T       |         |
| D912             | DIODE     | 1SS133             | 1    | 223163T       |         |
| D921             | DIODE     | 1SS133             | 1    | 223163T       |         |
| D922             | DIODE     | 1SS133             | 1    | 223163T       |         |
| D923             | DIODE     | 1SS133             | 1    | 223163T       |         |
| D924             | DIODE     | 1SS133             | 1    | 223163T       |         |
| D925             | DIODE     | 1SS133             | 1    | 223163T       |         |
| D930             | DIODE     | 1SS133             | 1    | 223163T       |         |
| D931             | DIODE     | 1SS133             | 1    | 223163T       |         |
| D933             | DIODE     | 1SS133             | 1    | 223163T       |         |
| D934             | ZENER D   | MTZJ3.6B           | 1    | 224470362T    |         |
| D935             | DIODE     | 1SS133             | 1    | 223163T       |         |
| Q5000            | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q5001            | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q5002            | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q5003            | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q5004            | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q5005            | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q5006            | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q5010            | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |
| Q5011            | TR        | 2SC2240-BL(TPE2_F) | 1    | 2211406T      |         |

|          |    |                    |      |          |  |
|----------|----|--------------------|------|----------|--|
| Q5012    | TR | 2SC2240-BL(TPE2_F) | 1    | 2211406T |  |
| Q5013    | TR | 2SC2240-BL(TPE2_F) | 1    | 2211406T |  |
| Q5014    | TR | 2SC2240-BL(TPE2_F) | 1    | 2211406T |  |
| Q5015    | TR | 2SC2240-BL(TPE2_F) | 1    | 2211406T |  |
| Q5016    | TR | 2SC2240-BL(TPE2_F) | 1    | 2211406T |  |
| Q5030    | TR | 2SA949-Y(TPE6_F)   | 1    | 2211354T |  |
| Q5031    | TR | 2SA949-Y(TPE6_F)   | 1    | 2211354T |  |
| Q5032    | TR | 2SA949-Y(TPE6_F)   | 1    | 2211354T |  |
| Q5033    | TR | 2SA949-Y(TPE6_F)   | 1    | 2211354T |  |
| Q5034    | TR | 2SA949-Y(TPE6_F)   | 1    | 2211354T |  |
| Q5035    | TR | 2SA949-Y(TPE6_F)   | 1    | 2211354T |  |
| Q5036    | TR | 2SA949-Y(TPE6_F)   | 1    | 2211354T |  |
| Q5040    | TR | 2SA949-Y(TPE6_F)   | 1    | 2211354T |  |
| Q5041    | TR | 2SA949-Y(TPE6_F)   | 1    | 2211354T |  |
| Q5042    | TR | 2SA949-Y(TPE6_F)   | 1    | 2211354T |  |
| Q5043    | TR | 2SA949-Y(TPE6_F)   | 1    | 2211354T |  |
| Q5044    | TR | 2SA949-Y(TPE6_F)   | 1    | 2211354T |  |
| Q5045    | TR | 2SA949-Y(TPE6_F)   | 1    | 2211354T |  |
| Q5046    | TR | 2SA949-Y(TPE6_F)   | 1    | 2211354T |  |
| Q5050    | TR | 2SC2240-BL(TPE2_F) | 1    | 2211406T |  |
| Q5050 or | TR | 2SC2240-GR         | ( 1) | 2211405T |  |
| Q5051    | TR | 2SC2240-BL(TPE2_F) | 1    | 2211406T |  |
| Q5051 or | TR | 2SC2240-GR         | ( 1) | 2211405T |  |
| Q5052    | TR | 2SC2240-BL(TPE2_F) | 1    | 2211406T |  |
| Q5052 or | TR | 2SC2240-GR         | ( 1) | 2211405T |  |
| Q5053    | TR | 2SC2240-BL(TPE2_F) | 1    | 2211406T |  |
| Q5053 or | TR | 2SC2240-GR         | ( 1) | 2211405T |  |
| Q5054    | TR | 2SC2240-BL(TPE2_F) | 1    | 2211406T |  |
| Q5054 or | TR | 2SC2240-GR         | ( 1) | 2211405T |  |
| Q5055    | TR | 2SC2240-BL(TPE2_F) | 1    | 2211406T |  |
| Q5055 or | TR | 2SC2240-GR         | ( 1) | 2211405T |  |
| Q5056    | TR | 2SC2240-BL(TPE2_F) | 1    | 2211406T |  |
| Q5056 or | TR | 2SC2240-GR         | ( 1) | 2211405T |  |
| Q5060    | TR | 2SA949-Y(TPE6_F)   | 1    | 2211354T |  |
| Q5061    | TR | 2SA949-Y(TPE6_F)   | 1    | 2211354T |  |
| Q5062    | TR | 2SA949-Y(TPE6_F)   | 1    | 2211354T |  |
| Q5063    | TR | 2SA949-Y(TPE6_F)   | 1    | 2211354T |  |
| Q5064    | TR | 2SA949-Y(TPE6_F)   | 1    | 2211354T |  |

|              |         |                        |   |            |        |
|--------------|---------|------------------------|---|------------|--------|
| Q5065        | TR      | 2SA949-Y(TPE6_F)       | 1 | 2211354T   |        |
| Q5066        | TR      | 2SA949-Y(TPE6_F)       | 1 | 2211354T   |        |
| Q5070        | TR      | 2SC2229-Y(TPE6_F)      | 1 | 2211634T   |        |
| Q5071        | TR      | 2SC2229-Y(TPE6_F)      | 1 | 2211634T   |        |
| Q5072        | TR      | 2SC2229-Y(TPE6_F)      | 1 | 2211634T   |        |
| Q5073        | TR      | 2SC2229-Y(TPE6_F)      | 1 | 2211634T   |        |
| Q5074        | TR      | 2SC2229-Y(TPE6_F)      | 1 | 2211634T   |        |
| Q5075        | TR      | 2SC2229-Y(TPE6_F)      | 1 | 2211634T   |        |
| Q5076        | TR      | 2SC2229-Y(TPE6_F)      | 1 | 2211634T   |        |
| Q6601        | TR      | RN1226                 | 1 | 2214680T   |        |
| Q6602        | TR      | RN1226                 | 1 | 2214680T   |        |
| Q6603        | TR      | RN1226                 | 1 | 2214680T   |        |
| Q6604        | TR      | RN1226                 | 1 | 2214680T   |        |
| Q6605        | TR      | RN1226                 | 1 | 2214680T   |        |
| Q6606        | TR      | RN1226                 | 1 | 2214680T   |        |
| [TRANS COIL] |         |                        |   |            |        |
| L6600        | S COIL  | SC-0.8X11.5X12.5T-6.5L | 1 | 231393S    |        |
| L6601        | S COIL  | SC-0.8X11.5X12.5T-6.5L | 1 | 231393S    |        |
| L6602        | S COIL  | SC-0.8X11.5X12.5T-6.5L | 1 | 231393S    |        |
| L6603        | S COIL  | SC-0.8X11.5X12.5T-6.5L | 1 | 231393S    |        |
| L6604        | S COIL  | SC-0.8X11.5X12.5T-6.5L | 1 | 231393S    |        |
| L6605        | S COIL  | SC-0.8X11.5X12.5T-6.5L | 1 | 231393S    |        |
| L6606        | S COIL  | SC-0.8X11.5X12.5T-6.5L | 1 | 231393S    |        |
| T902         | P TRANS | NPT-1520JQ             | 1 | 2301812A   | < MDD> |
| T902         | P TRANS | NPT-1520GQ             | 1 | 2301813A   | < MMA> |
| [CAPACITOR]  |         |                        |   |            |        |
| C5000        | UPZ C   | 2AUPZTF101JE           | 1 | 376331014T |        |
| C5001        | UPZ C   | 2AUPZTF101JE           | 1 | 376331014T |        |
| C5002        | UPZ C   | 2AUPZTF101JE           | 1 | 376331014T |        |
| C5003        | UPZ C   | 2AUPZTF101JE           | 1 | 376331014T |        |
| C5004        | UPZ C   | 2AUPZTF101JE           | 1 | 376331014T |        |
| C5005        | UPZ C   | 2AUPZTF101JE           | 1 | 376331014T |        |
| C5006        | UPZ C   | 2AUPZTF101JE           | 1 | 376331014T |        |
| C5010        | UTSP C  | CE04W50V 47M(UTSP)     | 1 | 397584707T |        |
| C5011        | UTSP C  | CE04W50V 47M(UTSP)     | 1 | 397584707T |        |
| C5012        | UTSP C  | CE04W50V 47M(UTSP)     | 1 | 397584707T |        |
| C5013        | UTSP C  | CE04W50V 47M(UTSP)     | 1 | 397584707T |        |
| C5014        | UTSP C  | CE04W50V 47M(UTSP)     | 1 | 397584707T |        |



|       |        |                     |   |            |  |
|-------|--------|---------------------|---|------------|--|
| C5015 | UTSP C | CE04W50V-47M(UTSP)  | 1 | 397584707T |  |
| C5016 | UTSP C | CE04W50V-47M(UTSP)  | 1 | 397584707T |  |
| C5020 | UTSP C | CE04W50V-10M(UTSP)  | 1 | 397581007T |  |
| C5021 | UTSP C | CE04W50V-10M(UTSP)  | 1 | 397581007T |  |
| C5022 | UTSP C | CE04W50V-10M(UTSP)  | 1 | 397581007T |  |
| C5023 | UTSP C | CE04W50V-10M(UTSP)  | 1 | 397581007T |  |
| C5024 | UTSP C | CE04W50V-10M(UTSP)  | 1 | 397581007T |  |
| C5025 | UTSP C | CE04W50V-10M(UTSP)  | 1 | 397581007T |  |
| C5026 | UTSP C | CE04W50V-10M(UTSP)  | 1 | 397581007T |  |
| C5040 | UTSP C | CE04W10V-470M(UTSP) | 1 | 397534717T |  |
| C5041 | UTSP C | CE04W10V-470M(UTSP) | 1 | 397534717T |  |
| C5042 | UTSP C | CE04W10V-470M(UTSP) | 1 | 397534717T |  |
| C5043 | UTSP C | CE04W10V-470M(UTSP) | 1 | 397534717T |  |
| C5044 | UTSP C | CE04W10V-470M(UTSP) | 1 | 397534717T |  |
| C5045 | UTSP C | CE04W10V-470M(UTSP) | 1 | 397534717T |  |
| C5046 | UTSP C | CE04W10V-470M(UTSP) | 1 | 397534717T |  |
| C5050 | UTSP C | CE04W50V-47M(UTSP)  | 1 | 397584707T |  |
| C5051 | UTSP C | CE04W50V-47M(UTSP)  | 1 | 397584707T |  |
| C5052 | UTSP C | CE04W50V-47M(UTSP)  | 1 | 397584707T |  |
| C5053 | UTSP C | CE04W50V-47M(UTSP)  | 1 | 397584707T |  |
| C5054 | UTSP C | CE04W50V-47M(UTSP)  | 1 | 397584707T |  |
| C5055 | UTSP C | CE04W50V-47M(UTSP)  | 1 | 397584707T |  |
| C5056 | UTSP C | CE04W50V-47M(UTSP)  | 1 | 397584707T |  |
| C5080 | CERA C | CC45SL50V-040C      | 1 | 345020401T |  |
| C5081 | CERA C | CC45SL50V-040C      | 1 | 345020401T |  |
| C5082 | CERA C | CC45SL50V-040C      | 1 | 345020401T |  |
| C5083 | CERA C | CC45SL50V-040C      | 1 | 345020401T |  |
| C5084 | CERA C | CC45SL50V-040C      | 1 | 345020401T |  |
| C5085 | CERA C | CC45SL50V-040C      | 1 | 345020401T |  |
| C5086 | CERA C | CC45SL50V-040C      | 1 | 345020401T |  |
| C5090 | UPZ C  | 2AUPZTF101JE        | 1 | 376331014T |  |
| C5091 | UPZ C  | 2AUPZTF101JE        | 1 | 376331014T |  |
| C5092 | UPZ C  | 2AUPZTF101JE        | 1 | 376331014T |  |
| C5093 | UPZ C  | 2AUPZTF101JE        | 1 | 376331014T |  |
| C5094 | UPZ C  | 2AUPZTF101JE        | 1 | 376331014T |  |
| C5095 | UPZ C  | 2AUPZTF101JE        | 1 | 376331014T |  |
| C5096 | UPZ C  | 2AUPZTF101JE        | 1 | 376331014T |  |
| C5100 | VR C   | CE04W100V-22M(VR)   | 1 | 394692207T |  |

|       |       |                   |   |            |        |
|-------|-------|-------------------|---|------------|--------|
| C5101 | VR C  | CE04W100V-22M(VR) | 1 | 394692207T |        |
| C5102 | VR C  | CE04W100V-22M(VR) | 1 | 394692207T |        |
| C5103 | VR C  | CE04W100V-22M(VR) | 1 | 394692207T |        |
| C5104 | VR C  | CE04W100V-22M(VR) | 1 | 394692207T |        |
| C5105 | VR C  | CE04W100V-22M(VR) | 1 | 394692207T |        |
| C5106 | VR C  | CE04W100V-22M(VR) | 1 | 394692207T |        |
| C5110 | VR C  | CE04W100V-22M(VR) | 1 | 394692207T |        |
| C5111 | VR C  | CE04W100V-22M(VR) | 1 | 394692207T |        |
| C5112 | VR C  | CE04W100V-22M(VR) | 1 | 394692207T |        |
| C5113 | VR C  | CE04W100V-22M(VR) | 1 | 394692207T |        |
| C5114 | VR C  | CE04W100V-22M(VR) | 1 | 394692207T |        |
| C5115 | VR C  | CE04W100V-22M(VR) | 1 | 394692207T |        |
| C5116 | VR C  | CE04W100V-22M(VR) | 1 | 394692207T |        |
| C6600 | TF C  | ECQ-V50V-103J     | 1 | 374721034T |        |
| C6602 | TF C  | ECQ-V50V-103J     | 1 | 374721034T |        |
| C6603 | TF C  | ECQ-V50V-103J     | 1 | 374721034T |        |
| C6605 | TF C  | ECQ-V50V-103J     | 1 | 374721034T |        |
| C6607 | TF C  | ECQ-V50V-103J     | 1 | 374721034T |        |
| C6609 | TF C  | ECQ-V50V-103J     | 1 | 374721034T |        |
| C6630 | TF C  | ECQ-V50V-473J     | 1 | 374724734T |        |
| C6631 | TF C  | ECQ-V50V-473J     | 1 | 374724734T |        |
| C6632 | TF C  | ECQ-V50V-473J     | 1 | 374724734T |        |
| C6633 | TF C  | ECQ-V50V-473J     | 1 | 374724734T |        |
| C6634 | TF C  | ECQ-V50V-473J     | 1 | 374724734T |        |
| C6635 | TF C  | ECQ-V50V-473J     | 1 | 374724734T |        |
| C6636 | TF C  | ECQ-V50V-473J     | 1 | 374724734T |        |
| C6639 | MKT C | B32529C0472J289   | 1 | 376494724T | < MMA> |
| C6640 | MKT C | B32529C0472J289   | 1 | 376494724T | < MMA> |
| C6641 | MKT C | B32529C0472J289   | 1 | 376494724T | < MMA> |
| C6642 | MKT C | B32529C0472J289   | 1 | 376494724T | < MMA> |
| C6643 | MKT C | B32529C0472J289   | 1 | 376494724T | < MMA> |
| C6644 | MKT C | B32529C0472J289   | 1 | 376494724T | < MMA> |
| C6645 | MKT C | B32529C0472J289   | 1 | 376494724T | < MMA> |
| C6646 | MKT C | B32529C0472J289   | 1 | 376494724T | < MMA> |
| C6647 | MKT C | B32529C0472J289   | 1 | 376494724T | < MMA> |
| C6648 | MKT C | B32529C0472J289   | 1 | 376494724T | < MMA> |
| C6649 | MKT C | B32529C0472J289   | 1 | 376494724T | < MMA> |
| C6650 | MKT C | B32529C0102J289   | 1 | 376491024T |        |

|            |          |                     |      |            |  |
|------------|----------|---------------------|------|------------|--|
| C6651      | MKT C    | B32529C0102J289     | 1    | 376491024T |  |
| C6652      | MKT C    | B32529C0102J289     | 1    | 376491024T |  |
| C6653      | MKT C    | B32529C0102J289     | 1    | 376491024T |  |
| C6654      | MKT C    | B32529C0102J289     | 1    | 376491024T |  |
| C6655      | MKT C    | B32529C0102J289     | 1    | 376491024T |  |
| C6656      | MKT C    | B32529C0102J289     | 1    | 376491024T |  |
| C6657      | MKT C    | B32529C0102J289     | 1    | 376491024T |  |
| C6658      | MKT C    | B32529C0102J289     | 1    | 376491024T |  |
| C6659      | MKT C    | B32529C0102J289     | 1    | 376491024T |  |
| C6660      | MKT C    | B32529C0102J289     | 1    | 376491024T |  |
| C901       | IS C     | ECQU2A103MLC        | 1    | 3800039S   |  |
| C901 or    | IS C     | RE275V-103M         | ( 1) | 3500196S   |  |
| C901 or    | IS C     | LE103-C3.5          | ( 1) | 3800042S   |  |
| C902       | TF C     | ECQ-V50V-104J       | 1    | 374721044T |  |
| C903       | PLA C    | MKP R46 104M        | 1    | 3800041S   |  |
| C911       | MKT C    | B32529C0102J289     | 1    | 376491024T |  |
| C921       | TF C     | ECQ-V50V-223J       | 1    | 374722234T |  |
| C922       | UTSP C   | CE04W25V-470M(UTSP) | 1    | 397554717T |  |
| C930       | UTSP C   | CE04W25V-220M(UTSP) | 1    | 397552217T |  |
| C933       | UTSP C   | CE04W50V-4.7M(UTSP) | 1    | 397580477T |  |
| [RESISTOR] |          |                     |      |            |  |
| R5000      | CARBON R | R16J-1.5K           | 1    | 417341524T |  |
| R5001      | CARBON R | R16J-1.5K           | 1    | 417341524T |  |
| R5002      | CARBON R | R16J-1.5K           | 1    | 417341524T |  |
| R5003      | CARBON R | R16J-1.5K           | 1    | 417341524T |  |
| R5004      | CARBON R | R16J-1.5K           | 1    | 417341524T |  |
| R5005      | CARBON R | R16J-1.5K           | 1    | 417341524T |  |
| R5006      | CARBON R | R16J-1.5K           | 1    | 417341524T |  |
| R5010      | CARBON R | R16J-33K            | 1    | 417343334T |  |
| R5011      | CARBON R | R16J-33K            | 1    | 417343334T |  |
| R5012      | CARBON R | R16J-33K            | 1    | 417343334T |  |
| R5013      | CARBON R | R16J-33K            | 1    | 417343334T |  |
| R5014      | CARBON R | R16J-33K            | 1    | 417343334T |  |
| R5015      | CARBON R | R16J-33K            | 1    | 417343334T |  |
| R5016      | CARBON R | R16J-33K            | 1    | 417343334T |  |
| R5020      | CARBON R | R16J-330            | 1    | 417343314T |  |
| R5021      | CARBON R | R16J-330            | 1    | 417343314T |  |
| R5022      | CARBON R | R16J-330            | 1    | 417343314T |  |

|       |             |           |   |            |  |
|-------|-------------|-----------|---|------------|--|
| R5023 | CARBON R    | R16J-330  | 1 | 417343314T |  |
| R5024 | CARBON R    | R16J-330  | 1 | 417343314T |  |
| R5025 | CARBON R    | R16J-330  | 1 | 417343314T |  |
| R5026 | CARBON R    | R16J-330  | 1 | 417343314T |  |
| R5030 | CARBON R    | R16J-33K  | 1 | 417343334T |  |
| R5031 | CARBON R    | R16J-33K  | 1 | 417343334T |  |
| R5032 | CARBON R    | R16J-33K  | 1 | 417343334T |  |
| R5033 | CARBON R    | R16J-33K  | 1 | 417343334T |  |
| R5034 | CARBON R    | R16J-33K  | 1 | 417343334T |  |
| R5035 | CARBON R    | R16J-33K  | 1 | 417343334T |  |
| R5036 | CARBON R    | R16J-33K  | 1 | 417343334T |  |
| R5040 | CARBON R    | R16J-1K   | 1 | 417341024T |  |
| R5041 | CARBON R    | R16J-1K   | 1 | 417341024T |  |
| R5042 | CARBON R    | R16J-1K   | 1 | 417341024T |  |
| R5043 | CARBON R    | R16J-1K   | 1 | 417341024T |  |
| R5044 | CARBON R    | R16J-1K   | 1 | 417341024T |  |
| R5045 | CARBON R    | R16J-1K   | 1 | 417341024T |  |
| R5046 | CARBON R    | R16J-1K   | 1 | 417341024T |  |
| R5050 | CARBON R    | R16J-5.6K | 1 | 417345624T |  |
| R5051 | CARBON R    | R16J-5.6K | 1 | 417345624T |  |
| R5052 | CARBON R    | R16J-5.6K | 1 | 417345624T |  |
| R5053 | CARBON R    | R16J-5.6K | 1 | 417345624T |  |
| R5054 | CARBON R    | R16J-5.6K | 1 | 417345624T |  |
| R5055 | CARBON R    | R16J-5.6K | 1 | 417345624T |  |
| R5056 | CARBON R    | R16J-5.6K | 1 | 417345624T |  |
| R5060 | CARBON R    | R16J-2.7K | 1 | 417342724T |  |
| R5061 | CARBON R    | R16J-2.7K | 1 | 417342724T |  |
| R5062 | CARBON R    | R16J-2.7K | 1 | 417342724T |  |
| R5063 | CARBON R    | R16J-2.7K | 1 | 417342724T |  |
| R5064 | CARBON R    | R16J-2.7K | 1 | 417342724T |  |
| R5065 | CARBON R    | R16J-2.7K | 1 | 417342724T |  |
| R5066 | CARBON R    | R16J-2.7K | 1 | 417342724T |  |
| R5080 | NF CARBON R | R25J-1.0K | 1 | 415471024T |  |
| R5081 | NF CARBON R | R25J-1.0K | 1 | 415471024T |  |
| R5082 | NF CARBON R | R25J-1.0K | 1 | 415471024T |  |
| R5083 | NF CARBON R | R25J-1.0K | 1 | 415471024T |  |
| R5084 | NF CARBON R | R25J-1.0K | 1 | 415471024T |  |
| R5085 | NF CARBON R | R25J-1.0K | 1 | 415471024T |  |

|       |             |           |   |            |  |
|-------|-------------|-----------|---|------------|--|
| R5086 | NF CARBON R | R25J-1.0K | 1 | 415471024T |  |
| R5090 | CARBON R    | R16J-100K | 1 | 417341044T |  |
| R5091 | CARBON R    | R16J-100K | 1 | 417341044T |  |
| R5092 | CARBON R    | R16J-100K | 1 | 417341044T |  |
| R5093 | CARBON R    | R16J-100K | 1 | 417341044T |  |
| R5094 | CARBON R    | R16J-100K | 1 | 417341044T |  |
| R5095 | CARBON R    | R16J-100K | 1 | 417341044T |  |
| R5096 | CARBON R    | R16J-100K | 1 | 417341044T |  |
| R5100 | CARBON R    | R16J-100K | 1 | 417341044T |  |
| R5101 | CARBON R    | R16J-100K | 1 | 417341044T |  |
| R5102 | CARBON R    | R16J-100K | 1 | 417341044T |  |
| R5103 | CARBON R    | R16J-100K | 1 | 417341044T |  |
| R5104 | CARBON R    | R16J-100K | 1 | 417341044T |  |
| R5105 | CARBON R    | R16J-100K | 1 | 417341044T |  |
| R5106 | CARBON R    | R16J-100K | 1 | 417341044T |  |
| R5110 | CARBON R    | R16J-2.2K | 1 | 417342224T |  |
| R5111 | CARBON R    | R16J-2.2K | 1 | 417342224T |  |
| R5112 | CARBON R    | R16J-2.2K | 1 | 417342224T |  |
| R5113 | CARBON R    | R16J-2.2K | 1 | 417342224T |  |
| R5114 | CARBON R    | R16J-2.2K | 1 | 417342224T |  |
| R5115 | CARBON R    | R16J-2.2K | 1 | 417342224T |  |
| R5116 | CARBON R    | R16J-2.2K | 1 | 417342224T |  |
| R5120 | CARBON R    | R16J-2.2K | 1 | 417342224T |  |
| R5121 | CARBON R    | R16J-2.2K | 1 | 417342224T |  |
| R5122 | CARBON R    | R16J-2.2K | 1 | 417342224T |  |
| R5123 | CARBON R    | R16J-2.2K | 1 | 417342224T |  |
| R5124 | CARBON R    | R16J-2.2K | 1 | 417342224T |  |
| R5125 | CARBON R    | R16J-2.2K | 1 | 417342224T |  |
| R5126 | CARBON R    | R16J-2.2K | 1 | 417342224T |  |
| R5130 | CARBON R    | R16J-18K  | 1 | 417341834T |  |
| R5131 | CARBON R    | R16J-18K  | 1 | 417341834T |  |
| R5132 | CARBON R    | R16J-18K  | 1 | 417341834T |  |
| R5133 | CARBON R    | R16J-18K  | 1 | 417341834T |  |
| R5134 | CARBON R    | R16J-18K  | 1 | 417341834T |  |
| R5135 | CARBON R    | R16J-18K  | 1 | 417341834T |  |
| R5136 | CARBON R    | R16J-18K  | 1 | 417341834T |  |
| R5140 | NF CARBON R | R25J-820  | 1 | 415478214T |  |
| R5141 | NF CARBON R | R25J-820  | 1 | 415478214T |  |



|       |             |           |   |            |  |
|-------|-------------|-----------|---|------------|--|
| R5142 | NF CARBON R | R25J-820  | 1 | 415478214T |  |
| R5143 | NF CARBON R | R25J-820  | 1 | 415478214T |  |
| R5144 | NF CARBON R | R25J-820  | 1 | 415478214T |  |
| R5145 | NF CARBON R | R25J-820  | 1 | 415478214T |  |
| R5146 | NF CARBON R | R25J-820  | 1 | 415478214T |  |
| R5150 | NF CARBON R | R25J-1.0K | 1 | 415471024T |  |
| R5151 | NF CARBON R | R25J-1.0K | 1 | 415471024T |  |
| R5152 | NF CARBON R | R25J-1.0K | 1 | 415471024T |  |
| R5153 | NF CARBON R | R25J-1.0K | 1 | 415471024T |  |
| R5154 | NF CARBON R | R25J-1.0K | 1 | 415471024T |  |
| R5155 | NF CARBON R | R25J-1.0K | 1 | 415471024T |  |
| R5156 | NF CARBON R | R25J-1.0K | 1 | 415471024T |  |
| R5160 | NF CARBON R | R25J-820  | 1 | 415478214T |  |
| R5161 | NF CARBON R | R25J-820  | 1 | 415478214T |  |
| R5162 | NF CARBON R | R25J-820  | 1 | 415478214T |  |
| R5163 | NF CARBON R | R25J-820  | 1 | 415478214T |  |
| R5164 | NF CARBON R | R25J-820  | 1 | 415478214T |  |
| R5165 | NF CARBON R | R25J-820  | 1 | 415478214T |  |
| R5166 | NF CARBON R | R25J-820  | 1 | 415478214T |  |
| R5170 | NF CARBON R | R25J-820  | 1 | 415478214T |  |
| R5171 | NF CARBON R | R25J-820  | 1 | 415478214T |  |
| R5172 | NF CARBON R | R25J-820  | 1 | 415478214T |  |
| R5173 | NF CARBON R | R25J-820  | 1 | 415478214T |  |
| R5174 | NF CARBON R | R25J-820  | 1 | 415478214T |  |
| R5175 | NF CARBON R | R25J-820  | 1 | 415478214T |  |
| R5176 | NF CARBON R | R25J-820  | 1 | 415478214T |  |
| R5180 | NF CARBON R | R25J-10   | 1 | 415471004T |  |
| R5181 | NF CARBON R | R25J-10   | 1 | 415471004T |  |
| R5182 | NF CARBON R | R25J-10   | 1 | 415471004T |  |
| R5183 | NF CARBON R | R25J-10   | 1 | 415471004T |  |
| R5184 | NF CARBON R | R25J-10   | 1 | 415471004T |  |
| R5185 | NF CARBON R | R25J-10   | 1 | 415471004T |  |
| R5186 | NF CARBON R | R25J-10   | 1 | 415471004T |  |
| R5190 | NF CARBON R | R25J-10   | 1 | 415471004T |  |
| R5191 | NF CARBON R | R25J-10   | 1 | 415471004T |  |
| R5192 | NF CARBON R | R25J-10   | 1 | 415471004T |  |
| R5193 | NF CARBON R | R25J-10   | 1 | 415471004T |  |
| R5194 | NF CARBON R | R25J-10   | 1 | 415471004T |  |

|       |             |          |   |            |  |
|-------|-------------|----------|---|------------|--|
| R5195 | NF CARBON R | R25J-10  | 1 | 415471004T |  |
| R5196 | NF CARBON R | R25J-10  | 1 | 415471004T |  |
| R5200 | CARBON R    | R16J-18K | 1 | 417341834T |  |
| R5201 | CARBON R    | R16J-18K | 1 | 417341834T |  |
| R5202 | CARBON R    | R16J-18K | 1 | 417341834T |  |
| R5203 | CARBON R    | R16J-18K | 1 | 417341834T |  |
| R5204 | CARBON R    | R16J-18K | 1 | 417341834T |  |
| R5205 | CARBON R    | R16J-18K | 1 | 417341834T |  |
| R5206 | CARBON R    | R16J-18K | 1 | 417341834T |  |
| R5210 | NF CARBON R | R25J-120 | 1 | 415471214T |  |
| R5211 | NF CARBON R | R25J-120 | 1 | 415471214T |  |
| R5212 | NF CARBON R | R25J-120 | 1 | 415471214T |  |
| R5213 | NF CARBON R | R25J-120 | 1 | 415471214T |  |
| R5214 | NF CARBON R | R25J-120 | 1 | 415471214T |  |
| R5215 | NF CARBON R | R25J-120 | 1 | 415471214T |  |
| R5216 | NF CARBON R | R25J-120 | 1 | 415471214T |  |
| R5220 | NF CARBON R | R25J-120 | 1 | 415471214T |  |
| R5221 | NF CARBON R | R25J-120 | 1 | 415471214T |  |
| R5222 | NF CARBON R | R25J-120 | 1 | 415471214T |  |
| R5223 | NF CARBON R | R25J-120 | 1 | 415471214T |  |
| R5224 | NF CARBON R | R25J-120 | 1 | 415471214T |  |
| R5225 | NF CARBON R | R25J-120 | 1 | 415471214T |  |
| R5226 | NF CARBON R | R25J-120 | 1 | 415471214T |  |
| R5300 | CARBON R    | R16J-330 | 1 | 417343314T |  |
| R5301 | CARBON R    | R16J-330 | 1 | 417343314T |  |
| R5302 | CARBON R    | R16J-330 | 1 | 417343314T |  |
| R5303 | CARBON R    | R16J-330 | 1 | 417343314T |  |
| R5304 | CARBON R    | R16J-330 | 1 | 417343314T |  |
| R5305 | CARBON R    | R16J-330 | 1 | 417343314T |  |
| R5306 | CARBON R    | R16J-330 | 1 | 417343314T |  |
| R5310 | CARBON R    | R16J-330 | 1 | 417343314T |  |
| R5311 | CARBON R    | R16J-330 | 1 | 417343314T |  |
| R5312 | CARBON R    | R16J-330 | 1 | 417343314T |  |
| R5313 | CARBON R    | R16J-330 | 1 | 417343314T |  |
| R5314 | CARBON R    | R16J-330 | 1 | 417343314T |  |
| R5315 | CARBON R    | R16J-330 | 1 | 417343314T |  |
| R5316 | CARBON R    | R16J-330 | 1 | 417343314T |  |
| R6600 | CARBON R    | R16J-22  | 1 | 417342204T |  |

|          |                |                  |   |            |  |
|----------|----------------|------------------|---|------------|--|
| R6601    | CARBON R       | R16J-22          | 1 | 417342204T |  |
| R6602    | CARBON R       | R16J-22          | 1 | 417342204T |  |
| R6603    | CARBON R       | R16J-22          | 1 | 417342204T |  |
| R6604    | CARBON R       | R16J-22          | 1 | 417342204T |  |
| R6605    | CARBON R       | R16J-22          | 1 | 417342204T |  |
| R6606    | CARBON R       | R16J-22          | 1 | 417342204T |  |
| R6610    | CARBON R       | R16J-22          | 1 | 417342204T |  |
| R6611    | CARBON R       | R16J-22          | 1 | 417342204T |  |
| R6612    | CARBON R       | R16J-22          | 1 | 417342204T |  |
| R6613    | CARBON R       | R16J-22          | 1 | 417342204T |  |
| R6614    | CARBON R       | R16J-22          | 1 | 417342204T |  |
| R6615    | CARBON R       | R16J-22          | 1 | 417342204T |  |
| R6616    | CARBON R       | R16J-22          | 1 | 417342204T |  |
| R6630    | METAL R        | RNU1WCJ-8.2      | 1 | 453630824T |  |
| R6631    | METAL R        | RNU1WCJ-8.2      | 1 | 453630824T |  |
| R6632    | METAL R        | RNU1WCJ-8.2      | 1 | 453630824T |  |
| R6633    | METAL R        | RNU1WCJ-8.2      | 1 | 453630824T |  |
| R6634    | METAL R        | RNU1WCJ-8.2      | 1 | 453630824T |  |
| R6635    | METAL R        | RNU1WCJ-8.2      | 1 | 453630824T |  |
| R6636    | METAL R        | RNU1WCJ-8.2      | 1 | 453630824T |  |
| R6690    | METAL R        | RNU1WCJ-8.2      | 1 | 453630824T |  |
| R6691    | METAL O R      | RS1/2WBJ-390     | 1 | 443523914T |  |
| R6692    | METAL O R      | RS1/2WBJ-390     | 1 | 443523914T |  |
| R921     | METAL O R      | RS1/2WBJ-47      | 1 | 443524704T |  |
| R922     | METAL O R      | RS1/2WBJ-68      | 1 | 443526804T |  |
| R934     | CARBON R       | R16J-33K         | 1 | 417343334T |  |
| [SW TRM] |                |                  |   |            |  |
| E5507B   | TRM            | NTM-1P233(M1969) | 1 | 25060302   |  |
| E5509B   | TRM            | NTM-1P233(M1969) | 1 | 25060302   |  |
| E6611    | TRM            | NTM-1P232(M1700) | 1 | 25060301   |  |
| E6612    | TRM-423(SCREW) | NEJITANSI ST3    | 1 | 25060495   |  |
| E901     | TRM-423(SCREW) | NEJITANSI ST3    | 1 | 25060495   |  |
| E902     | TRM            | NTM-1P233(M1969) | 1 | 25060302   |  |
| F901C    | FUSE HOL       | NSCT-1P2031      | 1 | 25052133T  |  |
| F901D    | FUSE HOL       | NSCT-1P2031      | 1 | 25052133T  |  |
| JL4103A  | SOCKET         | NSCT-5P97        | 1 | 25050269   |  |
| JL6600B  | SOCKET         | NSCT-7P99        | 1 | 25050271   |  |
| JL6603B  | SOCKET         | NSCT-9P101       | 1 | 25050273   |  |

|         |           |                   |      |           |   |
|---------|-----------|-------------------|------|-----------|---|
| JL6604A | WIRE HOL  | NSCT-11P882       | 1    | 25051095  |   |
| JL6604B | WIRE TRAP | NPLG-11P594       | 1    | 25055632  |   |
| JL6606A | WIRE HOL  | NSCT-7P878        | 1    | 25051091  |   |
| JL6607A | WIRE HOL  | NSCT-3P874        | 1    | 25051087  |   |
| JL6607B | WIRE HOL  | NSCT-3P874        | 1    | 25051087  |   |
| JL6620B | WIRE TRAP | NPLG-7P590        | 1    | 25055628  |   |
| JL901A  | WIRE HOL  | NSCT-5P876        | 1    | 25051089  |   |
| P001    | PWB       | BCTRM-0083        | 1    | 25140083B | N |
| P002    | PWB       | BCPS-0084         | { 1} | 25140084  | N |
| P003    | PWB       | BCTRM-0085        | { 1} | 25140085  | N |
| P004    | PWB       | BCTRM-0086        | { 1} | 25140086  | N |
| P005    | PWB       | BCCLA-0087        | { 1} | 25140087  | N |
| P1008B  | SOCKET    | IMSA-9142S-20A    | 1    | 25053232  |   |
| P1010B  | SOCKET    | IMSA-9142S-20A    | 1    | 25053232  |   |
| P6000A  | SOCKET    | NSCT-7P2187       | 1    | 25052290  |   |
| P6001A  | SOCKET    | NSCT-7P2187       | 1    | 25052290  |   |
| P6002A  | SOCKET    | NSCT-7P2187       | 1    | 25052290  |   |
| P6003A  | SOCKET    | NSCT-7P2187       | 1    | 25052290  |   |
| P6004A  | SOCKET    | NSCT-7P2187       | 1    | 25052290  |   |
| P6005A  | SOCKET    | NSCT-7P2187       | 1    | 25052290  |   |
| P6006A  | SOCKET    | NSCT-7P2187       | 1    | 25052290  |   |
| P6600   | TRM       | NTM-2PDMCR400     | 1    | 25060472  |   |
| P6601   | TRM       | NTM-2PDMCR400     | 1    | 25060472  |   |
| P6602   | TRM       | NTM-2PDMCR400     | 1    | 25060472  |   |
| P6603   | TRM       | NTM-2PDMCR400     | 1    | 25060472  |   |
| P6604   | TRM       | NTM-2PDMCR400     | 1    | 25060472  |   |
| P6605   | TRM       | NTM-2PDMCR400     | 1    | 25060472  |   |
| P6606   | TRM       | NTM-2PDMCR400     | 1    | 25060472  |   |
| P6607   | TRM       | NTM-2PDMCR400     | 1    | 25060472  |   |
| P6608   | TRM       | NTM-2PDMCR400     | 1    | 25060472  |   |
| P6609   | TRM       | NTM-2PDMCR400     | 1    | 25060472  |   |
| P6610   | TRM       | NTM-2PDMCR400     | 1    | 25060472  |   |
| P6621   | SOCKET    | IMSA-9142S-16A    | 1    | 25053230  |   |
| P911    | PLUG      | NPLG-2P631        | 1    | 25055675  |   |
| P911 or | PLUG      | 1-1123724-2       | ( 1) | 25056402  |   |
| P921C   | PLUG      | NPLG-2P631        | 1    | 25055675  |   |
| P921Cor | PLUG      | 1-1123724-2       | ( 1) | 25056402  |   |
| RL6600  | RELAY     | NRL-2P5A-DC24-193 | 1    | 25065703  |   |

|        |       |                   |   |          |  |
|--------|-------|-------------------|---|----------|--|
| RL6602 | RELAY | NRL-2P5A-DC24-193 | 1 | 25065703 |  |
| RL6603 | RELAY | NRL-2P5A-DC24-193 | 1 | 25065703 |  |
| RL6605 | RELAY | NRL-2P5A-DC24-193 | 1 | 25065703 |  |
| RL6607 | RELAY | NRL-2P5A-DC24-193 | 1 | 25065703 |  |
| RL6609 | RELAY | NRL-2P5A-DC24-193 | 1 | 25065703 |  |
| RL901  | RELAY | NRL-1P10A-DC9-186 | 1 | 25065683 |  |

PRINTED CIRCUIT BOARD PARTS LIST

DTR-40.1

|       |                                      |                |             |         |
|-------|--------------------------------------|----------------|-------------|---------|
| U003  | Digital input circuit PC board a'ssy | BADG-0099-1D * | 1B234599-1D | N B MDD |
| U0031 | CPU circuit PC board a'ssy           | BACPU-0100-1D  | 1B234500-1D | N B MDD |
| U0032 | Video input circuit PC board a'ssy   | BAVD-0101-1D   | 1B234501-1D | N B MDD |
| U0033 | Universal port PC board a'ssy        | BAETC-0103-1D  | 1B234503-1D | N B MDD |
| U003  | Digital input circuit PC board a'ssy | BADG-0099-1E * | 1B234599-1E | N B MMA |
| U0031 | CPU circuit PC board a'ssy           | BACPU-0100-1E  | 1B234500-1E | N B MMA |
| U0032 | Video input circuit PC board a'ssy   | BAVD-0101-1E   | 1B234501-1E | N B MMA |
| U0033 | Universal port PC board a'ssy        | BAETC-0103-1E  | 1B234503-1E | N B MMA |

| CIRCUIT. NO.     | PART NAME | DESCRIPTION          | Q'TY | PART NO. (SN) | REMARKS     |
|------------------|-----------|----------------------|------|---------------|-------------|
| [TUNER UNIT]     |           |                      |      |               |             |
| U1100            | REMO SENS | KSM-603TE2Q          | 1    | 24130018      | < MDD, MMA> |
| U1301            | PHT CP    | JSR1165-001recieving | 1    | 24120143      |             |
| U1302            | PHT CP    | JSR1165-001recieving | 1    | 24120143      |             |
| [SEMI CONDUCTOR] |           |                      |      |               |             |
| D1001            | C-DIODE   | 1SS352               | 1    | 223234R2      |             |
| D1001 or         | C-DIODE   | MA2J111              | ( 1) | 223279R2      |             |
| D1001 or         | C-DIODE   | KDS4148U             | ( 1) | 223283R2      |             |
| D1002            | C-DIODE   | 1SS352               | 1    | 223234R2      |             |
| D1002 or         | C-DIODE   | MA2J111              | ( 1) | 223279R2      |             |
| D1002 or         | C-DIODE   | KDS4148U             | ( 1) | 223283R2      |             |
| D1005            | C-DIODE   | 1SS352               | 1    | 223234R2      |             |
| D1005 or         | C-DIODE   | MA2J111              | ( 1) | 223279R2      |             |
| D1005 or         | C-DIODE   | KDS4148U             | ( 1) | 223283R2      |             |
| D1007            | C-DIODE   | 1SS352               | 1    | 223234R2      |             |
| D1007 or         | C-DIODE   | MA2J111              | ( 1) | 223279R2      |             |
| D1007 or         | C-DIODE   | KDS4148U             | ( 1) | 223283R2      |             |
| D1100            | SPCF D    | SIR-34ST3F           | 1    | 225456        | < MDD, MMA> |
| D1101            | SPCF D    | SIR-34ST3F           | 1    | 225456        | < MDD, MMA> |



|          |         |            |      |             |        |
|----------|---------|------------|------|-------------|--------|
| D4001    | C-DIODE | 1SS352     | 1    | 223234R2    |        |
| D4001 or | C-DIODE | MA2J111    | ( 1) | 223279R2    |        |
| D4001 or | C-DIODE | KDS4148U   | ( 1) | 223283R2    |        |
| D4002    | ZENER D | UDZS5.6B   | 1    | 224550560R2 |        |
| D4002 or | ZENER D | MAZ8056-M  | ( 1) | 224750562R2 |        |
| D4003    | C-DIODE | 1SS352     | 1    | 223234R2    |        |
| D4003 or | C-DIODE | MA2J111    | ( 1) | 223279R2    |        |
| D4003 or | C-DIODE | KDS4148U   | ( 1) | 223283R2    |        |
| D4004    | DIODE   | D5SBA20    | 1    | 22380130F   |        |
| D4005    | DIODE   | RB070M-30  | 1    | 22380361R2  |        |
| D4006    | DIODE   | RL1N4003   | 1    | 22380260T   |        |
| D4009    | DIODE   | D3SBA20    | 1    | 22380271F   |        |
| D4010    | C-DIODE | 1SS352     | 1    | 223234R2    |        |
| D4010 or | C-DIODE | MA2J111    | ( 1) | 223279R2    |        |
| D4010 or | C-DIODE | KDS4148U   | ( 1) | 223283R2    |        |
| D4015    | C-DIODE | 1SS352     | 1    | 223234R2    |        |
| D4015 or | C-DIODE | MA2J111    | ( 1) | 223279R2    |        |
| D4015 or | C-DIODE | KDS4148U   | ( 1) | 223283R2    |        |
| D4016    | C-DIODE | 1SS352     | 1    | 223234R2    |        |
| D4016 or | C-DIODE | MA2J111    | ( 1) | 223279R2    |        |
| D4016 or | C-DIODE | KDS4148U   | ( 1) | 223283R2    |        |
| D4017    | ZENER D | UDZS3.3B   | 1    | 224550330R2 |        |
| D4500    | C-DIODE | 1SS352     | 1    | 223234R2    |        |
| D4500 or | C-DIODE | MA2J111    | ( 1) | 223279R2    |        |
| D4500 or | C-DIODE | KDS4148U   | ( 1) | 223283R2    |        |
| D4501    | C-DIODE | 1SS352     | 1    | 223234R2    |        |
| D4501 or | C-DIODE | MA2J111    | ( 1) | 223279R2    |        |
| D4501 or | C-DIODE | KDS4148U   | ( 1) | 223283R2    |        |
| D4606    | DIODE   | RL1N4003   | 1    | 22380260T   |        |
| Q10      | IC      | NJM4580M-D | 1    | 22241448R2  | < MDD> |
| Q1001    | TR      | KRC104S    | 1    | 2216210R2   |        |
| Q1001 or | TR      | RN1404     | ( 1) | 2214490R2   |        |
| Q1002    | TR      | KRA102S    | 1    | 2216220R2   |        |
| Q1002 or | TR      | RN2402     | ( 1) | 2214530R2   |        |
| Q1003    | TR      | KRC104S    | 1    | 2216210R2   |        |
| Q1003 or | TR      | RN1404     | ( 1) | 2214490R2   |        |
| Q1004    | TR      | KRA102S    | 1    | 2216220R2   |        |
| Q1004 or | TR      | RN2402     | ( 1) | 2214530R2   |        |

|          |                          |                           |      |                 |        |
|----------|--------------------------|---------------------------|------|-----------------|--------|
| Q1005    | TR                       | KRC102S                   | 1    | 2216190R2       |        |
| Q1005 or | TR                       | RN1402                    | ( 1) | 2214470R2       |        |
| Q1005 or | TR                       | DTC114EKA                 | ( 1) | 2216250R2       |        |
| Q1006    | TR                       | KRA107S                   | 1    | 2216350R2       |        |
| Q1006 or | TR                       | RN2407(TE85L_F)           | ( 1) | 2216360R2       |        |
| Q1006 or | TR                       | DTA114YKA                 | ( 1) | 2216480R2       |        |
| Q1007    | TR                       | KRC102S                   | 1    | 2216190R2       |        |
| Q1007 or | TR                       | RN1402                    | ( 1) | 2214470R2       |        |
| Q1007 or | TR                       | DTC114EKA                 | ( 1) | 2216250R2       |        |
| Q1008    | TR                       | KRA107S                   | 1    | 2216350R2       |        |
| Q1008 or | TR                       | RN2407(TE85L_F)           | ( 1) | 2216360R2       |        |
| Q1008 or | TR                       | DTA114YKA                 | ( 1) | 2216480R2       |        |
| Q1009    | TR                       | KRC102S                   | 1    | 2216190R2       |        |
| Q1009 or | TR                       | RN1402                    | ( 1) | 2214470R2       |        |
| Q1009 or | TR                       | DTC114EKA                 | ( 1) | 2216250R2       |        |
| Q101     | IC                       | LC72725KV-TLM-E           | 1    | 22242584R2      | < MMA> |
| Q1010    | TR                       | KRC104S                   | 1    | 2216210R2       |        |
| Q1010 or | TR                       | RN1404                    | ( 1) | 2214490R2       |        |
| Q1011    | TR                       | KRA102S                   | 1    | 2216220R2       |        |
| Q1011 or | TR                       | RN2402                    | ( 1) | 2214530R2       |        |
| Q1016    | IC (MAIN MICROPROCESSOR) | MPD70F3746GJ-GAE-AX(0298) | 1    | 222W0079R302980 |        |
| Q1017    | IC                       | XC6202P502FR              | 1    | 22242331R2      |        |
| Q1018    | IC                       | XC6213B332MR              | 1    | 22242277R2      |        |
| Q1019    | IC                       | S-812C33AUA-C2N           | 1    | 22242222R2      |        |
| Q102     | IC                       | S-812C33AUA-C2N           | 1    | 22242222R2      | < MMA> |
| Q1020    | IC                       | S-812C56AUA-C3K           | 1    | 22242207R2      |        |
| Q1022    | IC                       | R1EX25064ASA00A           | 1    | 22242581R2      |        |
| Q1023    | IC                       | NJU7706F27A3              | 1    | 22242614R2      |        |
| Q1027    | TR                       | KRA102S                   | 1    | 2216220R2       |        |
| Q1028    | TR                       | KRC104S                   | 1    | 2216210R2       |        |
| Q1029    | TR                       | KRA102S                   | 1    | 2216220R2       |        |
| Q1030    | TR                       | KRC104S                   | 1    | 2216210R2       |        |
| Q1031    | TR                       | KRA102S                   | 1    | 2216220R2       |        |
| Q1032    | TR                       | KRC104S                   | 1    | 2216210R2       |        |
| Q1033    | TR                       | KRA102S                   | 1    | 2216220R2       |        |
| Q1034    | TR                       | KRC104S                   | 1    | 2216210R2       |        |
| Q1035    | TR                       | KRA102S                   | 1    | 2216220R2       |        |
| Q1036    | TR                       | KRC104S                   | 1    | 2216210R2       |        |

|          |          |                     |      |                |             |
|----------|----------|---------------------|------|----------------|-------------|
| Q1037    | TR       | KRA102S             | 1    | 2216220R2      |             |
| Q1038    | TR       | KRC104S             | 1    | 2216210R2      |             |
| Q1290    | TR       | 2SC2712-GR          | 1    | 2213145R2      |             |
| Q1291    | IC       | TC4066BFT           | 1    | 22284066MR2TO  |             |
| Q1292    | TR       | 2SC2712-GR          | 1    | 2213145R2      |             |
| Q1301    | IC       | TA4805BF(TE16L_NQ)  | 1    | 22278005DBR2TO |             |
| Q1301A   | RETAINER | (REG)               | 1    | 27142168       | N           |
| Q1302    | IC       | TA48033BF(TE16L_NQ) | 1    | 22278033DBR2TO |             |
| Q1311    | IC       | TC74VHC157FT        | 1    | 22274157ER2TO  |             |
| Q1322    | IC       | TC74VHCT00AFT (EKJ) | 1    | 22274000G1R2TO |             |
| Q1322 or | IC       | TC74VHCT00AFT       | ( 1) | 22274000GR2TO  |             |
| Q1324    | IC       | CS42516-CQZ(R)-D    | 1    | 22242294R2     |             |
| Q1325    | IC       | 74HCU04F            | 1    | 222740046R2    |             |
| Q1325 or | IC       | TC74HCU04AF         | ( 1) | 222740046R2TO  |             |
| Q1327    | IC       | TC7WU04FU(TE12L_F)  | 1    | 22240935R2     |             |
| Q1421    | IC       | PCM1690DCAR         | 1    | 22242599R2     | N           |
| Q1601    | IC       | NJM4580M-D          | 1    | 22241448R2     |             |
| Q1602    | IC       | NJM4580M-D          | 1    | 22241448R2     |             |
| Q1603    | IC       | NJM4580M-D          | 1    | 22241448R2     |             |
| Q1604    | IC       | NJM4580M-D          | 1    | 22241448R2     |             |
| Q1800    | IC       | NJM4580M-D          | 1    | 22241448R2     |             |
| Q1801    | IC       | NJM4580M-D          | 1    | 22241448R2     |             |
| Q1904    | IC       | NJM4580M-D          | 1    | 22241448R2     |             |
| Q1940    | IC       | XC6202P502FR        | 1    | 22242331R2     |             |
| Q1950    | IC       | NJM2505AF           | 1    | 22242490R2     |             |
| Q1960    | IC       | NJM2505AF           | 1    | 22242490R2     |             |
| Q1970    | IC       | NJM2505AF           | 1    | 22242490R2     |             |
| Q2       | IC       | 78M09HF(NJM78M09FA) | 1    | 222780095JRC   | < MDD, MMA> |
| Q4000    | TR       | KRC105S             | 1    | 2217290R2      |             |
| Q4000 or | TR       | RN1405              | ( 1) | 2214500R2      |             |
| Q4001    | IC       | 78M05(NJM78M05FA)   | 1    | 222780055JRC   |             |
| Q4002    | IC       | SI8008TM            | 1    | 22242323R2     |             |
| Q4003    | TR       | KRC105S             | 1    | 2217290R2      |             |
| Q4003 or | TR       | RN1405              | ( 1) | 2214500R2      |             |
| Q4100    | IC       | NJW1325             | 1    | 22242596R3     |             |
| Q4101    | TR ARRAY | UM6K1N              | 1    | 226066R2       |             |
| Q4502    | TR       | 2SA950-Y            | 1    | 2211504T       |             |
| Q4502 or | TR       | 2SA950-O            | ( 1) | 2211503T       |             |

|              |            |               |      |              |             |
|--------------|------------|---------------|------|--------------|-------------|
| Q4503        | TR         | 2SC1815-GR    | 1    | 2211255T     |             |
| Q4504        | TR         | 2SA854S-R     | 1    | 2217394T     |             |
| Q4504 or     | TR         | 2SB1240-R     | ( 1) | 2213794T     |             |
| Q4700        | IC         | ICL3221ECVZ   | 1    | 22242268R2   | < MDD, MMA> |
| Q9           | IC         | NJM4580M-D    | 1    | 22241448R2   | < MDD, MMA> |
| [TRANS COIL] |            |               |      |              |             |
| L1090        | CHOKE COIL | BLM21PG221SN1 | 1    | 230949R2     |             |
| L1290        | CHOKE COIL | LBC2518T470M  | 1    | 231364M470R2 |             |
| L1301        | CHOKE COIL | LBC2518T470M  | 1    | 231364M470R2 |             |
| L1305        | CHOKE COIL | LBC2518T2R2M  | 1    | 231364M022R2 |             |
| L1306        | CHOKE COIL | LBC2518T470M  | 1    | 231364M470R2 |             |
| L1307        | CHOKE COIL | LBC2518T2R2M  | 1    | 231364M022R2 |             |
| L1308        | CHOKE COIL | LBC2518T2R2M  | 1    | 231364M022R2 |             |
| L1309        | CHOKE COIL | LBC2518T4R7M  | 1    | 231364M047R2 |             |
| L1312        | CHOKE COIL | LBC2518T470M  | 1    | 231364M470R2 |             |
| L1313        | CHOKE COIL | LBC2518T4R7M  | 1    | 231364M047R2 |             |
| L1314        | CHOKE COIL | LBC2518T4R7M  | 1    | 231364M047R2 |             |
| L1315        | CHOKE COIL | LBC2518T4R7M  | 1    | 231364M047R2 |             |
| L1316        | EMIFIL     | BK1608LM182-T | 1    | 230958R1     |             |
| L1317        | EMIFIL     | BK1608LM182-T | 1    | 230958R1     |             |
| L1318        | CHOKE COIL | LBC2518T470M  | 1    | 231364M470R2 |             |
| L1319        | CHOKE COIL | LBC2518T470M  | 1    | 231364M470R2 |             |
| L1320        | EMIFIL     | BK1608LM182-T | 1    | 230958R1     |             |
| L1321        | EMIFIL     | BK1608LM182-T | 1    | 230958R1     |             |
| L1322        | EMIFIL     | BK1608LM182-T | 1    | 230958R1     |             |
| L1323        | EMIFIL     | BK1608HS102-T | 1    | 230955R2     |             |
| L1324        | EMIFIL     | BK1608HS102-T | 1    | 230955R2     |             |
| L1325        | EMIFIL     | BK1608HS102-T | 1    | 230955R2     |             |
| L1404        | CHOKE COIL | LBC2518T4R7M  | 1    | 231364M047R2 |             |
| L1407        | CHOKE COIL | LBC2518T4R7M  | 1    | 231364M047R2 |             |
| L1900        | CHOKE COIL | BLM21PG221SN1 | 1    | 230949R2     |             |
| L1901        | CHOKE COIL | BLM21PG221SN1 | 1    | 230949R2     |             |
| L1902        | EMIFIL     | BK1608LM182-T | 1    | 230958R1     |             |
| L1903        | EMIFIL     | BK1608LM182-T | 1    | 230958R1     |             |
| L1904        | EMIFIL     | BK1608LM182-T | 1    | 230958R1     |             |
| L1905        | EMIFIL     | BK1608LM182-T | 1    | 230958R1     |             |
| L1906        | CHOKE COIL | BLM21PG221SN1 | 1    | 230949R2     |             |
| L1907        | CHOKE COIL | BLM21PG221SN1 | 1    | 230949R2     |             |

|             |            |                     |   |              |             |
|-------------|------------|---------------------|---|--------------|-------------|
| L1908       | EMIFIL     | BK1608LM182-T       | 1 | 230958R1     |             |
| L1909       | EMIFIL     | BK1608LM182-T       | 1 | 230958R1     |             |
| L1910       | EMIFIL     | BK1608LM182-T       | 1 | 230958R1     |             |
| L1911       | EMIFIL     | BK1608LM182-T       | 1 | 230958R1     |             |
| L1912       | EMIFIL     | BK1608LM182-T       | 1 | 230958R1     |             |
| L1913       | EMIFIL     | BK1608LM182-T       | 1 | 230958R1     |             |
| L1914       | EMIFIL     | BK1608LM182-T       | 1 | 230958R1     |             |
| L1915       | EMIFIL     | BK1608LM182-T       | 1 | 230958R1     |             |
| L1916       | EMIFIL     | BK1608LM182-T       | 1 | 230958R1     |             |
| L1917       | EMIFIL     | BK1608LM182-T       | 1 | 230958R1     |             |
| L1918       | EMIFIL     | BK1608LM182-T       | 1 | 230958R1     |             |
| L1919       | EMIFIL     | BK1608LM182-T       | 1 | 230958R1     |             |
| L1920       | EMIFIL     | BK1608LM182-T       | 1 | 230958R1     |             |
| L1921       | EMIFIL     | BK1608LM182-T       | 1 | 230958R1     |             |
| L4000       | COIL       | 0182-7310-470K-RB   | 1 | 231389       |             |
| L4001       | CHOKE COIL | LBC2518T4R7M        | 1 | 231364M047R2 |             |
| L4005       | CHOKE COIL | LBC2518T4R7M        | 1 | 231364M047R2 |             |
| L4700       | CHOKE COIL | LBC2518T470M        | 1 | 231364M470R2 |             |
| L5          | CHOKE COIL | LBC2518T100M        | 1 | 231364M100R2 | < MDD, MMA> |
| X1001       | CERA LOCK  | CSTCR5M00G53-B0     | 1 | 3010356R2    |             |
| X101        | CRYSTAL    | HC-49S 4.332MHz     | 1 | 3010469T     | < MMA>      |
| X1301       | CRYSTAL    | HC-49US24.576MHz    | 1 | 3010423T     |             |
| [CAPACITOR] |            |                     |   |              |             |
| C1          | UTSP C     | CE04W50V-10M(UTSP)  | 1 | 397581007T   | < MDD, MMA> |
| C1001       | C-CERA C   | CK725F1A-105Z1      | 1 | 332181050R1  |             |
| C1004       | C-CERA C   | CK725F1A-105Z1      | 1 | 332181050R1  |             |
| C1005       | C-CERA C   | CK725F1E-104Z1      | 1 | 332161040R1  |             |
| C1006       | C-CERA C   | CK725F1E-104Z1      | 1 | 332161040R1  |             |
| C1007       | C-CERA C   | CK725F1A-105Z1      | 1 | 332181050R1  |             |
| C1008       | C-CERA C   | CC725CH1H-101J1     | 1 | 342101014R1  |             |
| C1009       | C-CERA C   | CC725CH1H-101J1     | 1 | 342101014R1  |             |
| C101        | C-CERA C   | CC725CH1H-221J1     | 1 | 342102214R1  | < MMA>      |
| C1010       | C-CERA C   | CC725CH1H-101J1     | 1 | 342101014R1  |             |
| C1015       | UTSP C     | CE04W25V-100M(UTSP) | 1 | 397551017T   |             |
| C1017       | UTSP C     | CE04W10V-100M(UTSP) | 1 | 397531017T   |             |
| C1019       | UTSP C     | CE04W10V-100M(UTSP) | 1 | 397531017T   |             |
| C102        | C-CERA C   | CC725CH1H-331J1     | 1 | 342103314R1  | < MMA>      |
| C1020       | C-CERA C   | CK725F1A-105Z1      | 1 | 332181050R1  |             |



|       |          |                     |   |             |             |
|-------|----------|---------------------|---|-------------|-------------|
| C1021 | C-CERA C | CK725B1H-102K1      | 1 | 332101025R1 |             |
| C1022 | C-CERA C | CK725B1H-102K1      | 1 | 332101025R1 |             |
| C1023 | ELECT C  | CE04W25V-4.7M(MA)   | 1 | 355750479T  |             |
| C1024 | C-CERA C | CK725B1H-102K1      | 1 | 332101025R1 |             |
| C1025 | C-CERA C | CK725B1H-102K1      | 1 | 332101025R1 |             |
| C1026 | C-CERA C | CK725B1H-102K1      | 1 | 332101025R1 |             |
| C1027 | C-CERA C | CK725B1H-102K1      | 1 | 332101025R1 |             |
| C1028 | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  |             |
| C1029 | UTSP C   | CE04W10V-100M(UTSP) | 1 | 397531017T  |             |
| C103  | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  | < MMA>      |
| C1030 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C1031 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C1032 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C1033 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C1034 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C1036 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C1037 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C1038 | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  |             |
| C1039 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C104  | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  | < MMA>      |
| C1040 | UTSP C   | CE04W10V-470M(UTSP) | 1 | 397534717T  |             |
| C1041 | ELECT C  | CE04W16V-10M        | 1 | 355741009T  |             |
| C1042 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C1043 | C-CERA C | CK725F1A-105Z1      | 1 | 332181050R1 |             |
| C1044 | C-CERA C | CK725F1A-105Z1      | 1 | 332181050R1 |             |
| C1045 | C-CERA C | CK725F1A-105Z1      | 1 | 332181050R1 |             |
| C1046 | C-CERA C | CK725F1A-105Z1      | 1 | 332181050R1 |             |
| C1047 | C-CERA C | CK725F1A-105Z1      | 1 | 332181050R1 |             |
| C1048 | C-CERA C | CK725F1A-105Z1      | 1 | 332181050R1 |             |
| C105  | C-CERA C | CK725B1H-103K1      | 1 | 332101035R1 | < MMA>      |
| C1053 | C-CERA C | CK725B1H-102K1      | 1 | 332101025R1 | < MDD, MMA> |
| C1054 | UTSP C   | CE04W10V-220M(UTSP) | 1 | 397532217T  | < MDD, MMA> |
| C106  | C-CERA C | CC725CH1H-331J1     | 1 | 342103314R1 | < MMA>      |
| C1060 | C-CERA C | CK725B1H-102K1      | 1 | 332101025R1 |             |
| C1061 | C-CERA C | CK725B1H-102K1      | 1 | 332101025R1 |             |
| C107  | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 | < MMA>      |
| C108  | C-CERA C | CC725CH1H-150J1     | 1 | 342101504R1 | < MMA>      |
| C109  | C-CERA C | CC725CH1H-150J1     | 1 | 342101504R1 | < MMA>      |

|       |          |                     |   |             |        |
|-------|----------|---------------------|---|-------------|--------|
| C110  | C-CERA C | CK725F1A-105Z1      | 1 | 332181050R1 | < MMA> |
| C1290 | UTSP C   | CE04W25V-100M(UTSP) | 1 | 397551017T  |        |
| C1291 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |        |
| C1292 | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  |        |
| C1293 | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  |        |
| C1294 | UTSP C   | CE04W50V-22M(UTSP)  | 1 | 397582207T  |        |
| C1295 | UTSP C   | CE04W50V-22M(UTSP)  | 1 | 397582207T  |        |
| C1296 | UTSP C   | CE04W50V-22M(UTSP)  | 1 | 397582207T  |        |
| C1302 | UTSP C   | CE04W10V-100M(UTSP) | 1 | 397531017T  |        |
| C1303 | UTSP C   | CE04W50V 47M(UTSP)  | 1 | 397584707T  |        |
| C1304 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |        |
| C1305 | UTSP C   | CE04W10V-470M(UTSP) | 1 | 397534717T  |        |
| C1306 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |        |
| C1307 | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  |        |
| C1308 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |        |
| C1309 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |        |
| C1310 | UTSP C   | CE04W10V-470M(UTSP) | 1 | 397534717T  |        |
| C1311 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |        |
| C1365 | C-CERA C | CK725B1C-104K1      | 1 | 332121045R1 |        |
| C1366 | C-CERA C | CC725CH1H-101J1     | 1 | 342101014R1 |        |
| C1368 | C-CERA C | CC725CH1H-101J1     | 1 | 342101014R1 |        |
| C1369 | UTSP C   | CE04W10V-100M(UTSP) | 1 | 397531017T  |        |
| C1370 | UTSP C   | CE04W10V-470M(UTSP) | 1 | 397534717T  |        |
| C1371 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |        |
| C1372 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |        |
| C1373 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |        |
| C1374 | UTSP C   | CE04W10V-470M(UTSP) | 1 | 397534717T  |        |
| C1375 | C-CERA C | CK725B1C-104K1      | 1 | 332121045R1 |        |
| C1376 | UTSP C   | CE04W10V-100M(UTSP) | 1 | 397531017T  |        |
| C1377 | UTSJ C   | CE04W50V-47M(UTSJ)  | 1 | 398084707T  |        |
| C1379 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |        |
| C1380 | C-CERA C | CK725B1C-104K1      | 1 | 332121045R1 |        |
| C1381 | C-CERA C | CC725CH1H-101J1     | 1 | 342101014R1 |        |
| C1388 | C-CERA C | CK725B1H-102K1      | 1 | 332101025R1 |        |
| C1390 | C-CERA C | CK725B1H-223K1      | 1 | 332102235R1 |        |
| C1392 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |        |
| C1396 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |        |
| C1397 | C-CERA C | CK725B1H-102K1      | 1 | 332101025R1 |        |

|       |          |                     |   |             |             |
|-------|----------|---------------------|---|-------------|-------------|
| C1398 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C1399 | UTSP C   | CE04W10V-470M(UTSP) | 1 | 397534717T  |             |
| C1400 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C1401 | C-CERA C | CC725CH1H-330J1     | 1 | 342103304R1 |             |
| C1402 | C-CERA C | CC725CH1H-330J1     | 1 | 342103304R1 |             |
| C1403 | C-CERA C | CC725CH1H-330J1     | 1 | 342103304R1 |             |
| C1404 | C-CERA C | CC725CH1H-330J1     | 1 | 342103304R1 |             |
| C1405 | C-CERA C | CC725CH1H-330J1     | 1 | 342103304R1 |             |
| C1406 | C-CERA C | CC725CH1H-330J1     | 1 | 342103304R1 |             |
| C1408 | C-CERA C | CC725CH1H-080D1     | 1 | 342100802R1 |             |
| C1409 | C-CERA C | CC725CH1H-080D1     | 1 | 342100802R1 |             |
| C1410 | UTSP C   | CE04W10V-470M(UTSP) | 1 | 397534717T  |             |
| C1411 | UTSP C   | CE04W10V-470M(UTSP) | 1 | 397534717T  |             |
| C1413 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C1414 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C1415 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C1417 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C1418 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C1419 | C-CERA C | CC725CH1H-080D1     | 1 | 342100802R1 |             |
| C1421 | UTSP C   | CE04W10V-220M(UTSP) | 1 | 397532217T  |             |
| C1424 | C-CERA C | CC725CH1H-060D1     | 1 | 342100602R1 |             |
| C1425 | C-CERA C | CC725CH1H-060D1     | 1 | 342100602R1 |             |
| C1430 | UTSP C   | CE04W10V-470M(UTSP) | 1 | 397534717T  |             |
| C1454 | C-FILM C | ECHU16V-104J        | 1 | 373041044R2 |             |
| C1455 | C-FILM C | ECHU16V-104J        | 1 | 373041044R2 |             |
| C1456 | C-FILM C | ECHU16V-104J        | 1 | 373041044R2 |             |
| C1460 | UTSJ C   | CE04W50V-47M(UTSJ)  | 1 | 398084707T  |             |
| C1499 | UTSP C   | CE04W10V-100M(UTSP) | 1 | 397531017T  |             |
| C1582 | C-FILM C | ECHU50V-222J        | 1 | 373022224R2 |             |
| C1583 | C-FILM C | ECHU50V-222J        | 1 | 373022224R2 |             |
| C1600 | UPZ C    | 2AUPZTF471JE        | 1 | 376334714T  | < MDD, MMA> |
| C1601 | UPZ C    | 2AUPZTF471JE        | 1 | 376334714T  | < MDD, MMA> |
| C1602 | UPZ C    | 2AUPZTF471JE        | 1 | 376334714T  | < MDD, MMA> |
| C1603 | UPZ C    | 2AUPZTF471JE        | 1 | 376334714T  | < MDD, MMA> |
| C1604 | UPZ C    | 2AUPZTF471JE        | 1 | 376334714T  | < MDD, MMA> |
| C1605 | UPZ C    | 2AUPZTF471JE        | 1 | 376334714T  | < MDD, MMA> |
| C1606 | UPZ C    | 2AUPZTF471JE        | 1 | 376334714T  | < MDD, MMA> |
| C1607 | UPZ C    | 2AUPZTF471JE        | 1 | 376334714T  | < MDD, MMA> |

|       |          |                     |   |             |             |
|-------|----------|---------------------|---|-------------|-------------|
| C1610 | CERA C   | CC45SL50V-101J      | 1 | 345021014T  | < MDD, MMA> |
| C1611 | CERA C   | CC45SL50V-101J      | 1 | 345021014T  | < MDD, MMA> |
| C1612 | CERA C   | CC45SL50V-101J      | 1 | 345021014T  | < MDD, MMA> |
| C1613 | CERA C   | CC45SL50V-101J      | 1 | 345021014T  | < MDD, MMA> |
| C1614 | CERA C   | CC45SL50V-101J      | 1 | 345021014T  | < MDD, MMA> |
| C1615 | CERA C   | CC45SL50V-101J      | 1 | 345021014T  | < MDD, MMA> |
| C1616 | CERA C   | CC45SL50V-101J      | 1 | 345021014T  | < MDD, MMA> |
| C1617 | CERA C   | CC45SL50V-101J      | 1 | 345021014T  | < MDD, MMA> |
| C1620 | CERA C   | CC45SL50V-101J      | 1 | 345021014T  | < MDD, MMA> |
| C1621 | CERA C   | CC45SL50V-101J      | 1 | 345021014T  | < MDD, MMA> |
| C1622 | CERA C   | CC45SL50V-101J      | 1 | 345021014T  | < MDD, MMA> |
| C1623 | CERA C   | CC45SL50V-101J      | 1 | 345021014T  | < MDD, MMA> |
| C1624 | CERA C   | CC45SL50V-101J      | 1 | 345021014T  | < MDD, MMA> |
| C1625 | CERA C   | CC45SL50V-101J      | 1 | 345021014T  | < MDD, MMA> |
| C1626 | CERA C   | CC45SL50V-101J      | 1 | 345021014T  | < MDD, MMA> |
| C1627 | CERA C   | CC45SL50V-101J      | 1 | 345021014T  | < MDD, MMA> |
| C1650 | UTSP C   | CE04W25V-220M(UTSP) | 1 | 397552217T  |             |
| C1651 | UTSP C   | CE04W25V-220M(UTSP) | 1 | 397552217T  |             |
| C1800 | UTSP C   | CE04W25V-47M(UTSP)  | 1 | 397554707T  |             |
| C1801 | UTSP C   | CE04W25V-47M(UTSP)  | 1 | 397554707T  |             |
| C1810 | UTSP C   | CE04W25V-47M(UTSP)  | 1 | 397554707T  |             |
| C1811 | UTSP C   | CE04W25V-47M(UTSP)  | 1 | 397554707T  |             |
| C1900 | UTSP C   | CE04W25V-100M(UTSP) | 1 | 397551017T  |             |
| C1902 | UTSP C   | CE04W25V-100M(UTSP) | 1 | 397551017T  |             |
| C1904 | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  |             |
| C1905 | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  |             |
| C1906 | C-CERA C | CC725CH1H-101J1     | 1 | 342101014R1 |             |
| C1907 | C-CERA C | CC725CH1H-101J1     | 1 | 342101014R1 |             |
| C1908 | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  |             |
| C1909 | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  |             |
| C1911 | C-CERA C | CC725CH1H-101J1     | 1 | 342101014R1 |             |
| C1912 | C-CERA C | CC725CH1H-101J1     | 1 | 342101014R1 |             |
| C1913 | C-CERA C | CC725CH1H-470J1     | 1 | 342104704R1 |             |
| C1914 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C1915 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C1921 | C-CERA C | CC725CH1H-471J1     | 1 | 342104714R1 |             |
| C1922 | C-CERA C | CC725CH1H-471J1     | 1 | 342104714R1 |             |
| C1923 | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |             |

|       |          |                     |   |             |             |
|-------|----------|---------------------|---|-------------|-------------|
| C1924 | C-CERA C | CC725CH1H-221J1     | 1 | 342102214R1 |             |
| C1930 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C1931 | C-CERA C | CC725CH1H-470J1     | 1 | 342104704R1 |             |
| C1941 | UTSP C   | CE04W25V-100M(UTSP) | 1 | 397551017T  |             |
| C1942 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C1943 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C1944 | UTSP C   | CE04W25V-47M(UTSP)  | 1 | 397554707T  |             |
| C1951 | VR C     | CE04W6.3V-470M(VR)  | 1 | 394624717T  |             |
| C1952 | VR C     | CE04W6.3V-470M(VR)  | 1 | 394624717T  |             |
| C1953 | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  |             |
| C1954 | UTSP C   | CE04W10V-100M(UTSP) | 1 | 397531017T  |             |
| C1955 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C1956 | C-CERA C | CC725CH1H-470J1     | 1 | 342104704R1 |             |
| C1957 | C-CERA C | CC725CH1H-470J1     | 1 | 342104704R1 |             |
| C1961 | VR C     | CE04W6.3V-470M(VR)  | 1 | 394624717T  |             |
| C1962 | VR C     | CE04W6.3V-470M(VR)  | 1 | 394624717T  |             |
| C1963 | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  |             |
| C1964 | UTSP C   | CE04W10V-100M(UTSP) | 1 | 397531017T  |             |
| C1965 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C1966 | C-CERA C | CC725CH1H-470J1     | 1 | 342104704R1 |             |
| C1967 | C-CERA C | CC725CH1H-470J1     | 1 | 342104704R1 |             |
| C1971 | VR C     | CE04W6.3V-470M(VR)  | 1 | 394624717T  |             |
| C1972 | VR C     | CE04W6.3V-470M(VR)  | 1 | 394624717T  |             |
| C1973 | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  |             |
| C1974 | UTSP C   | CE04W10V-100M(UTSP) | 1 | 397531017T  |             |
| C1975 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C1976 | C-CERA C | CK725B1H-102K1      | 1 | 332101025R1 |             |
| C1977 | C-CERA C | CC725CH1H-470J1     | 1 | 342104704R1 |             |
| C1978 | C-CERA C | CK725B1H-102K1      | 1 | 332101025R1 |             |
| C1979 | C-CERA C | CK725B1H-102K1      | 1 | 332101025R1 |             |
| C1980 | C-CERA C | CC725CH1H-470J1     | 1 | 342104704R1 |             |
| C1981 | C-CERA C | CC725CH1H-470J1     | 1 | 342104704R1 |             |
| C2    | VR C     | CE04W16V-100M(VR)   | 1 | 394641017T  | < MDD, MMA> |
| C4000 | UTSP C   | CE04W50V-4.7M(UTSP) | 1 | 397580477T  |             |
| C4001 | VR C     | CE04W16V-470M(VR)   | 1 | 394644717T  |             |
| C4002 | UTSP C   | CE04W10V-470M(UTSP) | 1 | 397534717T  |             |
| C4003 | TF C     | ECQ-V50V-334J       | 1 | 374723344T  |             |
| C4004 | UTSP C   | CE04W10V-470M(UTSP) | 1 | 397534717T  |             |



|       |          |                     |   |             |             |
|-------|----------|---------------------|---|-------------|-------------|
| C4005 | C-CERA C | CK725B1H-223K1      | 1 | 332102235R1 |             |
| C4006 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C4007 | ELECT C  | CE04W35V-4700M(VZ)  | 1 | 394564727S  |             |
| C4009 | TF C     | ECQ-V50V-334J       | 1 | 374723344T  |             |
| C4010 | TF C     | ECQ-V50V-334J       | 1 | 374723344T  |             |
| C4012 | TF C     | ECQ-V50V-334J       | 1 | 374723344T  |             |
| C4013 | ELECT C  | CE04W35V-4700M(VZ)  | 1 | 394564727S  |             |
| C4100 | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  |             |
| C4101 | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  |             |
| C4102 | UTSP C   | CE04W50V-10M(UTSP)  | 1 | 397581007T  |             |
| C4103 | UTSP C   | CE04W50V-2.2M(UTSP) | 1 | 397580227T  |             |
| C4108 | UTSP C   | CE04W50V-1M(UTSP)   | 1 | 397580107T  | < MDD, MMA> |
| C4109 | UTSP C   | CE04W50V-1M(UTSP)   | 1 | 397580107T  | < MDD, MMA> |
| C4110 | UTSP C   | CE04W50V-2.2M(UTSP) | 1 | 397580227T  | < MDD, MMA> |
| C4111 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C4112 | C-CERA C | CK725B1H-102K1      | 1 | 332101025R1 |             |
| C4114 | UTSP C   | CE04W50V-1M(UTSP)   | 1 | 397580107T  |             |
| C4115 | VR C     | CE04W6.3V-470M(VR)  | 1 | 394624717T  |             |
| C4117 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 | < MDD, MMA> |
| C4119 | VR C     | CE04W6.3V-470M(VR)  | 1 | 394624717T  |             |
| C4121 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C4122 | UTSP C   | CE04W50V-1M(UTSP)   | 1 | 397580107T  |             |
| C4123 | UTSP C   | CE04W50V-2.2M(UTSP) | 1 | 397580227T  |             |
| C4131 | C-CERA C | CK725B1H-102K1      | 1 | 332101025R1 |             |
| C4132 | VR C     | CE04W6.3V-470M(VR)  | 1 | 394624717T  |             |
| C4133 | UTSP C   | CE04W50V-1M(UTSP)   | 1 | 397580107T  |             |
| C4134 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C4135 | UTSP C   | CE04W25V-47M(UTSP)  | 1 | 397554707T  |             |
| C4136 | C-CERA C | CK725B1H-102K1      | 1 | 332101025R1 |             |
| C4137 | C-CERA C | CK725B0J-106K       | 1 | 332091065R2 |             |
| C4138 | VR C     | CE04W6.3V-470M(VR)  | 1 | 394624717T  |             |
| C4139 | UTSP C   | CE04W50V-22M(UTSP)  | 1 | 397582207T  |             |
| C4140 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C4141 | UTSP C   | CE04W50V-1M(UTSP)   | 1 | 397580107T  |             |
| C4142 | VR C     | CE04W6.3V-470M(VR)  | 1 | 394624717T  | < MDD, MMA> |
| C4143 | VR C     | CE04W6.3V-470M(VR)  | 1 | 394624717T  |             |
| C4144 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C4145 | UTSP C   | CE04W50V-2.2M(UTSP) | 1 | 397580227T  |             |

|       |          |                     |   |             |             |
|-------|----------|---------------------|---|-------------|-------------|
| C4146 | VR C     | CE04W6.3V-470M(VR)  | 1 | 394624717T  |             |
| C4150 | VR C     | CE04W6.3V-470M(VR)  | 1 | 394624717T  |             |
| C4151 | UTSP C   | CE04W25V-47M(UTSP)  | 1 | 397554707T  |             |
| C4152 | UTSP C   | CE04W25V-47M(UTSP)  | 1 | 397554707T  |             |
| C4154 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C4156 | UTSP C   | CE04W25V-47M(UTSP)  | 1 | 397554707T  |             |
| C4157 | VR C     | CE04W6.3V-470M(VR)  | 1 | 394624717T  |             |
| C4159 | C-CERA C | CK725B1H-102K1      | 1 | 332101025R1 |             |
| C4160 | VR C     | CE04W6.3V-470M(VR)  | 1 | 394624717T  |             |
| C4161 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C4162 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C4163 | VR C     | CE04W6.3V-470M(VR)  | 1 | 394624717T  |             |
| C4167 | C-CERA C | CK725F1A-105Z1      | 1 | 332181050R1 |             |
| C4168 | UTSP C   | CE04W50V-1M(UTSP)   | 1 | 397580107T  |             |
| C4169 | UTSP C   | CE04W50V-2.2M(UTSP) | 1 | 397580227T  |             |
| C4173 | VR C     | CE04W6.3V-470M(VR)  | 1 | 394624717T  |             |
| C4174 | C-CERA C | CK725B1H-102K1      | 1 | 332101025R1 |             |
| C4175 | C-CERA C | CK725F1A-105Z1      | 1 | 332181050R1 |             |
| C4176 | UTSP C   | CE04W50V-1M(UTSP)   | 1 | 397580107T  |             |
| C4179 | UTSP C   | CE04W50V-2.2M(UTSP) | 1 | 397580227T  |             |
| C4183 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C4184 | UTSP C   | CE04W25V-47M(UTSP)  | 1 | 397554707T  |             |
| C4186 | UTSP C   | CE04W25V-47M(UTSP)  | 1 | 397554707T  |             |
| C4187 | UTSP C   | CE04W25V-47M(UTSP)  | 1 | 397554707T  |             |
| C4191 | C-CERA C | CK725F1E-104Z1      | 1 | 332161040R1 | < MDD, MMA> |
| C4192 | UTSP C   | CE04W50V-1M(UTSP)   | 1 | 397580107T  |             |
| C4193 | C-CERA C | CC725CH1H-151J1     | 1 | 342101514R1 |             |
| C4194 | C-CERA C | CC725CH1H-151J1     | 1 | 342101514R1 |             |
| C4195 | C-CERA C | CC725CH1H-151J1     | 1 | 342101514R1 |             |
| C4196 | C-CERA C | CK725B1H-102K1      | 1 | 332101025R1 |             |
| C4197 | C-CERA C | CK725F1A-105Z1      | 1 | 332181050R1 |             |
| C4198 | UTSP C   | CE04W50V-1M(UTSP)   | 1 | 397580107T  |             |
| C4199 | UTSP C   | CE04W50V-2.2M(UTSP) | 1 | 397580227T  |             |
| C4200 | UTSP C   | CE04W50V-1M(UTSP)   | 1 | 397580107T  |             |
| C4202 | C-CERA C | CK725F1A-105Z1      | 1 | 332181050R1 |             |
| C4203 | UTSP C   | CE04W25V-47M(UTSP)  | 1 | 397554707T  |             |
| C4205 | UTSP C   | CE04W50V-1M(UTSP)   | 1 | 397580107T  |             |
| C4206 | UTSP C   | CE04W50V-2.2M(UTSP) | 1 | 397580227T  |             |

|            |            |                     |   |             |             |
|------------|------------|---------------------|---|-------------|-------------|
| C4207      | UTSP C     | CE04W50V-1M(UTSP)   | 1 | 397580107T  |             |
| C4209      | C-CERA C   | CK725B1H-102K1      | 1 | 332101025R1 |             |
| C4211      | VR C       | CE04W6.3V-470M(VR)  | 1 | 394624717T  |             |
| C4212      | C-CERA C   | CC725CH1H-151J1     | 1 | 342101514R1 |             |
| C4213      | C-CERA C   | CC725CH1H-151J1     | 1 | 342101514R1 |             |
| C4214      | C-CERA C   | CC725CH1H-151J1     | 1 | 342101514R1 |             |
| C4215      | UTSP C     | CE04W25V-47M(UTSP)  | 1 | 397554707T  |             |
| C4218      | C-CERA C   | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C4219      | C-CERA C   | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C4223      | C-CERA C   | CK725F1E-104Z1      | 1 | 332161040R1 | < MDD, MMA> |
| C4226      | VR C       | CE04W6.3V-470M(VR)  | 1 | 394624717T  |             |
| C4234      | VR C       | CE04W6.3V-470M(VR)  | 1 | 394624717T  |             |
| C4235      | VR C       | CE04W6.3V-470M(VR)  | 1 | 394624717T  |             |
| C4250      | C-CERA C   | CK725F1E-104Z1      | 1 | 332161040R1 | < MDD, MMA> |
| C4251      | C-CERA C   | CK725F1E-104Z1      | 1 | 332161040R1 | < MDD, MMA> |
| C4252      | C-CERA C   | CK725F1E-104Z1      | 1 | 332161040R1 | < MDD, MMA> |
| C4253      | C-CERA C   | CK725F1E-104Z1      | 1 | 332161040R1 | < MDD, MMA> |
| C4254      | C-CERA C   | CK725F1E-104Z1      | 1 | 332161040R1 | < MDD, MMA> |
| C4255      | C-CERA C   | CK725F1E-104Z1      | 1 | 332161040R1 | < MDD, MMA> |
| C4294      | C-CERA C   | CC725CH1H-151J1     | 1 | 342101514R1 | < MDD, MMA> |
| C4295      | C-CERA C   | CK725B1H-102K1      | 1 | 332101025R1 | < MDD, MMA> |
| C4500      | UTSP C     | CE04W25V-220M(UTSP) | 1 | 397552217T  |             |
| C4502      | UTSP C     | CE04W25V-220M(UTSP) | 1 | 397552217T  |             |
| C4503      | UTSP C     | CE04W25V-220M(UTSP) | 1 | 397552217T  |             |
| C47        | ELECT C    | CE04W35V-10M(S)     | 1 | 353761009T  | < MDD, MMA> |
| C4700      | UTSP C     | CE04W50V-1M(UTSP)   | 1 | 397580107T  |             |
| C4701      | UTSP C     | CE04W50V-1M(UTSP)   | 1 | 397580107T  |             |
| C4702      | VR C       | CE04W16V-100M(VR)   | 1 | 394641017T  |             |
| C4703      | C-CERA C   | CK725F1E-104Z1      | 1 | 332161040R1 |             |
| C4704      | UTSP C     | CE04W50V-1M(UTSP)   | 1 | 397580107T  |             |
| C4705      | UTSP C     | CE04W50V-1M(UTSP)   | 1 | 397580107T  |             |
| C4706      | C-CERA C   | CK725B1H-102K1      | 1 | 332101025R1 |             |
| C48        | ELECT C    | CE04W35V-10M(S)     | 1 | 353761009T  | < MDD, MMA> |
| C52        | UTSP C     | CE04W50V-10M(UTSP)  | 1 | 397581007T  | < MDD>      |
| C53        | UTSP C     | CE04W50V-10M(UTSP)  | 1 | 397581007T  | < MDD>      |
| C7         | UTSP C     | CE04W25V-47M(UTSP)  | 1 | 397554707T  | < MDD, MMA> |
| [RESISTOR] |            |                     |   |             |             |
| R1001      | C-CARBON R | RN72K1J-473JE       | 1 | 435034734R1 |             |

|       |            |               |   |             |  |
|-------|------------|---------------|---|-------------|--|
| R1002 | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1 |  |
| R1003 | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1 |  |
| R1004 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |  |
| R1005 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |  |
| R1006 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |  |
| R1007 | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1 |  |
| R1008 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R1010 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R1011 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |  |
| R1012 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1013 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1014 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1015 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1016 | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1 |  |
| R1017 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |  |
| R1019 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1020 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |  |
| R1026 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R1027 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |  |
| R1028 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1029 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1031 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |  |
| R1032 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |  |
| R1033 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |  |
| R1034 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R1035 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R1036 | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1 |  |
| R1037 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |  |
| R1038 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |  |
| R1039 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |  |
| R1040 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |  |
| R1041 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R1042 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |  |
| R1043 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |  |
| R1044 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1045 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1046 | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1 |  |
| R1047 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |  |

|       |            |               |   |             |  |
|-------|------------|---------------|---|-------------|--|
| R1048 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |  |
| R1049 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1050 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1051 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |  |
| R1052 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |  |
| R1055 | C-CARBON R | RN72K1J-273JE | 1 | 435032734R1 |  |
| R1056 | C-CARBON R | RN72K1J-273JE | 1 | 435032734R1 |  |
| R1057 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1058 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R1059 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R1060 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1061 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R1062 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1063 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1064 | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1 |  |
| R1065 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |  |
| R1066 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1067 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R1068 | C-CARBON R | RN72K1J-273JE | 1 | 435032734R1 |  |
| R1069 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R1070 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R1071 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |  |
| R1072 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |  |
| R1073 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |  |
| R1074 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |  |
| R1075 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |  |
| R1077 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1078 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |  |
| R1079 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R1080 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R1081 | C-CARBON R | RN72K1J-272JE | 1 | 435032724R1 |  |
| R1082 | C-CARBON R | RN72K1J-272JE | 1 | 435032724R1 |  |
| R1083 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |  |
| R1084 | C-CARBON R | RN72K1J-272JE | 1 | 435032724R1 |  |
| R1085 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |  |
| R1086 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |  |
| R1087 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |  |
| R1088 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |



|       |            |               |   |             |             |
|-------|------------|---------------|---|-------------|-------------|
| R1089 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |             |
| R1090 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1091 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |             |
| R1092 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |             |
| R1093 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |             |
| R1094 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |             |
| R1095 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |             |
| R1096 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1097 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |             |
| R1098 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1099 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |             |
| R11   | METAL O R  | RS1/2WBJ-10   | 1 | 443521004T  | < MDD, MMA> |
| R1101 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |             |
| R1104 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |             |
| R1107 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1109 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1111 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |             |
| R1113 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |             |
| R1114 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 | < MDD>      |
| R1115 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |             |
| R1116 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 | < MDD>      |
| R1117 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |             |
| R1118 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 | < MDD>      |
| R1119 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |             |
| R1120 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1121 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |             |
| R1122 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1123 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |             |
| R1124 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |             |
| R1126 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |             |
| R1128 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1130 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |             |
| R1131 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |             |
| R1132 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1133 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |             |
| R1134 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1136 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |             |
| R1137 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |

|       |            |               |   |             |             |
|-------|------------|---------------|---|-------------|-------------|
| R1138 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |             |
| R1139 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |             |
| R1140 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |             |
| R1141 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1142 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |             |
| R1143 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1144 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |             |
| R1146 | METAL R    | RNU1WCJ-1.5   | 1 | 453630154T  |             |
| R1147 | METAL R    | RNU1WCJ-1.5   | 1 | 453630154T  |             |
| R1148 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |             |
| R1149 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1150 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 | < MDD, MMA> |
| R1151 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |             |
| R1152 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 | < MDD, MMA> |
| R1153 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1154 | C-CARBON R | RN72K1J-333JE | 1 | 435033334R1 | < MDD, MMA> |
| R1155 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 | < MDD, MMA> |
| R1156 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1157 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 | < MDD, MMA> |
| R1158 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 | < MDD, MMA> |
| R1159 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 | < MMA>      |
| R1160 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 | < MDD>      |
| R1160 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 | < MMA>      |
| R1161 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |             |
| R1162 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |             |
| R1164 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |             |
| R1165 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |             |
| R1166 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |             |
| R1167 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |             |
| R1168 | C-CARBON R | RN72K1J-272JE | 1 | 435032724R1 |             |
| R1170 | C-CARBON R | RN72K1J-272JE | 1 | 435032724R1 |             |
| R1171 | C-CARBON R | RN72K1J-272JE | 1 | 435032724R1 |             |
| R1172 | C-CARBON R | RN72K1J-272JE | 1 | 435032724R1 |             |
| R1173 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1175 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |             |
| R1176 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |             |
| R1177 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |             |
| R1178 | C-CARBON R | RN72K1J-272JE | 1 | 435032724R1 |             |

|       |            |               |   |             |             |
|-------|------------|---------------|---|-------------|-------------|
| R1179 | C-CARBON R | RN72K1J-272JE | 1 | 435032724R1 |             |
| R1180 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |             |
| R1182 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1183 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1184 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1185 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |             |
| R1186 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |             |
| R1187 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1188 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 | < MDD, MMA> |
| R1189 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1190 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1191 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1192 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1193 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1194 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |             |
| R1195 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |             |
| R1196 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1197 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1198 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1199 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1200 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |             |
| R1201 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |             |
| R1202 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |             |
| R1203 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |             |
| R1204 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |             |
| R1205 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |             |
| R1207 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |             |
| R1209 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |             |
| R1210 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |             |
| R1211 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |             |
| R1212 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |             |
| R1213 | C-CARBON R | RN72K1J-272JE | 1 | 435032724R1 |             |
| R1214 | C-CARBON R | RN72K1J-272JE | 1 | 435032724R1 |             |
| R1217 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |             |
| R1218 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |             |
| R1219 | C-CARBON R | RN72K1J-332JE | 1 | 435033324R1 |             |
| R1220 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 | < MDD>      |
| R1221 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |

|       |            |               |   |             |             |
|-------|------------|---------------|---|-------------|-------------|
| R1222 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1223 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |             |
| R1224 | C-CARBON R | RN72K1J-332JE | 1 | 435033324R1 |             |
| R1225 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |             |
| R1226 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |             |
| R1228 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |             |
| R1230 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |             |
| R1231 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |             |
| R1235 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |             |
| R1240 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |             |
| R1241 | C-CARBON R | RN72K1J-272JE | 1 | 435032724R1 |             |
| R1242 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1243 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1244 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1245 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1246 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |             |
| R1248 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1249 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |             |
| R1250 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1251 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1252 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1253 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |             |
| R1254 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |             |
| R1255 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |             |
| R1264 | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1 |             |
| R1266 | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1 |             |
| R1267 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |             |
| R1268 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |             |
| R1270 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 | < MDD, MMA> |
| R1271 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 | < MDD, MMA> |
| R1284 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1285 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1286 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |             |
| R1289 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |             |
| R1290 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |             |
| R1291 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |             |
| R1292 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |             |
| R1293 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |             |

|       |            |               |   |             |  |
|-------|------------|---------------|---|-------------|--|
| R1294 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |  |
| R1295 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |  |
| R1296 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |  |
| R1297 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |  |
| R1298 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |  |
| R1299 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |  |
| R1300 | THERMISTOR | FUSB090F      | 1 | 4000252T    |  |
| R1301 | METAL R    | RNU1WCJ-4.7   | 1 | 453630474T  |  |
| R1302 | METAL R    | RNU1WCJ-4.7   | 1 | 453630474T  |  |
| R1303 | METAL O R  | RS1WBJ-22     | 1 | 443622204T  |  |
| R1304 | METAL O R  | RS1WBJ-22     | 1 | 443622204T  |  |
| R1311 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R1312 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R1313 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R1315 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R1316 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R1317 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1318 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1319 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R1320 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R1321 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1322 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R1323 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R1325 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1485 | C-CARBON R | RN72K1J-100JE | 1 | 435031004R1 |  |
| R1486 | C-CARBON R | RN72K1J-100JE | 1 | 435031004R1 |  |
| R1487 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R1488 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R1490 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R1491 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R1492 | C-CARBON R | RN72K1J-100JE | 1 | 435031004R1 |  |
| R1496 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R1497 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1 |  |
| R1500 | C-CARBON R | RN72K1J-392JE | 1 | 435033924R1 |  |
| R1504 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |  |
| R1506 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1507 | C-CARBON R | RN72K1J-152JE | 1 | 435031524R1 |  |
| R1508 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |  |



|       |            |               |   |             |  |
|-------|------------|---------------|---|-------------|--|
| R1509 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R1510 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R1511 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |  |
| R1512 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1513 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R1514 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |  |
| R1515 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R1517 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R1518 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R1519 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R1520 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1521 | C-CARBON R | RN72K1J-823JE | 1 | 435038234R1 |  |
| R1522 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R1523 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R1524 | C-CARBON R | RN72K1J-823JE | 1 | 435038234R1 |  |
| R1525 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1526 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1527 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |  |
| R1528 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1529 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1530 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1531 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R1532 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R1534 | C-CARBON R | RN72K1J-823JE | 1 | 435038234R1 |  |
| R1535 | C-CARBON R | RN72K1J-105JE | 1 | 435031054R1 |  |
| R1567 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R1568 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R1569 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R1570 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R1571 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R1572 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R1573 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |  |
| R1575 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R1577 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R1579 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R1580 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |  |
| R1581 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1 |  |
| R1599 | C-CARBON R | RN72K1J-392JE | 1 | 435033924R1 |  |

|       |            |               |   |             |             |
|-------|------------|---------------|---|-------------|-------------|
| R1600 | C-CARBON R | RN72K1J-153JE | 1 | 435031534R1 |             |
| R1601 | C-CARBON R | RN72K1J-153JE | 1 | 435031534R1 |             |
| R1602 | C-CARBON R | RN72K1J-153JE | 1 | 435031534R1 |             |
| R1603 | C-CARBON R | RN72K1J-153JE | 1 | 435031534R1 |             |
| R1604 | C-CARBON R | RN72K1J-153JE | 1 | 435031534R1 |             |
| R1605 | C-CARBON R | RN72K1J-153JE | 1 | 435031534R1 |             |
| R1606 | C-CARBON R | RN72K1J-153JE | 1 | 435031534R1 |             |
| R1607 | C-CARBON R | RN72K1J-153JE | 1 | 435031534R1 |             |
| R1610 | C-CARBON R | RN72K1J-153JE | 1 | 435031534R1 |             |
| R1611 | C-CARBON R | RN72K1J-153JE | 1 | 435031534R1 |             |
| R1612 | C-CARBON R | RN72K1J-153JE | 1 | 435031534R1 |             |
| R1613 | C-CARBON R | RN72K1J-153JE | 1 | 435031534R1 |             |
| R1614 | C-CARBON R | RN72K1J-153JE | 1 | 435031534R1 |             |
| R1615 | C-CARBON R | RN72K1J-153JE | 1 | 435031534R1 |             |
| R1616 | C-CARBON R | RN72K1J-153JE | 1 | 435031534R1 |             |
| R1617 | C-CARBON R | RN72K1J-153JE | 1 | 435031534R1 |             |
| R1620 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 | < MDD, MMA> |
| R1621 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 | < MDD, MMA> |
| R1622 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 | < MDD, MMA> |
| R1623 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 | < MDD, MMA> |
| R1624 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 | < MDD, MMA> |
| R1625 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 | < MDD, MMA> |
| R1626 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 | < MDD, MMA> |
| R1627 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 | < MDD, MMA> |
| R1630 | C-CARBON R | RN72K1J-123JE | 1 | 435031234R1 | < MDD, MMA> |
| R1631 | C-CARBON R | RN72K1J-123JE | 1 | 435031234R1 | < MDD, MMA> |
| R1632 | C-CARBON R | RN72K1J-123JE | 1 | 435031234R1 | < MDD, MMA> |
| R1633 | C-CARBON R | RN72K1J-123JE | 1 | 435031234R1 | < MDD, MMA> |
| R1634 | C-CARBON R | RN72K1J-123JE | 1 | 435031234R1 | < MDD, MMA> |
| R1635 | C-CARBON R | RN72K1J-123JE | 1 | 435031234R1 | < MDD, MMA> |
| R1636 | C-CARBON R | RN72K1J-123JE | 1 | 435031234R1 | < MDD, MMA> |
| R1637 | C-CARBON R | RN72K1J-123JE | 1 | 435031234R1 | < MDD, MMA> |
| R1640 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 | < MDD, MMA> |
| R1641 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 | < MDD, MMA> |
| R1642 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 | < MDD, MMA> |
| R1643 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 | < MDD, MMA> |
| R1644 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 | < MDD, MMA> |
| R1645 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 | < MDD, MMA> |

|       |            |               |   |             |             |
|-------|------------|---------------|---|-------------|-------------|
| R1646 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 | < MDD, MMA> |
| R1647 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 | < MDD, MMA> |
| R1650 | C-CARBON R | RN72K1J-123JE | 1 | 435031234R1 | < MDD, MMA> |
| R1651 | C-CARBON R | RN72K1J-123JE | 1 | 435031234R1 | < MDD, MMA> |
| R1652 | C-CARBON R | RN72K1J-123JE | 1 | 435031234R1 | < MDD, MMA> |
| R1653 | C-CARBON R | RN72K1J-123JE | 1 | 435031234R1 | < MDD, MMA> |
| R1654 | C-CARBON R | RN72K1J-123JE | 1 | 435031234R1 | < MDD, MMA> |
| R1655 | C-CARBON R | RN72K1J-123JE | 1 | 435031234R1 | < MDD, MMA> |
| R1656 | C-CARBON R | RN72K1J-123JE | 1 | 435031234R1 | < MDD, MMA> |
| R1657 | C-CARBON R | RN72K1J-123JE | 1 | 435031234R1 | < MDD, MMA> |
| R1660 | C-CARBON R | RN72K1J-182JE | 1 | 435031824R1 | < MDD, MMA> |
| R1661 | C-CARBON R | RN72K1J-182JE | 1 | 435031824R1 | < MDD, MMA> |
| R1662 | C-CARBON R | RN72K1J-182JE | 1 | 435031824R1 | < MDD, MMA> |
| R1663 | C-CARBON R | RN72K1J-182JE | 1 | 435031824R1 | < MDD, MMA> |
| R1664 | C-CARBON R | RN72K1J-182JE | 1 | 435031824R1 | < MDD, MMA> |
| R1665 | C-CARBON R | RN72K1J-182JE | 1 | 435031824R1 | < MDD, MMA> |
| R1666 | C-CARBON R | RN72K1J-182JE | 1 | 435031824R1 | < MDD, MMA> |
| R1667 | C-CARBON R | RN72K1J-182JE | 1 | 435031824R1 | < MDD, MMA> |
| R1670 | C-CARBON R | RN72K1J-182JE | 1 | 435031824R1 | < MDD, MMA> |
| R1671 | C-CARBON R | RN72K1J-182JE | 1 | 435031824R1 | < MDD, MMA> |
| R1672 | C-CARBON R | RN72K1J-182JE | 1 | 435031824R1 | < MDD, MMA> |
| R1673 | C-CARBON R | RN72K1J-182JE | 1 | 435031824R1 | < MDD, MMA> |
| R1674 | C-CARBON R | RN72K1J-182JE | 1 | 435031824R1 | < MDD, MMA> |
| R1675 | C-CARBON R | RN72K1J-182JE | 1 | 435031824R1 | < MDD, MMA> |
| R1676 | C-CARBON R | RN72K1J-182JE | 1 | 435031824R1 | < MDD, MMA> |
| R1677 | C-CARBON R | RN72K1J-182JE | 1 | 435031824R1 | < MDD, MMA> |
| R1770 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 | < MDD, MMA> |
| R1771 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 | < MDD, MMA> |
| R1772 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 | < MDD, MMA> |
| R1773 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 | < MDD, MMA> |
| R1774 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 | < MDD, MMA> |
| R1775 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 | < MDD, MMA> |
| R1776 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 | < MDD, MMA> |
| R1777 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 | < MDD, MMA> |
| R1780 | METAL O R  | RS1/2WBJ-22   | 1 | 443522204T  |             |
| R1781 | METAL O R  | RS1/2WBJ-22   | 1 | 443522204T  |             |
| R1800 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |             |
| R1801 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |             |

|       |            |               |   |             |  |
|-------|------------|---------------|---|-------------|--|
| R1810 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R1811 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R1820 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R1821 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R1830 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R1831 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R1840 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R1841 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R1850 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R1851 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R1860 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R1861 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R1900 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |  |
| R1901 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |  |
| R1902 | C-CARBON R | RN72K1J-105JE | 1 | 435031054R1 |  |
| R1904 | C-CARBON R | RN72K1J-223JE | 1 | 435032234R1 |  |
| R1905 | C-CARBON R | RN72K1J-223JE | 1 | 435032234R1 |  |
| R1906 | C-CARBON R | RN72K1J-223JE | 1 | 435032234R1 |  |
| R1907 | C-CARBON R | RN72K1J-223JE | 1 | 435032234R1 |  |
| R1908 | C-CARBON R | RN72K1J-471JE | 1 | 435034714R1 |  |
| R1909 | C-CARBON R | RN72K1J-471JE | 1 | 435034714R1 |  |
| R1910 | C-CARBON R | RN72K1J-223JE | 1 | 435032234R1 |  |
| R1911 | C-CARBON R | RN72K1J-223JE | 1 | 435032234R1 |  |
| R1912 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R1913 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R1920 | C-CARBON R | RN72K1J-223JE | 1 | 435032234R1 |  |
| R1921 | C-CARBON R | RN72K1J-223JE | 1 | 435032234R1 |  |
| R1951 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R1952 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R1953 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R1954 | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1 |  |
| R1955 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R1956 | C-CARBON R | RN72K1J-105JE | 1 | 435031054R1 |  |
| R1961 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R1962 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R1963 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R1964 | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1 |  |
| R1965 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |

|       |            |                |   |             |             |
|-------|------------|----------------|---|-------------|-------------|
| R1971 | C-CARBON R | RN72K1J-220JE  | 1 | 435032204R1 |             |
| R1972 | C-CARBON R | RN72K1J-220JE  | 1 | 435032204R1 |             |
| R1973 | C-CARBON R | RN72K1J-750JE  | 1 | 435037504R1 |             |
| R1974 | C-CARBON R | RN72K1J-222JE  | 1 | 435032224R1 |             |
| R1975 | C-CARBON R | RN72K1J-220JE  | 1 | 435032204R1 |             |
| R1980 | THERMISTOR | FUSB090F       | 1 | 4000252T    |             |
| R39   | C-CARBON R | RN72K1J-220JE  | 1 | 435032204R1 | < MDD>      |
| R4000 | METAL R    | RNU1/2WCJ-4.7  | 1 | 453530474T  |             |
| R4001 | C-CARBON R | RN72K1J-682JE  | 1 | 435036824R1 | < MDD, MMA> |
| R4002 | METAL R    | RNU1WCJ-0.22   | 1 | 453632294T  |             |
| R4003 | METAL R    | RNU1/2WCJ-0.47 | 1 | 453534794T  |             |
| R4004 | C-CARBON R | RN72K1J-562JE  | 1 | 435035624R1 |             |
| R4005 | C-CARBON R | RN72K1J-152JE  | 1 | 435031524R1 |             |
| R4006 | C-CARBON R | RN72K1J-102JE  | 1 | 435031024R1 |             |
| R4007 | C-CARBON R | RN72K1J-392JE  | 1 | 435033924R1 |             |
| R4008 | C-CARBON R | RN72K2E-022JE  | 1 | 435220224R1 |             |
| R4022 | METAL O R  | RS2WBJ-3.3     | 1 | 441720334F  |             |
| R4024 | C-CARBON R | RN72K1J-470JE  | 1 | 435034704R1 |             |
| R41   | C-CARBON R | RN72K1J-220JE  | 1 | 435032204R1 | < MDD>      |
| R4103 | C-CARBON R | RN72K1J-750JE  | 1 | 435037504R1 | < MDD, MMA> |
| R4104 | C-CARBON R | RN72K1J-750JE  | 1 | 435037504R1 | < MDD, MMA> |
| R4105 | C-CARBON R | RN72K1J-750JE  | 1 | 435037504R1 | < MDD, MMA> |
| R4106 | C-CARBON R | RN72K1J-000JE  | 1 | 435030004R1 |             |
| R4107 | C-CARBON R | RN72K1J-000JE  | 1 | 435030004R1 |             |
| R4108 | C-CARBON R | RN72K1J-101JE  | 1 | 435031014R1 |             |
| R4109 | C-CARBON R | RN72K1J-000JE  | 1 | 435030004R1 |             |
| R4110 | C-CARBON R | RN72K1J-750JE  | 1 | 435037504R1 |             |
| R4111 | C-CARBON R | RN72K1J-392JE  | 1 | 435033924R1 |             |
| R4112 | C-CARBON R | RN72K1J-750JE  | 1 | 435037504R1 |             |
| R4113 | C-CARBON R | RN72K1J-101JE  | 1 | 435031014R1 |             |
| R4114 | C-CARBON R | RN72K1J-000JE  | 1 | 435030004R1 | < MDD, MMA> |
| R4115 | C-CARBON R | RN72K1J-750JE  | 1 | 435037504R1 |             |
| R4116 | C-CARBON R | RN72K1J-000JE  | 1 | 435030004R1 |             |
| R4117 | C-CARBON R | RN72K1J-750JE  | 1 | 435037504R1 |             |
| R4118 | C-CARBON R | RN72K1J-000JE  | 1 | 435030004R1 |             |
| R4119 | C-CARBON R | RN72K2E-022JE  | 1 | 435220224R1 |             |
| R4120 | C-CARBON R | RN72K1J-750JE  | 1 | 435037504R1 |             |
| R4121 | C-CARBON R | RN72K1J-750JE  | 1 | 435037504R1 |             |

|       |            |               |   |             |  |
|-------|------------|---------------|---|-------------|--|
| R4122 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R4123 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |  |
| R4124 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R4125 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |  |
| R4126 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R4127 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |  |
| R4135 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R4136 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R4137 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R4138 | C-CARBON R | RN72K2E-022JE | 1 | 435220224R1 |  |
| R4139 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R4140 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R4141 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R4142 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R4143 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R4144 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R4145 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |  |
| R4146 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |  |
| R4147 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |  |
| R4148 | C-CARBON R | RN72K1J-392JE | 1 | 435033924R1 |  |
| R4149 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R4150 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R4151 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R4152 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R4153 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R4155 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R4156 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R4157 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R4159 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R4160 | C-CARBON R | RN72K2E-022JE | 1 | 435220224R1 |  |
| R4161 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R4162 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R4163 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |  |
| R4164 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |  |
| R4165 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |  |
| R4166 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |  |
| R4167 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |  |
| R4168 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |



|       |            |               |   |             |             |
|-------|------------|---------------|---|-------------|-------------|
| R4169 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |             |
| R4170 | C-CARBON R | RN72K2E-022JE | 1 | 435220224R1 |             |
| R4171 | C-CARBON R | RN72K2E-022JE | 1 | 435220224R1 |             |
| R4172 | C-CARBON R | RN72K1J-682JE | 1 | 435036824R1 |             |
| R4173 | C-CARBON R | RN72K1J-682JE | 1 | 435036824R1 |             |
| R4174 | C-CARBON R | RN72K2E-022JE | 1 | 435220224R1 |             |
| R4175 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |             |
| R4176 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |             |
| R4177 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |             |
| R4181 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |             |
| R4182 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |             |
| R4183 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |             |
| R4187 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |             |
| R4189 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |             |
| R4199 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 | < MDD, MMA> |
| R4200 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |             |
| R4201 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |             |
| R4202 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |             |
| R4203 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 | < MDD, MMA> |
| R4205 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |             |
| R4206 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |             |
| R4207 | C-CARBON R | RN72K2E-022JE | 1 | 435220224R1 |             |
| R4208 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |             |
| R4209 | C-CARBON R | RN72K1J-392JE | 1 | 435033924R1 |             |
| R4211 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |             |
| R4212 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |             |
| R4215 | C-CARBON R | RN72K1J-105JE | 1 | 435031054R1 |             |
| R4216 | C-CARBON R | RN72K1J-105JE | 1 | 435031054R1 |             |
| R4217 | C-CARBON R | RN72K1J-105JE | 1 | 435031054R1 |             |
| R4218 | C-CARBON R | RN72K1J-105JE | 1 | 435031054R1 |             |
| R4219 | C-CARBON R | RN72K1J-105JE | 1 | 435031054R1 |             |
| R4220 | C-CARBON R | RN72K1J-105JE | 1 | 435031054R1 |             |
| R4221 | C-CARBON R | RN72K1J-105JE | 1 | 435031054R1 |             |
| R4222 | C-CARBON R | RN72K1J-105JE | 1 | 435031054R1 |             |
| R4223 | C-CARBON R | RN72K1J-105JE | 1 | 435031054R1 |             |
| R4224 | C-CARBON R | RN72K1J-105JE | 1 | 435031054R1 |             |
| R4225 | C-CARBON R | RN72K1J-105JE | 1 | 435031054R1 |             |
| R4226 | C-CARBON R | RN72K1J-105JE | 1 | 435031054R1 |             |

|       |             |               |   |             |             |
|-------|-------------|---------------|---|-------------|-------------|
| R4227 | C-CARBON R  | RN72K1J-682JE | 1 | 435036824R1 |             |
| R4228 | C-CARBON R  | RN72K1J-222JE | 1 | 435032224R1 |             |
| R4229 | C-CARBON R  | RN72K1J-331JE | 1 | 435033314R1 |             |
| R4233 | C-CARBON R  | RN72K1J-222JE | 1 | 435032224R1 |             |
| R4235 | C-CARBON R  | RN72K1J-222JE | 1 | 435032224R1 |             |
| R4238 | C-CARBON R  | RN72K1J-222JE | 1 | 435032224R1 |             |
| R4247 | C-CARBON R  | RN72K1J-750JE | 1 | 435037504R1 | < MDD, MMA> |
| R4248 | C-CARBON R  | RN72K1J-104JE | 1 | 435031044R1 | < MDD, MMA> |
| R4258 | C-CARBON R  | RN72K2E-022JE | 1 | 435220224R1 |             |
| R43   | C-CARBON R  | RN72K1J-000JE | 1 | 435030004R1 | < MDD>      |
| R44   | NF CARBON R | R25J-10       | 1 | 415471004T  | < MDD, MMA> |
| R45   | NF CARBON R | R25J-10       | 1 | 415471004T  | < MDD, MMA> |
| R4505 | C-CARBON R  | RN72K1J-223JE | 1 | 435032234R1 |             |
| R4506 | C-CARBON R  | RN72K1J-122JE | 1 | 435031224R1 |             |
| R4507 | C-CARBON R  | RN72K1J-473JE | 1 | 435034734R1 |             |
| R4508 | C-CARBON R  | RN72K1J-182JE | 1 | 435031824R1 |             |
| R4509 | C-CARBON R  | RN72K1J-331JE | 1 | 435033314R1 |             |
| R4510 | C-CARBON R  | RN72K1J-562JE | 1 | 435035624R1 |             |
| R4511 | METAL R     | RNU1WCJ-1     | 1 | 453630104T  |             |
| R46   | C-CARBON R  | RN72K1J-103JE | 1 | 435031034R1 | < MMA>      |
| R47   | C-CARBON R  | RN72K1J-101JE | 1 | 435031014R1 | < MMA>      |
| R4700 | C-CARBON R  | RN72K1J-103JE | 1 | 435031034R1 |             |
| R4701 | C-CARBON R  | RN72K1J-103JE | 1 | 435031034R1 |             |
| R4702 | C-CARBON R  | RN72K1J-331JE | 1 | 435033314R1 |             |
| R4703 | C-CARBON R  | RN72K1J-331JE | 1 | 435033314R1 |             |
| R4704 | C-CARBON R  | RN72K1J-103JE | 1 | 435031034R1 |             |
| R4705 | C-CARBON R  | RN72K1J-331JE | 1 | 435033314R1 |             |
| R4707 | C-CARBON R  | RN72K1J-331JE | 1 | 435033314R1 |             |
| R48   | C-CARBON R  | RN72K1J-101JE | 1 | 435031014R1 | < MMA>      |
| R49   | C-CARBON R  | RN72K1J-103JE | 1 | 435031034R1 | < MDD, MMA> |
| R50   | C-CARBON R  | RN72K1J-103JE | 1 | 435031034R1 | < MDD, MMA> |
| R51   | C-CARBON R  | RN72K1J-273JE | 1 | 435032734R1 | < MDD, MMA> |
| R52   | C-CARBON R  | RN72K1J-273JE | 1 | 435032734R1 | < MDD, MMA> |
| R53   | C-CARBON R  | RN72K1J-223JE | 1 | 435032234R1 | < MDD, MMA> |
| R54   | C-CARBON R  | RN72K1J-103JE | 1 | 435031034R1 | < MDD, MMA> |
| R55   | C-CARBON R  | RN72K1J-103JE | 1 | 435031034R1 | < MDD, MMA> |
| R56   | C-CARBON R  | RN72K1J-223JE | 1 | 435032234R1 | < MDD, MMA> |
| R57   | C-CARBON R  | RN72K1J-103JE | 1 | 435031034R1 | < MDD>      |

|          |                |                |      |             |             |
|----------|----------------|----------------|------|-------------|-------------|
| R58      | C-CARBON R     | RN72K1J-103JE  | 1    | 435031034R1 | < MDD>      |
| R59      | C-CARBON R     | RN72K1J-103JE  | 1    | 435031034R1 | < MDD>      |
| R60      | C-CARBON R     | RN72K1J-103JE  | 1    | 435031034R1 | < MDD>      |
| R61      | C-CARBON R     | RN72K1J-103JE  | 1    | 435031034R1 | < MDD>      |
| R62      | C-CARBON R     | RN72K1J-103JE  | 1    | 435031034R1 | < MDD>      |
| R63      | C-CARBON R     | RN72K1J-103JE  | 1    | 435031034R1 | < MDD>      |
| R64      | C-CARBON R     | RN72K1J-103JE  | 1    | 435031034R1 | < MDD>      |
| [SW TRM] |                |                |      |             |             |
| E1911    | TRM-423(SCREW) | NEJITANSI ST3  | 1    | 25060495    |             |
| F4000A   | FUSE HOL       | NSCT-1P2031    | 1    | 25052133T   |             |
| F4000B   | FUSE HOL       | NSCT-1P2031    | 1    | 25052133T   |             |
| F4001A   | FUSE HOL       | NSCT-1P2031    | 1    | 25052133T   |             |
| F4001B   | FUSE HOL       | NSCT-1P2031    | 1    | 25052133T   |             |
| JL104B   | WIRE TRAP      | NPLG-9P592     | 1    | 25055630    | < MDD, MMA> |
| JL5515A  | WIRE HOL       | NSCT-11P882    | 1    | 25051095    | < MDD, MMA> |
| JL8002A  | WIRE HOL       | NSCT-5P896     | 1    | 25051109    |             |
| JL901B   | WIRE TRAP      | NPLG-5P588     | 1    | 25055626    |             |
| P001     | PWB            | BCDG-0099      | 1    | 25140099C   | N           |
| P002     | PWB            | BCCPU-0100     | { 1} | 25140100    | N           |
| P003     | PWB            | BCVD-0101      | { 1} | 25140101    | N           |
| P005     | PWB            | BCETC-0103     | { 1} | 25140103    | N           |
| P1004A   | SOCKET         | NSCT-9P2243    | 1    | 25052346    |             |
| P1008B   | PLUG           | IMSA-9142B-20A | 1    | 25056600    |             |
| P1010B   | PLUG           | IMSA-9142B-20A | 1    | 25056600    |             |
| P103B    | SOCKET         | NSCT-11P2104   | 1    | 25052207    | < MDD, MMA> |
| P1208    | ST JACK        | MSJ-035-22     | 1    | 25045887    |             |
| P1307    | TRM-423(SCREW) | NEJITANSI ST3  | 1    | 25060495    |             |
| P1309    | PIN JACK       | NPJ-3PDO657    | 1    | 25045885    | < MDD, MMA> |
| P1309 or | PIN JACK       | NPJ-3PDO431    | ( 1) | 25045624    | < MDD, MMA> |
| P1901A   | PLUG           | IMSA-9142B-22A | 1    | 25056601    | N           |
| P1901B   | SOCKET         | IMSA-9142S-22A | 1    | 25053233    | N           |
| P1902    | SOCKET         | NNA1-01-006    | 1    | 25053357    |             |
| P3605B   | SOCKET         | IMSA-9142S-18A | 1    | 25053231    |             |
| P3607B   | SOCKET         | IMSA-9142S-16A | 1    | 25053230    |             |
| P3608B   | SOCKET         | IMSA-9142S-18A | 1    | 25053231    |             |
| P4000B   | PLUG           | NPLG-5P119     | 1    | 25055135    |             |
| P4100A   | PLUG           | IMSA-9142B-16A | 1    | 25056598    |             |
| P4100B   | SOCKET         | IMSA-9142S-16A | 1    | 25053230    |             |

|          |                |                           |      |          |             |
|----------|----------------|---------------------------|------|----------|-------------|
| P4101A   | PLUG           | IMSA-9142B-18A            | 1    | 25056599 |             |
| P4101B   | SOCKET         | IMSA-9142S-18A            | 1    | 25053231 |             |
| P4104A   | SOCKET         | NSCT-19P2112              | 1    | 25052215 | < MDD, MMA> |
| P4112    | PIN JACK       | NPJ-10PDSY628             | 1    | 25045849 | < MDD, MMA> |
| P4112 or | PIN JACK       | NPJ-10PDBY481             | ( 1) | 25045684 | < MDD, MMA> |
| P4113    | PIN JACK       | NPJ-10PDSY628             | 1    | 25045849 | < MDD, MMA> |
| P4113 or | PIN JACK       | NPJ-10PDBY481             | ( 1) | 25045684 | < MDD, MMA> |
| P4114    | PIN JACK       | NPJ-10PDSY628             | 1    | 25045849 | < MDD, MMA> |
| P4114 or | PIN JACK       | NPJ-10PDBY481             | ( 1) | 25045684 | < MDD, MMA> |
| P4115    | PIN JACK       | NPJ-1PDY655               | 1    | 25045882 | < MDD, MMA> |
| P4115 or | PIN JACK       | NPJ-1PDYE402              | ( 1) | 25045591 | < MDD, MMA> |
| P4116    | PIN JACK       | NPJ-6PDGLR649             | 1    | 25045874 | < MDD, MMA> |
| P4117    | PIN JACK       | NPJ-6PDGLR649             | 1    | 25045874 | < MDD, MMA> |
| P4118    | TRM-423(SCREW) | NEJITANSI ST3             | 1    | 25060495 |             |
| P4119    | RETAINER       | (JOINT)                   | 1    | 27142069 |             |
| P4501    | PLUG           | NPLG-2P83                 | 1    | 25055099 |             |
| P4700    | SOCKET         | MDS-09P-V-01(DSUB9P)      | 1    | 25053363 | < MDD, MMA> |
| P5512B   | PLUG           | NPLG-15P0970              | 1    | 25056020 |             |
| P5513B   | PLUG           | NPLG-19P0974              | 1    | 25056024 |             |
| P5518B   | PLUG           | NPLG-3P0958               | 1    | 25056008 |             |
| P6621B   | PLUG           | IMSA-9142B-16A            | 1    | 25056598 | < MDD, MMA> |
| P7501A   | PLUG           | A2545WR2-2x20P(IDE40SIDE) | 1    | 25056643 | N           |
| P8       | SOCKET         | 2MJ-3516-002              | 1    | 25053355 | < MDD>      |

PRINTED CIRCUIT BOARD PARTS LIST

DTR-40.1

|       |                                    |                 |             |              |
|-------|------------------------------------|-----------------|-------------|--------------|
| U004  | Display circuit PC board a'ssy     | BADIS-0146-1A * | 1B234546-1A | N B MDD, MMA |
| U0041 | Support PC board-1                 | BAETC-0154-1A   | 1B234554-1A | N B MDD, MMA |
| U0042 | Stadby switch PC board a'ssy       | BASW-0147-1A    | 1B234547-1A | N B MDD, MMA |
| U0043 | FL power supply PC board a'ssy     | BAPS-0148-1A    | 1B234548-1A | N B MDD, MMA |
| U0044 | Headphone terminal PC board a'ssy  | BAETC-0149-1A   | 1B234549-1A | N B MDD, MMA |
| U0045 | Support PC board-2                 | BAETC-0150-1A   | 1B234550-1A | N B MDD, MMA |
| U0046 | Front digital input PC board a'ssy | BAETC-0151-1A   | 1B234551-1A | N B MDD, MMA |
| U0047 | Support PC board-3                 | BAETC-0155-1A   | 1B234555-1A | N B MDD, MMA |
| U0048 | Support PC board-4                 | BAETC-0156-1A   | 1B234556-1A | N B MDD, MMA |

| CIRCUIT. NO. | PART NAME | DESCRIPTION | Q'TY | PART NO. (SN) | REMARKS |
|--------------|-----------|-------------|------|---------------|---------|
| [TUNER UNIT] |           |             |      |               |         |

|                  |           |               |      |             |   |
|------------------|-----------|---------------|------|-------------|---|
| U7520            | PHT CP    | JSR1321-001   | 1    | 24120138    |   |
| U7560            | REMO SENS | TSOP34338RF1F | 1    | 24130017    | N |
| [SEMI CONDUCTOR] |           |               |      |             |   |
| D7500            | ZENER D   | UDZS10B       | 1    | 224551000R2 |   |
| D7520            | C-DIODE   | 1SS355        | 1    | 223269R2    |   |
| D7520 or         | C-DIODE   | 1SS352        | ( 1) | 223234R2    |   |
| D7520 or         | C-DIODE   | MA2J111       | ( 1) | 223279R2    |   |
| D7520 or         | C-DIODE   | KDS4148U      | ( 1) | 223283R2    |   |
| D7521            | C-DIODE   | 1SS355        | 1    | 223269R2    |   |
| D7521 or         | C-DIODE   | 1SS352        | ( 1) | 223234R2    |   |
| D7521 or         | C-DIODE   | MA2J111       | ( 1) | 223279R2    |   |
| D7521 or         | C-DIODE   | KDS4148U      | ( 1) | 223283R2    |   |
| D7522            | C-DIODE   | 1SS355        | 1    | 223269R2    |   |
| D7522 or         | C-DIODE   | 1SS352        | ( 1) | 223234R2    |   |
| D7522 or         | C-DIODE   | MA2J111       | ( 1) | 223279R2    |   |
| D7522 or         | C-DIODE   | KDS4148U      | ( 1) | 223283R2    |   |
| D7523            | C-DIODE   | 1SS355        | 1    | 223269R2    |   |
| D7523 or         | C-DIODE   | 1SS352        | ( 1) | 223234R2    |   |
| D7523 or         | C-DIODE   | MA2J111       | ( 1) | 223279R2    |   |
| D7523 or         | C-DIODE   | KDS4148U      | ( 1) | 223283R2    |   |
| D7530            | ZENER D   | UDZS5.1B      | 1    | 224550510R2 |   |
| D7531            | C-DIODE   | 1SS355        | 1    | 223269R2    |   |
| D7531 or         | C-DIODE   | 1SS352        | ( 1) | 223234R2    |   |
| D7531 or         | C-DIODE   | MA2J111       | ( 1) | 223279R2    |   |
| D7531 or         | C-DIODE   | KDS4148U      | ( 1) | 223283R2    |   |
| D7532            | C-DIODE   | 1SS355        | 1    | 223269R2    |   |
| D7532 or         | C-DIODE   | 1SS352        | ( 1) | 223234R2    |   |
| D7532 or         | C-DIODE   | MA2J111       | ( 1) | 223279R2    |   |
| D7532 or         | C-DIODE   | KDS4148U      | ( 1) | 223283R2    |   |
| D7560            | C-DIODE   | 1SS355        | 1    | 223269R2    |   |
| D7560 or         | C-DIODE   | 1SS352        | ( 1) | 223234R2    |   |
| D7560 or         | C-DIODE   | MA2J111       | ( 1) | 223279R2    |   |
| D7560 or         | C-DIODE   | KDS4148U      | ( 1) | 223283R2    |   |
| D7561            | C-DIODE   | 1SS355        | 1    | 223269R2    |   |
| D7561 or         | C-DIODE   | 1SS352        | ( 1) | 223234R2    |   |
| D7561 or         | C-DIODE   | MA2J111       | ( 1) | 223279R2    |   |
| D7561 or         | C-DIODE   | KDS4148U      | ( 1) | 223283R2    |   |
| D7580            | C-DIODE   | 1SS355        | 1    | 223269R2    |   |

|          |         |                   |      |             |  |
|----------|---------|-------------------|------|-------------|--|
| D7580 or | C-DIODE | 1SS352            | ( 1) | 223234R2    |  |
| D7580 or | C-DIODE | MA2J111           | ( 1) | 223279R2    |  |
| D7580 or | C-DIODE | KDS4148U          | ( 1) | 223283R2    |  |
| D7581    | C-DIODE | 1SS355            | 1    | 223269R2    |  |
| D7581 or | C-DIODE | 1SS352            | ( 1) | 223234R2    |  |
| D7581 or | C-DIODE | MA2J111           | ( 1) | 223279R2    |  |
| D7581 or | C-DIODE | KDS4148U          | ( 1) | 223283R2    |  |
| D7582    | C-DIODE | 1SS355            | 1    | 223269R2    |  |
| D7582 or | C-DIODE | 1SS352            | ( 1) | 223234R2    |  |
| D7582 or | C-DIODE | MA2J111           | ( 1) | 223279R2    |  |
| D7582 or | C-DIODE | KDS4148U          | ( 1) | 223283R2    |  |
| D7583    | C-DIODE | 1SS355            | 1    | 223269R2    |  |
| D7583 or | C-DIODE | 1SS352            | ( 1) | 223234R2    |  |
| D7583 or | C-DIODE | MA2J111           | ( 1) | 223279R2    |  |
| D7583 or | C-DIODE | KDS4148U          | ( 1) | 223283R2    |  |
| D7593    | LED     | SLR-342MGTE7P     | 1    | 225455T     |  |
| D7595    | LED     | SLI-343URC-TE7    | 1    | 225449T     |  |
| D7806    | ZENER D | UDZS22B           | 1    | 224552200R2 |  |
| D7810    | ZENER D | UDZS24B           | 1    | 224552400R2 |  |
| D7812    | DIODE   | RL1N4003          | 1    | 22380260T   |  |
| D7813    | DIODE   | RL1N4003          | 1    | 22380260T   |  |
| D7814    | DIODE   | RL1N4003          | 1    | 22380260T   |  |
| D7815    | DIODE   | RL1N4003          | 1    | 22380260T   |  |
| D7816    | DIODE   | RL1N4003          | 1    | 22380260T   |  |
| Q7500    | FL TUBE | HNA-16SL05T       | 1    | 212271A     |  |
| Q7500A   | HOLDER  | (FL)              | 1    | 27191303    |  |
| Q7501    | IC      | M66005-0001AHP    | 1    | 22242208R3  |  |
| Q7502    | IC      | M66005-0001AHP    | 1    | 22242208R3  |  |
| Q7503    | TR      | 2SC2712-GR        | 1    | 2213145R2   |  |
| Q7504    | TR      | 2SC2712-GR        | 1    | 2213145R2   |  |
| Q7530    | IC      | NJM4580M-D        | 1    | 22241448R2  |  |
| Q7532    | TR      | RN1441            | 1    | 2215410R2   |  |
| Q7533    | TR      | RN2403            | 1    | 2214540R2   |  |
| Q7533 or | TR      | KRA103S           | ( 1) | 2216230R2   |  |
| Q7534    | IC      | NJM4580M-D        | 1    | 22241448R2  |  |
| Q7593    | TR      | DTC123JKA         | 1    | 2216690R2   |  |
| Q7801    | TR      | 2SC2235-O(TPE6_F) | 1    | 2211653T    |  |
| Q7801 or | TR      | 2SC2235-Y(TPE6_F) | ( 1) | 2211654T    |  |



| [TRANS COIL] |            |                 |   |              |  |
|--------------|------------|-----------------|---|--------------|--|
| L7520        | CHOKE COIL | LBC2518T2R2M    | 1 | 231364M022R2 |  |
| L7530        | CHOKE COIL | LBC2518T2R2M    | 1 | 231364M022R2 |  |
| L7580        | CHOKE COIL | LBC2518T2R2M    | 1 | 231364M022R2 |  |
| L7581        | CHOKE COIL | LBC2518T2R2M    | 1 | 231364M022R2 |  |
| L7582        | CHOKE COIL | LBC2518T2R2M    | 1 | 231364M022R2 |  |
| [CAPACITOR]  |            |                 |   |              |  |
| C7501        | C-CERA C   | CK725B1H-223K1  | 1 | 332102235R1  |  |
| C7502        | C-CERA C   | CK725F1E-104Z1  | 1 | 332161040R1  |  |
| C7503        | C-CERA C   | CK725F1E-104Z1  | 1 | 332161040R1  |  |
| C7504        | C-CERA C   | CK725B1H-473K1  | 1 | 332104735R1  |  |
| C7505        | C-CERA C   | CK725B1H-473K1  | 1 | 332104735R1  |  |
| C7506        | ELECT C    | CE04W50V-33M    | 1 | 355783309T   |  |
| C7511        | C-CERA C   | CK725F1E-104Z1  | 1 | 332161040R1  |  |
| C7512        | C-CERA C   | CC725CH1H-180J1 | 1 | 342101804R1  |  |
| C7513        | C-CERA C   | CK725F1E-104Z1  | 1 | 332161040R1  |  |
| C7514        | C-CERA C   | CK725F1E-104Z1  | 1 | 332161040R1  |  |
| C7518        | C-CERA C   | CK725F1E-104Z1  | 1 | 332161040R1  |  |
| C7519        | C-CERA C   | CK725F1E-104Z1  | 1 | 332161040R1  |  |
| C7520        | C-CERA C   | CK725B1H-223K1  | 1 | 332102235R1  |  |
| C7521        | ELECT C    | CE04W6.3V-100M  | 1 | 355721019T   |  |
| C7522        | C-CERA C   | CC725CH1H-221J1 | 1 | 342102214R1  |  |
| C7523        | C-CERA C   | CC725CH1H-221J1 | 1 | 342102214R1  |  |
| C7524        | C-CERA C   | CK725B1H-102K1  | 1 | 332101025R1  |  |
| C7530        | C-CERA C   | CK725B1H-102K1  | 1 | 332101025R1  |  |
| C7531        | C-CERA C   | CK725B1H-102K1  | 1 | 332101025R1  |  |
| C7533        | ELECT C    | CE04W35V-47M    | 1 | 355764709T   |  |
| C7534        | ELECT C    | CE04W35V-47M    | 1 | 355764709T   |  |
| C7535        | ELECT C    | CE04W35V-10M(S) | 1 | 353761009T   |  |
| C7537        | C-CERA C   | CC725CH1H-330J1 | 1 | 342103304R1  |  |
| C7538        | ELECT C    | CE04W35V-10M(S) | 1 | 353761009T   |  |
| C7539        | ELECT C    | CE04W35V-10M(S) | 1 | 353761009T   |  |
| C7540        | ELECT C    | CE04W35V-10M(S) | 1 | 353761009T   |  |
| C7543        | C-CERA C   | CK725B1H-102K1  | 1 | 332101025R1  |  |
| C7560        | ELECT C    | CE04W6.3V-220M  | 1 | 355722219T   |  |
| C7561        | C-CERA C   | CK725B1H-102K1  | 1 | 332101025R1  |  |
| C7562        | C-CERA C   | CK725B1H-102K1  | 1 | 332101025R1  |  |
| C7563        | C-CERA C   | CK725F1E-104Z1  | 1 | 332161040R1  |  |

|            |            |                   |   |             |  |
|------------|------------|-------------------|---|-------------|--|
| C7580      | MKT C      | B32529C0102J289   | 1 | 376491024T  |  |
| C7581      | MKT C      | B32529C0102J289   | 1 | 376491024T  |  |
| C7582      | MKT C      | B32529C0102J289   | 1 | 376491024T  |  |
| C7583      | MKT C      | B32529C0102J289   | 1 | 376491024T  |  |
| C7590      | C-CERA C   | CK725B1H-103K1    | 1 | 332101035R1 |  |
| C7591      | C-CERA C   | CK725B1H-103K1    | 1 | 332101035R1 |  |
| C7804      | VR C       | CE04W63V-220M(VR) | 1 | 394672217T  |  |
| C7805      | VR C       | CE04W63V-47M(VR)  | 1 | 394674707T  |  |
| C7806      | C-CERA C   | CK725B1H-223K1    | 1 | 332102235R1 |  |
| C7900      | C-CERA C   | CK725F1E-104Z1    | 1 | 332161040R1 |  |
| [RESISTOR] |            |                   |   |             |  |
| R7500      | C-CARBON R | RN72K1J-221JE     | 1 | 435032214R1 |  |
| R7501      | C-CARBON R | RN72K1J-221JE     | 1 | 435032214R1 |  |
| R7502      | C-CARBON R | RN72K1J-273JE     | 1 | 435032734R1 |  |
| R7503      | C-CARBON R | RN72K1J-222JE     | 1 | 435032224R1 |  |
| R7504      | C-CARBON R | RN72K1J-222JE     | 1 | 435032224R1 |  |
| R7505      | C-CARBON R | RN72K1J-222JE     | 1 | 435032224R1 |  |
| R7506      | C-CARBON R | RN72K1J-222JE     | 1 | 435032224R1 |  |
| R7507      | C-CARBON R | RN72K1J-222JE     | 1 | 435032224R1 |  |
| R7508      | C-CARBON R | RN72K1J-222JE     | 1 | 435032224R1 |  |
| R7509      | C-CARBON R | RN72K1J-222JE     | 1 | 435032224R1 |  |
| R7510      | C-CARBON R | RN72K1J-222JE     | 1 | 435032224R1 |  |
| R7520      | C-CARBON R | RN72K1J-221JE     | 1 | 435032214R1 |  |
| R7521      | C-CARBON R | RN72K1J-331JE     | 1 | 435033314R1 |  |
| R7522      | C-CARBON R | RN72K1J-331JE     | 1 | 435033314R1 |  |
| R7523      | C-CARBON R | RN72K1J-750JE     | 1 | 435037504R1 |  |
| R7526      | C-CARBON R | RN72K1J-223JE     | 1 | 435032234R1 |  |
| R7527      | C-CARBON R | RN72K1J-223JE     | 1 | 435032234R1 |  |
| R7528      | C-CARBON R | RN72K1J-224JE     | 1 | 435032244R1 |  |
| R7529      | C-CARBON R | RN72K1J-224JE     | 1 | 435032244R1 |  |
| R7530      | C-CARBON R | RN72K1J-472JE     | 1 | 435034724R1 |  |
| R7531      | C-CARBON R | RN72K1J-101JE     | 1 | 435031014R1 |  |
| R7532      | C-CARBON R | RN72K1J-331JE     | 1 | 435033314R1 |  |
| R7533      | C-CARBON R | RN72K1J-182JE     | 1 | 435031824R1 |  |
| R7534      | C-CARBON R | RN72K1J-104JE     | 1 | 435031044R1 |  |
| R7535      | C-CARBON R | RN72K1J-102JE     | 1 | 435031024R1 |  |
| R7536      | C-CARBON R | RN72K1J-333JE     | 1 | 435033334R1 |  |
| R7537      | C-CARBON R | RN72K1J-333JE     | 1 | 435033334R1 |  |

|       |            |               |   |             |  |
|-------|------------|---------------|---|-------------|--|
| R7538 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |  |
| R7539 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |  |
| R7540 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1 |  |
| R7560 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |  |
| R7561 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1 |  |
| R7580 | METAL O R  | RS1WBJ-33     | 1 | 443623304T  |  |
| R7581 | METAL O R  | RS1WBJ-33     | 1 | 443623304T  |  |
| R7590 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R7591 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R7592 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R7593 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R7597 | C-CARBON R | RN72K1J-181JE | 1 | 435031814R1 |  |
| R7599 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1 |  |
| R7611 | C-CARBON R | RN72K1J-271JE | 1 | 435032714R1 |  |
| R7612 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R7613 | C-CARBON R | RN72K1J-471JE | 1 | 435034714R1 |  |
| R7614 | C-CARBON R | RN72K1J-561JE | 1 | 435035614R1 |  |
| R7615 | C-CARBON R | RN72K1J-821JE | 1 | 435038214R1 |  |
| R7616 | C-CARBON R | RN72K1J-122JE | 1 | 435031224R1 |  |
| R7617 | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1 |  |
| R7618 | C-CARBON R | RN72K1J-392JE | 1 | 435033924R1 |  |
| R7619 | C-CARBON R | RN72K1J-123JE | 1 | 435031234R1 |  |
| R7621 | C-CARBON R | RN72K1J-271JE | 1 | 435032714R1 |  |
| R7622 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R7623 | C-CARBON R | RN72K1J-471JE | 1 | 435034714R1 |  |
| R7624 | C-CARBON R | RN72K1J-561JE | 1 | 435035614R1 |  |
| R7625 | C-CARBON R | RN72K1J-821JE | 1 | 435038214R1 |  |
| R7626 | C-CARBON R | RN72K1J-122JE | 1 | 435031224R1 |  |
| R7627 | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1 |  |
| R7628 | C-CARBON R | RN72K1J-392JE | 1 | 435033924R1 |  |
| R7629 | C-CARBON R | RN72K1J-123JE | 1 | 435031234R1 |  |
| R7631 | C-CARBON R | RN72K1J-271JE | 1 | 435032714R1 |  |
| R7632 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R7633 | C-CARBON R | RN72K1J-471JE | 1 | 435034714R1 |  |
| R7634 | C-CARBON R | RN72K1J-561JE | 1 | 435035614R1 |  |
| R7635 | C-CARBON R | RN72K1J-821JE | 1 | 435038214R1 |  |
| R7636 | C-CARBON R | RN72K1J-122JE | 1 | 435031224R1 |  |
| R7637 | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1 |  |

|          |                |                           |      |              |   |
|----------|----------------|---------------------------|------|--------------|---|
| R7638    | C-CARBON R     | RN72K1J-392JE             | 1    | 435033924R1  |   |
| R7639    | C-CARBON R     | RN72K1J-123JE             | 1    | 435031234R1  |   |
| R7641    | C-CARBON R     | RN72K1J-271JE             | 1    | 435032714R1  |   |
| R7642    | C-CARBON R     | RN72K1J-331JE             | 1    | 435033314R1  |   |
| R7643    | C-CARBON R     | RN72K1J-471JE             | 1    | 435034714R1  |   |
| R7644    | C-CARBON R     | RN72K1J-561JE             | 1    | 435035614R1  |   |
| R7645    | C-CARBON R     | RN72K1J-821JE             | 1    | 435038214R1  |   |
| R7646    | C-CARBON R     | RN72K1J-122JE             | 1    | 435031224R1  |   |
| R7647    | C-CARBON R     | RN72K1J-222JE             | 1    | 435032224R1  |   |
| R7804    | METAL O R      | RS1/2WBJ-10               | 1    | 443521004T   |   |
| R7805    | C-CARBON R     | RN72K1J-562JE             | 1    | 435035624R1  |   |
| R7807    | C-CARBON R     | RN72K1J-333JE             | 1    | 435033334R1  |   |
| R7808    | METAL R        | RNU1/2WCJ-1               | 1    | 453530104T   |   |
| R7810    | METAL O R      | RS1/2WBJ-10               | 1    | 443521004T   |   |
| R7939    | C-CARBON R     | RN72K1J-104JE             | 1    | 435031044R1  |   |
| R7954    | C-CARBON R     | RN72K1J-104JE             | 1    | 435031044R1  |   |
| [SW TRM] |                |                           |      |              |   |
| E7301    | RETAINER       | (S)                       | 1    | 27142074     |   |
| E7580    | TRM-423(SCREW) | NEJITANSI ST3             | 1    | 25060495     |   |
| E7601    | TRM-423(SCREW) | NEJITANSI ST3             | 1    | 25060495     |   |
| JL4103A  | WIRE HOL       | NSCT-5P896                | 1    | 25051109     |   |
| JL9303A  | WIRE HOL       | NSCT-5P876                | 1    | 25051089     |   |
| JL9303B  | WIRE TRAP      | NPLG-5P588                | 1    | 25055626     |   |
| P7501B   | PLUG           | A2545WR2-2x20P(IDE40SIDE) | 1    | 25056643     |   |
| P7507    | PWB            | BCETC-0154                | { 1} | 25140154     | N |
| P7522    | PIN JACK       | NPJ-3PDB694               | 1    | 25045926     |   |
| P7530    | ST JACK        | MSJ-035-05C B AG GR type  | 1    | 25045880     |   |
| P7560A   | SOCKET         | NSCT-3P2183               | 1    | 25052286     |   |
| P7560B   | PLUG           | NPLG-3P0958               | 1    | 25056008     |   |
| P7580    | ST JACK        | MSJ-064-05A GR            | 1    | 25045782     |   |
| P7590A   | SOCKET AS      | NSAS-18P1674              | 1    | 2009991072UL |   |
| P7590B   | PLUG           | NPLG-9P356                | 1    | 25055373     |   |
| P7600    | PWB            | BCDIS-0146                | 1    | 25140146B    | N |
| P7601    | PWB            | BCSW-0147                 | { 1} | 25140147     | N |
| P7602    | PWB            | BCPS-0148                 | { 1} | 25140148     | N |
| P7603    | PWB            | BCETC-0149                | { 1} | 25140149     | N |
| P7604    | PWB            | BCETC-0150                | { 1} | 25140150     | N |
| P7605    | PWB            | BCETC-0151                | { 1} | 25140151     | N |

|          |          |              |      |           |   |
|----------|----------|--------------|------|-----------|---|
| P7609    | PWB      | BCETC-0155   | { 1} | 25140155  | N |
| P7610    | PWB      | BCETC-0156   | { 1} | 25140156  | N |
| P9301A   | PLUG     | NPLG-6P120   | 1    | 25055136  |   |
| S7590    | R ENCODE | EVEHD1F3024B | 1    | 25065695W |   |
| S7611    | PUSH SW  | NPS-111-S681 | 1    | 25035718T |   |
| S7611 or | PUSH SW  | NPS-111-S677 | ( 1) | 25035714T |   |
| S7612    | PUSH SW  | NPS-111-S681 | 1    | 25035718T |   |
| S7612 or | PUSH SW  | NPS-111-S677 | ( 1) | 25035714T |   |
| S7616    | PUSH SW  | NPS-111-S681 | 1    | 25035718T |   |
| S7616 or | PUSH SW  | NPS-111-S677 | ( 1) | 25035714T |   |
| S7618    | PUSH SW  | NPS-111-S681 | 1    | 25035718T |   |
| S7618 or | PUSH SW  | NPS-111-S677 | ( 1) | 25035714T |   |
| S7619    | PUSH SW  | NPS-111-S681 | 1    | 25035718T |   |
| S7619 or | PUSH SW  | NPS-111-S677 | ( 1) | 25035714T |   |
| S7620    | PUSH SW  | NPS-111-S681 | 1    | 25035718T |   |
| S7620 or | PUSH SW  | NPS-111-S677 | ( 1) | 25035714T |   |
| S7621    | PUSH SW  | NPS-111-S681 | 1    | 25035718T |   |
| S7621 or | PUSH SW  | NPS-111-S677 | ( 1) | 25035714T |   |
| S7622    | PUSH SW  | NPS-111-S681 | 1    | 25035718T |   |
| S7622 or | PUSH SW  | NPS-111-S677 | ( 1) | 25035714T |   |
| S7624    | PUSH SW  | NPS-111-S681 | 1    | 25035718T |   |
| S7624 or | PUSH SW  | NPS-111-S677 | ( 1) | 25035714T |   |
| S7625    | PUSH SW  | NPS-111-S681 | 1    | 25035718T |   |
| S7625 or | PUSH SW  | NPS-111-S677 | ( 1) | 25035714T |   |
| S7626    | PUSH SW  | NPS-111-S681 | 1    | 25035718T |   |
| S7626 or | PUSH SW  | NPS-111-S677 | ( 1) | 25035714T |   |
| S7627    | PUSH SW  | NPS-111-S681 | 1    | 25035718T |   |
| S7627 or | PUSH SW  | NPS-111-S677 | ( 1) | 25035714T |   |
| S7628    | PUSH SW  | NPS-111-S681 | 1    | 25035718T |   |
| S7628 or | PUSH SW  | NPS-111-S677 | ( 1) | 25035714T |   |
| S7629    | PUSH SW  | NPS-111-S681 | 1    | 25035718T |   |
| S7629 or | PUSH SW  | NPS-111-S677 | ( 1) | 25035714T |   |
| S7630    | PUSH SW  | NPS-111-S681 | 1    | 25035718T |   |
| S7630 or | PUSH SW  | NPS-111-S677 | ( 1) | 25035714T |   |
| S7631    | PUSH SW  | NPS-111-S681 | 1    | 25035718T |   |
| S7631 or | PUSH SW  | NPS-111-S677 | ( 1) | 25035714T |   |
| S7632    | PUSH SW  | NPS-111-S681 | 1    | 25035718T |   |
| S7632 or | PUSH SW  | NPS-111-S677 | ( 1) | 25035714T |   |

|          |         |              |      |           |  |
|----------|---------|--------------|------|-----------|--|
| S7633    | PUSH SW | NPS-111-S681 | 1    | 25035718T |  |
| S7633 or | PUSH SW | NPS-111-S677 | ( 1) | 25035714T |  |
| S7634    | PUSH SW | NPS-111-S681 | 1    | 25035718T |  |
| S7634 or | PUSH SW | NPS-111-S677 | ( 1) | 25035714T |  |
| S7635    | PUSH SW | NPS-111-S681 | 1    | 25035718T |  |
| S7635 or | PUSH SW | NPS-111-S677 | ( 1) | 25035714T |  |
| S7636    | PUSH SW | NPS-111-S681 | 1    | 25035718T |  |
| S7636 or | PUSH SW | NPS-111-S677 | ( 1) | 25035714T |  |
| S7637    | PUSH SW | NPS-111-S681 | 1    | 25035718T |  |
| S7637 or | PUSH SW | NPS-111-S677 | ( 1) | 25035714T |  |
| S7638    | PUSH SW | NPS-111-S681 | 1    | 25035718T |  |
| S7638 or | PUSH SW | NPS-111-S677 | ( 1) | 25035714T |  |
| S7639    | PUSH SW | NPS-111-S681 | 1    | 25035718T |  |
| S7639 or | PUSH SW | NPS-111-S677 | ( 1) | 25035714T |  |
| S7640    | PUSH SW | NPS-111-S681 | 1    | 25035718T |  |
| S7640 or | PUSH SW | NPS-111-S677 | ( 1) | 25035714T |  |
| S7641    | PUSH SW | NPS-111-S681 | 1    | 25035718T |  |
| S7641 or | PUSH SW | NPS-111-S677 | ( 1) | 25035714T |  |
| S7642    | PUSH SW | NPS-111-S681 | 1    | 25035718T |  |
| S7642 or | PUSH SW | NPS-111-S677 | ( 1) | 25035714T |  |
| S7643    | PUSH SW | NPS-111-S681 | 1    | 25035718T |  |
| S7643 or | PUSH SW | NPS-111-S677 | ( 1) | 25035714T |  |
| S7644    | PUSH SW | NPS-111-S681 | 1    | 25035718T |  |
| S7644 or | PUSH SW | NPS-111-S677 | ( 1) | 25035714T |  |
| S7645    | PUSH SW | NPS-111-S681 | 1    | 25035718T |  |
| S7645 or | PUSH SW | NPS-111-S677 | ( 1) | 25035714T |  |
| S7646    | PUSH SW | NPS-111-S681 | 1    | 25035718T |  |
| S7646 or | PUSH SW | NPS-111-S677 | ( 1) | 25035714T |  |
| S7647    | PUSH SW | NPS-111-S681 | 1    | 25035718T |  |
| S7647 or | PUSH SW | NPS-111-S677 | ( 1) | 25035714T |  |
| S7648    | PUSH SW | NPS-111-S681 | 1    | 25035718T |  |
| S7648 or | PUSH SW | NPS-111-S677 | ( 1) | 25035714T |  |

PRINTED CIRCUIT BOARD PARTS LIST

DTR-40.1

|              |                             |                 |             |               |         |
|--------------|-----------------------------|-----------------|-------------|---------------|---------|
| U005         | HDMI circuit PC board a'ssy | BAHDM-0132-1D * | 1B234532-1D | B MDD, MMA    |         |
| CIRCUIT. NO. | PART NAME                   | DESCRIPTION     | Q'TY        | PART NO. (SN) | REMARKS |



| [SEMI CONDUCTOR] |          |                        |      |                 |   |
|------------------|----------|------------------------|------|-----------------|---|
| D3101            | C-DIODE  | KDS4148U               | 1    | 223283R2        |   |
| D3101 or         | C-DIODE  | 1SS352                 | ( 1) | 223234R2        |   |
| D3401            | C-DIODE  | KDS4148U               | 1    | 223283R2        |   |
| D3401 or         | C-DIODE  | 1SS352                 | ( 1) | 223234R2        |   |
| D8041            | DIODE    | RB070M-30              | 1    | 22380361R2      |   |
| D8043            | DIODE    | RB070M-30              | 1    | 22380361R2      |   |
| D8301            | C-DIODE  | 1SS226(TE85L_F)        | 1    | 223266R2        |   |
| D8302            | C-DIODE  | KDS4148U               | 1    | 223283R2        |   |
| D8302 or         | C-DIODE  | 1SS352                 | ( 1) | 223234R2        |   |
| D8652            | C-DIODE  | 1SR154-400             | 1    | 22380284R2      |   |
| D8653            | C-DIODE  | KDS4148U               | 1    | 223283R2        |   |
| D8653 or         | C-DIODE  | 1SS352                 | ( 1) | 223234R2        |   |
| D8701            | C-DIODE  | KDS4148U               | 1    | 223283R2        |   |
| D8701 or         | C-DIODE  | 1SS352                 | ( 1) | 223234R2        |   |
| D8951            | DIODE    | RSX501LA-20            | 1    | 22380364R2      |   |
| D8952            | DIODE    | RSX501LA-20            | 1    | 22380364R2      |   |
| D8953            | DIODE    | RSX501LA-20            | 1    | 22380364R2      |   |
| D8954            | DIODE    | RSX501LA-20            | 1    | 22380364R2      |   |
| D8958            | C-DIODE  | 1SS352                 | 1    | 223234R2        |   |
| D8958 or         | C-DIODE  | MA2J111                | ( 1) | 223279R2        |   |
| D8958 or         | C-DIODE  | KDS4148U               | ( 1) | 223283R2        |   |
| Q205             | IC       | TC74VHC157FT           | 1    | 22274157ER2TO   |   |
| Q3001            | IC       | D830K011AZKB300ZrevC   | 1    | 22242617R3      | N |
| Q3002            | IC (DSP) | NAND256W3A2BN6E (0309) | 1    | 222W0092R303096 |   |
| Q3003            | IC       | IS42S16160C-7TL        | 1    | 22242592R3      |   |
| Q3003 or         | IC       | K4S561632J-UC75        | ( 1) | 22242524AR3     |   |
| Q3004            | IC       | IS42S16160C-7TL        | 1    | 22242592R3      |   |
| Q3004 or         | IC       | K4S561632J-UC75        | ( 1) | 22242524AR3     |   |
| Q3005            | IC       | TC7W32FU               | 1    | 22241162R2      |   |
| Q3006            | IC       | S-80127CNMC-JKM-T2     | 1    | 22241642R2      |   |
| Q3103            | IC       | BH18LB1WG-TR           | 1    | 22242562R2      |   |
| Q3106            | IC       | BH33FB1WG-TR           | 1    | 22242585R2      |   |
| Q3107            | IC       | BA33BC0FP              | 1    | 22278033DR2RH   |   |
| Q3107 or         | IC       | TA48033BF(TE16L_NQ)    | ( 1) | 22278033DBR2TO  |   |
| Q3107 or         | IC       | TA48033AF(TE16L_NQ)    | ( 1) | 22278033DR2TO   |   |
| Q3108            | IC       | KSZ8041NL              | 1    | 22242591R2      |   |
| Q3109            | IC       | BD7820                 | 1    | 22242300R2      |   |

|          |           |                          |      |                 |   |
|----------|-----------|--------------------------|------|-----------------|---|
| Q3202    | IC        | TC74VHC157FT             | 1    | 22274157ER2TO   |   |
| Q3204    | IC        | TC7SZU04FU               | 1    | 22242512R2TO    |   |
| Q3205    | IC        | TC7SZU04FU               | 1    | 22242512R2TO    |   |
| Q3206    | IC        | NE5532APSR               | 1    | 22242283R2      |   |
| Q3207    | IC        | NE5532APSR               | 1    | 22242283R2      |   |
| Q3210    | IC        | TC7WH241FU(TE12L_F)      | 1    | 22242076R2TO    |   |
| Q3401    | IC (DSP2) | ES29LV160ET-70TG (0324)  | 1    | 222W0069R303247 |   |
| Q3401 or | IC (DSP2) | S29AL016D70TFI010 (0324) | ( 1) | 222W0063R303247 |   |
| Q3401 or | IC (DSP2) | S29AL016J70TFI010 (0324) | ( 1) | 222W0100R303247 |   |
| Q3401 or | IC (DSP2) | MX29LV160DTTI-7 (0324)   | ( 1) | 222W0104R303247 |   |
| Q3402    | IC        | D788E001BRFP266Z         | 1    | 22242502R3      |   |
| Q3403    | IC        | K4S641632K-UC60          | 1    | 22242462R2      |   |
| Q3403 or | IC        | K4S641632N-LC60          | ( 1) | 22242603R2      |   |
| Q3403 or | IC        | EM638165TS-7G            | ( 1) | 22242607R2      |   |
| Q3404    | IC        | BD7820                   | 1    | 22242300R2      |   |
| Q3405    | IC        | TC7WU04FU(TE12L_F)       | 1    | 22240935R2      |   |
| Q3406    | IC        | TA48033AF(TE16L_NQ)      | 1    | 22278033DR2TO   |   |
| Q3406 or | IC        | TA48033BF(TE16L_NQ)      | ( 1) | 22278033DBR2TO  |   |
| Q3604    | IC        | PCM1754DBQR              | 1    | 22242598R2      |   |
| Q8000    | IC        | HY5DU561622ETP-4-C       | 1    | 22242450R3      |   |
| Q8000 or | IC        | HY5DU561622FTP-4-C       | ( 1) | 22242577R3      |   |
| Q8001    | IC        | HY5DU561622ETP-4-C       | 1    | 22242450R3      |   |
| Q8001 or | IC        | HY5DU561622FTP-4-C       | ( 1) | 22242577R3      |   |
| Q8005    | IC (DSP)  | MX29LV320CTTC-70G (0311) | 1    | 222W0052R30311A |   |
| Q8005 or | IC (DSP)  | MX29LV320DTTI-70G (0311) | ( 1) | 222W0109R30311A | N |
| Q8041    | IC        | TA48018BF(TE16L_NQ)      | 1    | 22278018DBR2TO  |   |
| Q8161    | IC        | TA48018BF(TE16L_NQ)      | 1    | 22278018DBR2TO  |   |
| Q8162    | IC        | SH9185ACTU               | 1    | 22242471R3      |   |
| Q8200    | IC        | FLI30336                 | 1    | 22242469R3      |   |
| Q8201    | IC        | BR24S32FJ-WE2            | 1    | 22242569R2      |   |
| Q8201 or | IC        | 24LC32A-I/SN             | ( 1) | 22242521R2      |   |
| Q8305    | IC        | S-812C50BUC-C5ET2G       | 1    | 22242407R2      |   |
| Q8306    | IC        | NC7SZ08P5X_F042          | 1    | 22242482R2      |   |
| Q8306 or | IC        | TC7SZ08FU(TE85L_F)       | ( 1) | 22242071R2TO    |   |
| Q8309    | TR ARRAY  | UM6K1N                   | 1    | 226066R2        |   |
| Q8362    | IC        | SH9185ACTU               | 1    | 22242471R3      |   |
| Q8401    | IC        | SH9134CTU                | 1    | 22242394R3      |   |
| Q8404    | IC        | BH18LB1WG-TR             | 1    | 22242562R2      |   |

|              |                 |                            |      |                 |   |
|--------------|-----------------|----------------------------|------|-----------------|---|
| Q8405        | IC              | SN74CB3Q3305PWR            | 1    | 22242258R2      |   |
| Q8501        | IC              | SIH9233ACTU                | 1    | 22242582R3      |   |
| Q8595        | IC              | TA48018BF(TE16L_NQ)        | 1    | 22278018DBR2TO  |   |
| Q8652        | IC              | BH33FB1WG-TR               | 1    | 22242585R2      |   |
| Q8654        | IC              | BD7820                     | 1    | 22242300R2      |   |
| Q8701        | IC (HDMI/VIDEO) | MPD70F3739GC-UEU-AX (0299) | 1    | 222W0102R302995 | N |
| Q8813        | IC              | TC74VCX162827              | 1    | 22242395R2      |   |
| Q8814        | IC              | TC74VCX162827              | 1    | 22242395R2      |   |
| Q8817        | IC              | TC74VCX162827              | 1    | 22242395R2      |   |
| Q8818        | IC              | TC74VCX162827              | 1    | 22242395R2      |   |
| Q8951        | IC              | MP1593DN                   | 1    | 22242601R2      | N |
| Q8952        | IC              | MP1593DN                   | 1    | 22242601R2      | N |
| Q8953        | IC              | MP1593DN                   | 1    | 22242601R2      | N |
| Q8954        | IC              | MP1593DN                   | 1    | 22242601R2      | N |
| Q8955        | TR              | DTC144EE                   | 1    | 2216390R2       |   |
| Q8955 or     | TR              | KRC404E                    | ( 1) | 2216450R2       |   |
| Q8956        | TR              | DTC144EE                   | 1    | 2216390R2       |   |
| Q8956 or     | TR              | KRC404E                    | ( 1) | 2216450R2       |   |
| Q8957        | TR              | DTC144EE                   | 1    | 2216390R2       |   |
| Q8957 or     | TR              | KRC404E                    | ( 1) | 2216450R2       |   |
| Q8958        | TR              | DTC144EE                   | 1    | 2216390R2       |   |
| Q8958 or     | TR              | KRC404E                    | ( 1) | 2216450R2       |   |
| Q8963        | TR              | DTC144EE                   | 1    | 2216390R2       |   |
| Q8963 or     | TR              | KRC404E                    | ( 1) | 2216450R2       |   |
| [TRANS COIL] |                 |                            |      |                 |   |
| L251         | CORE            | BLM18PG181SN1D             | 1    | 2350005R1       |   |
| L261         | EMIFIL          | BK1608LM182-T              | 1    | 230958R1        |   |
| L3001        | CORE            | BLM18PG121SN1D             | 1    | 2350006R1       |   |
| L3002        | CORE            | BLM18PG121SN1D             | 1    | 2350006R1       |   |
| L3003        | CORE            | BLM18PG121SN1D             | 1    | 2350006R1       |   |
| L3004        | CORE            | BLM18PG121SN1D             | 1    | 2350006R1       |   |
| L3005        | CORE            | BLM18PG121SN1D             | 1    | 2350006R1       |   |
| L3103        | CORE            | BLM18PG121SN1D             | 1    | 2350006R1       |   |
| L3104        | CORE            | BLM18PG121SN1D             | 1    | 2350006R1       |   |
| L3105        | CORE            | BLM18PG121SN1D             | 1    | 2350006R1       |   |
| L3106        | CORE            | BLM18PG121SN1D             | 1    | 2350006R1       |   |
| L3107        | CORE            | BLM18PG121SN1D             | 1    | 2350006R1       |   |
| L3108        | CORE            | BLM18PG121SN1D             | 1    | 2350006R1       |   |

|       |            |                |   |              |  |
|-------|------------|----------------|---|--------------|--|
| L3109 | CORE       | BLM18PG121SN1D | 1 | 2350006R1    |  |
| L3110 | CORE       | BLM18PG121SN1D | 1 | 2350006R1    |  |
| L3202 | C-CARBON R | RN72K1J-000JE  | 1 | 435030004R1  |  |
| L3203 | CORE       | MMZ1608Y601BT  | 1 | 2350004R1    |  |
| L3204 | CORE       | MMZ1608Y601BT  | 1 | 2350004R1    |  |
| L3205 | CORE       | BLM18PG121SN1D | 1 | 2350006R1    |  |
| L3206 | CORE       | BLM18PG121SN1D | 1 | 2350006R1    |  |
| L3207 | CORE       | MMZ1608Y601BT  | 1 | 2350004R1    |  |
| L3208 | CORE       | MMZ1608Y601BT  | 1 | 2350004R1    |  |
| L3209 | CORE       | MMZ1608Y601BT  | 1 | 2350004R1    |  |
| L3401 | C-CARBON R | RN72K1J-000JE  | 1 | 435030004R1  |  |
| L3402 | CORE       | BLM18PG121SN1D | 1 | 2350006R1    |  |
| L3403 | CORE       | MMZ1608Y601BT  | 1 | 2350004R1    |  |
| L3405 | CORE       | BLM18PG121SN1D | 1 | 2350006R1    |  |
| L3406 | CORE       | BLM18PG121SN1D | 1 | 2350006R1    |  |
| L3407 | CORE       | BLM18PG121SN1D | 1 | 2350006R1    |  |
| L3408 | CORE       | BLM18PG121SN1D | 1 | 2350006R1    |  |
| L3409 | CORE       | BLM18PG121SN1D | 1 | 2350006R1    |  |
| L3410 | CORE       | MMZ1608Y601BT  | 1 | 2350004R1    |  |
| L3411 | CORE       | MMZ1608Y601BT  | 1 | 2350004R1    |  |
| L3509 | CHOKE COIL | LBC2518T470M   | 1 | 231364M470R2 |  |
| L8021 | CHOKE COIL | BLM21PG221SN1  | 1 | 230949R2     |  |
| L8022 | CHOKE COIL | BLM21PG221SN1  | 1 | 230949R2     |  |
| L8023 | CHOKE COIL | BLM21PG221SN1  | 1 | 230949R2     |  |
| L8024 | CHOKE COIL | BLM21PG221SN1  | 1 | 230949R2     |  |
| L8025 | CHOKE COIL | BLM21PG221SN1  | 1 | 230949R2     |  |
| L8026 | CHOKE COIL | BLM21PG221SN1  | 1 | 230949R2     |  |
| L8027 | CHOKE COIL | BLM21PG221SN1  | 1 | 230949R2     |  |
| L8041 | CHOKE COIL | BLM21PG221SN1  | 1 | 230949R2     |  |
| L8042 | CHOKE COIL | BLM21PG221SN1  | 1 | 230949R2     |  |
| L8043 | CHOKE COIL | BLM21PG221SN1  | 1 | 230949R2     |  |
| L8161 | CORE       | BLM18PG181SN1D | 1 | 2350005R1    |  |
| L8162 | CORE       | BLM18PG181SN1D | 1 | 2350005R1    |  |
| L8163 | CORE       | BLM18PG181SN1D | 1 | 2350005R1    |  |
| L8361 | CORE       | BLM18PG181SN1D | 1 | 2350005R1    |  |
| L8362 | CORE       | BLM18PG181SN1D | 1 | 2350005R1    |  |
| L8363 | CORE       | BLM18PG181SN1D | 1 | 2350005R1    |  |
| L8401 | CORE       | BLM18PG181SN1D | 1 | 2350005R1    |  |

|          |            |                      |      |               |  |
|----------|------------|----------------------|------|---------------|--|
| L8402    | CORE       | BLM18PG181SN1D       | 1    | 2350005R1     |  |
| L8403    | CORE       | BLM18PG181SN1D       | 1    | 2350005R1     |  |
| L8404    | CORE       | BLM18PG181SN1D       | 1    | 2350005R1     |  |
| L8405    | CORE       | BLM18PG181SN1D       | 1    | 2350005R1     |  |
| L8406    | C-R NET    | MNR12E0APJ000        | 1    | 43464900002R2 |  |
| L8407    | C-R NET    | MNR12E0APJ000        | 1    | 43464900002R2 |  |
| L8408    | CORE       | BLM18PG181SN1D       | 1    | 2350005R1     |  |
| L8409    | C-R NET    | MNR12E0APJ000        | 1    | 43464900002R2 |  |
| L8410    | C-R NET    | MNR12E0APJ000        | 1    | 43464900002R2 |  |
| L8601    | CORE       | BLM18PG181SN1D       | 1    | 2350005R1     |  |
| L8602    | CORE       | BLM18PG181SN1D       | 1    | 2350005R1     |  |
| L8603    | CORE       | BLM18PG181SN1D       | 1    | 2350005R1     |  |
| L8604    | CORE       | BLM18PG181SN1D       | 1    | 2350005R1     |  |
| L8605    | CORE       | BLM18PG181SN1D       | 1    | 2350005R1     |  |
| L8606    | CORE       | BLM18PG181SN1D       | 1    | 2350005R1     |  |
| L8608    | EMIFIL     | BK1608LM182-T        | 1    | 230958R1      |  |
| L8641    | CORE       | BLM18PG181SN1D       | 1    | 2350005R1     |  |
| L8701    | CORE       | BLM18PG181SN1D       | 1    | 2350005R1     |  |
| L8951    | CHOKE COIL | 0182-7E08Q-100M-RA   | 1    | 231396M100R2  |  |
| L8952    | CHOKE COIL | 0182-7E08Q-6R8N-RA   | 1    | 231395P068R2  |  |
| L8953    | CHOKE COIL | 0182-7E08Q-6R8N-RA   | 1    | 231395P068R2  |  |
| L8954    | CHOKE COIL | 0182-7E08Q-100M-RA   | 1    | 231396M100R2  |  |
| L8955    | CHOKE COIL | BLM21PG221SN1        | 1    | 230949R2      |  |
| L8956    | CHOKE COIL | BLM21PG221SN1        | 1    | 230949R2      |  |
| L8957    | CHOKE COIL | BLM21PG221SN1        | 1    | 230949R2      |  |
| L8958    | CHOKE COIL | BLM21PG221SN1        | 1    | 230949R2      |  |
| L8959    | CHOKE COIL | BLM21PG221SN1        | 1    | 230949R2      |  |
| L8960    | CHOKE COIL | BLM21PG221SN1        | 1    | 230949R2      |  |
| L8961    | CHOKE COIL | BLM21PG221SN1        | 1    | 230949R2      |  |
| L8962    | CHOKE COIL | BLM21PG221SN1        | 1    | 230949R2      |  |
| L8963    | CHOKE COIL | BLM21PG221SN1        | 1    | 230949R2      |  |
| L8964    | CHOKE COIL | BLM21PG221SN1        | 1    | 230949R2      |  |
| L8965    | CHOKE COIL | BLM21PG221SN1        | 1    | 230949R2      |  |
| L8966    | CHOKE COIL | BLM21PG221SN1        | 1    | 230949R2      |  |
| X3001    | CRYSTAL    | HC-49SMD24.000MHz    | 1    | 3010479R2     |  |
| X3001 or | CRYSTAL    | HC-49USSMD24.00MHz   | ( 1) | 3010471R2     |  |
| X3201    | CRYSTAL    | HC-49/U03C 12.288MHz | 1    | 3010323R2     |  |
| X3202    | CRYSTAL    | HC-49SMD11.2896MHz   | 1    | 3010480R2     |  |

|             |           |                      |      |             |   |
|-------------|-----------|----------------------|------|-------------|---|
| X3202 or    | CRYSTAL   | HC-49USSMD11.2896MHz | ( 1) | 3010472R2   |   |
| X3401       | CRYSTAL   | HC-49USSMD17.734MHz  | 1    | 3010442R2   |   |
| X8200       | CRYSTAL   | HC-49USSMD19.6608M   | 1    | 3010458R2   |   |
| X8501       | CRYSTAL   | DSX530GAK27.0000MHZ  | 1    | 3010474R2   | N |
| X8701       | CERA LOCK | CSTCR5M00G53-B0      | 1    | 3010356R2   |   |
| [CAPACITOR] |           |                      |      |             |   |
| C251        | C-CERA C  | CK725F1A-105Z1       | 1    | 332181050R1 |   |
| C252        | C-CERA C  | CK725F1A-105Z1       | 1    | 332181050R1 |   |
| C3001       | C-CERA C  | CK725F1A-105Z1       | 1    | 332181050R1 |   |
| C3002       | C-CERA C  | CK725F1A-105Z1       | 1    | 332181050R1 |   |
| C3003       | C-CERA C  | CK725B0J-106K        | 1    | 332091065R2 |   |
| C3004       | C-CERA C  | CK725B0J-106K        | 1    | 332091065R2 |   |
| C3005       | C-CERA C  | CK725F1A-105Z1       | 1    | 332181050R1 |   |
| C3006       | C-CERA C  | CC725CH1H-102J1      | 1    | 342101024R1 |   |
| C3007       | C-CERA C  | CK725F1A-105Z1       | 1    | 332181050R1 |   |
| C3008       | C-CERA C  | CC725CH1H-102J1      | 1    | 342101024R1 |   |
| C3009       | C-CERA C  | CK725F1A-105Z1       | 1    | 332181050R1 |   |
| C3010       | C-CERA C  | CK725F1A-105Z1       | 1    | 332181050R1 |   |
| C3011       | C-CERA C  | CK725F1A-105Z1       | 1    | 332181050R1 |   |
| C3012       | C-CERA C  | CC725CH1H-102J1      | 1    | 342101024R1 |   |
| C3013       | C-CERA C  | CK725F1A-105Z1       | 1    | 332181050R1 |   |
| C3014       | C-CERA C  | CC725CH1H-102J1      | 1    | 342101024R1 |   |
| C3015       | C-CERA C  | CC725CH1H-102J1      | 1    | 342101024R1 |   |
| C3016       | C-CERA C  | CK725F1A-105Z1       | 1    | 332181050R1 |   |
| C3017       | C-CERA C  | CK725F1A-105Z1       | 1    | 332181050R1 |   |
| C3018       | C-CERA C  | CK725F1A-105Z1       | 1    | 332181050R1 |   |
| C3019       | C-CERA C  | CC725CH1H-102J1      | 1    | 342101024R1 |   |
| C3020       | C-CERA C  | CK725F1A-105Z1       | 1    | 332181050R1 |   |
| C3021       | C-CERA C  | CK725F1A-105Z1       | 1    | 332181050R1 |   |
| C3022       | C-CERA C  | CK725F1A-105Z1       | 1    | 332181050R1 |   |
| C3023       | C-CERA C  | CK725B0J-106K        | 1    | 332091065R2 |   |
| C3024       | C-CERA C  | CC725CH1H-102J1      | 1    | 342101024R1 |   |
| C3025       | C-CERA C  | CK725F1A-105Z1       | 1    | 332181050R1 |   |
| C3026       | C-CERA C  | CK725B1C-104K1       | 1    | 332121045R1 |   |
| C3027       | C-CERA C  | CC725CH1H-102J1      | 1    | 342101024R1 |   |
| C3028       | C-CERA C  | CK725F1A-105Z1       | 1    | 332181050R1 |   |
| C3029       | C-CERA C  | CC725CH1H-102J1      | 1    | 342101024R1 |   |
| C3030       | C-CERA C  | CK725F1A-105Z1       | 1    | 332181050R1 |   |



|       |              |                 |   |             |  |
|-------|--------------|-----------------|---|-------------|--|
| C3031 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3032 | C-CERA C     | CC725CH1H-102J1 | 1 | 342101024R1 |  |
| C3033 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3034 | C-CERA C     | CC725CH1H-120J1 | 1 | 342101204R1 |  |
| C3035 | C-CERA C     | CC725CH1H-102J1 | 1 | 342101024R1 |  |
| C3036 | C-CERA C     | CC725CH1H-120J1 | 1 | 342101204R1 |  |
| C3037 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3038 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3039 | C-CERA C     | CK725B1H-103K1  | 1 | 332101035R1 |  |
| C3040 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3041 | C-CERA C     | CK725B0J-106K   | 1 | 332091065R2 |  |
| C3042 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3043 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3105 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3106 | C-CERA C     | CK725B0J-106K   | 1 | 332091065R2 |  |
| C3107 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3108 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3109 | C-CERA C     | CK725B0J-106K   | 1 | 332091065R2 |  |
| C3110 | C-CERA C     | CK725B1A-224K1  | 1 | 332132245R1 |  |
| C3112 | C-CERA C     | CK725B0J-106K   | 1 | 332091065R2 |  |
| C3113 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3114 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3115 | C-CERA C     | CK725B0J-106K   | 1 | 332091065R2 |  |
| C3116 | C-CERA C     | CK725B0J-106K   | 1 | 332091065R2 |  |
| C3117 | C-CERA C     | CC725CH1H-102J1 | 1 | 342101024R1 |  |
| C3118 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3119 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3120 | C-CERA C     | CK725B0J-106K   | 1 | 332091065R2 |  |
| C3121 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3122 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3123 | CHIP ELECT C | CEWX10V-220M    | 1 | 398132217R2 |  |
| C3124 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3125 | C-CERA C     | CK725B0J-106K   | 1 | 332091065R2 |  |
| C3126 | C-CERA C     | CK725B0J-106K   | 1 | 332091065R2 |  |
| C3127 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3128 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3129 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3130 | C-CERA C     | CK725B0J-106K   | 1 | 332091065R2 |  |

|       |              |                 |   |             |  |
|-------|--------------|-----------------|---|-------------|--|
| C3131 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3132 | C-CERA C     | CC725CH1H-101J1 | 1 | 342101014R1 |  |
| C3133 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3134 | C-CERA C     | CK725B1C-104K1  | 1 | 332121045R1 |  |
| C3135 | C-CERA C     | CK725B1C-104K1  | 1 | 332121045R1 |  |
| C3136 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3137 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3138 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3139 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3140 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3143 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3144 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3145 | C-CERA C     | CK725B0J-106K   | 1 | 332091065R2 |  |
| C3146 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3147 | C-CERA C     | CK725B0J-106K   | 1 | 332091065R2 |  |
| C3148 | C-CERA C     | CK725B1H-223K1  | 1 | 332102235R1 |  |
| C3149 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3150 | CHIP ELECT C | CEWX4V-22M      | 1 | 3981G2207R2 |  |
| C3151 | C-CERA C     | CK725B1H-103K1  | 1 | 332101035R1 |  |
| C3152 | C-CERA C     | CK725B0J-106K   | 1 | 332091065R2 |  |
| C3153 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3154 | C-CERA C     | CK725B0J-106K   | 1 | 332091065R2 |  |
| C3155 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3156 | C-CERA C     | CC725CH1H-102J1 | 1 | 342101024R1 |  |
| C3157 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3158 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3159 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3202 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3204 | C-CERA C     | CK725B0J-106K   | 1 | 332091065R2 |  |
| C3205 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3206 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3207 | C-CERA C     | CK725B0J-106K   | 1 | 332091065R2 |  |
| C3208 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3209 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3210 | CHIP ELECT C | CEWX16V-100M    | 1 | 398141017R2 |  |
| C3211 | C-CERA C     | CK725B1H-222K1  | 1 | 332102225R1 |  |
| C3213 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3214 | C-CERA C     | CK725B0J-106K   | 1 | 332091065R2 |  |

|       |              |                 |   |             |  |
|-------|--------------|-----------------|---|-------------|--|
| C3215 | CHIP ELECT C | CEWX16V-10M     | 1 | 398141007R2 |  |
| C3216 | C-CERA C     | CC725CH1H-120J1 | 1 | 342101204R1 |  |
| C3219 | C-CERA C     | CC725CH1H-120J1 | 1 | 342101204R1 |  |
| C3220 | C-CERA C     | CC725CH1H-120J1 | 1 | 342101204R1 |  |
| C3223 | C-CERA C     | CC725CH1H-120J1 | 1 | 342101204R1 |  |
| C3224 | C-CERA C     | CK725B1H-152K1  | 1 | 332101525R1 |  |
| C3225 | C-CERA C     | CK725B1H-152K1  | 1 | 332101525R1 |  |
| C3226 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3227 | CHIP ELECT C | CEWX16V-10M     | 1 | 398141007R2 |  |
| C3228 | C-CERA C     | CK725B1H-222K1  | 1 | 332102225R1 |  |
| C3229 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3230 | C-CERA C     | CK725B0J-106K   | 1 | 332091065R2 |  |
| C3231 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3233 | CHIP ELECT C | CEWX16V-100M    | 1 | 398141017R2 |  |
| C3402 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3403 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3404 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3405 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3406 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3407 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3408 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3409 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3410 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3412 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3413 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3414 | C-CERA C     | CC725CH1H-102J1 | 1 | 342101024R1 |  |
| C3415 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3416 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3417 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3418 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3419 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3420 | C-CERA C     | CK725B0J-106K   | 1 | 332091065R2 |  |
| C3421 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3422 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3423 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3424 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3425 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3426 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |

|       |              |                 |   |             |  |
|-------|--------------|-----------------|---|-------------|--|
| C3427 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3428 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3429 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3430 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3431 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3432 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3433 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3434 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3435 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3436 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3437 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3438 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3439 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3440 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3441 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3442 | C-CERA C     | CK725B0J-106K   | 1 | 332091065R2 |  |
| C3443 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3444 | C-CERA C     | CC725CH1H-102J1 | 1 | 342101024R1 |  |
| C3445 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3446 | C-CERA C     | CK725B0J-106K   | 1 | 332091065R2 |  |
| C3447 | C-CERA C     | CK725B0J-106K   | 1 | 332091065R2 |  |
| C3448 | C-CERA C     | CK725B0J-106K   | 1 | 332091065R2 |  |
| C3449 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3450 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3451 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3452 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3453 | CHIP ELECT C | CEWX4V-22M      | 1 | 3981G2207R2 |  |
| C3454 | C-CERA C     | CK725B1H-103K1  | 1 | 332101035R1 |  |
| C3455 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3456 | C-CERA C     | CK725B0J-106K   | 1 | 332091065R2 |  |
| C3457 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3458 | C-CERA C     | CK725B0J-106K   | 1 | 332091065R2 |  |
| C3459 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3461 | CHIP ELECT C | CEWX4V-220M     | 1 | 3981G2217R2 |  |
| C3462 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C3463 | C-CERA C     | CC725CH1H-060D1 | 1 | 342100602R1 |  |
| C3464 | C-CERA C     | CC725CH1H-060D1 | 1 | 342100602R1 |  |
| C8000 | CHIP TANTAL  | TCSCS0J226MAAR  | 1 | 396522207R2 |  |

|          |              |                |      |             |  |
|----------|--------------|----------------|------|-------------|--|
| C8000 or | CHIP TANTAL  | F93-6.3V-22M   | ( 1) | 395522207R2 |  |
| C8001    | C-CERA C     | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8002    | C-CERA C     | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8003    | CHIP TANTAL  | TCSCS0J226MAAR | 1    | 396522207R2 |  |
| C8003 or | CHIP TANTAL  | F93-6.3V-22M   | ( 1) | 395522207R2 |  |
| C8004    | CHIP TANTAL  | TCSCS0J226MAAR | 1    | 396522207R2 |  |
| C8004 or | CHIP TANTAL  | F93-6.3V-22M   | ( 1) | 395522207R2 |  |
| C8005    | C-CERA C     | CK725B1H-103K1 | 1    | 332101035R1 |  |
| C8006    | C-CERA C     | CK725F1A-105Z1 | 1    | 332181050R1 |  |
| C8007    | C-CERA C     | CK725F1A-105Z1 | 1    | 332181050R1 |  |
| C8008    | C-CERA C     | CK725F1A-105Z1 | 1    | 332181050R1 |  |
| C8009    | C-CERA C     | CK725F1A-105Z1 | 1    | 332181050R1 |  |
| C8010    | C-CERA C     | CK725F1A-105Z1 | 1    | 332181050R1 |  |
| C8011    | C-CERA C     | CK725F1A-105Z1 | 1    | 332181050R1 |  |
| C8012    | C-CERA C     | CK725F1A-105Z1 | 1    | 332181050R1 |  |
| C8013    | C-CERA C     | CK725F1A-105Z1 | 1    | 332181050R1 |  |
| C8014    | C-CERA C     | CK725F1A-105Z1 | 1    | 332181050R1 |  |
| C8015    | C-CERA C     | CK725F1A-105Z1 | 1    | 332181050R1 |  |
| C8016    | C-CERA C     | CK725F1A-105Z1 | 1    | 332181050R1 |  |
| C8017    | C-CERA C     | CK725F1A-105Z1 | 1    | 332181050R1 |  |
| C8018    | C-CERA C     | CK725F1A-105Z1 | 1    | 332181050R1 |  |
| C8021    | CHIP ELECT C | CEWX16V-100M   | 1    | 398141017R2 |  |
| C8022    | C-CERA C     | CK725F1A-105Z1 | 1    | 332181050R1 |  |
| C8023    | CHIP ELECT C | CEWX4V-100M    | 1    | 3981G1017R2 |  |
| C8026    | CHIP ELECT C | CEWX4V-220M    | 1    | 3981G2217R2 |  |
| C8030    | CHIP TANTAL  | TCSCS0J226MAAR | 1    | 396522207R2 |  |
| C8030 or | CHIP TANTAL  | F93-6.3V-22M   | ( 1) | 395522207R2 |  |
| C8031    | C-CERA C     | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8032    | C-CERA C     | CK725B1H-103K1 | 1    | 332101035R1 |  |
| C8033    | C-CERA C     | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8034    | CHIP TANTAL  | TCSCS0J226MAAR | 1    | 396522207R2 |  |
| C8034 or | CHIP TANTAL  | F93-6.3V-22M   | ( 1) | 395522207R2 |  |
| C8041    | CHIP ELECT C | CEWX16V-100M   | 1    | 398141017R2 |  |
| C8042    | C-CERA C     | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8043    | CHIP ELECT C | CEWX4V-220M    | 1    | 3981G2217R2 |  |
| C8044    | CHIP ELECT C | CEWX4V-220M    | 1    | 3981G2217R2 |  |
| C8051    | C-CERA C     | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8052    | C-CERA C     | CK725F1E-104Z1 | 1    | 332161040R1 |  |

|       |              |                |   |             |  |
|-------|--------------|----------------|---|-------------|--|
| C8053 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8054 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8055 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8056 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8057 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8058 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8059 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8060 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8061 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8062 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8063 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8064 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8065 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8066 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8077 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8078 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8079 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8080 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8142 | C-CARBON R   | RN72K1J-000JE  | 1 | 435030004R1 |  |
| C8161 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8162 | CHIP ELECT C | CEWX4V-100M    | 1 | 3981G1017R2 |  |
| C8163 | C-CERA C     | CK725B1H-102K1 | 1 | 332101025R1 |  |
| C8164 | C-CERA C     | CK725B0J-106K  | 1 | 332091065R2 |  |
| C8165 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8166 | C-CERA C     | CK725B0J-106K  | 1 | 332091065R2 |  |
| C8167 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8168 | C-CERA C     | CK725B0J-106K  | 1 | 332091065R2 |  |
| C8169 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8170 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8171 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8172 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8173 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8174 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8175 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8176 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8177 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8178 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8179 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |



|          |             |                |      |             |  |
|----------|-------------|----------------|------|-------------|--|
| C8180    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8181    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8200    | CHIP TANTAL | TCSCS0J226MAAR | 1    | 396522207R2 |  |
| C8200 or | CHIP TANTAL | F93-6.3V-22M   | ( 1) | 395522207R2 |  |
| C8201    | CHIP TANTAL | TCSCS0J226MAAR | 1    | 396522207R2 |  |
| C8201 or | CHIP TANTAL | F93-6.3V-22M   | ( 1) | 395522207R2 |  |
| C8202    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8203    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8204    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8205    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8206    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8207    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8208    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8209    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8210    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8211    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8212    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8213    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8214    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8215    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8216    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8217    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8218    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8219    | CHIP TANTAL | TCSCS0J226MAAR | 1    | 396522207R2 |  |
| C8219 or | CHIP TANTAL | F93-6.3V-22M   | ( 1) | 395522207R2 |  |
| C8220    | CHIP TANTAL | TCSCS0J226MAAR | 1    | 396522207R2 |  |
| C8220 or | CHIP TANTAL | F93-6.3V-22M   | ( 1) | 395522207R2 |  |
| C8221    | C-CERA C    | CK725B1H-103K1 | 1    | 332101035R1 |  |
| C8222    | C-CERA C    | CK725B1H-103K1 | 1    | 332101035R1 |  |
| C8223    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8224    | C-CERA C    | CK725B1H-103K1 | 1    | 332101035R1 |  |
| C8225    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8226    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8227    | C-CERA C    | CK725B1H-103K1 | 1    | 332101035R1 |  |
| C8228    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8229    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8230    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8231    | C-CERA C    | CK725B1H-103K1 | 1    | 332101035R1 |  |

|          |             |                |      |             |  |
|----------|-------------|----------------|------|-------------|--|
| C8232    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8233    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8234    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8235    | C-CERA C    | CK725B1H-103K1 | 1    | 332101035R1 |  |
| C8236    | CHIP TANTAL | TCSCS0J226MAAR | 1    | 396522207R2 |  |
| C8236 or | CHIP TANTAL | F93-6.3V-22M   | ( 1) | 395522207R2 |  |
| C8237    | CHIP TANTAL | TCSCS0J226MAAR | 1    | 396522207R2 |  |
| C8237 or | CHIP TANTAL | F93-6.3V-22M   | ( 1) | 395522207R2 |  |
| C8238    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8239    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8240    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8241    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8242    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8243    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8244    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8245    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8246    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8247    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8248    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8249    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8250    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8251    | CHIP TANTAL | TCSCS0J226MAAR | 1    | 396522207R2 |  |
| C8251 or | CHIP TANTAL | F93-6.3V-22M   | ( 1) | 395522207R2 |  |
| C8252    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8253    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8254    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8255    | CHIP TANTAL | TCSCS0J226MAAR | 1    | 396522207R2 |  |
| C8255 or | CHIP TANTAL | F93-6.3V-22M   | ( 1) | 395522207R2 |  |
| C8256    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8257    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8258    | CHIP TANTAL | TCSCS0J226MAAR | 1    | 396522207R2 |  |
| C8258 or | CHIP TANTAL | F93-6.3V-22M   | ( 1) | 395522207R2 |  |
| C8259    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8260    | CHIP TANTAL | TCSCS0J226MAAR | 1    | 396522207R2 |  |
| C8260 or | CHIP TANTAL | F93-6.3V-22M   | ( 1) | 395522207R2 |  |
| C8261    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8262    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |
| C8263    | C-CERA C    | CK725F1E-104Z1 | 1    | 332161040R1 |  |

|          |              |                 |      |             |  |
|----------|--------------|-----------------|------|-------------|--|
| C8264    | CHIP TANTAL  | TCSCS0J226MAAR  | 1    | 396522207R2 |  |
| C8264 or | CHIP TANTAL  | F93-6.3V-22M    | ( 1) | 395522207R2 |  |
| C8265    | C-CERA C     | CK725F1E-104Z1  | 1    | 332161040R1 |  |
| C8266    | C-CERA C     | CK725F1E-104Z1  | 1    | 332161040R1 |  |
| C8267    | C-CERA C     | CK725F1E-104Z1  | 1    | 332161040R1 |  |
| C8268    | CHIP TANTAL  | TCSCS0J226MAAR  | 1    | 396522207R2 |  |
| C8268 or | CHIP TANTAL  | F93-6.3V-22M    | ( 1) | 395522207R2 |  |
| C8269    | C-CERA C     | CK725F1E-104Z1  | 1    | 332161040R1 |  |
| C8270    | C-CERA C     | CK725F1E-104Z1  | 1    | 332161040R1 |  |
| C8271    | C-CERA C     | CK725F1E-104Z1  | 1    | 332161040R1 |  |
| C8272    | C-CERA C     | CK725F1E-104Z1  | 1    | 332161040R1 |  |
| C8273    | CHIP TANTAL  | TCSCS0J226MAAR  | 1    | 396522207R2 |  |
| C8273 or | CHIP TANTAL  | F93-6.3V-22M    | ( 1) | 395522207R2 |  |
| C8274    | C-CERA C     | CK725F1E-104Z1  | 1    | 332161040R1 |  |
| C8275    | C-CERA C     | CK725F1E-104Z1  | 1    | 332161040R1 |  |
| C8276    | C-CERA C     | CK725B1H-103K1  | 1    | 332101035R1 |  |
| C8284    | C-CERA C     | CK725F1E-104Z1  | 1    | 332161040R1 |  |
| C8288    | C-CERA C     | CC725CH1H-330J1 | 1    | 342103304R1 |  |
| C8289    | C-CERA C     | CC725CH1H-330J1 | 1    | 342103304R1 |  |
| C8290    | C-CERA C     | CK725B1H-102K1  | 1    | 332101025R1 |  |
| C8291    | C-CERA C     | CK725F1E-104Z1  | 1    | 332161040R1 |  |
| C8326    | C-CERA C     | CK725F1E-104Z1  | 1    | 332161040R1 |  |
| C8327    | C-CERA C     | CK725F1A-105Z1  | 1    | 332181050R1 |  |
| C8328    | CHIP ELECT C | CEWX16V-22M     | 1    | 398142207R2 |  |
| C8329    | C-CERA C     | CK725F1A-105Z1  | 1    | 332181050R1 |  |
| C8330    | C-CERA C     | CK725F1A-105Z1  | 1    | 332181050R1 |  |
| C8332    | C-CERA C     | CK725F1E-104Z1  | 1    | 332161040R1 |  |
| C8341    | C-CARBON R   | RN72K1J-000JE   | 1    | 435030004R1 |  |
| C8342    | C-CARBON R   | RN72K1J-000JE   | 1    | 435030004R1 |  |
| C8348    | C-CARBON R   | RN72K1J-000JE   | 1    | 435030004R1 |  |
| C8349    | C-CARBON R   | RN72K1J-000JE   | 1    | 435030004R1 |  |
| C8362    | C-CERA C     | CK725F1E-104Z1  | 1    | 332161040R1 |  |
| C8364    | C-CERA C     | CK725B0J-106K   | 1    | 332091065R2 |  |
| C8365    | C-CERA C     | CK725F1E-104Z1  | 1    | 332161040R1 |  |
| C8366    | C-CERA C     | CK725B0J-106K   | 1    | 332091065R2 |  |
| C8367    | C-CERA C     | CK725F1E-104Z1  | 1    | 332161040R1 |  |
| C8368    | C-CERA C     | CK725B0J-106K   | 1    | 332091065R2 |  |
| C8369    | C-CERA C     | CK725F1E-104Z1  | 1    | 332161040R1 |  |

|       |              |                |   |             |  |
|-------|--------------|----------------|---|-------------|--|
| C8370 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8371 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8372 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8373 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8374 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8375 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8376 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8377 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8378 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8379 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8380 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8381 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8401 | CHIP ELECT C | CEWX4V-22M     | 1 | 3981G2207R2 |  |
| C8402 | CHIP ELECT C | CEWX4V-22M     | 1 | 3981G2207R2 |  |
| C8403 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8404 | C-CERA C     | CK725B1H-102K1 | 1 | 332101025R1 |  |
| C8405 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8406 | C-CERA C     | CK725B1H-102K1 | 1 | 332101025R1 |  |
| C8408 | CHIP ELECT C | CEWX4V-22M     | 1 | 3981G2207R2 |  |
| C8409 | CHIP ELECT C | CEWX4V-22M     | 1 | 3981G2207R2 |  |
| C8410 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8411 | C-CERA C     | CK725B1H-102K1 | 1 | 332101025R1 |  |
| C8412 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8413 | C-CERA C     | CK725B1H-102K1 | 1 | 332101025R1 |  |
| C8414 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8415 | C-CERA C     | CK725B1H-102K1 | 1 | 332101025R1 |  |
| C8416 | C-CERA C     | CK725B1H-102K1 | 1 | 332101025R1 |  |
| C8417 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8418 | CHIP ELECT C | CEWX4V-22M     | 1 | 3981G2207R2 |  |
| C8419 | C-CERA C     | CK725B1H-102K1 | 1 | 332101025R1 |  |
| C8420 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8421 | C-CERA C     | CK725B1H-102K1 | 1 | 332101025R1 |  |
| C8422 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8423 | C-CERA C     | CK725B1H-102K1 | 1 | 332101025R1 |  |
| C8424 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8425 | C-CERA C     | CK725B1H-102K1 | 1 | 332101025R1 |  |
| C8426 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8427 | C-CERA C     | CK725B1H-102K1 | 1 | 332101025R1 |  |

|       |              |                |   |             |  |
|-------|--------------|----------------|---|-------------|--|
| C8428 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8429 | C-CERA C     | CK725B1H-102K1 | 1 | 332101025R1 |  |
| C8430 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8431 | C-CERA C     | CK725B1H-102K1 | 1 | 332101025R1 |  |
| C8432 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8433 | C-CERA C     | CK725B1H-102K1 | 1 | 332101025R1 |  |
| C8434 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8435 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8436 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8437 | CHIP ELECT C | CEWX4V-22M     | 1 | 3981G2207R2 |  |
| C8438 | C-CERA C     | CK725B1H-102K1 | 1 | 332101025R1 |  |
| C8439 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8440 | C-CERA C     | CK725B0J-106K  | 1 | 332091065R2 |  |
| C8441 | CHIP ELECT C | CEWX4V-220M    | 1 | 3981G2217R2 |  |
| C8501 | C-CERA C     | CK725B1H-102K1 | 1 | 332101025R1 |  |
| C8502 | C-CERA C     | CK725B0J-106K  | 1 | 332091065R2 |  |
| C8503 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8504 | C-CERA C     | CK725B1H-102K1 | 1 | 332101025R1 |  |
| C8505 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8506 | C-CERA C     | CK725B0J-106K  | 1 | 332091065R2 |  |
| C8507 | C-CERA C     | CK725B1H-102K1 | 1 | 332101025R1 |  |
| C8508 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8509 | C-CERA C     | CK725B1H-102K1 | 1 | 332101025R1 |  |
| C8510 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8511 | C-CERA C     | CK725B1H-102K1 | 1 | 332101025R1 |  |
| C8512 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8513 | C-CERA C     | CK725B1H-102K1 | 1 | 332101025R1 |  |
| C8514 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8515 | C-CERA C     | CK725B1H-102K1 | 1 | 332101025R1 |  |
| C8516 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8517 | C-CERA C     | CK725B1H-102K1 | 1 | 332101025R1 |  |
| C8518 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8519 | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8521 | C-CERA C     | CK725F1E-104Z1 | 1 | 332161040R1 |  |
| C8522 | C-CERA C     | CK725B0J-106K  | 1 | 332091065R2 |  |
| C8525 | C-CERA C     | CK725B0J-106K  | 1 | 332091065R2 |  |
| C8527 | C-CERA C     | CK725B1H-102K1 | 1 | 332101025R1 |  |
| C8529 | C-CERA C     | CK725B0J-106K  | 1 | 332091065R2 |  |

|       |            |                 |   |             |  |
|-------|------------|-----------------|---|-------------|--|
| C8530 | C-CERA C   | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C8531 | C-CERA C   | CK725B1H-102K1  | 1 | 332101025R1 |  |
| C8532 | C-CERA C   | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C8533 | C-CERA C   | CK725B1H-102K1  | 1 | 332101025R1 |  |
| C8534 | C-CERA C   | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C8535 | C-CERA C   | CK725B1H-102K1  | 1 | 332101025R1 |  |
| C8536 | C-CERA C   | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C8537 | C-CERA C   | CK725B1H-102K1  | 1 | 332101025R1 |  |
| C8538 | C-CERA C   | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C8539 | C-CERA C   | CK725B1H-102K1  | 1 | 332101025R1 |  |
| C8540 | C-CERA C   | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C8548 | C-CERA C   | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C8549 | C-CERA C   | CK725B1H-102K1  | 1 | 332101025R1 |  |
| C8550 | C-CERA C   | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C8551 | C-CERA C   | CK725B1H-102K1  | 1 | 332101025R1 |  |
| C8552 | C-CERA C   | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C8553 | C-CERA C   | CK725B1H-102K1  | 1 | 332101025R1 |  |
| C8554 | C-CERA C   | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C8555 | C-CERA C   | CK725B1H-102K1  | 1 | 332101025R1 |  |
| C8556 | C-CERA C   | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C8557 | C-CERA C   | CK725B1H-102K1  | 1 | 332101025R1 |  |
| C8558 | C-CERA C   | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C8559 | C-CERA C   | CK725B1H-102K1  | 1 | 332101025R1 |  |
| C8560 | C-CERA C   | CK725B0J-106K   | 1 | 332091065R2 |  |
| C8563 | C-CERA C   | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C8564 | C-CERA C   | CK725B0J-106K   | 1 | 332091065R2 |  |
| C8565 | C-CERA C   | CK725B0J-106K   | 1 | 332091065R2 |  |
| C8566 | C-CERA C   | CK725B1H-102K1  | 1 | 332101025R1 |  |
| C8567 | C-CERA C   | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C8573 | C-CERA C   | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C8574 | C-CERA C   | CC725CH1H-070D1 | 1 | 342100702R1 |  |
| C8575 | C-CERA C   | CC725CH1H-070D1 | 1 | 342100702R1 |  |
| C8584 | C-CERA C   | CK725B0J-106K   | 1 | 332091065R2 |  |
| C8585 | C-CERA C   | CK725B0J-106K   | 1 | 332091065R2 |  |
| C8605 | C-CARBON R | RN72K1J-000JE   | 1 | 435030004R1 |  |
| C8608 | C-CERA C   | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C8609 | C-CERA C   | CK725B0J-106K   | 1 | 332091065R2 |  |
| C8611 | C-CARBON R | RN72K1J-000JE   | 1 | 435030004R1 |  |



|       |              |                 |   |             |  |
|-------|--------------|-----------------|---|-------------|--|
| C8612 | C-CARBON R   | RN72K1J-000JE   | 1 | 435030004R1 |  |
| C8621 | C-CARBON R   | RN72K1J-000JE   | 1 | 435030004R1 |  |
| C8622 | C-CARBON R   | RN72K1J-000JE   | 1 | 435030004R1 |  |
| C8631 | C-CARBON R   | RN72K1J-000JE   | 1 | 435030004R1 |  |
| C8632 | C-CARBON R   | RN72K1J-000JE   | 1 | 435030004R1 |  |
| C8675 | CHIP ELECT C | CEWX4V-100M     | 1 | 3981G1017R2 |  |
| C8676 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C8701 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C8702 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C8703 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C8704 | CHIP ELECT C | CEWX50V-4.7M    | 1 | 398180477R2 |  |
| C8705 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C8706 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C8707 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C8708 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C8709 | CHIP ELECT C | CEWX4V-220M     | 1 | 3981G2217R2 |  |
| C8710 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |
| C8838 | C-CERA C     | CC725CH1H-470J1 | 1 | 342104704R1 |  |
| C8839 | C-CERA C     | CC725CH1H-470J1 | 1 | 342104704R1 |  |
| C8840 | C-CERA C     | CC725CH1H-470J1 | 1 | 342104704R1 |  |
| C8855 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |  |
| C8856 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |  |
| C8857 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |  |
| C8858 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |  |
| C8859 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |  |
| C8860 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |  |
| C8861 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |  |
| C8862 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |  |
| C8863 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |  |
| C8864 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |  |
| C8865 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |  |
| C8866 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |  |
| C8867 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |  |
| C8868 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |  |
| C8869 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |  |
| C8870 | C-CERA C     | CK725F1E-104Z1  | 1 | 332161040R1 |  |
| C8951 | C-CERA C     | CK725B1C-104K1  | 1 | 332121045R1 |  |
| C8952 | C-CERA C     | CK725F1A-105Z1  | 1 | 332181050R1 |  |

|            |              |                |   |             |  |
|------------|--------------|----------------|---|-------------|--|
| C8953      | CD C         | UCD1E221MNL1GS | 1 | 396652217R2 |  |
| C8954      | C-CERA C     | CK725B1H-103K1 | 1 | 332101035R1 |  |
| C8955      | C-CERA C     | CK725B1H-332K1 | 1 | 332103325R1 |  |
| C8956      | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8957      | CHIP ELECT C | CEWT10V-470M   | 1 | 395734717R2 |  |
| C8958      | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8961      | C-CERA C     | CK725B1A-224K1 | 1 | 332132245R1 |  |
| C8962      | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8963      | CD C         | UCD1E221MNL1GS | 1 | 396652217R2 |  |
| C8964      | C-CERA C     | CK725B1H-332K1 | 1 | 332103325R1 |  |
| C8965      | C-CERA C     | CK725B1H-332K1 | 1 | 332103325R1 |  |
| C8966      | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8967      | CHIP ELECT C | CEWT10V-470M   | 1 | 395734717R2 |  |
| C8968      | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8971      | C-CERA C     | CK725B1C-104K1 | 1 | 332121045R1 |  |
| C8972      | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8973      | CD C         | UCD1E221MNL1GS | 1 | 396652217R2 |  |
| C8974      | C-CERA C     | CK725B1H-332K1 | 1 | 332103325R1 |  |
| C8975      | C-CERA C     | CK725B1H-332K1 | 1 | 332103325R1 |  |
| C8976      | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8977      | CHIP ELECT C | CEWT10V-470M   | 1 | 395734717R2 |  |
| C8978      | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8979      | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8981      | C-CERA C     | CK725B1H-223K1 | 1 | 332102235R1 |  |
| C8982      | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8983      | CD C         | UCD1E221MNL1GS | 1 | 396652217R2 |  |
| C8984      | C-CERA C     | CK725B1H-103K1 | 1 | 332101035R1 |  |
| C8985      | C-CERA C     | CK725B1H-222K1 | 1 | 332102225R1 |  |
| C8986      | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| C8987      | CHIP ELECT C | CEWT10V-470M   | 1 | 395734717R2 |  |
| C8988      | C-CERA C     | CK725F1A-105Z1 | 1 | 332181050R1 |  |
| [RESISTOR] |              |                |   |             |  |
| R268       | C-CARBON R   | RN72K1J-331JE  | 1 | 435033314R1 |  |
| R269       | C-CARBON R   | RN72K1J-331JE  | 1 | 435033314R1 |  |
| R270       | C-CARBON R   | RN72K1J-331JE  | 1 | 435033314R1 |  |
| R271       | C-CARBON R   | RN72K1J-470JE  | 1 | 435034704R1 |  |
| R272       | C-CARBON R   | RN72K1J-331JE  | 1 | 435033314R1 |  |
| R273       | C-CARBON R   | RN72K1J-331JE  | 1 | 435033314R1 |  |

|       |            |               |   |               |  |
|-------|------------|---------------|---|---------------|--|
| R274  | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R275  | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1   |  |
| R276  | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1   |  |
| R277  | C-CARBON R | RN72K1J-151JE | 1 | 435031514R1   |  |
| R278  | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1   |  |
| R279  | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1   |  |
| R280  | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3009 | C-CARBON R | RN72K1J-330JE | 1 | 435033304R1   |  |
| R3010 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R3011 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R3012 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R3013 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R3014 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R3015 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R3016 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3017 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R3018 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3019 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R3020 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R3021 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3022 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3023 | C-R NET    | RM7LJ470X04   | 1 | 43484747004R2 |  |
| R3024 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3025 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1   |  |
| R3026 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3028 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3029 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1   |  |
| R3032 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R3033 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3034 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3035 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3036 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3037 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3038 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3039 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3040 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R3041 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R3042 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |

|       |            |               |   |               |  |
|-------|------------|---------------|---|---------------|--|
| R3043 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1   |  |
| R3044 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R3045 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R3047 | C-CARBON R | RN72K1J-560JE | 1 | 435035604R1   |  |
| R3048 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1   |  |
| R3049 | C-CARBON R | RN72K1J-560JE | 1 | 435035604R1   |  |
| R3050 | C-CARBON R | RN72K1J-560JE | 1 | 435035604R1   |  |
| R3051 | C-CARBON R | RN72K1J-560JE | 1 | 435035604R1   |  |
| R3052 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R3053 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R3054 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R3055 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1   |  |
| R3056 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1   |  |
| R3060 | C-CARBON R | RN72K1J-680JE | 1 | 435036804R1   |  |
| R3061 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3062 | C-CARBON R | RN72K1J-680JE | 1 | 435036804R1   |  |
| R3063 | C-CARBON R | RN72K1J-680JE | 1 | 435036804R1   |  |
| R3064 | C-CARBON R | RN72K1J-680JE | 1 | 435036804R1   |  |
| R3065 | C-CARBON R | RN72K1J-680JE | 1 | 435036804R1   |  |
| R3066 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1   |  |
| R3101 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R3102 | C-CARBON R | RN72K1J-153JE | 1 | 435031534R1   |  |
| R3108 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R3110 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R3111 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R3113 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R3115 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R3117 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R3119 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1   |  |
| R3121 | C-CARBON R | RN72K1J-153JE | 1 | 435031534R1   |  |
| R3122 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1   |  |
| R3123 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1   |  |
| R3124 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1   |  |
| R3125 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3126 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3127 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3128 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1   |  |
| R3129 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |

|       |            |                        |   |             |  |
|-------|------------|------------------------|---|-------------|--|
| R3130 | C-CARBON R | RN72K1J-470JE          | 1 | 435034704R1 |  |
| R3131 | C-CARBON R | RN72K1J-470JE          | 1 | 435034704R1 |  |
| R3132 | C-CARBON R | RN72K1J-103JE          | 1 | 435031034R1 |  |
| R3133 | C-CARBON R | RN72K1J-470JE          | 1 | 435034704R1 |  |
| R3134 | C-CARBON R | RN72K1J-103JE          | 1 | 435031034R1 |  |
| R3135 | C-CARBON R | RN72K1J-103JE          | 1 | 435031034R1 |  |
| R3136 | C-CARBON R | RN72K1J-000JE          | 1 | 435030004R1 |  |
| R3137 | C-CARBON R | RN72K1J-000JE          | 1 | 435030004R1 |  |
| R3139 | C-CARBON R | RN72K1J-101JE          | 1 | 435031014R1 |  |
| R3140 | C-CARBON R | RN72K1J-103JE          | 1 | 435031034R1 |  |
| R3143 | C-CARBON R | RN72K1J-103JE          | 1 | 435031034R1 |  |
| R3144 | C-CARBON R | RN72K1J-101JE          | 1 | 435031014R1 |  |
| R3145 | C-CARBON R | RN72K1J-103JE          | 1 | 435031034R1 |  |
| R3146 | C-CARBON R | RN72K1J-390JE          | 1 | 435033904R1 |  |
| R3147 | C-CARBON R | RN72K1J-000JE          | 1 | 435030004R1 |  |
| R3148 | C-CARBON R | RN72K1J-390JE          | 1 | 435033904R1 |  |
| R3149 | C-CARBON R | RN72K1J-102JE          | 1 | 435031024R1 |  |
| R3150 | C-CARBON R | RN72K1J-330JE          | 1 | 435033304R1 |  |
| R3151 | C-CARBON R | RN72K1J-103JE          | 1 | 435031034R1 |  |
| R3152 | C-CARBON R | RN72K1J-103JE          | 1 | 435031034R1 |  |
| R3154 | C-CARBON R | RN72K1J-390JE          | 1 | 435033904R1 |  |
| R3155 | C-CARBON R | RN72K1J-390JE          | 1 | 435033904R1 |  |
| R3156 | C-CARBON R | RN72K1J-390JE          | 1 | 435033904R1 |  |
| R3157 | C-CARBON R | RN72K1J-000JE          | 1 | 435030004R1 |  |
| R3158 | C-CARBON R | RN72K1J-000JE          | 1 | 435030004R1 |  |
| R3159 | C-CARBON R | RN72K1J-000JE          | 1 | 435030004R1 |  |
| R3160 | C-CARBON R | RN72K1J-000JE          | 1 | 435030004R1 |  |
| R3162 | C-CARBON R | RN72K1J-390JE          | 1 | 435033904R1 |  |
| R3163 | C-CARBON R | RN72K1J-220JE          | 1 | 435032204R1 |  |
| R3164 | C-CARBON R | RN72K1J-472JE          | 1 | 435034724R1 |  |
| R3168 | C-CARBON R | RN72K1J-220JE          | 1 | 435032204R1 |  |
| R3169 | C-CARBON R | RN72K1J-220JE          | 1 | 435032204R1 |  |
| R3170 | C-CARBON R | RN72K1J-391FE          | 1 | 435033912R1 |  |
| R3171 | C-CARBON R | RN72K1J-222FE          | 1 | 435032222R1 |  |
| R3172 | C-CARBON R | RN72K1J-392FE          | 1 | 435033922R1 |  |
| R3173 | C-CARBON R | RN72K1J-390JE          | 1 | 435033904R1 |  |
| R3174 | C-CARBON R | RN72K1J-390JE          | 1 | 435033904R1 |  |
| R3176 | C-CARBON R | MCR03EZPF49R9(49.9_1%) | 1 | 4100037R2   |  |

|       |            |                        |   |               |
|-------|------------|------------------------|---|---------------|
| R3177 | C-CARBON R | MCR03EZPF49R9(49.9_1%) | 1 | 4100037R2     |
| R3178 | C-CARBON R | MCR03EZPF49R9(49.9_1%) | 1 | 4100037R2     |
| R3179 | C-CARBON R | MCR03EZPF49R9(49.9_1%) | 1 | 4100037R2     |
| R3180 | C-CARBON R | RN72K1J-100FE          | 1 | 435031002R1   |
| R3181 | C-CARBON R | RN72K1J-470JE          | 1 | 435034704R1   |
| R3182 | C-CARBON R | RN72K1J-472JE          | 1 | 435034724R1   |
| R3183 | C-CARBON R | RN72K1J-470JE          | 1 | 435034704R1   |
| R3184 | C-CARBON R | RN72K1J-470JE          | 1 | 435034704R1   |
| R3185 | C-CARBON R | RN72K1J-392FE          | 1 | 435033922R1   |
| R3186 | C-CARBON R | RN72K1J-472JE          | 1 | 435034724R1   |
| R3187 | C-CARBON R | RN72K1J-223FE          | 1 | 435032232R1   |
| R3188 | C-CARBON R | RN72K1J-224FE          | 1 | 435032242R1   |
| R3189 | C-CARBON R | RN72K1J-103FE          | 1 | 435031032R1   |
| R3190 | C-CARBON R | RN72K1J-393FE          | 1 | 435033932R1   |
| R3191 | C-CARBON R | RN72K1J-105FE          | 1 | 435031052R1   |
| R3192 | C-CARBON R | RN72K1J-472JE          | 1 | 435034724R1   |
| R3193 | C-CARBON R | RN72K1J-472JE          | 1 | 435034724R1   |
| R3194 | C-CARBON R | RN72K1J-472JE          | 1 | 435034724R1   |
| R3195 | C-CARBON R | RN72K1J-221JE          | 1 | 435032214R1   |
| R3196 | C-CARBON R | RN72K1J-221JE          | 1 | 435032214R1   |
| R3199 | C-CARBON R | RN72K1J-102JE          | 1 | 435031024R1   |
| R3200 | C-CARBON R | RN72K1J-103JE          | 1 | 435031034R1   |
| R3201 | C-CARBON R | RN72K1J-103JE          | 1 | 435031034R1   |
| R3202 | C-CARBON R | RN72K1J-103JE          | 1 | 435031034R1   |
| R3203 | C-CARBON R | RN72K1J-103JE          | 1 | 435031034R1   |
| R3204 | C-CARBON R | RN72K1J-103JE          | 1 | 435031034R1   |
| R3205 | C-CARBON R | RN72K1J-103JE          | 1 | 435031034R1   |
| R3208 | C-CARBON R | RN72K1J-220JE          | 1 | 435032204R1   |
| R3212 | C-CARBON R | RN72K1J-220JE          | 1 | 435032204R1   |
| R3215 | C-CARBON R | RN72K1J-221JE          | 1 | 435032214R1   |
| R3218 | C-CARBON R | RN72K1J-220JE          | 1 | 435032204R1   |
| R3219 | C-CARBON R | RN72K1J-221JE          | 1 | 435032214R1   |
| R3221 | C-CARBON R | RN72K1J-470JE          | 1 | 435034704R1   |
| R3224 | C-CARBON R | RN72K1J-220JE          | 1 | 435032204R1   |
| R3225 | C-CARBON R | RN72K1J-220JE          | 1 | 435032204R1   |
| R3226 | C-R NET    | RM7LJ470X04            | 1 | 43484747004R2 |
| R3227 | C-CARBON R | RN72K1J-470JE          | 1 | 435034704R1   |
| R3228 | C-CARBON R | RN72K1J-470JE          | 1 | 435034704R1   |



|       |            |               |   |             |  |
|-------|------------|---------------|---|-------------|--|
| R3229 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3230 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |  |
| R3231 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3232 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |  |
| R3233 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |  |
| R3234 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3236 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3237 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |  |
| R3238 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3239 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |  |
| R3240 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R3241 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |  |
| R3242 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |  |
| R3243 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R3244 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3245 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R3246 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R3247 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1 |  |
| R3248 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R3249 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3250 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3251 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3252 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R3253 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3254 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3255 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R3256 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3257 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3259 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R3260 | C-CARBON R | RN72K1J-390JE | 1 | 435033904R1 |  |
| R3261 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3262 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1 |  |
| R3264 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3265 | C-CARBON R | RN72K1J-390JE | 1 | 435033904R1 |  |
| R3267 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3268 | C-CARBON R | RN72K1J-390JE | 1 | 435033904R1 |  |
| R3270 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3271 | C-CARBON R | RN72K1J-390JE | 1 | 435033904R1 |  |

|       |            |               |   |             |  |
|-------|------------|---------------|---|-------------|--|
| R3272 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3273 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3274 | C-CARBON R | RN72K1J-390JE | 1 | 435033904R1 |  |
| R3275 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R3276 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3277 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R3278 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3279 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3280 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1 |  |
| R3281 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R3282 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R3283 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R3284 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R3285 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R3286 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R3287 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R3288 | C-CARBON R | RN72K1J-223JE | 1 | 435032234R1 |  |
| R3289 | C-CARBON R | RN72K1J-152JE | 1 | 435031524R1 |  |
| R3290 | C-CARBON R | RN72K1J-105JE | 1 | 435031054R1 |  |
| R3291 | C-CARBON R | RN72K1J-105JE | 1 | 435031054R1 |  |
| R3292 | C-CARBON R | RN72K1J-561FE | 1 | 435035612R1 |  |
| R3293 | C-CARBON R | RN72K1J-560JE | 1 | 435035604R1 |  |
| R3294 | C-CARBON R | RN72K1J-561FE | 1 | 435035612R1 |  |
| R3295 | C-CARBON R | RN72K1J-560JE | 1 | 435035604R1 |  |
| R3296 | C-CARBON R | RN72K1J-223JE | 1 | 435032234R1 |  |
| R3297 | C-CARBON R | RN72K1J-332JE | 1 | 435033324R1 |  |
| R3298 | C-CARBON R | RN72K1J-182JE | 1 | 435031824R1 |  |
| R3299 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R3300 | C-CARBON R | RN72K1J-153JE | 1 | 435031534R1 |  |
| R3301 | C-CARBON R | RN72K1J-153JE | 1 | 435031534R1 |  |
| R3302 | C-CARBON R | RN72K1J-332JE | 1 | 435033324R1 |  |
| R3303 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |  |
| R3304 | C-CARBON R | RN72K1J-153JE | 1 | 435031534R1 |  |
| R3305 | C-CARBON R | RN72K1J-153JE | 1 | 435031534R1 |  |
| R3306 | C-CARBON R | RN72K1J-332JE | 1 | 435033324R1 |  |
| R3307 | C-CARBON R | RN72K1J-104JE | 1 | 435031044R1 |  |
| R3308 | C-CARBON R | RN72K1J-223JE | 1 | 435032234R1 |  |
| R3309 | C-CARBON R | RN72K1J-332JE | 1 | 435033324R1 |  |

|       |            |               |   |               |  |
|-------|------------|---------------|---|---------------|--|
| R3310 | C-CARBON R | RN72K1J-182JE | 1 | 435031824R1   |  |
| R3311 | C-CARBON R | RN72K1J-471JE | 1 | 435034714R1   |  |
| R3312 | C-CARBON R | RN72K1J-223JE | 1 | 435032234R1   |  |
| R3313 | C-CARBON R | RN72K1J-152JE | 1 | 435031524R1   |  |
| R3314 | C-CARBON R | RN72K1J-391JE | 1 | 435033914R1   |  |
| R3315 | C-CARBON R | RN72K1J-560JE | 1 | 435035604R1   |  |
| R3401 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R3402 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R3403 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R3404 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R3405 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R3406 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R3407 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R3408 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R3409 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R3410 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1   |  |
| R3411 | C-CARBON R | RN72K1J-221JE | 1 | 435032214R1   |  |
| R3412 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3413 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3414 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3416 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1   |  |
| R3417 | C-CARBON R | RN72K1J-330JE | 1 | 435033304R1   |  |
| R3418 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3419 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1   |  |
| R3420 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3421 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1   |  |
| R3422 | C-CARBON R | RN72K1J-330JE | 1 | 435033304R1   |  |
| R3423 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3424 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3425 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3426 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R3427 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3428 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3429 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R3430 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R3431 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R3432 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R3433 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |

|       |            |               |   |               |  |
|-------|------------|---------------|---|---------------|--|
| R3435 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R3436 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1   |  |
| R3437 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1   |  |
| R3438 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1   |  |
| R3439 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R3440 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1   |  |
| R3441 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1   |  |
| R3442 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1   |  |
| R3443 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1   |  |
| R3444 | C-CARBON R | RN72K1J-331JE | 1 | 435033314R1   |  |
| R3445 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R3446 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3447 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3448 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3449 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3450 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3451 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R3452 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R3453 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R3454 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3455 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R3456 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3457 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3458 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3459 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3460 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3461 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3462 | C-CARBON R | RN72K1J-470JE | 1 | 435034704R1   |  |
| R3464 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1   |  |
| R3465 | C-CARBON R | RN72K1J-223FE | 1 | 435032232R1   |  |
| R3466 | C-CARBON R | RN72K1J-392FE | 1 | 435033922R1   |  |
| R3467 | C-CARBON R | RN72K1J-224FE | 1 | 435032242R1   |  |
| R3468 | C-CARBON R | RN72K1J-103FE | 1 | 435031032R1   |  |
| R3469 | C-CARBON R | RN72K1J-333FE | 1 | 435033332R1   |  |
| R3470 | C-CARBON R | RN72K1J-391JE | 1 | 435033914R1   |  |
| R3471 | C-CARBON R | RN72K1J-391JE | 1 | 435033914R1   |  |
| R3472 | C-CARBON R | RN72K1J-105JE | 1 | 435031054R1   |  |
| R3473 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1   |  |

|       |            |               |   |             |  |
|-------|------------|---------------|---|-------------|--|
| R3570 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R3622 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R3623 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R3624 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R3625 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R3626 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R3627 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R3670 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R3671 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R3672 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R3673 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R3674 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R8000 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R8001 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R8002 | C-CARBON R | RN72K1J-271JE | 1 | 435032714R1 |  |
| R8003 | C-CARBON R | RN72K1J-271JE | 1 | 435032714R1 |  |
| R8010 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R8011 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R8012 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R8013 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R8014 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R8015 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R8016 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R8017 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R8018 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R8019 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R8020 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R8021 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R8022 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R8026 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R8028 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R8029 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R8033 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R8034 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R8035 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1 |  |
| R8036 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R8038 | C-CARBON R | RN72K1J-330JE | 1 | 435033304R1 |  |
| R8045 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |

|       |            |               |   |             |  |
|-------|------------|---------------|---|-------------|--|
| R8046 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R8047 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R8048 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R8049 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R8050 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R8051 | C-CARBON R | RN72K1J-680JE | 1 | 435036804R1 |  |
| R8052 | C-CARBON R | RN72K1J-471JE | 1 | 435034714R1 |  |
| R8053 | C-CARBON R | RN72K1J-680JE | 1 | 435036804R1 |  |
| R8054 | C-CARBON R | RN72K1J-471JE | 1 | 435034714R1 |  |
| R8055 | C-CARBON R | RN72K1J-680JE | 1 | 435036804R1 |  |
| R8056 | C-CARBON R | RN72K1J-471JE | 1 | 435034714R1 |  |
| R8057 | C-CARBON R | RN72K1J-680JE | 1 | 435036804R1 |  |
| R8058 | C-CARBON R | RN72K1J-471JE | 1 | 435034714R1 |  |
| R8059 | C-CARBON R | RN72K1J-680JE | 1 | 435036804R1 |  |
| R8060 | C-CARBON R | RN72K1J-680JE | 1 | 435036804R1 |  |
| R8061 | C-CARBON R | RN72K1J-680JE | 1 | 435036804R1 |  |
| R8062 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R8063 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R8064 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R8065 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R8066 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R8067 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R8068 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R8069 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R8070 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R8071 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R8072 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R8073 | C-CARBON R | RN72K1J-750JE | 1 | 435037504R1 |  |
| R8074 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R8075 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R8076 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1 |  |
| R8079 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R8080 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R8081 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1 |  |
| R8082 | C-CARBON R | RN72K1J-680JE | 1 | 435036804R1 |  |
| R8083 | C-CARBON R | RN72K1J-471JE | 1 | 435034714R1 |  |
| R8084 | C-CARBON R | RN72K1J-471JE | 1 | 435034714R1 |  |
| R8085 | C-CARBON R | RN72K1J-471JE | 1 | 435034714R1 |  |



|       |            |               |   |               |  |
|-------|------------|---------------|---|---------------|--|
| R8086 | C-CARBON R | RN72K1J-471JE | 1 | 435034714R1   |  |
| R8087 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1   |  |
| R8088 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1   |  |
| R8089 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1   |  |
| R8090 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1   |  |
| R8160 | C-CARBON R | RN72K1J-332JE | 1 | 435033324R1   |  |
| R8161 | C-CARBON R | RN72K1J-681JE | 1 | 435036814R1   |  |
| R8162 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1   |  |
| R8165 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8201 | C-CARBON R | RN72K1J-330JE | 1 | 435033304R1   |  |
| R8202 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1   |  |
| R8203 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1   |  |
| R8205 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1   |  |
| R8206 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8207 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8208 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8209 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8210 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8212 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8213 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8214 | C-CARBON R | RN72K1J-272JE | 1 | 435032724R1   |  |
| R8215 | C-CARBON R | RN72K1J-272JE | 1 | 435032724R1   |  |
| R8219 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8223 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8224 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8230 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R8231 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R8232 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R8233 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R8234 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R8235 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R8236 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R8238 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R8239 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R8240 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R8241 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R8243 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R8245 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |

|       |            |               |   |               |  |
|-------|------------|---------------|---|---------------|--|
| R8248 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R8249 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R8251 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |
| R8252 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |
| R8253 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |
| R8254 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |
| R8255 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |
| R8256 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |
| R8257 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |
| R8258 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |
| R8259 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |
| R8264 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8271 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |
| R8272 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |
| R8273 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |
| R8274 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |
| R8275 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |
| R8276 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |
| R8277 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |
| R8278 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |
| R8279 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |
| R8280 | C-CARBON R | RN72K1J-120JE | 1 | 435031204R1   |  |
| R8282 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1   |  |
| R8333 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8334 | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1   |  |
| R8335 | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1   |  |
| R8336 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1   |  |
| R8337 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1   |  |
| R8338 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1   |  |
| R8339 | C-CARBON R | RN72K2E-470JE | 1 | 435224704R1   |  |
| R8343 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8349 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1   |  |
| R8350 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1   |  |
| R8360 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8361 | C-CARBON R | RN72K1J-681JE | 1 | 435036814R1   |  |
| R8362 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1   |  |
| R8365 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8401 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |

|       |            |               |   |               |  |
|-------|------------|---------------|---|---------------|--|
| R8402 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1   |  |
| R8403 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |
| R8404 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1   |  |
| R8405 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1   |  |
| R8408 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1   |  |
| R8409 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1   |  |
| R8410 | C-CARBON R | RN72K1J-681JE | 1 | 435036814R1   |  |
| R8411 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1   |  |
| R8416 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |
| R8417 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |
| R8418 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |
| R8419 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |
| R8420 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |
| R8421 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |
| R8422 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |
| R8423 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |
| R8424 | C-R NET    | RM7LJ220X04   | 1 | 43484722004R2 |  |
| R8425 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1   |  |
| R8429 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1   |  |
| R8431 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1   |  |
| R8432 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1   |  |
| R8442 | C-CARBON R | RN72K1J-102JE | 1 | 435031024R1   |  |
| R8501 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1   |  |
| R8502 | C-CARBON R | RN72K1J-120JE | 1 | 435031204R1   |  |
| R8503 | C-R NET    | RM7LJ000X04   | 1 | 43484700004R2 |  |
| R8504 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R8505 | C-R NET    | RM7LJ000X04   | 1 | 43484700004R2 |  |
| R8507 | C-R NET    | RM7LJ000X04   | 1 | 43484700004R2 |  |
| R8508 | C-R NET    | RM7LJ000X04   | 1 | 43484700004R2 |  |
| R8509 | C-R NET    | RM7LJ000X04   | 1 | 43484700004R2 |  |
| R8510 | C-R NET    | RM7LJ000X04   | 1 | 43484700004R2 |  |
| R8511 | C-R NET    | RM7LJ000X04   | 1 | 43484700004R2 |  |
| R8512 | C-R NET    | RM7LJ000X04   | 1 | 43484700004R2 |  |
| R8513 | C-R NET    | RM7LJ000X04   | 1 | 43484700004R2 |  |
| R8516 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1   |  |
| R8517 | C-CARBON R | RN72K1J-101JE | 1 | 435031014R1   |  |
| R8518 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1   |  |
| R8519 | C-CARBON R | RN72K1J-151JE | 1 | 435031514R1   |  |

|       |            |               |   |               |  |
|-------|------------|---------------|---|---------------|--|
| R8522 | C-R NET    | RM7LJ330X04   | 1 | 43484733004R2 |  |
| R8523 | C-CARBON R | RN72K1J-330JE | 1 | 435033304R1   |  |
| R8524 | C-CARBON R | RN72K1J-330JE | 1 | 435033304R1   |  |
| R8525 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1   |  |
| R8526 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1   |  |
| R8527 | C-CARBON R | RN72K1J-562JE | 1 | 435035624R1   |  |
| R8528 | C-CARBON R | RN72K1J-562JE | 1 | 435035624R1   |  |
| R8529 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8530 | C-CARBON R | RN72K1J-105JE | 1 | 435031054R1   |  |
| R8531 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1   |  |
| R8533 | C-CARBON R | RN72K1J-562JE | 1 | 435035624R1   |  |
| R8534 | C-CARBON R | RN72K1J-562JE | 1 | 435035624R1   |  |
| R8535 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1   |  |
| R8536 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1   |  |
| R8601 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1   |  |
| R8602 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1   |  |
| R8607 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1   |  |
| R8608 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1   |  |
| R8609 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1   |  |
| R8617 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1   |  |
| R8618 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1   |  |
| R8619 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8627 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1   |  |
| R8628 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1   |  |
| R8629 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8637 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1   |  |
| R8638 | C-CARBON R | RN72K1J-473JE | 1 | 435034734R1   |  |
| R8639 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8647 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1   |  |
| R8648 | C-CARBON R | RN72K1J-472JE | 1 | 435034724R1   |  |
| R8649 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1   |  |
| R8650 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1   |  |
| R8651 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1   |  |
| R8654 | C-CARBON R | RN72K1J-223JE | 1 | 435032234R1   |  |
| R8655 | C-CARBON R | RN72K1J-224JE | 1 | 435032244R1   |  |
| R8656 | C-CARBON R | RN72K1J-333JE | 1 | 435033334R1   |  |
| R8701 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8702 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |

|       |            |               |   |               |  |
|-------|------------|---------------|---|---------------|--|
| R8703 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8705 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1   |  |
| R8706 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1   |  |
| R8707 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1   |  |
| R8708 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8709 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8710 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8711 | C-CARBON R | RN72K1J-222JE | 1 | 435032224R1   |  |
| R8712 | C-R NET    | RM7LJ222X04   | 1 | 43484722204R2 |  |
| R8713 | C-R NET    | RM7LJ222X04   | 1 | 43484722204R2 |  |
| R8714 | C-R NET    | RM7LJ222X04   | 1 | 43484722204R2 |  |
| R8715 | C-R NET    | RM7LJ103X04   | 1 | 43484710304R2 |  |
| R8716 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8717 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8718 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1   |  |
| R8719 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8720 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1   |  |
| R8721 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1   |  |
| R8722 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8723 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8733 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8742 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8744 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8746 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8747 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8749 | C-CARBON R | RN72K1J-220JE | 1 | 435032204R1   |  |
| R8750 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1   |  |
| R8751 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1   |  |
| R8752 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1   |  |
| R8823 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1   |  |
| R8824 | C-CARBON R | RN72K1J-000JE | 1 | 435030004R1   |  |
| R8937 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8951 | C-CARBON R | RN72K1J-103JE | 1 | 435031034R1   |  |
| R8952 | C-CARBON R | RN72K1J-683JE | 1 | 435036834R1   |  |
| R8953 | C-CARBON R | RN72K1J-183FE | 1 | 435031832R1   |  |
| R8954 | C-CARBON R | RN72K1J-224FE | 1 | 435032242R1   |  |
| R8955 | C-CARBON R | RN72K1J-103FE | 1 | 435031032R1   |  |
| R8957 | C-CARBON R | RN72K1J-333JE | 1 | 435033334R1   |  |

|          |                |                   |      |             |   |
|----------|----------------|-------------------|------|-------------|---|
| R8958    | C-CARBON R     | RN72K1J-333FE     | 1    | 435033332R1 |   |
| R8959    | C-CARBON R     | RN72K1J-562FE     | 1    | 435035622R1 |   |
| R8960    | C-CARBON R     | RN72K1J-103FE     | 1    | 435031032R1 |   |
| R8962    | C-CARBON R     | RN72K1J-333JE     | 1    | 435033334R1 |   |
| R8963    | C-CARBON R     | RN72K1J-153FE     | 1    | 435031532R1 |   |
| R8964    | C-CARBON R     | RN72K1J-333FE     | 1    | 435033332R1 |   |
| R8965    | C-CARBON R     | RN72K1J-103FE     | 1    | 435031032R1 |   |
| R8967    | C-CARBON R     | RN72K1J-683JE     | 1    | 435036834R1 |   |
| R8968    | C-CARBON R     | RN72K1J-333FE     | 1    | 435033332R1 |   |
| R8969    | C-CARBON R     | RN72K1J-394FE     | 1    | 435033942R1 |   |
| R8970    | C-CARBON R     | RN72K1J-103FE     | 1    | 435031032R1 |   |
| R8971    | C-CARBON R     | RN72K1J-473JE     | 1    | 435034734R1 |   |
| R8972    | C-CARBON R     | RN72K1J-103JE     | 1    | 435031034R1 |   |
| R8973    | C-CARBON R     | RN72K1J-103JE     | 1    | 435031034R1 |   |
| R8974    | C-CARBON R     | RN72K1J-103JE     | 1    | 435031034R1 |   |
| R8976    | C-CARBON R     | RN72K1J-103JE     | 1    | 435031034R1 |   |
| R8977    | C-CARBON R     | RN72K1J-562JE     | 1    | 435035624R1 |   |
| R8978    | C-CARBON R     | RN72K1J-682JE     | 1    | 435036824R1 |   |
| R8979    | C-CARBON R     | RN72K1J-562JE     | 1    | 435035624R1 |   |
| [SW TRM] |                |                   |      |             |   |
| JL3201   | WIRE TRAP      | NPLG-5P588        | 1    | 25055626    |   |
| JL8002B  | SOCKET         | NSCT-5P97         | 1    | 25050269    |   |
| P005     | PWB            | BCHDM-0132        | 1    | 25140132C   | N |
| P3001    | SOCKET(B to B) | IMSA-9850S-20Y900 | 1    | 25052813R2  |   |
| P3102A   | SOCKET         | NSCT-9P2472       | 1    | 25052575R2  |   |
| P3104    | SOCKET         | SI-60073-F        | 1    | 25053307    |   |
| P3104 or | SOCKET         | J0026D21NL        | ( 1) | 25053250    |   |
| P3605A   | PLUG           | IMSA-9142B-18A    | 1    | 25056599    |   |
| P3607A   | PLUG           | IMSA-9142B-16A    | 1    | 25056598    |   |
| P3608A   | PLUG           | IMSA-9142B-18A    | 1    | 25056599    |   |
| P3609    | SOCKET         | 04FMN-SMT-A-TF    | 1    | 25052821R2  |   |
| P4104A   | SOCKET         | NSCT-19P2112      | 1    | 25052215    |   |
| P8005A   | TRM-423(SCREW) | NEJITANSI ST3     | 1    | 25060495    |   |
| P8006    | HOLDER         | (ｸﾗｰﾝｼﾞﾝｸﾞ) UA-0  | 1    | 27190432    |   |
| P8302    | SOCKET         | YKF45-7037V       | 1    | 25053253R3  |   |
| P8341    | SOCKET         | YKF45-7037V       | 1    | 25053253R3  |   |
| P8601    | SOCKET         | YKF45-7037V       | 1    | 25053253R3  |   |
| P8611    | SOCKET         | YKF45-7037V       | 1    | 25053253R3  |   |

|        |        |                |   |            |  |
|--------|--------|----------------|---|------------|--|
| P8621  | SOCKET | YKF45-7037V    | 1 | 25053253R3 |  |
| P8631  | SOCKET | YKF45-7037V    | 1 | 25053253R3 |  |
| P8641B | SOCKET | FX16-31S-0.5SH | 1 | 25053365R2 |  |
| P8702  | SOCKET | NSCT-9P2472    | 1 | 25052575R2 |  |
| P8704  | SOCKET | 04FMN-SMT-A-TF | 1 | 25052821R2 |  |

PRINTED CIRCUIT BOARD PARTS LIST

DTR-40.1

|      |                                                   |             |            |
|------|---------------------------------------------------|-------------|------------|
| U006 | Front HDMI terminal PC board a'ss BAHDM-0290-1A * | 1B234590-1A | B MDD, MMA |
|------|---------------------------------------------------|-------------|------------|

| CIRCUIT. NO.     | PART NAME  | DESCRIPTION    | Q'TY | PART NO. (SN) | REMARKS |
|------------------|------------|----------------|------|---------------|---------|
| [SEMI CONDUCTOR] |            |                |      |               |         |
| D8661            | C-DIODE    | KDS4148U       | 1    | 223283R2      |         |
| D8661 or         | C-DIODE    | 1SS352         | ( 1) | 223234R2      |         |
| D8662            | C-DIODE    | KDS4148U       | 1    | 223283R2      |         |
| D8662 or         | C-DIODE    | 1SS352         | ( 1) | 223234R2      |         |
| Q8661            | IC         | TMDS141RHARG4  | 1    | 22242586R2    |         |
| [TRANS COIL]     |            |                |      |               |         |
| L8661            | CORE       | BLM18PG181SN1D | 1    | 2350005R1     |         |
| [CAPACITOR]      |            |                |      |               |         |
| C8661            | C-FILM C   | ECHU16V-104J   | 1    | 373041044R2   |         |
| C8663            | C-CERA C   | CK725F1A-105Z1 | 1    | 332181050R1   |         |
| C8664            | C-CERA C   | CK725B1H-102K1 | 1    | 332101025R1   |         |
| C8669            | C-CERA C   | CK725F1A-105Z1 | 1    | 332181050R1   |         |
| C8670            | C-CERA C   | CK725B1H-102K1 | 1    | 332101025R1   |         |
| C8671            | C-CERA C   | CK725F1A-105Z1 | 1    | 332181050R1   |         |
| C8672            | C-CERA C   | CK725B1H-102K1 | 1    | 332101025R1   |         |
| C8673            | C-CERA C   | CK725F1A-105Z1 | 1    | 332181050R1   |         |
| C8674            | C-CERA C   | CK725B1H-102K1 | 1    | 332101025R1   |         |
| C8675            | C-CERA C   | CK725F1A-105Z1 | 1    | 332181050R1   |         |
| C8676            | C-CERA C   | CK725B1H-102K1 | 1    | 332101025R1   |         |
| C8677            | C-CERA C   | CK725B0J-106K  | 1    | 332091065R2   |         |
| C8680            | C-CERA C   | CK725B0J-106K  | 1    | 332091065R2   |         |
| [RESISTOR]       |            |                |      |               |         |
| R8667            | C-CARBON R | RN72K1J-473JE  | 1    | 435034734R1   |         |
| R8668            | C-CARBON R | RN72K1J-473JE  | 1    | 435034734R1   |         |
| R8669            | C-CARBON R | RN72K1J-000JE  | 1    | 435030004R1   |         |
| R8670            | C-CARBON R | RN72K1J-000JE  | 1    | 435030004R1   |         |



|          |            |                |   |              |   |
|----------|------------|----------------|---|--------------|---|
| R8672    | C-CARBON R | RN72K1J-103JE  | 1 | 435031034R1  |   |
| R8673    | C-CARBON R | RN72K1J-472JE  | 1 | 435034724R1  |   |
| R8674    | C-CARBON R | RN72K1J-103JE  | 1 | 435031034R1  |   |
| R8675    | C-CARBON R | RN72K1J-103JE  | 1 | 435031034R1  |   |
| R8676    | C-CARBON R | RN72K1J-103JE  | 1 | 435031034R1  |   |
| R8680    | C-CARBON R | RN72K1J-000JE  | 1 | 435030004R1  |   |
| R8681    | C-CARBON R | RN72K1J-000JE  | 1 | 435030004R1  |   |
| [SW TRM] |            |                |   |              |   |
| P010     | PWB        | BCHDM-0290     | 1 | 25140290B    | N |
| P8641C   | SOCKET     | FX16-31S-0.5SV | 1 | 25053354R2   |   |
| P8661    | SOCKET     | YKF45-7037V    | 1 | 25053253R3   |   |
| P8663    | CRIMP AS   | CRIMP AS DX730 | 1 | 2063925100UL |   |

---

Integra Division of

**ONKYO CORPORATION**

Service Dept. Technical Support : 2-1, Nisshin-cho, Neyagawa-shi, OSAKA 572-8540, JAPAN

Tel: 072-831-8023 Fax: 072-831-8163 <http://www.onkyo.com/>

Integra Division of

**ONKYO U.S.A. CORPORATION**

18 Park Way, Upper Saddle River, N.J. 07458, U.S.A.

Tel: 201-785-2600 Fax: 201-785-2650 <http://www.integrahometheater.com>