



ONKYO SERVICE MANUAL

AV RECEIVER MODEL TX-SR707 (B)/(S)/(G)

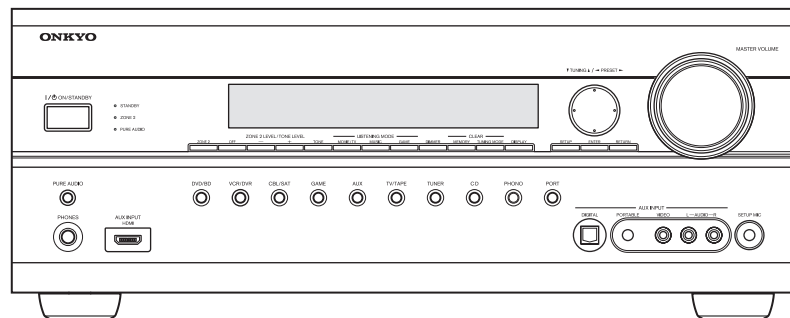


Black, Silver and Gold models

BMDC	120V AC 60Hz
BMDF	
BMMP, SMMP	220-240V AC 50/60Hz
BMMO, SMMO	
BMMA, SMMA	
BMMQ	
GMMR	

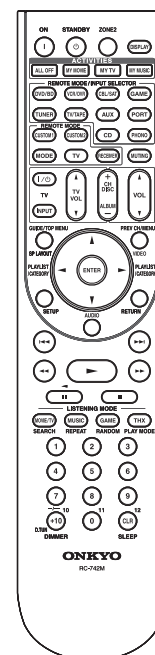

RC-742M

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK  ON THE SCHEMATIC DIAGRAM AND IN THE PARTS LIST ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE THESE COMPONENTS WITH ONKYO PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL.

MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.

EXPLODED VIEWS-1


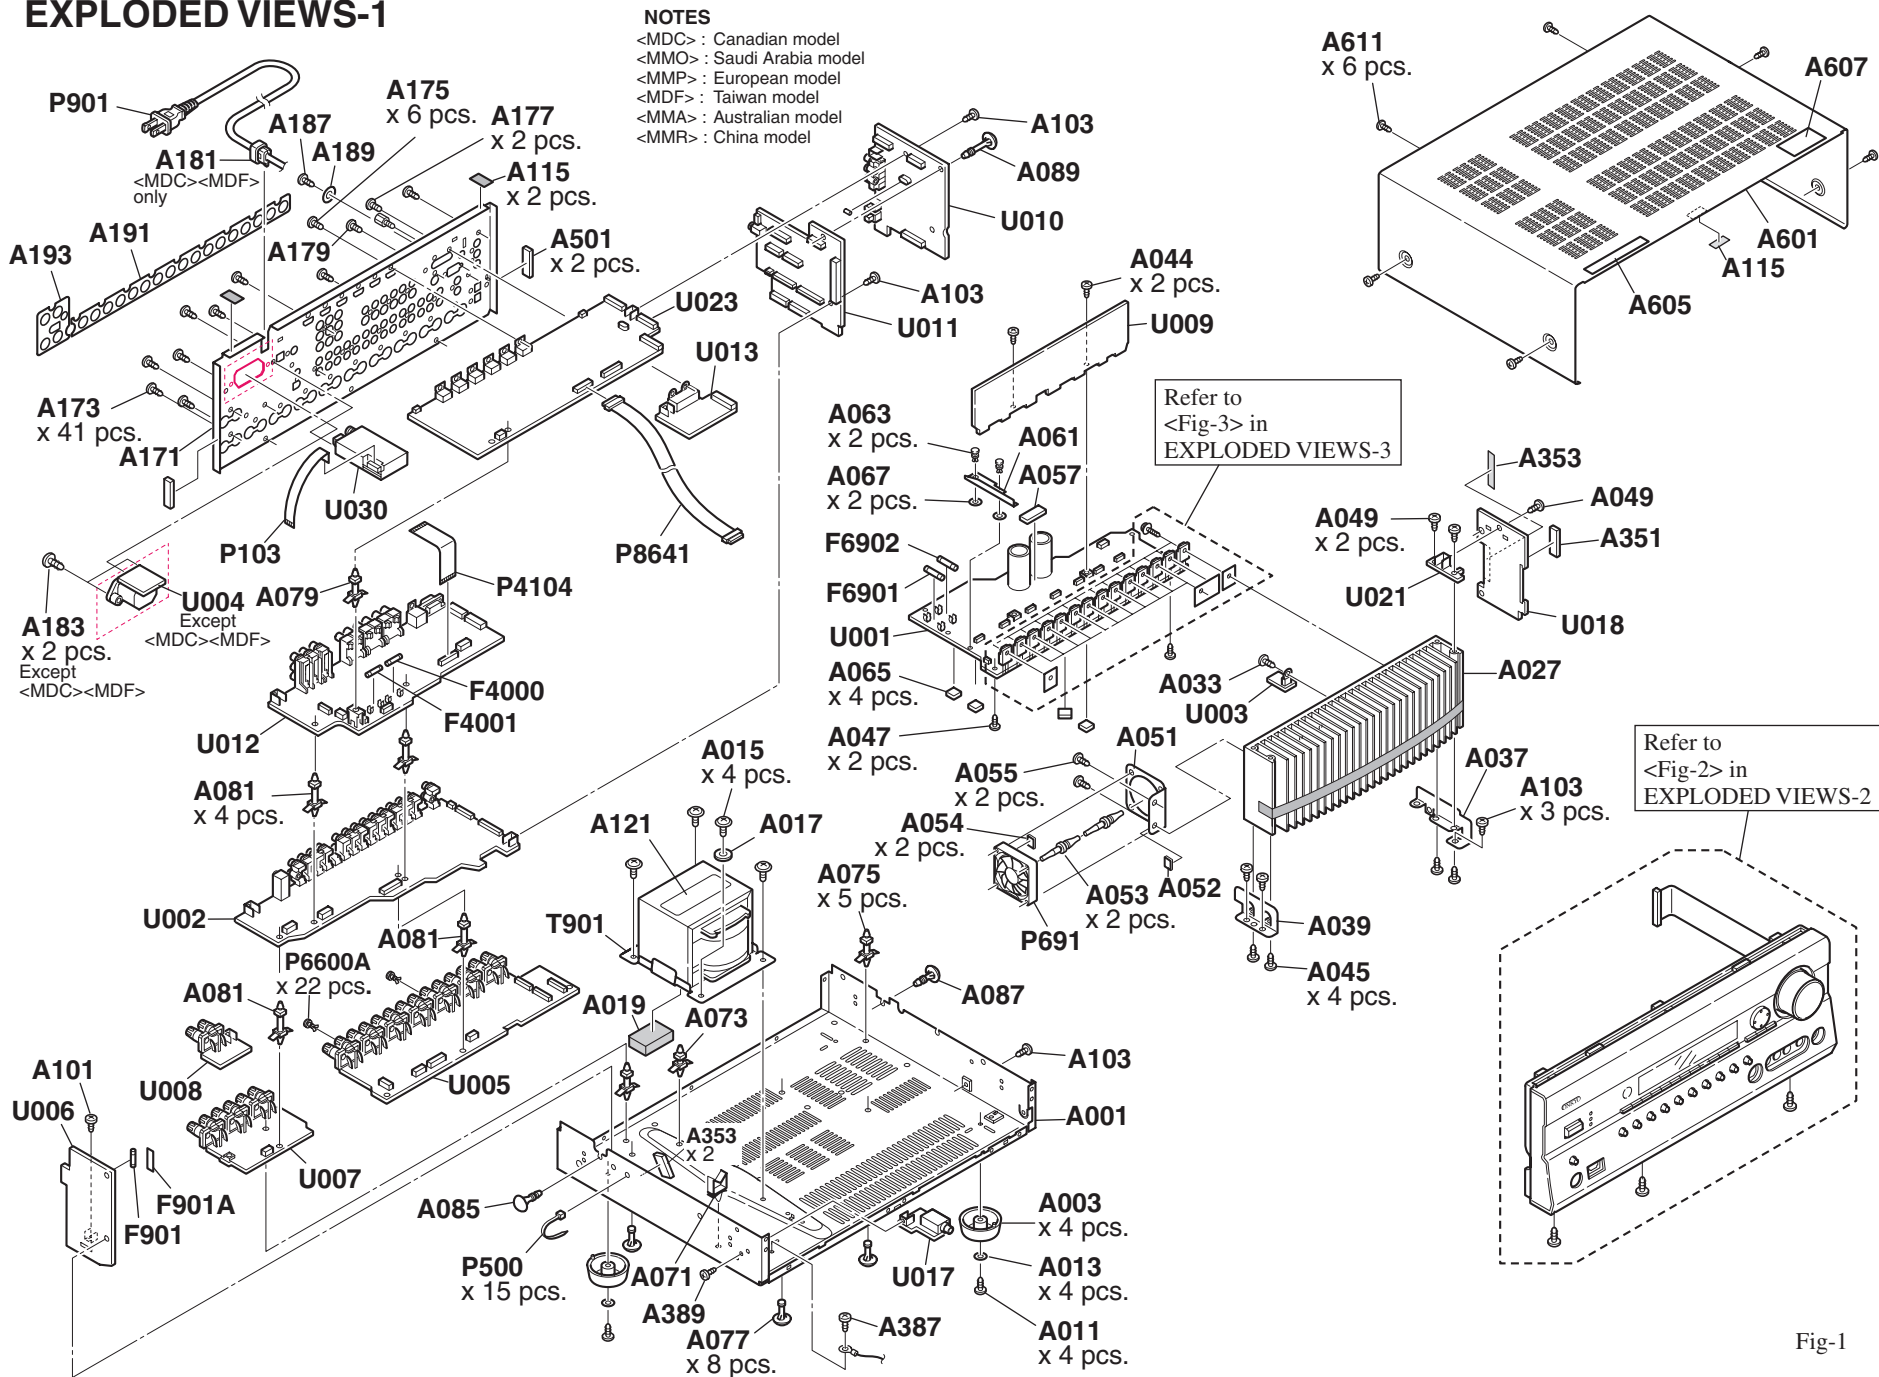


Fig-1


EXPLODED VIEWS-2

<Fig-2>

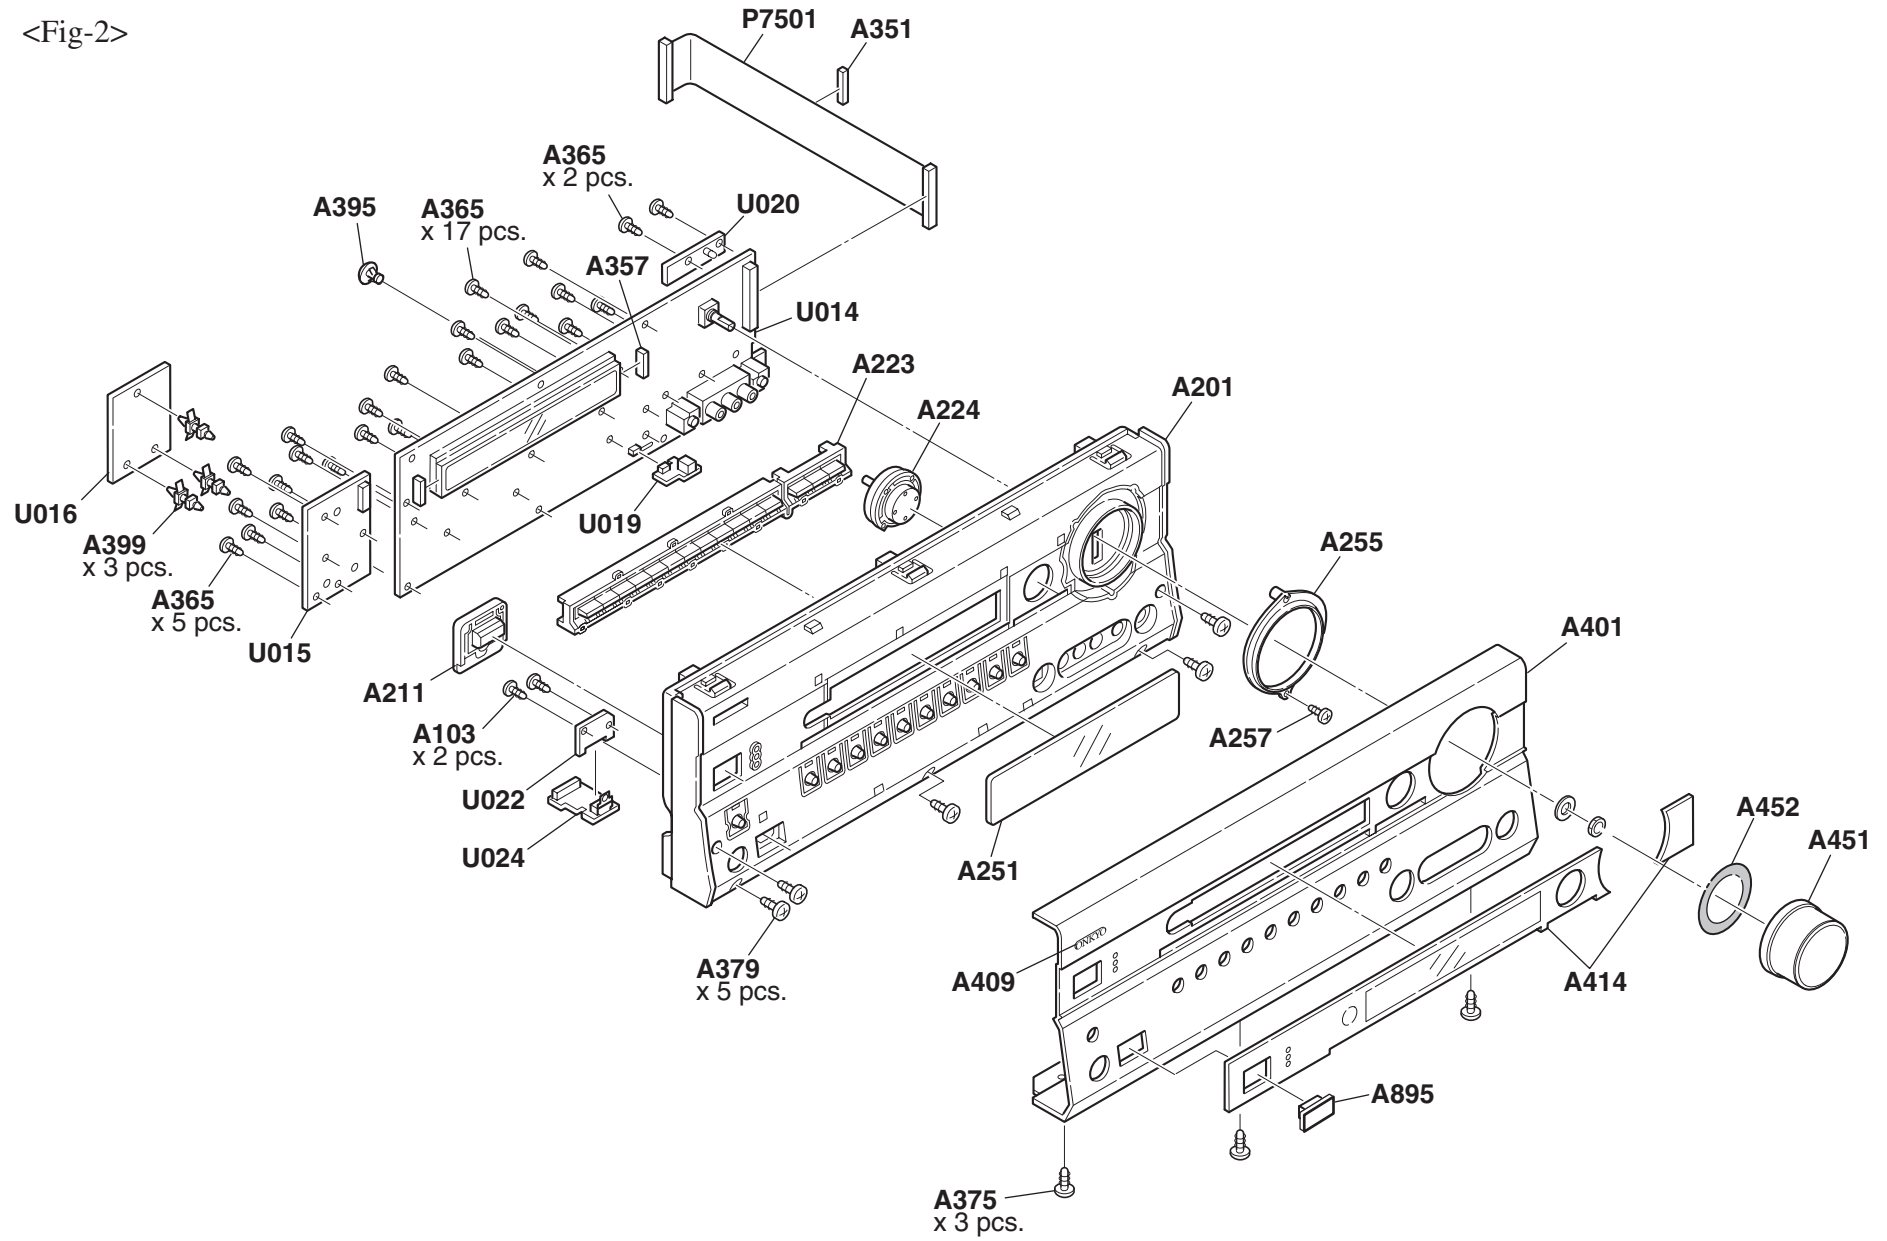


EXPLODED VIEWS-3

<Fig-3>

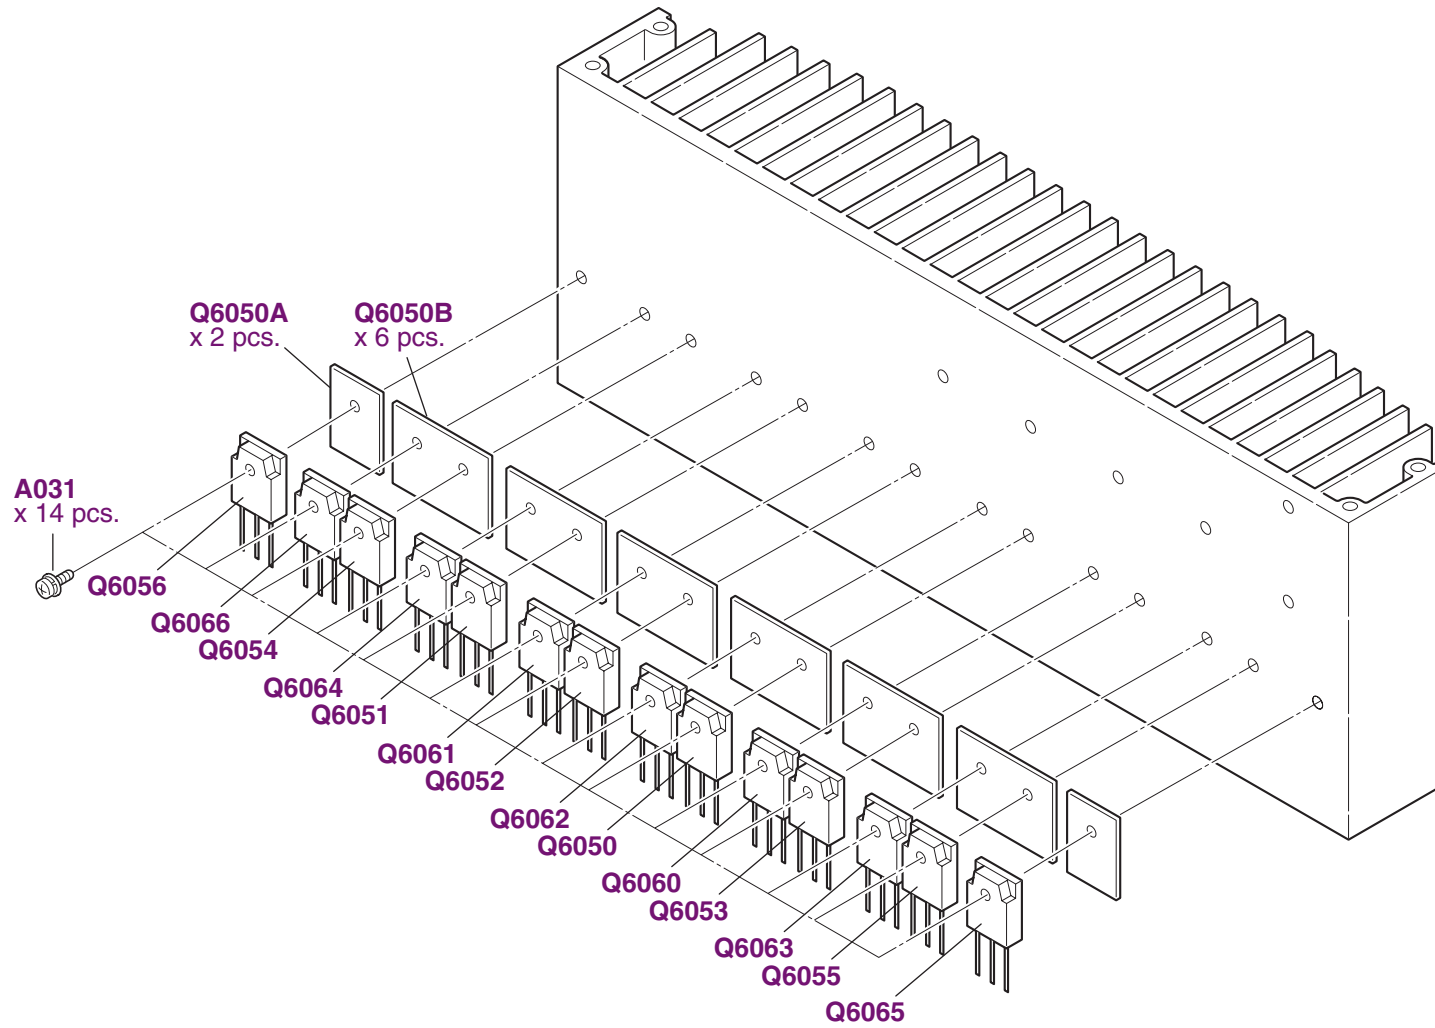

BLOCK DIAGRAM-1

AUDIO SECTION

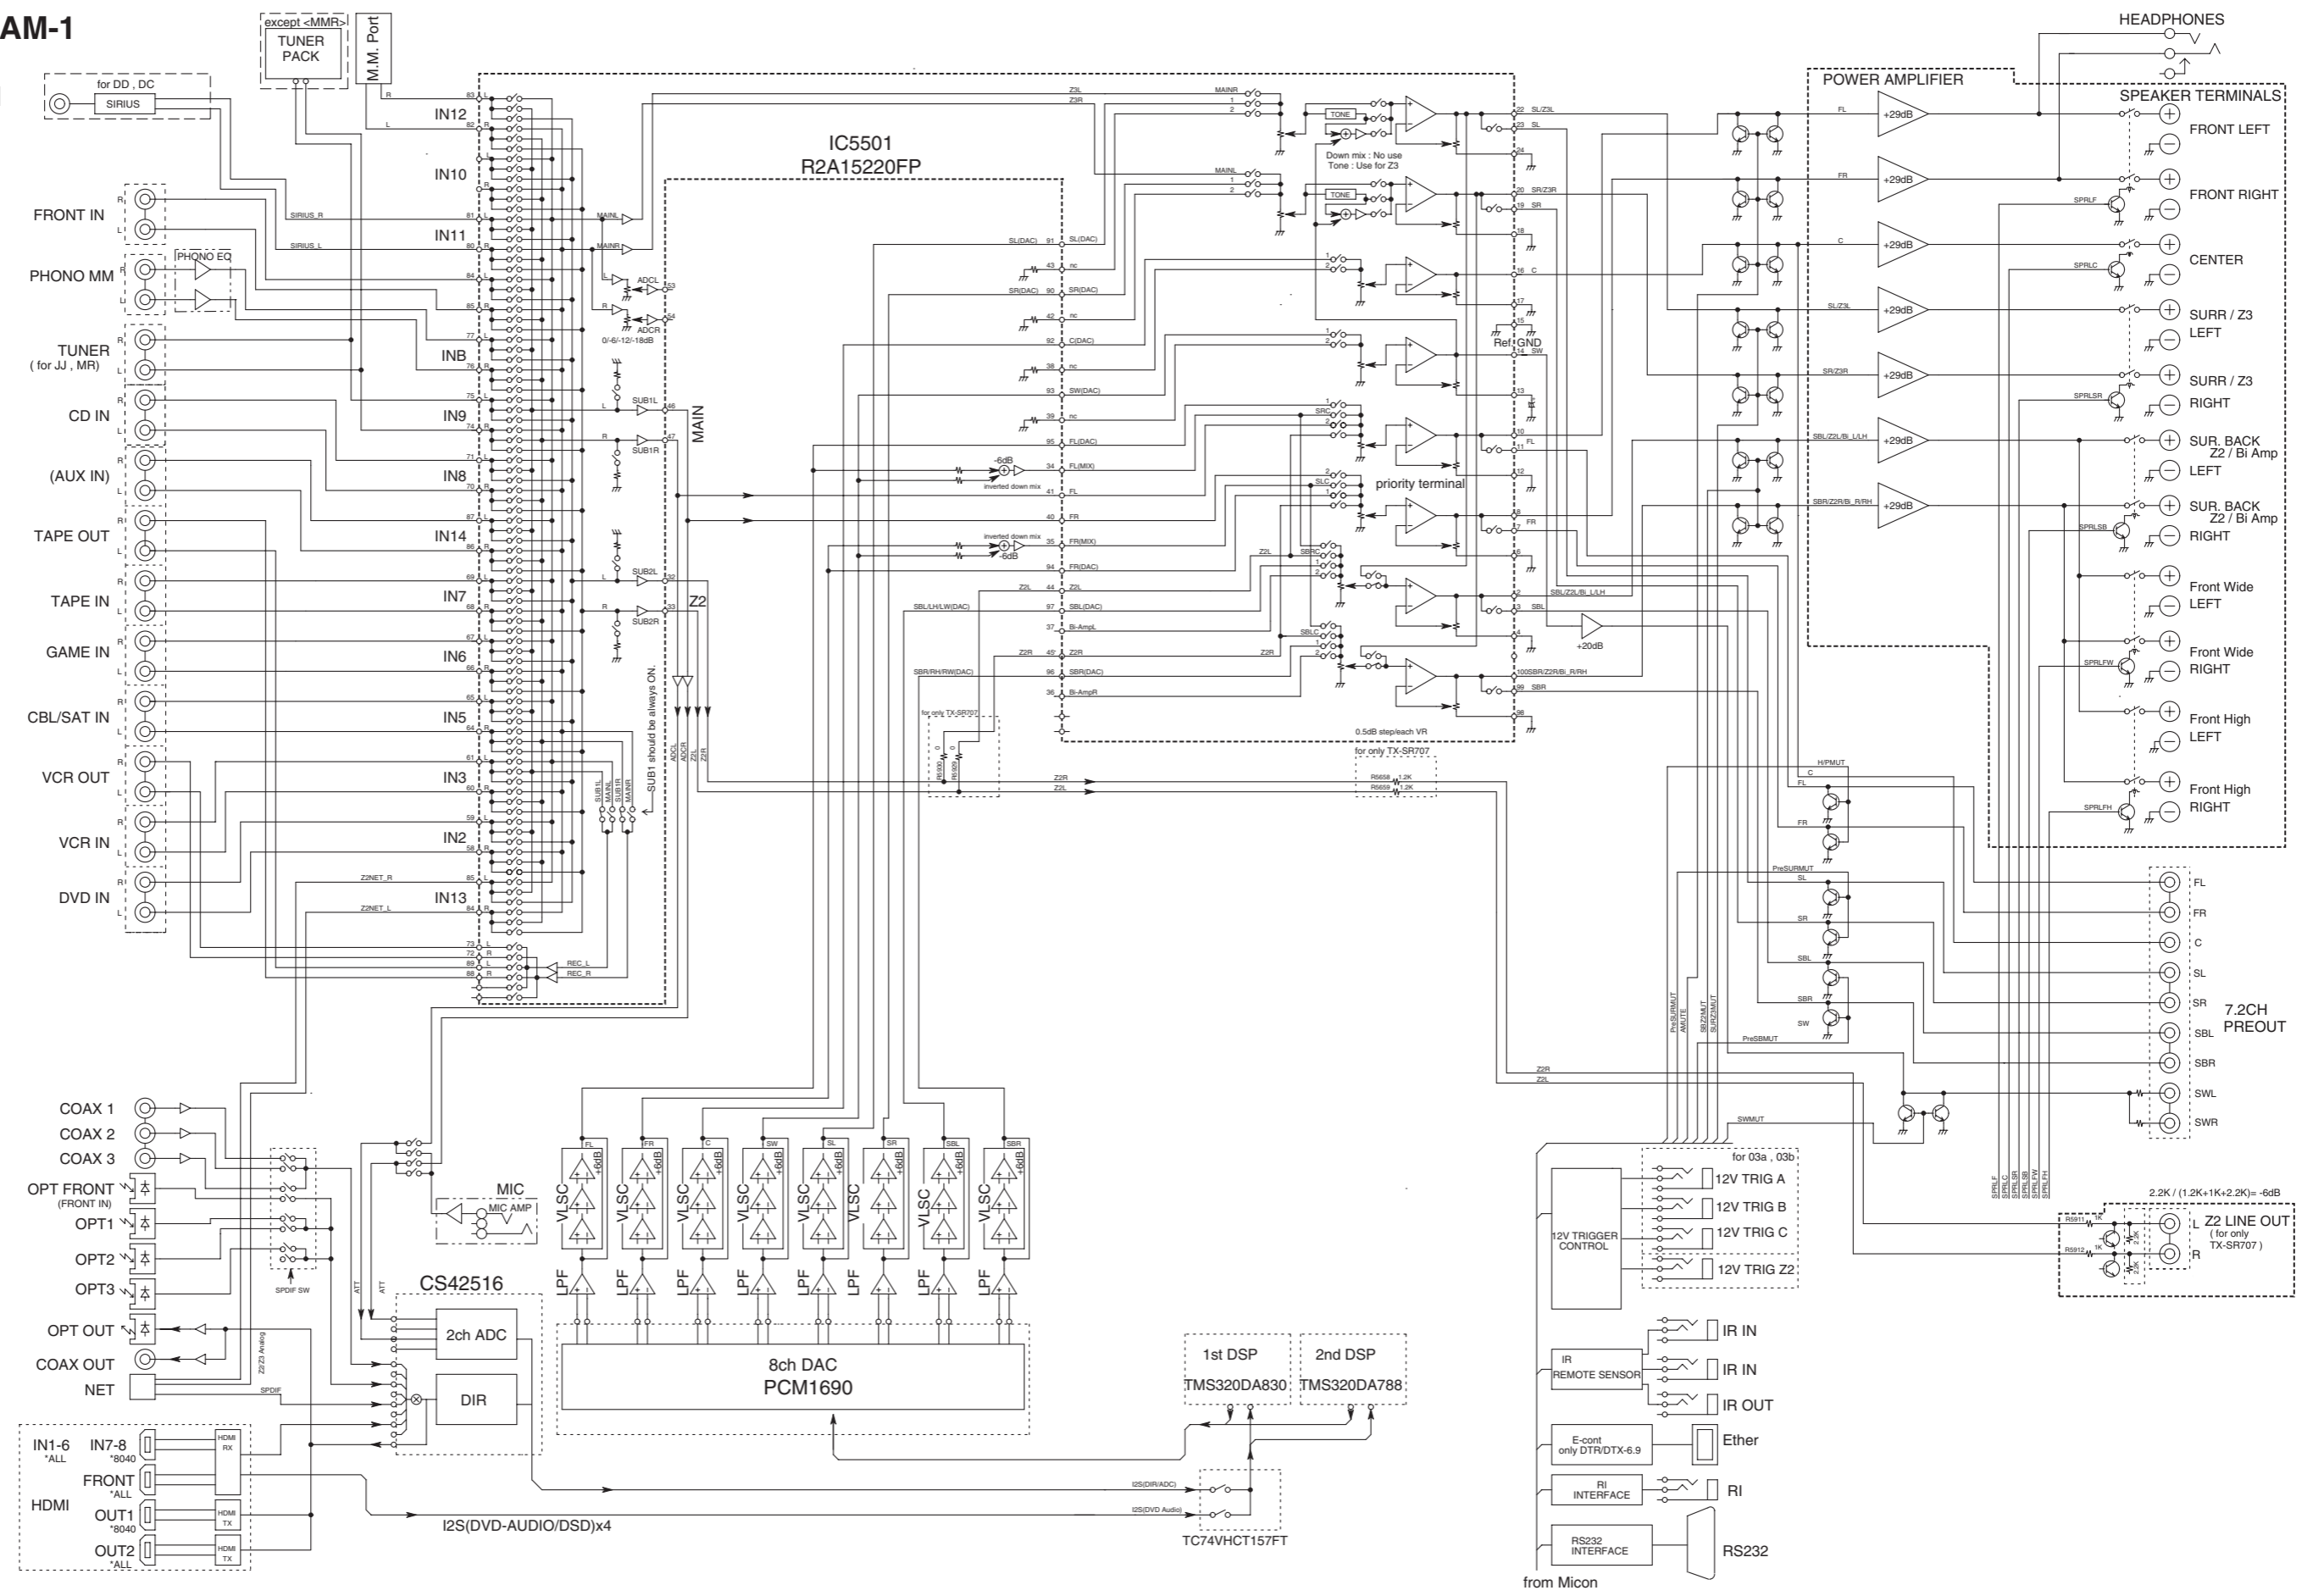

except <MMR>
TUNER PACK
M.M. Port

FRONT IN
PHONO MM
TUNER (for JJ, MR)
CD IN
(AUX IN)
TAPE OUT
TAPE IN
GAME IN
CBL/SAT IN
VCR OUT
VCR IN
DVD IN

COAX 1
COAX 2
COAX 3
OPT FRONT (FRONT IN)
OPT1
OPT2
OPT3
OPT OUT
COAX OUT
NET
HDMI IN1-6 *ALL *8040
HDMI FRONT *ALL *8040
HDMI OUT1 *8040
HDMI OUT2 *ALL


IC5501 R2A15220FP
MAIN
Z2
priority terminal
0.5dB step/peach VR for only TX-SR707

CS42516
2ch ADC
DIR
8ch DAC PCM1690
1st DSP TMS320DA830
2nd DSP TMS320DA788
TC74VHCT157FT
I2S(DVD-AUDIO/DSD)x4

POWER AMPLIFIER
SPEAKER TERMINALS
FRONT LEFT
FRONT RIGHT
CENTER
SURRE/Z3 LEFT
SURRE/Z3 RIGHT
SUR_BACK Z2/Bi Amp LEFT
SUR_BACK Z2/Bi Amp RIGHT
Front Wide LEFT
Front Wide RIGHT
Front High LEFT
Front High RIGHT
7.2CH PREOUT
FL
FR
C
SL
SR
SBL
SBR
SWL
SWR
12V TRIG A
12V TRIG B
12V TRIG C
12V TRIG Z2
IR IN
IR REMOTE SENSOR
IR IN
IR OUT
Ether
RI INTERFACE
RI
RS232 INTERFACE
RS232
Z2 LINE OUT (for only TX-SR707)

BLOCK DIAGRAM-2
VIDEO SECTION

2009 Mid RCV VIDEO BLK

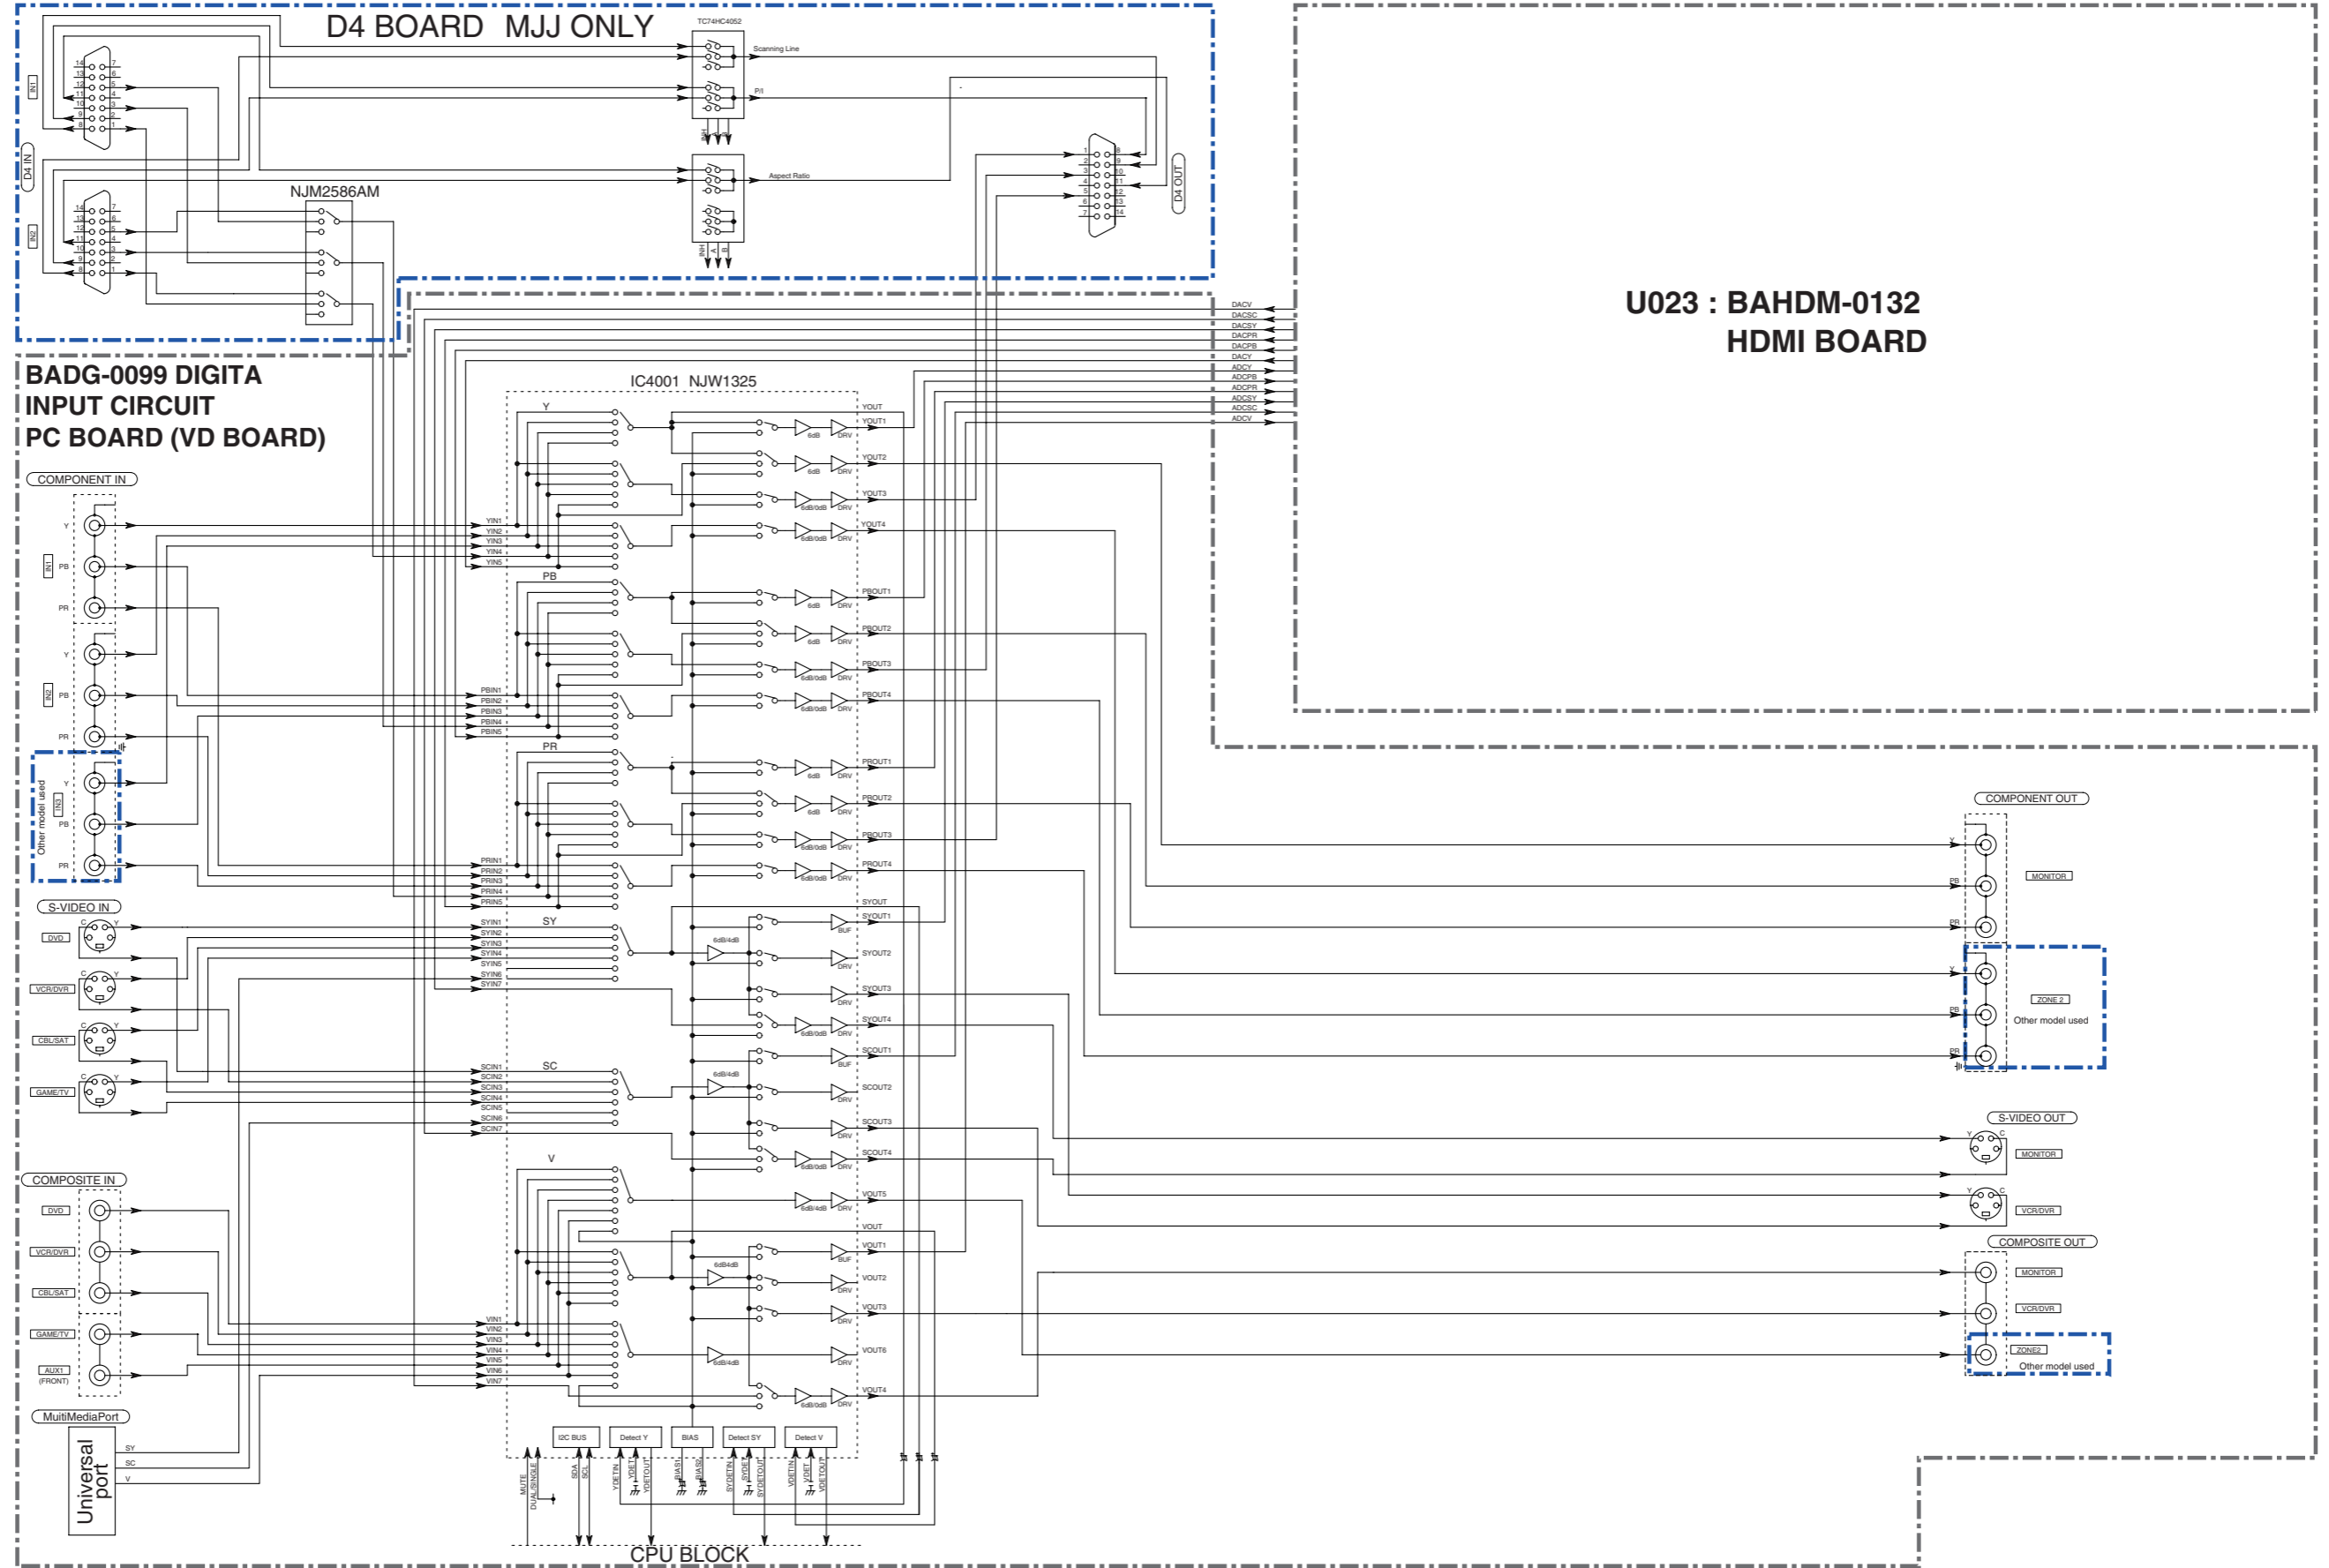


U023 : BAHDM-0132
HDMI BOARD

BLOCK DIAGRAM-3


HDMI SECTION

U023:
HDMI CIRCUIT
PC BOARD
BAHDM-0132

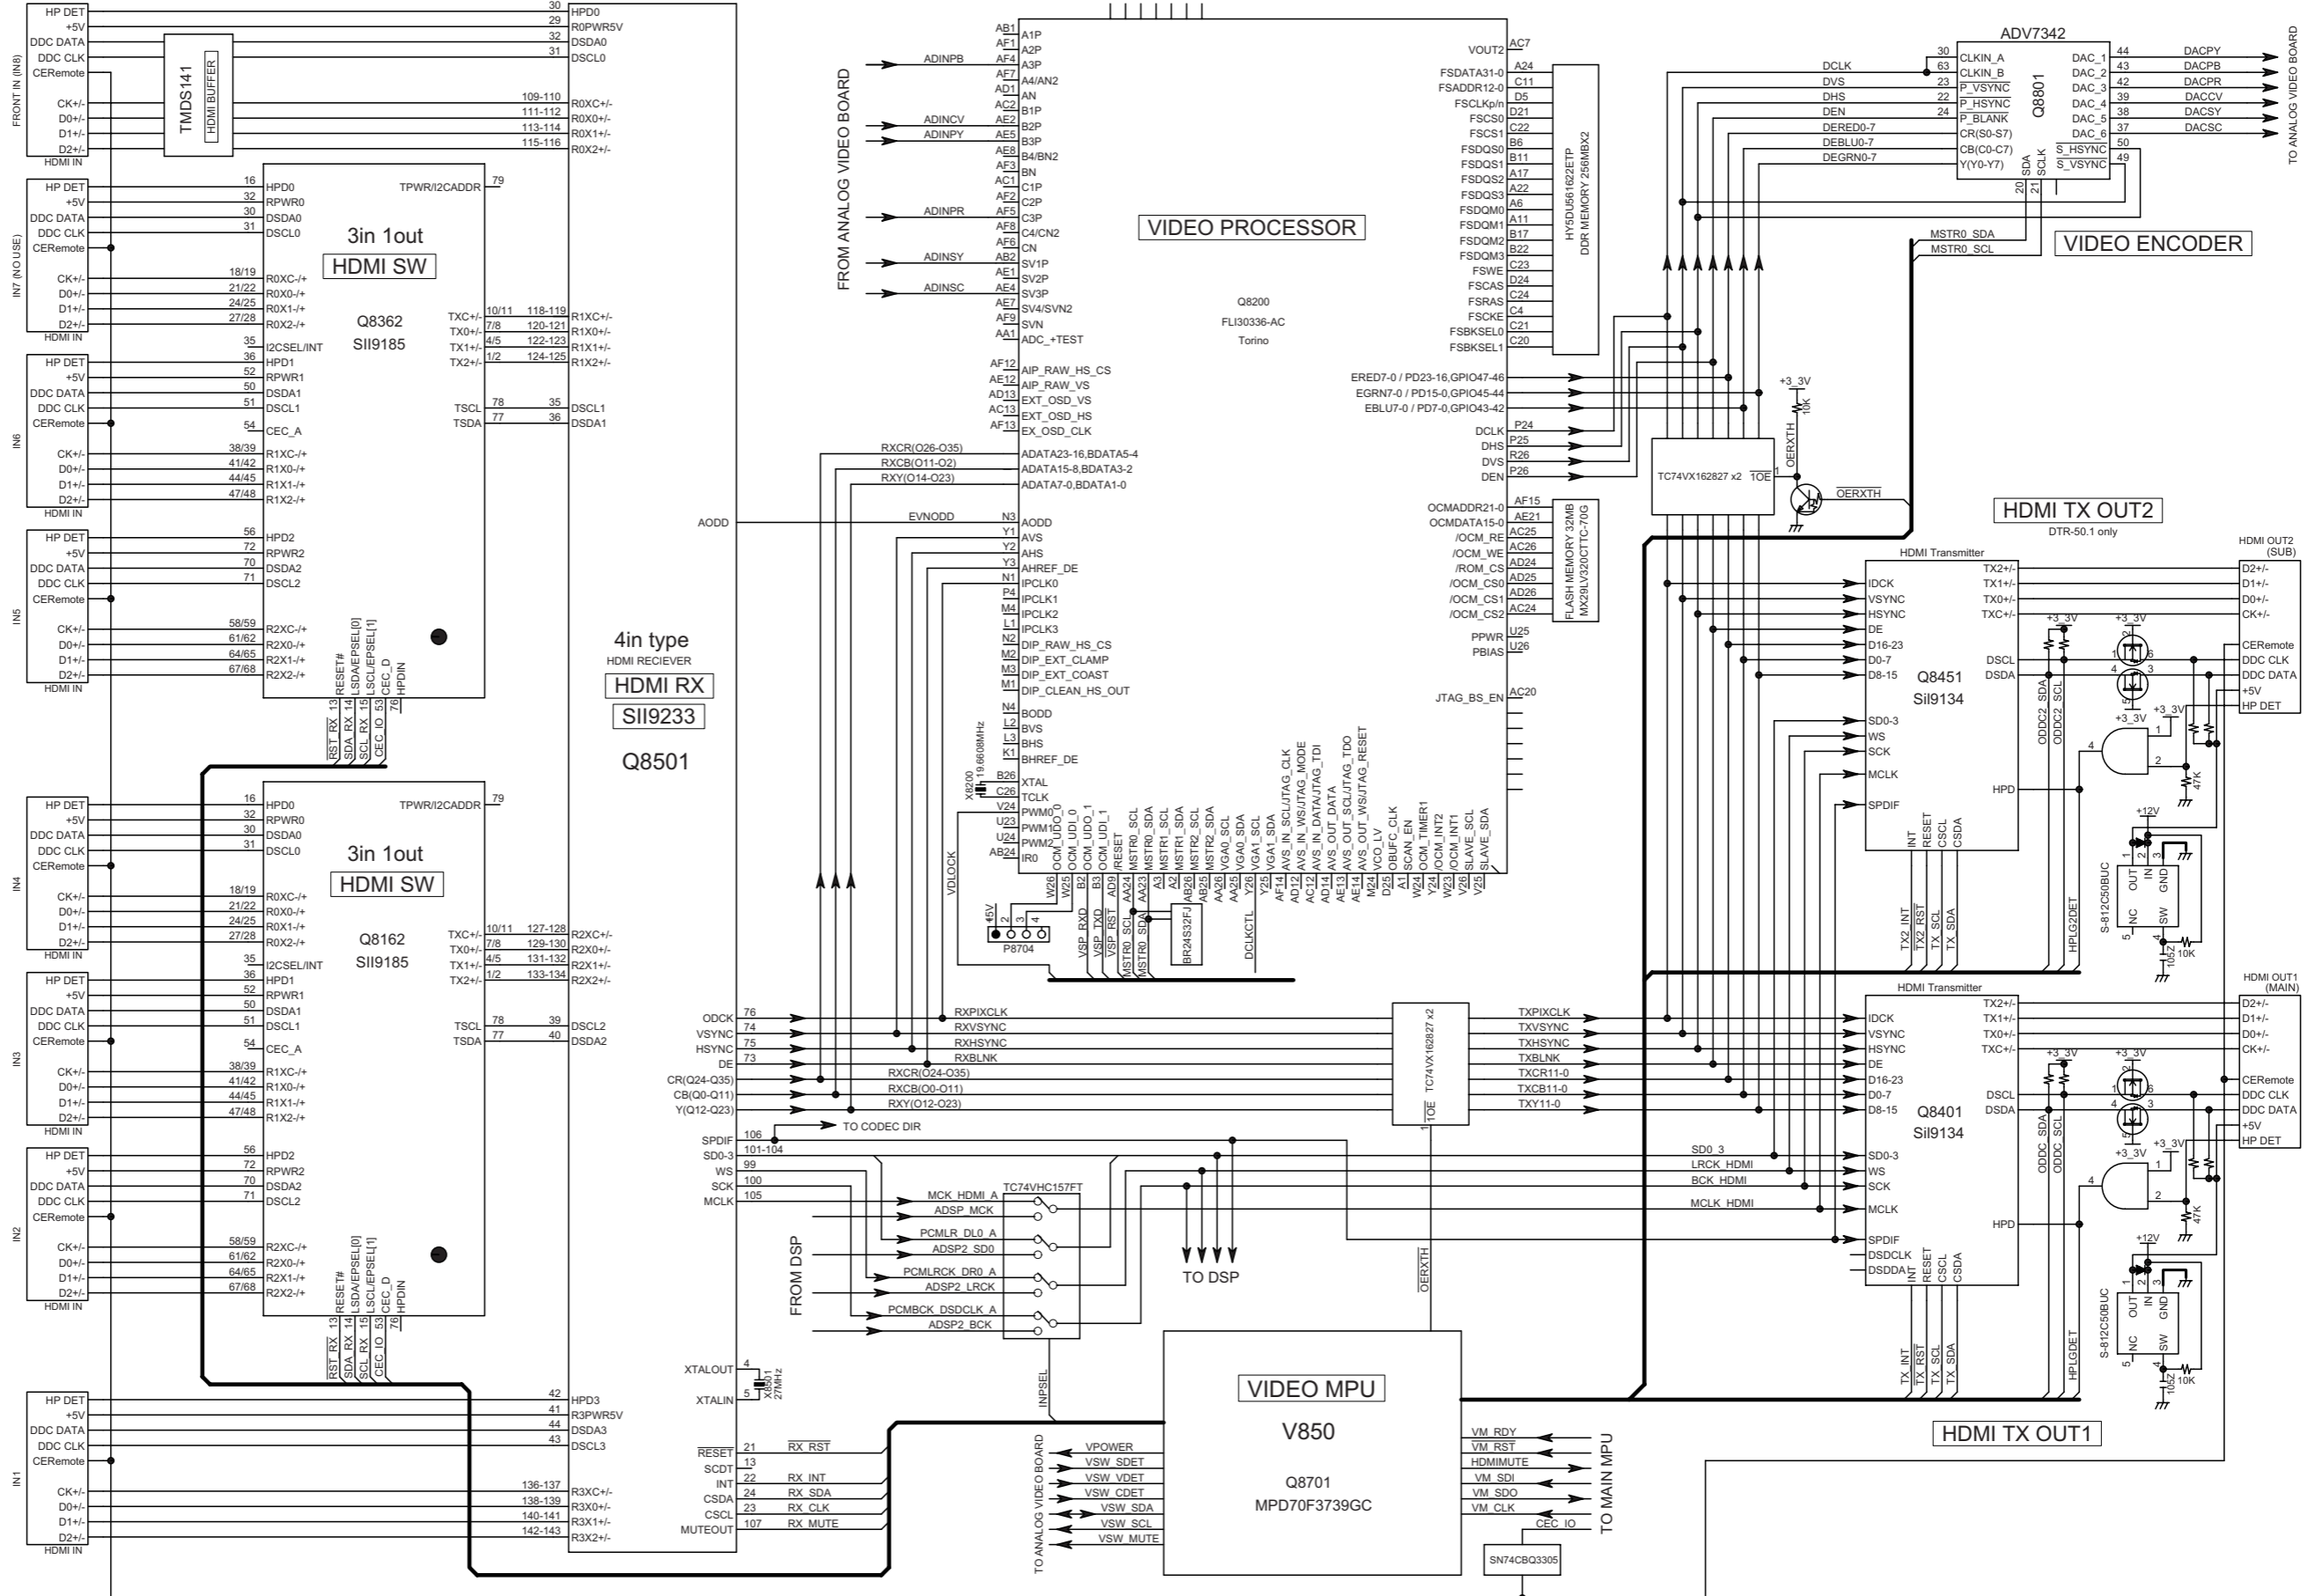

BLOCK DIAGRAM-4

DSP/ ETHER/ USB SECTION

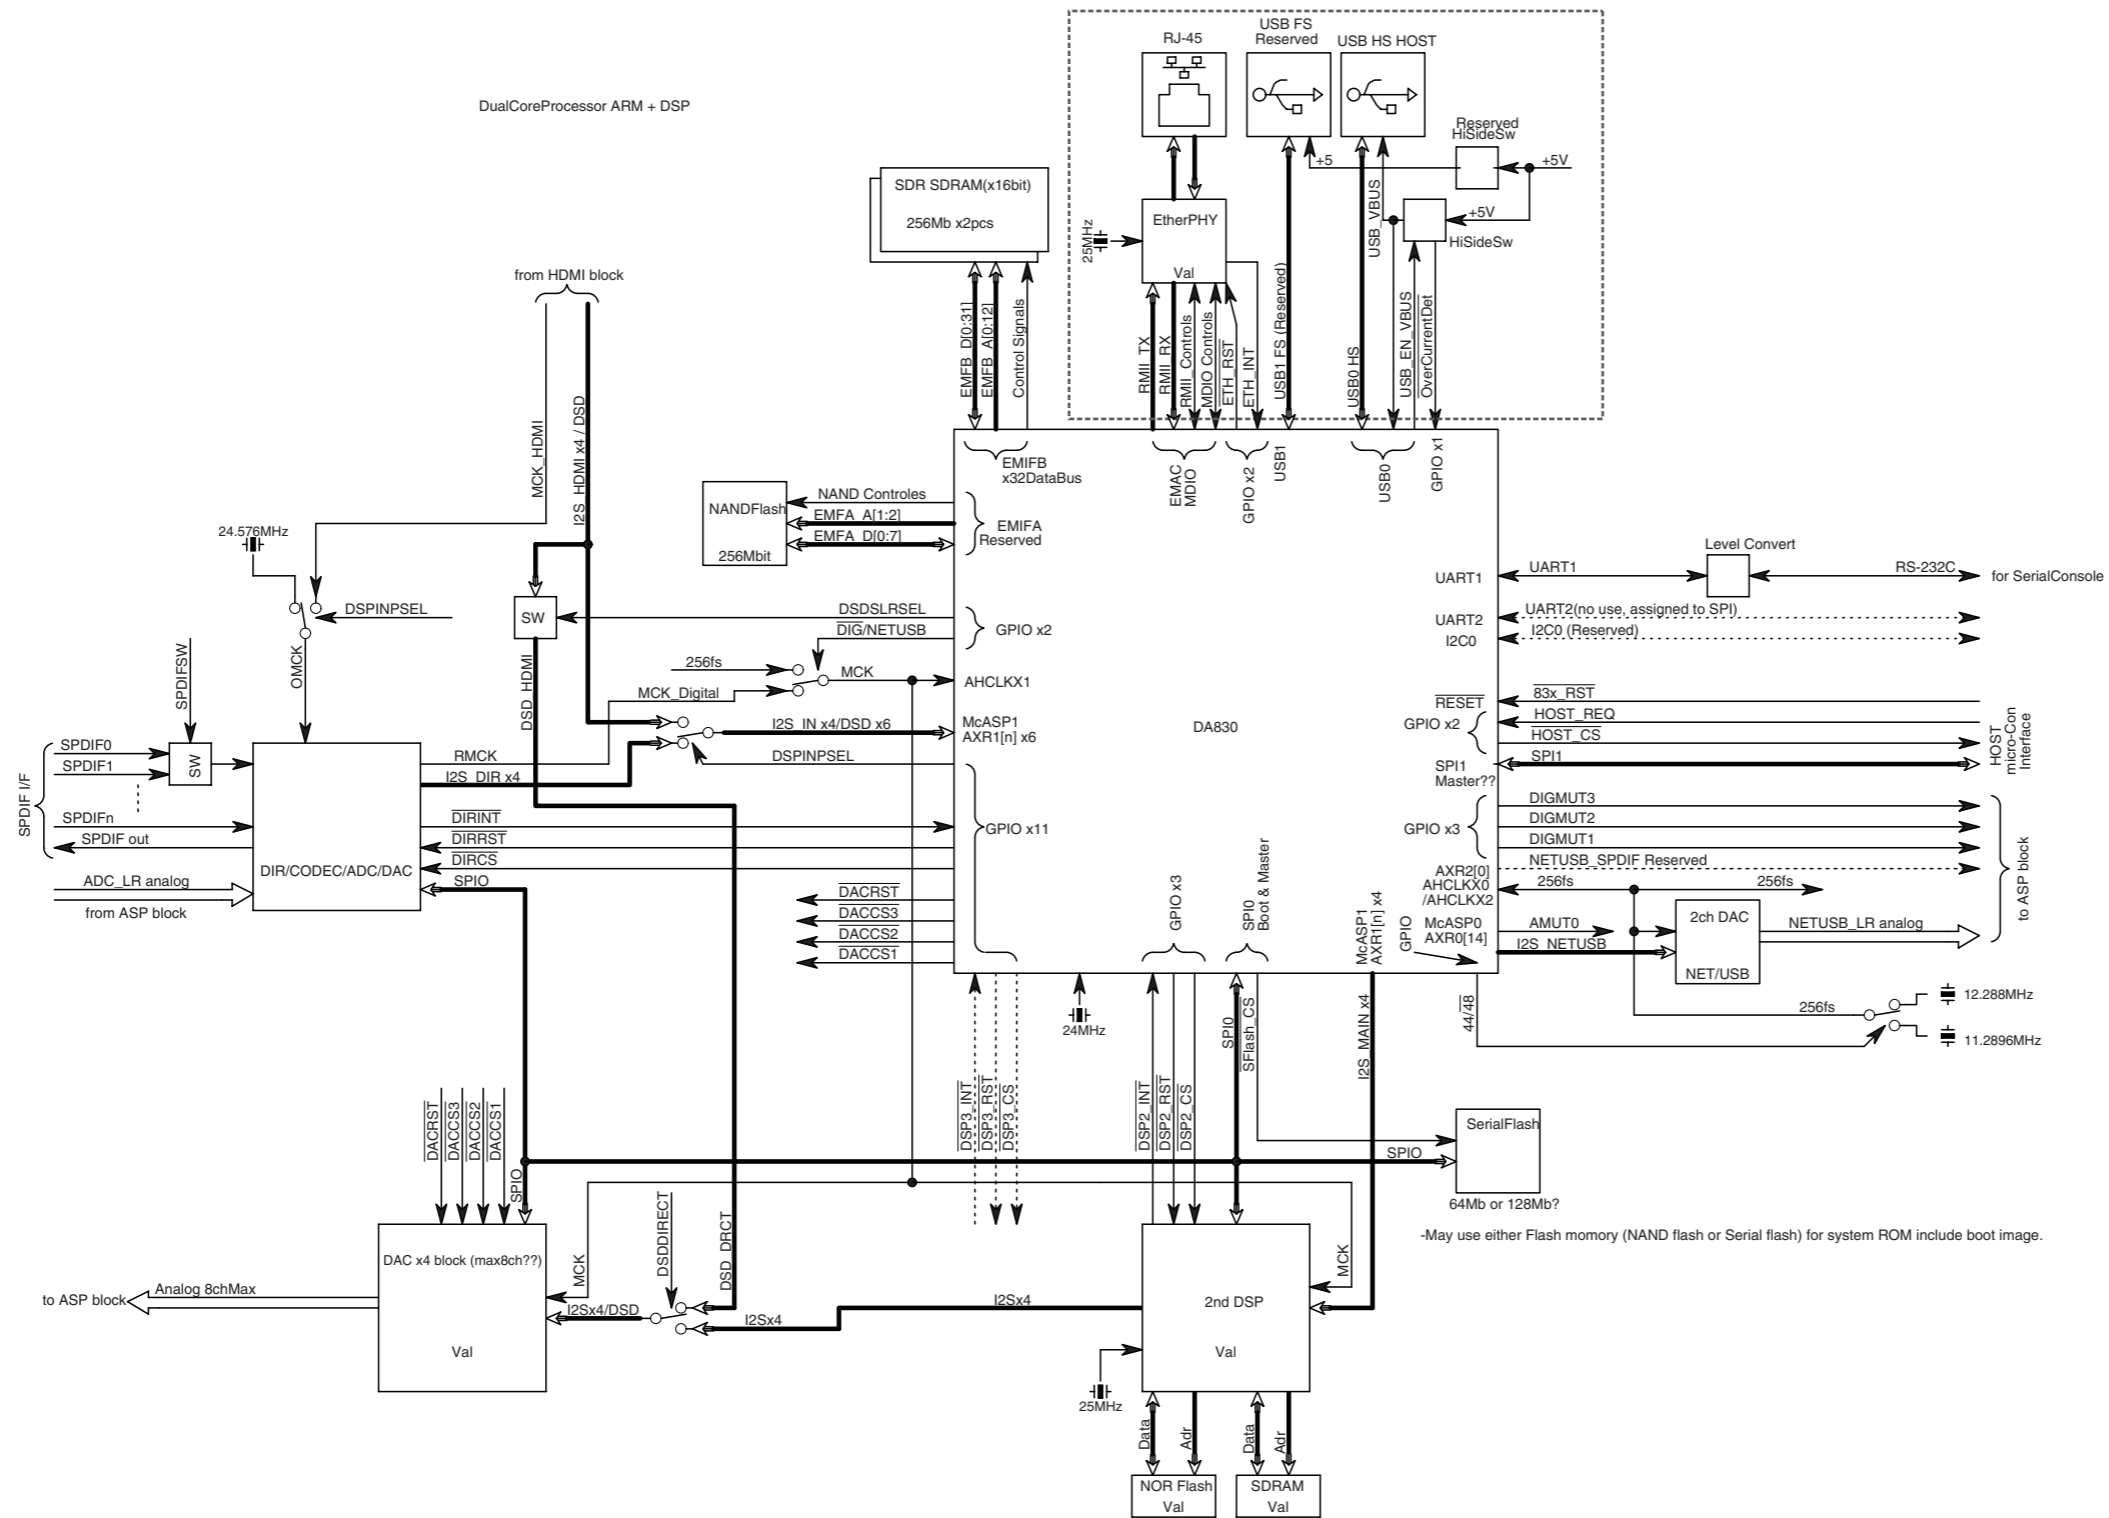

A B C D E F G H

SCHEMATIC DIAGRAM-2

U009

POWER AMP. INPUT CIRCUIT PC BOARD
BACLA-0087

	TX-SR707
Q5060 - 5066	2SA949-Y
Q5070 - 5076	2SC2229-Y


1

2

3

4

5

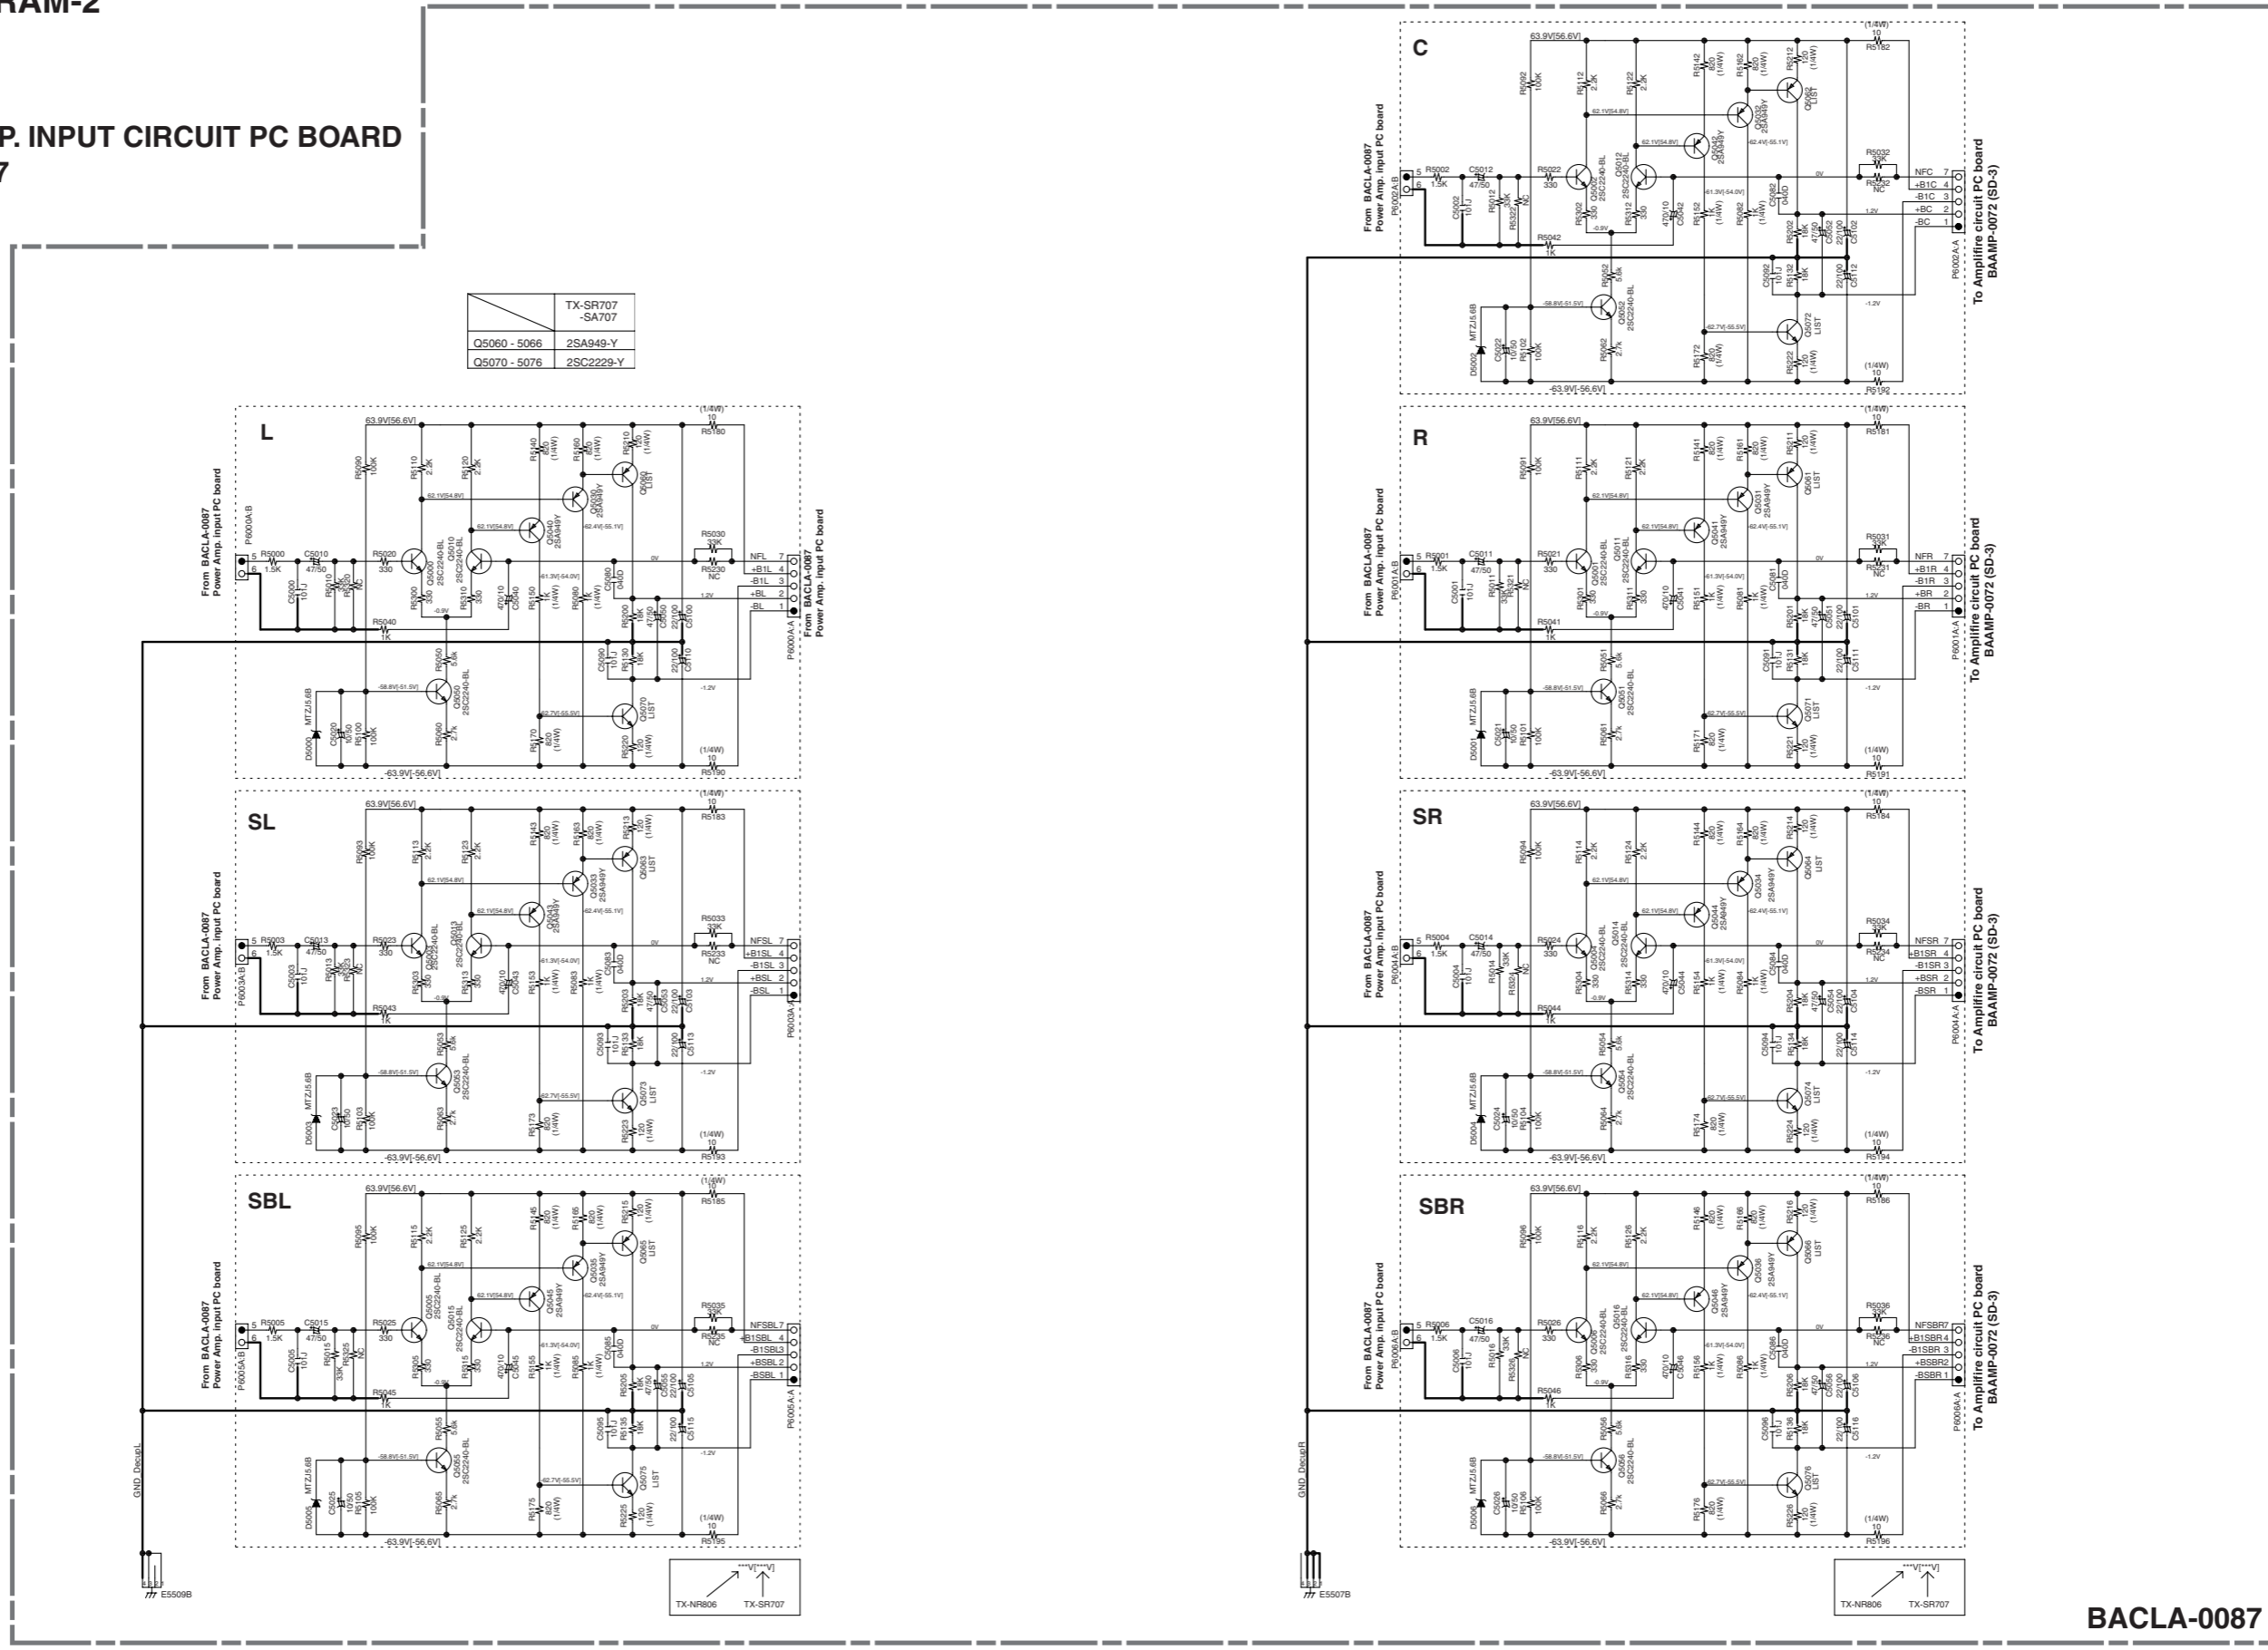

BACLA-0087

SCHEMATIC DIAGRAM-3


U001 AUDIO AMP. CIRCUIT PC BOARD BAAMP-0072

TX-SR707	TX-SR807
Q6050 - Q6056	2SC5242 TTC0001
Q6060 - Q6066	2SA1962 TTA0001

U004 AC INLET TERMINAL PC BOARD BAETC-0089





U003 THERMISTOR PC BOARD BAETC-0074



To Speaker terminal PC board BATRM-0063 (SD-4)

FROM TRANSFORMER

From BAASP-0073

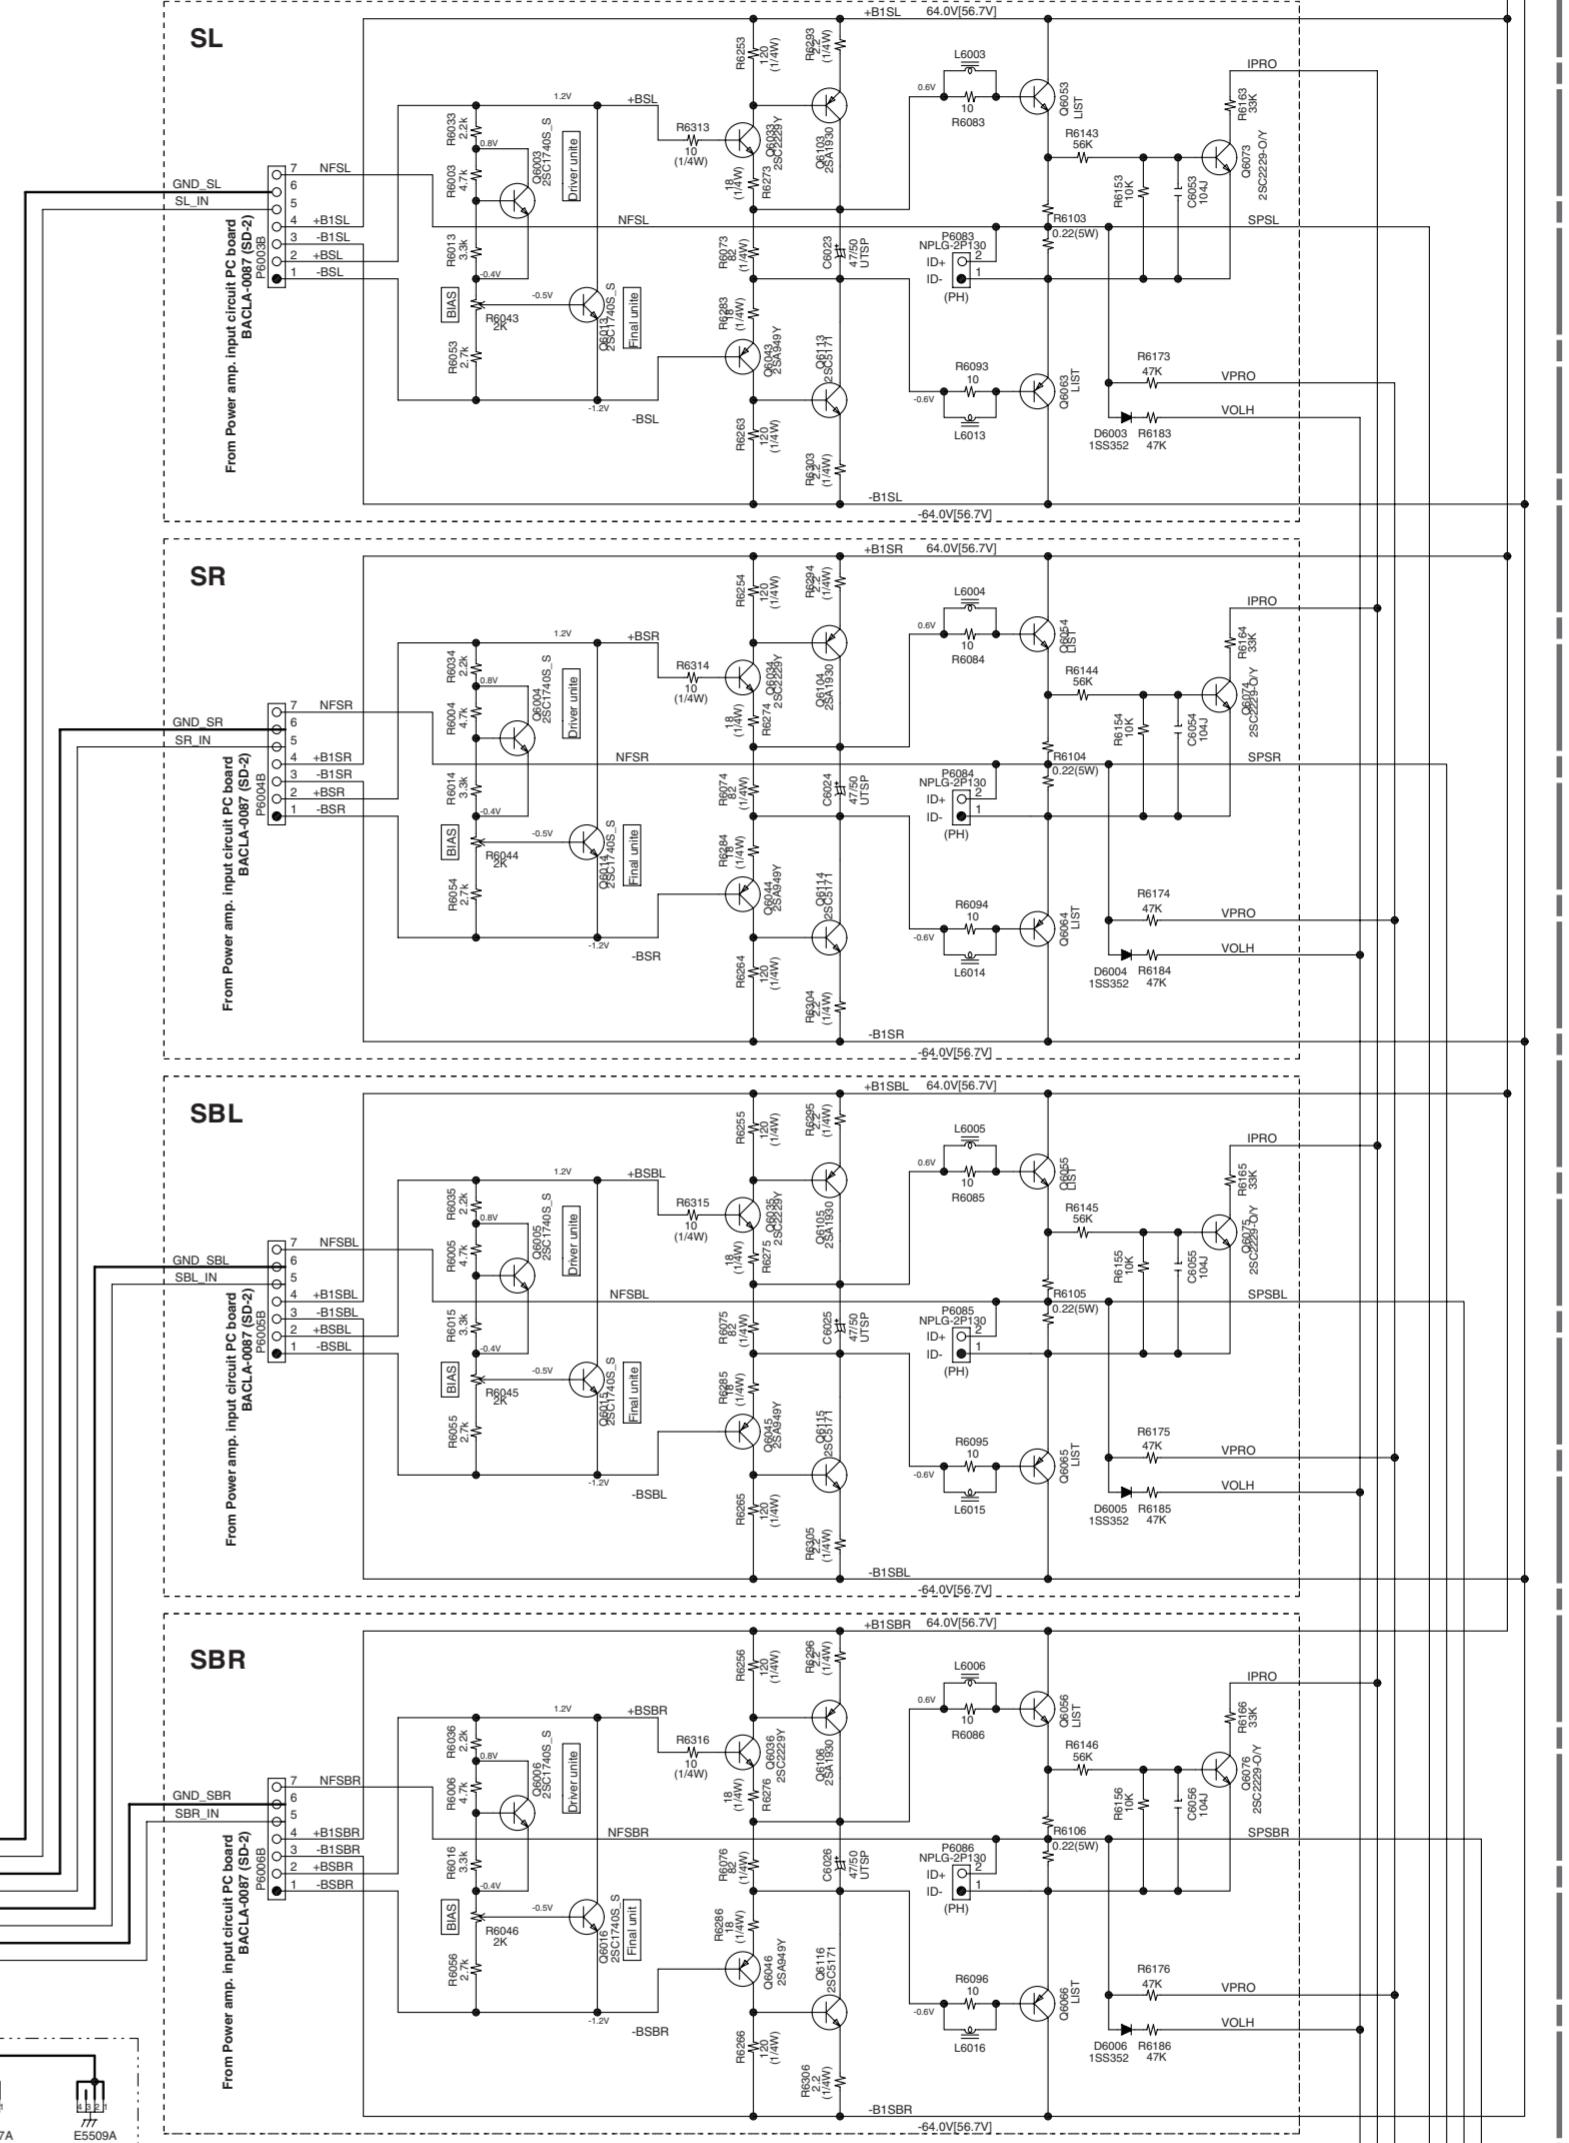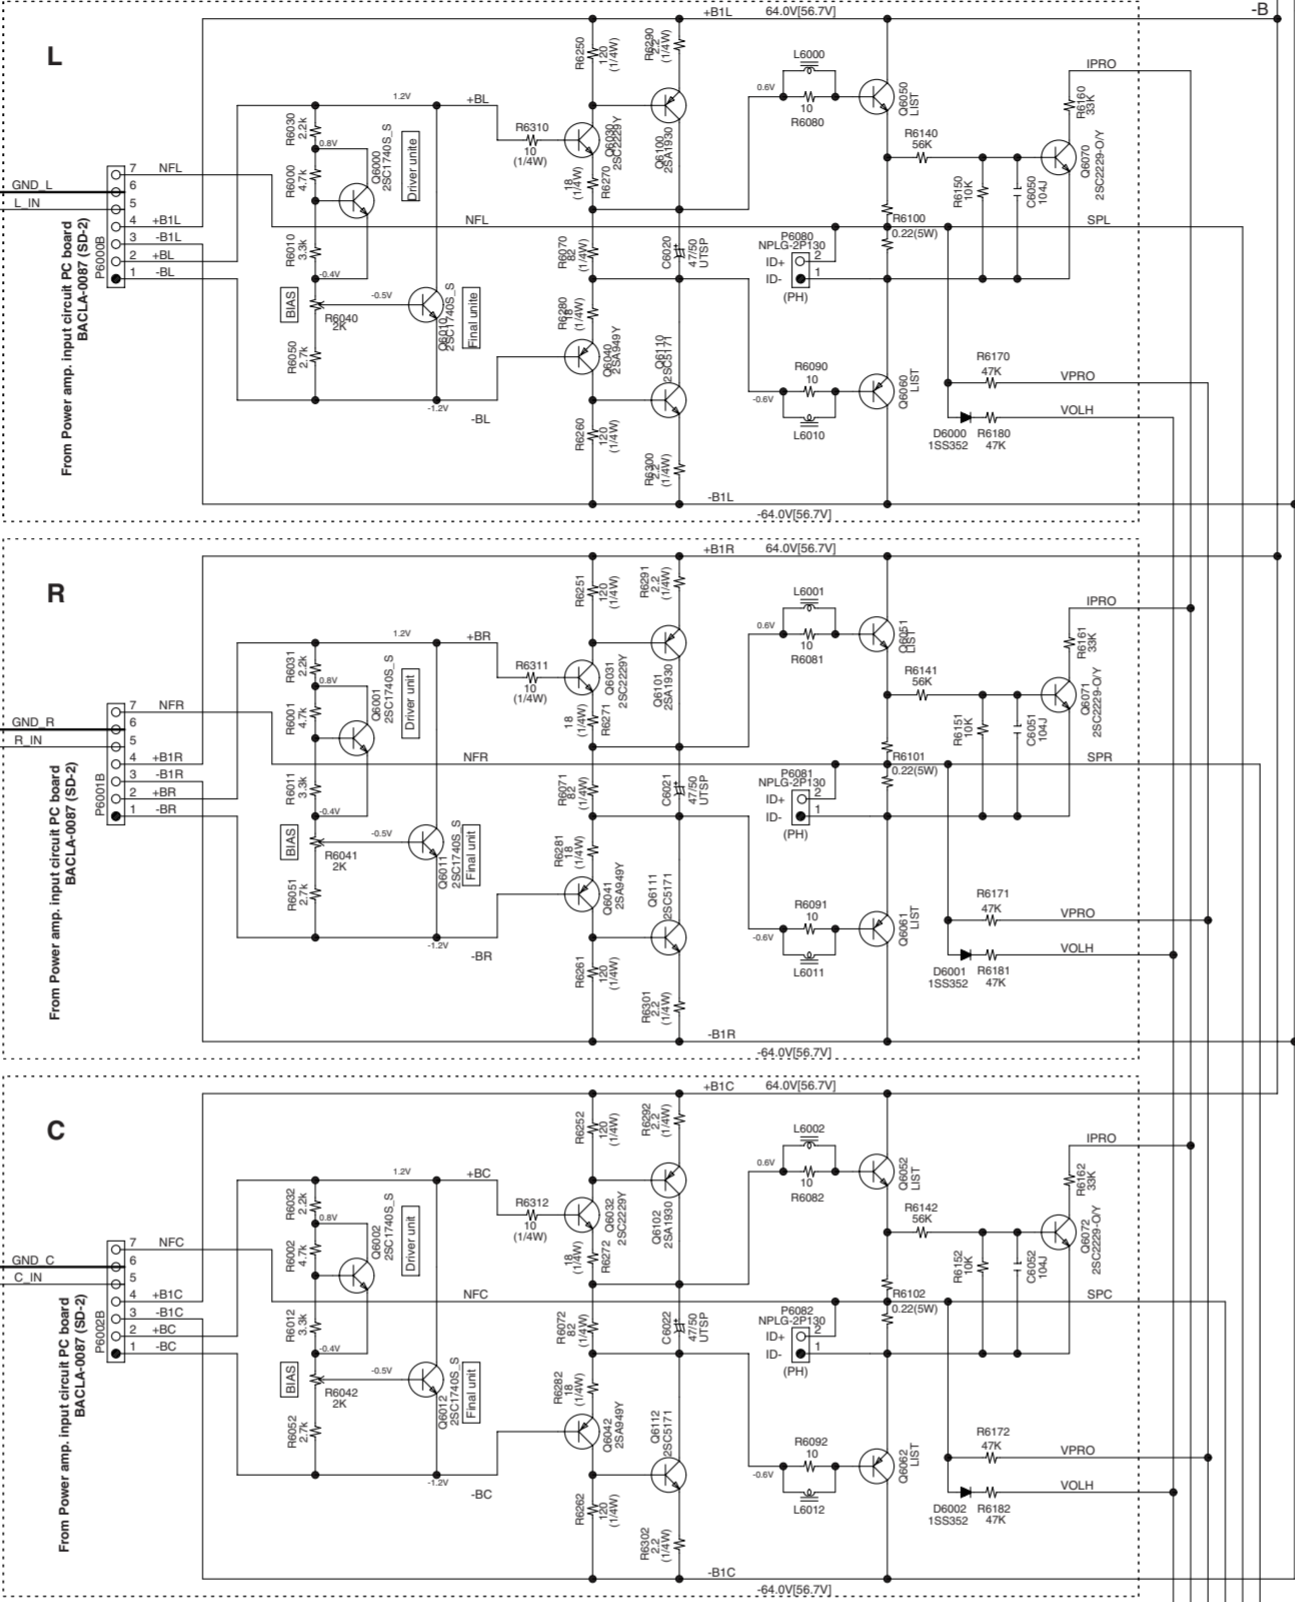

C8901	C8902	MODEL
12000uF/50V		TX-SR707 MDC
12000uF/7V		TX-SR707 Except MDC/MDF

To Speaker terminal PC board BATRM-0063 (SD-4)

From Amplifier circuit PC board BAAMP-0072


To Speaker terminal PC board BAASP-0073

BAAMP-0072


SCHEMATIC DIAGRAM-4

AREA-1


U005 SPEAKER TERMINAL PC BOARD
BATRM-0083

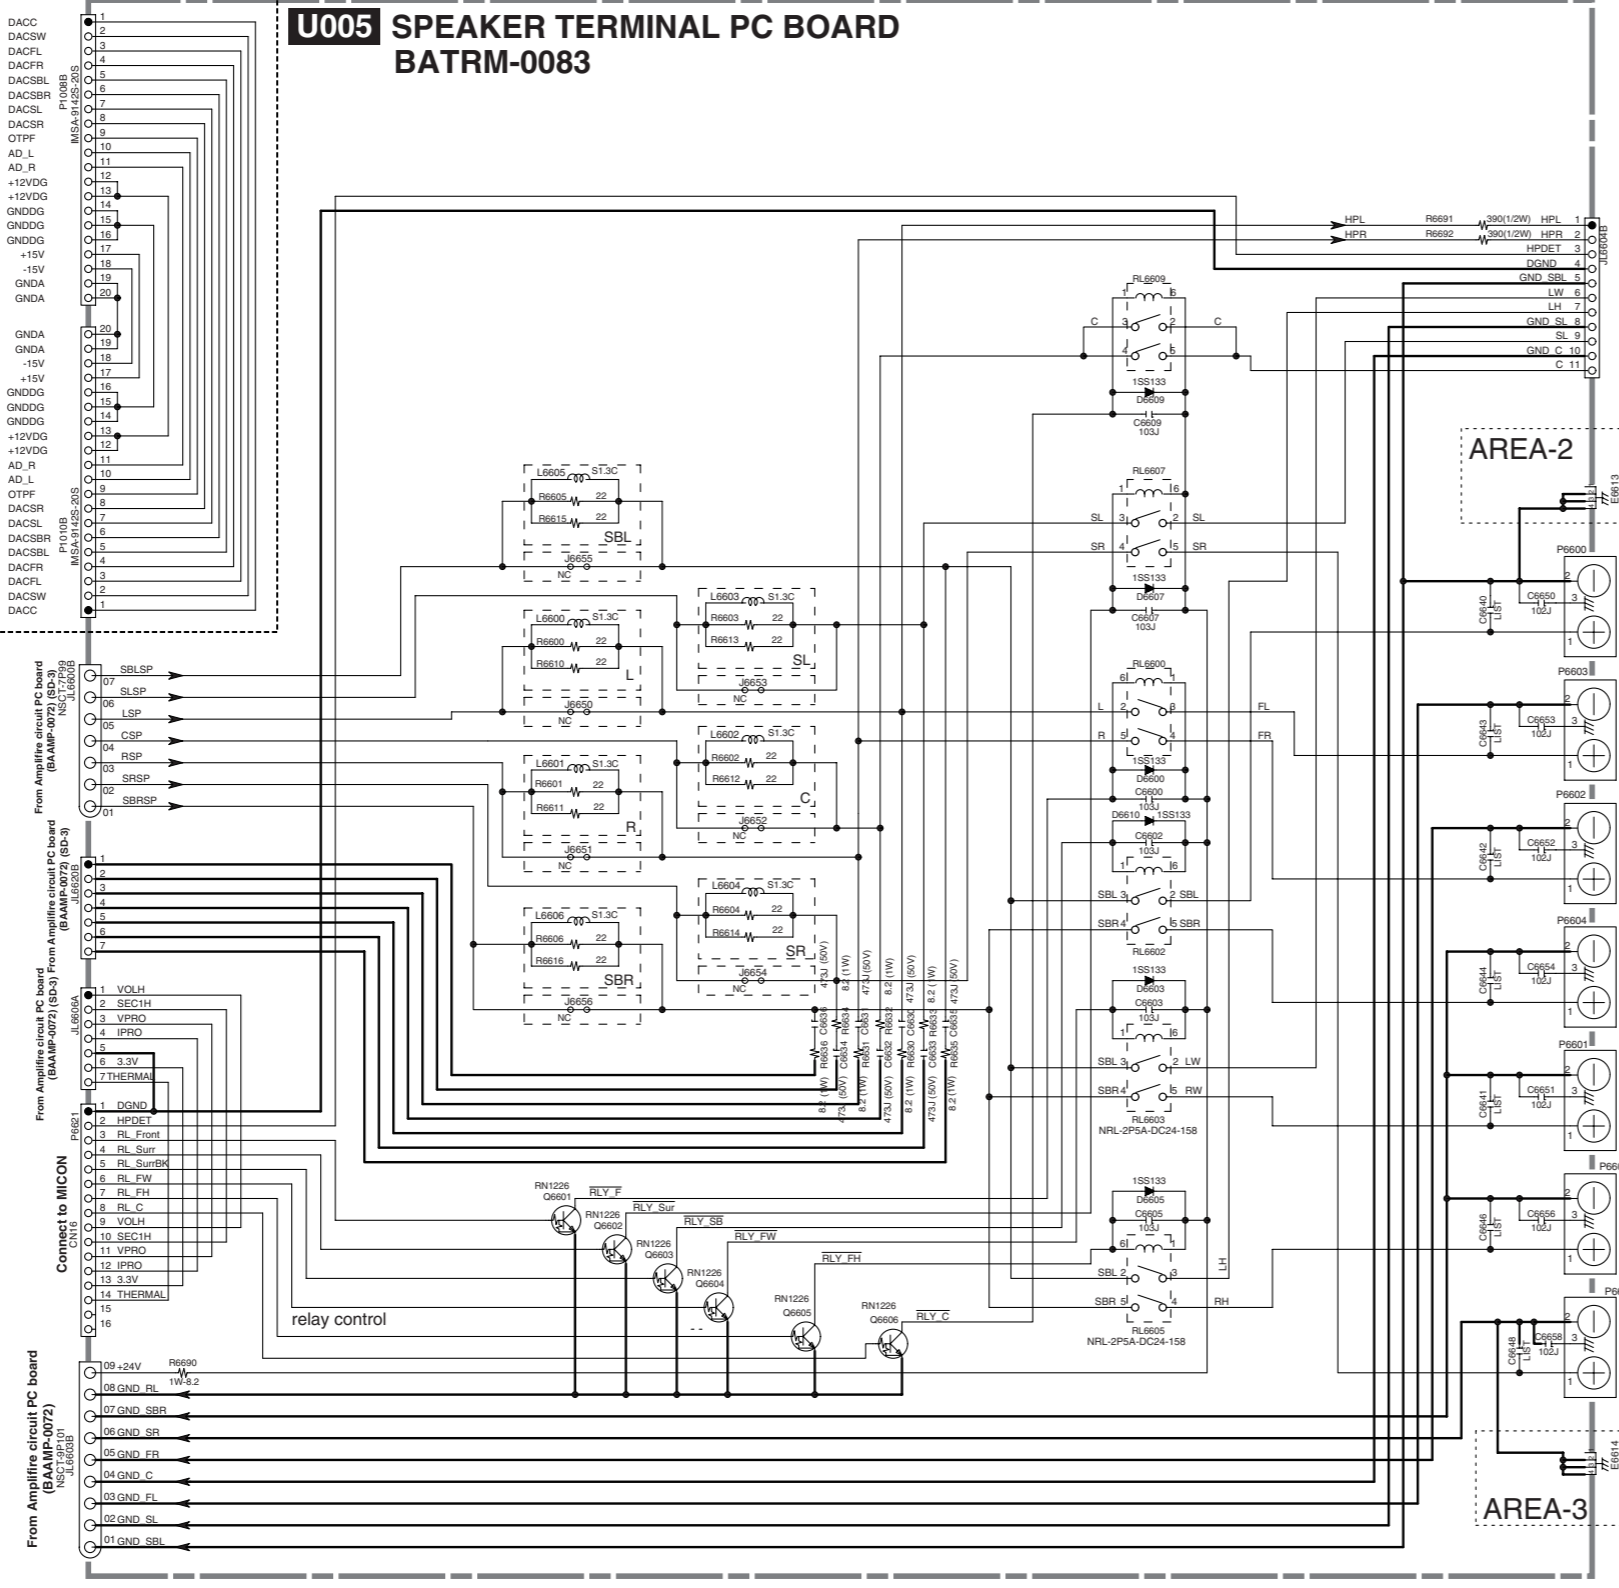






AREA-4

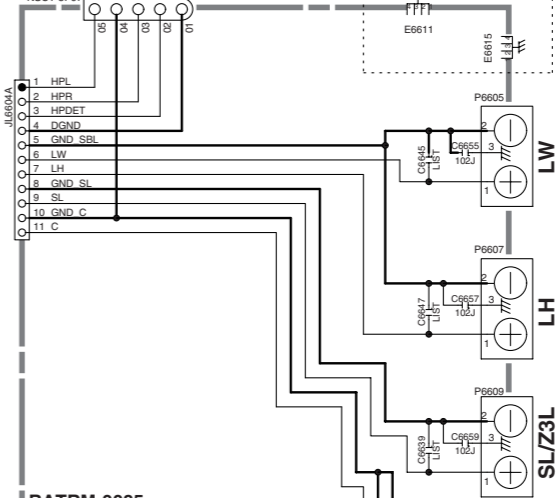

AREA-5

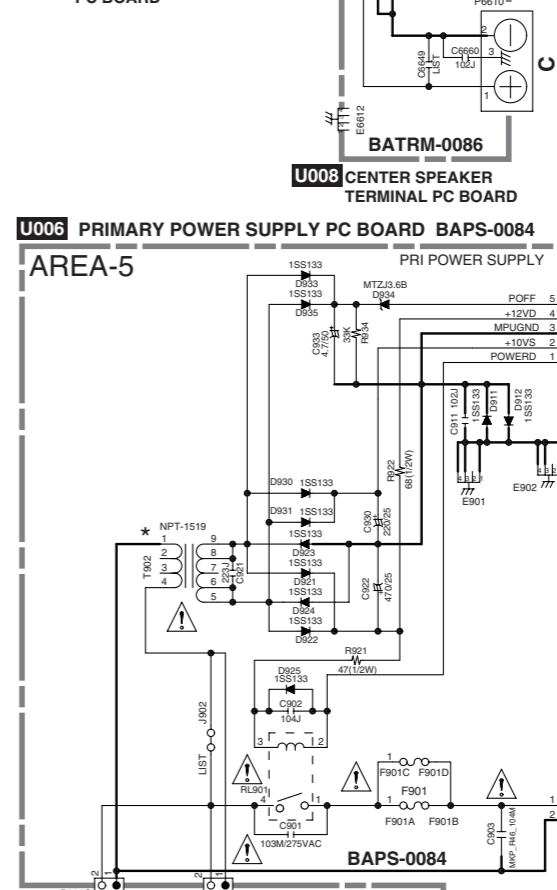


AREA-6

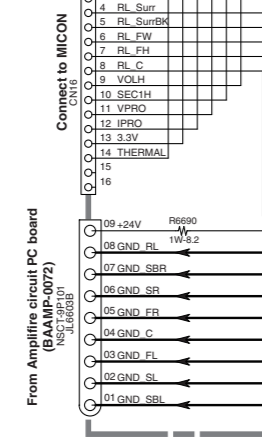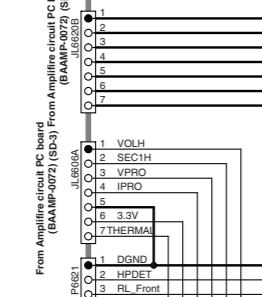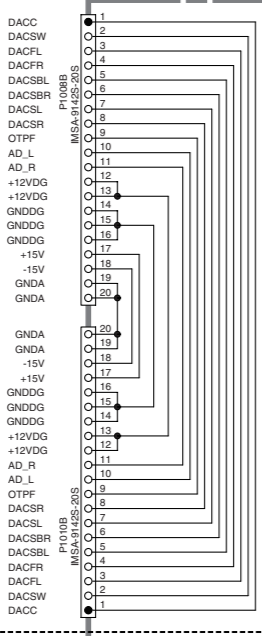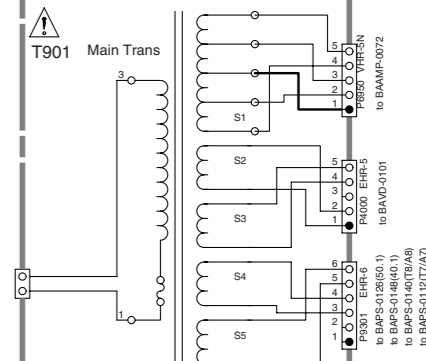

CAUTION
FOR CONTINUED PROTECTION AGAINST FIRE HAZARD, REPLACE ONLY WITH FUSE OF SAME TYPE AND RATING INDICATED.


ATTENTION
AFIN D'ASSURER UNE PROTECTION PERMANENTE CONTRE LES RISQUES D'INCENDIE, REMPLACER UNIQUEMENT PAR UN FUSIBLE DE MEME TYPE ET CALIBRATION COMMIE INDIQUE.



TYPE	T7	A7	T8	A8
D	NC	---	NC	---
J	---	NC	---	NC
M	472J	---	472J	---

CODE	MODEL
T7	TX-SR-707, DTR-40.1
A7	TX-SA707
T8	TX-NR807, DTR-50.1
A8	TX-NA807

connect Inlet Socket or AC Cord
To Power switch or insert Short Pin (2009991127UL)




J902	Mount
SR707,SA707	Mount
NR807,NA807	No mount
Other model	Mount

P902B	Mount
SR707,SA707	No mount
NR807,NA807	Mount
Other model	No mount

F901	T7	A7	T8	A8	DHC-40.1
MDF/MDC	10A 125V	---	12A 125V	---	5A 125V
MJJ	10A 125V	10A 125V	15A 125V	15A 125V	---
MMP etc	T5.0AL250V	---	T6.3AL250V	---	---

T902	T7	A7	T8	A8	DHC-40.1
MDF/MDC	1520JQ	---	1520JQ	---	1520JQ
MJJ	---	1520JQ	---	1520JQ	---
MMP etc	1520GQ	---	1520GQ	---	---

SCHEMATIC DIAGRAM-5

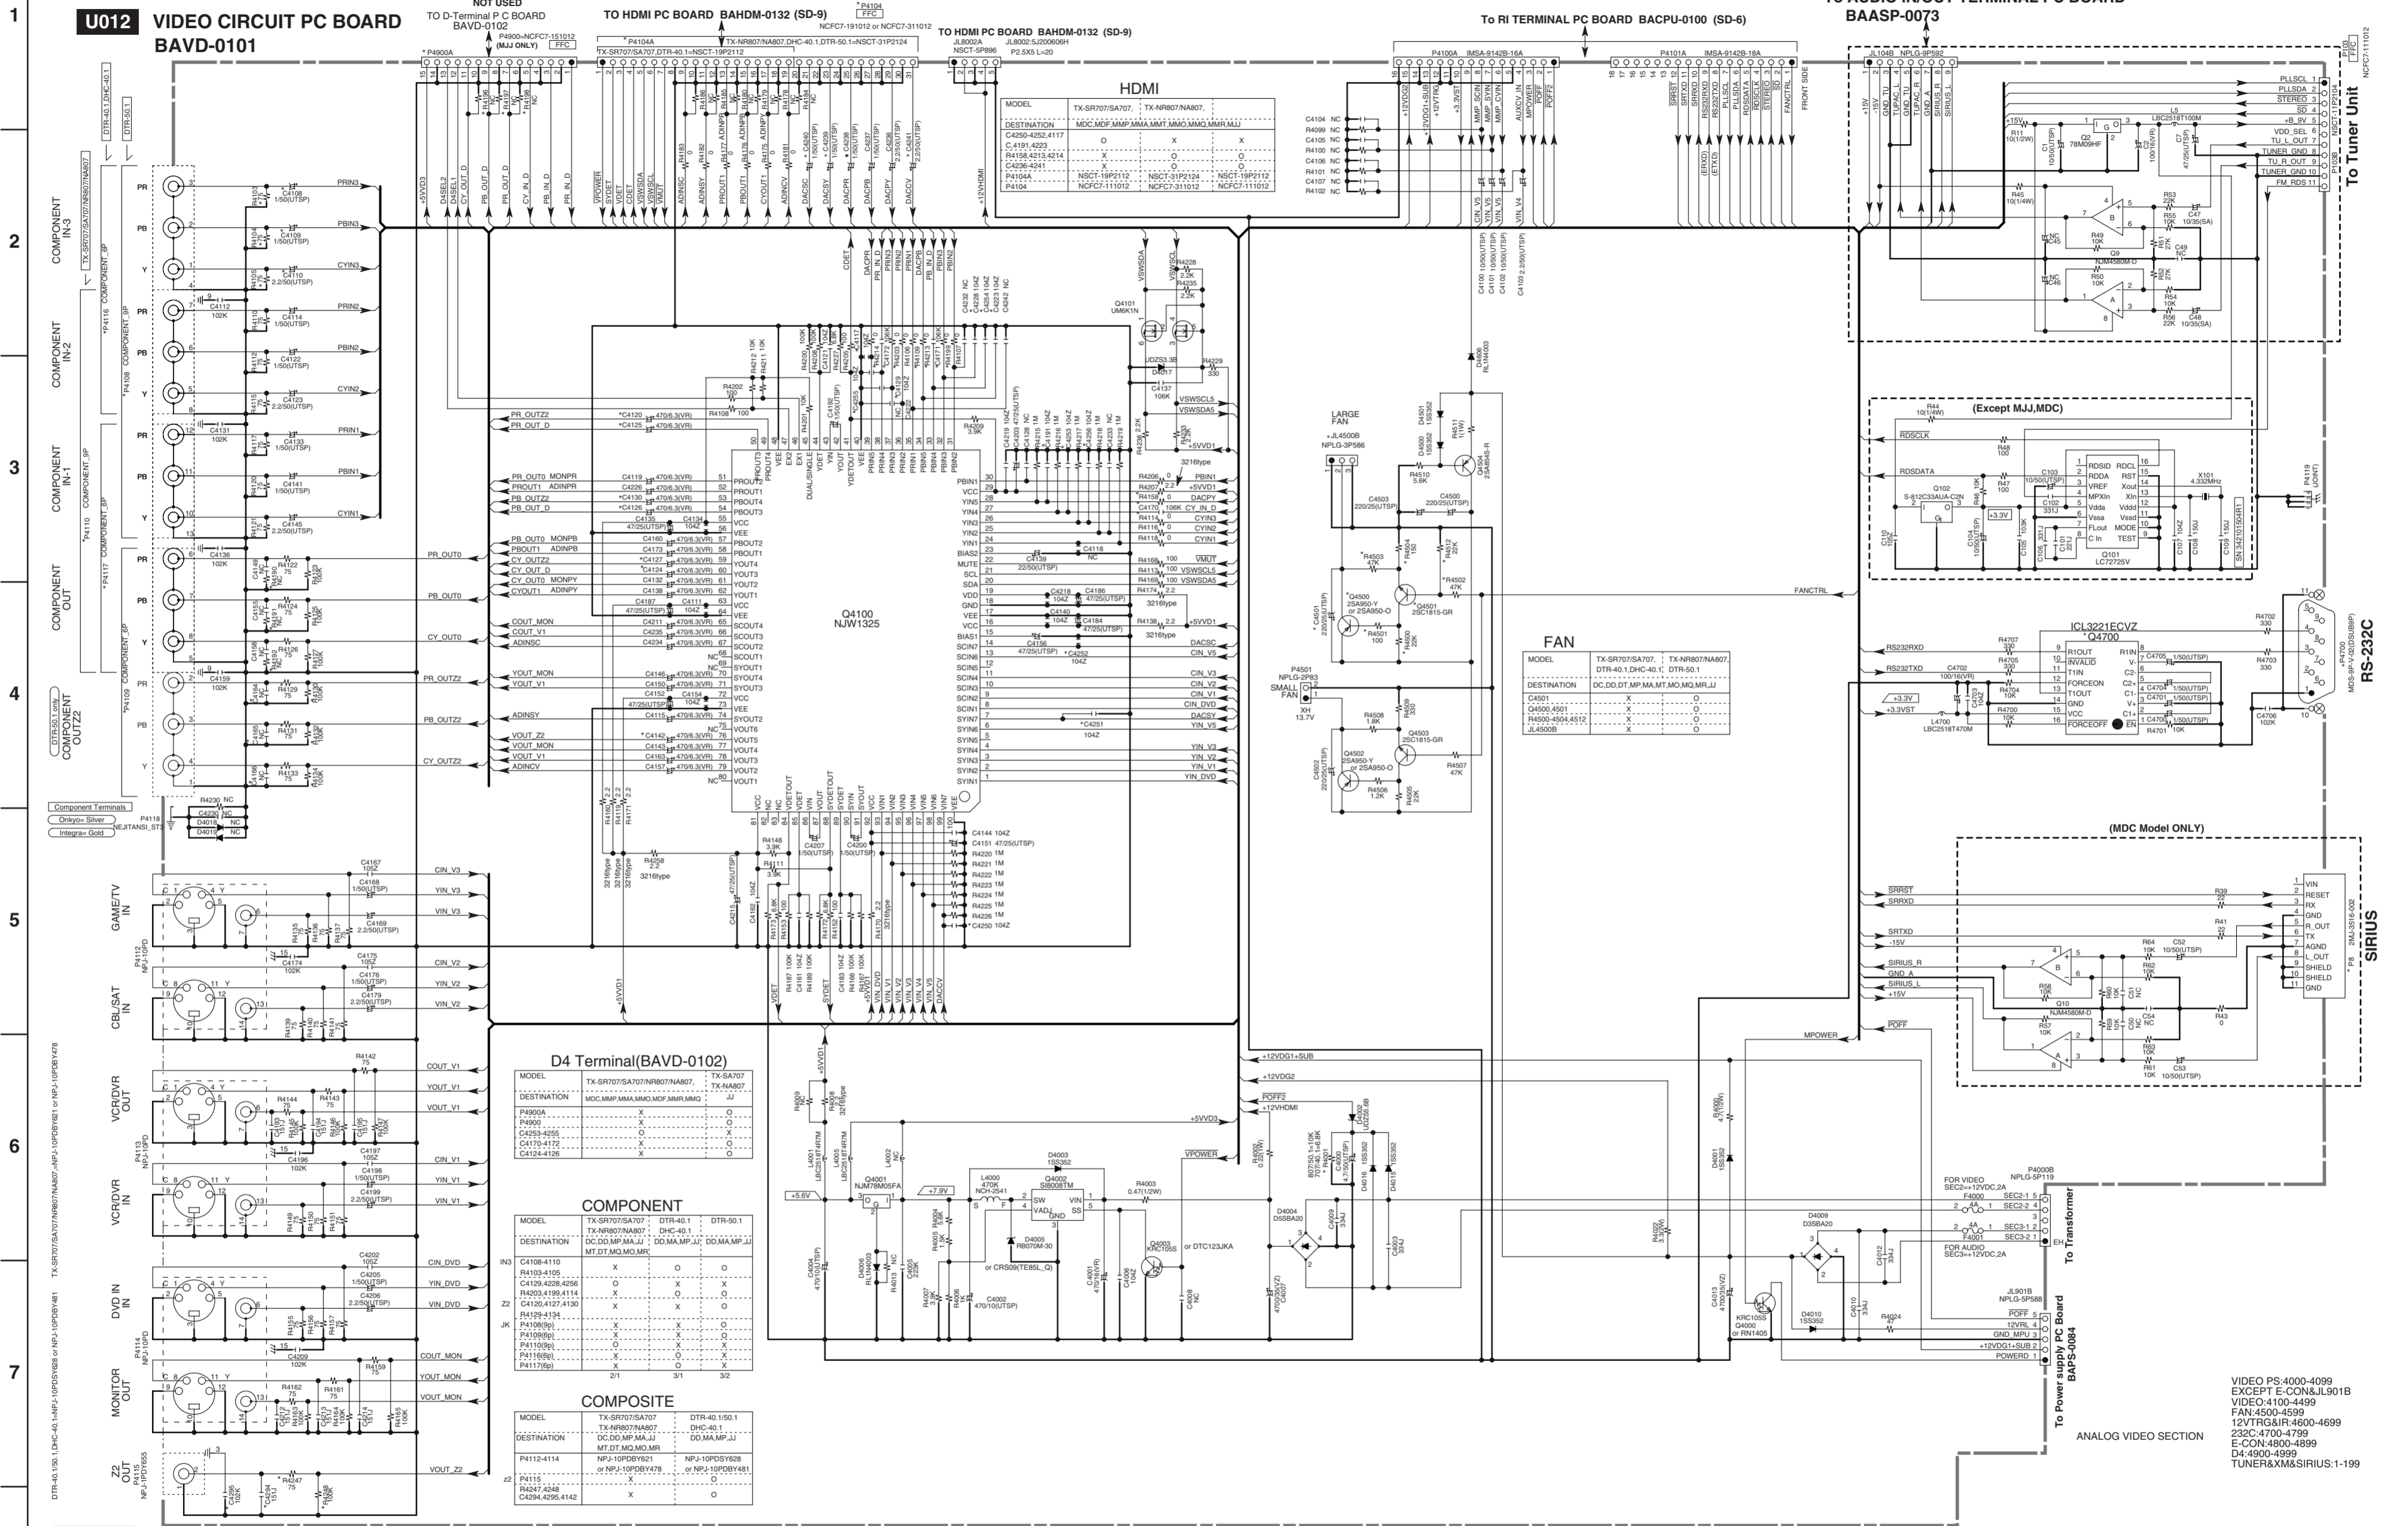

1
2
3
4
5
6
7
8

U012 VIDEO CIRCUIT PC BOARD
BAVD-0101

TO HDMI PC BOARD
BAHDM-0132 (SD-9)

TO RI TERMINAL PC BOARD
BACPU-0100 (SD-6)

TO AUDIO IN/OUT TERMINAL PC BOARD
BAASP-0073

HDMI

MODEL	TX-SR707/SA707, TX-NR807/NA807
DESTINATION	MDC, MDF, MMP, MMA, MMT, MMO, MMR, MJJ
C4191, A223	X
R4158, A213, A214	X
C4265, A241	X
P4104A	X
P4104	X
NCF7-111012	X

FAN

MODEL	TX-SR707/SA707, TX-NR807/NA807
DESTINATION	DC, DD, DT, MP, MA, MT, MO, MD, MR, MJJ
C4501	X
C4500, A501	X
R4500, A504, A512	X
JL4500B	X

D4 Terminal (BAVD-0102)

MODEL	TX-SR707/SA707, TX-NR807/NA807, TX-SA707, TX-NA807
DESTINATION	MDC, MDF, MMP, MMA, MMT, MMR, MJJ
P4900A	X
P4900	X
C4293, A255	X
C4124, A138	X

COMPONENT

MODEL	TX-SR707/SA707, DTR-40.1, DTR-50.1	TX-NR807/NA807, DHC-40.1, DHC-50.1
DESTINATION	DC, DD, MP, MA, MJ	DD, MA, MP, MJ
INS	C4108, A110	X
R4103, A105	X	
C4128, A258, A256	X	
R4203, A199, A114	X	
C4120, A127, A130	X	
R4228, A134	X	
P4108 (90)	X	
P4109 (90)	X	
P4110 (90)	X	
P4111 (90)	X	
P4112 (90)	X	
P4117 (60)	X	

COMPOSITE

MODEL	TX-SR707/SA707, DTR-40.1, DTR-50.1	TX-NR807/NA807, DHC-40.1, DHC-50.1
DESTINATION	DC, DD, MP, MA, MJ	DD, MA, MP, MJ
INS	P4112, A114	X
P4115	X	
R4227, A246	X	
C4294, A295, A142	X	

VIDEO PS:4000-4099
EXCEPT E-CON&JL901B
VIDEO:4100-4499
FAN:4500-4599
12VTRG&R:4600-4699
232C:4700-4799
E-CON:4800-4899
D4:4900-4999
TUNER&M&SIRIUS:1-199


Composite Terminals
Onkyo Silver
Integra Gold

A2 size


SCHEMATIC DIAGRAM-6

1
2
3
4
5
6
7
8

U011 RI TERMINAL PC BOARD BACPU-0100

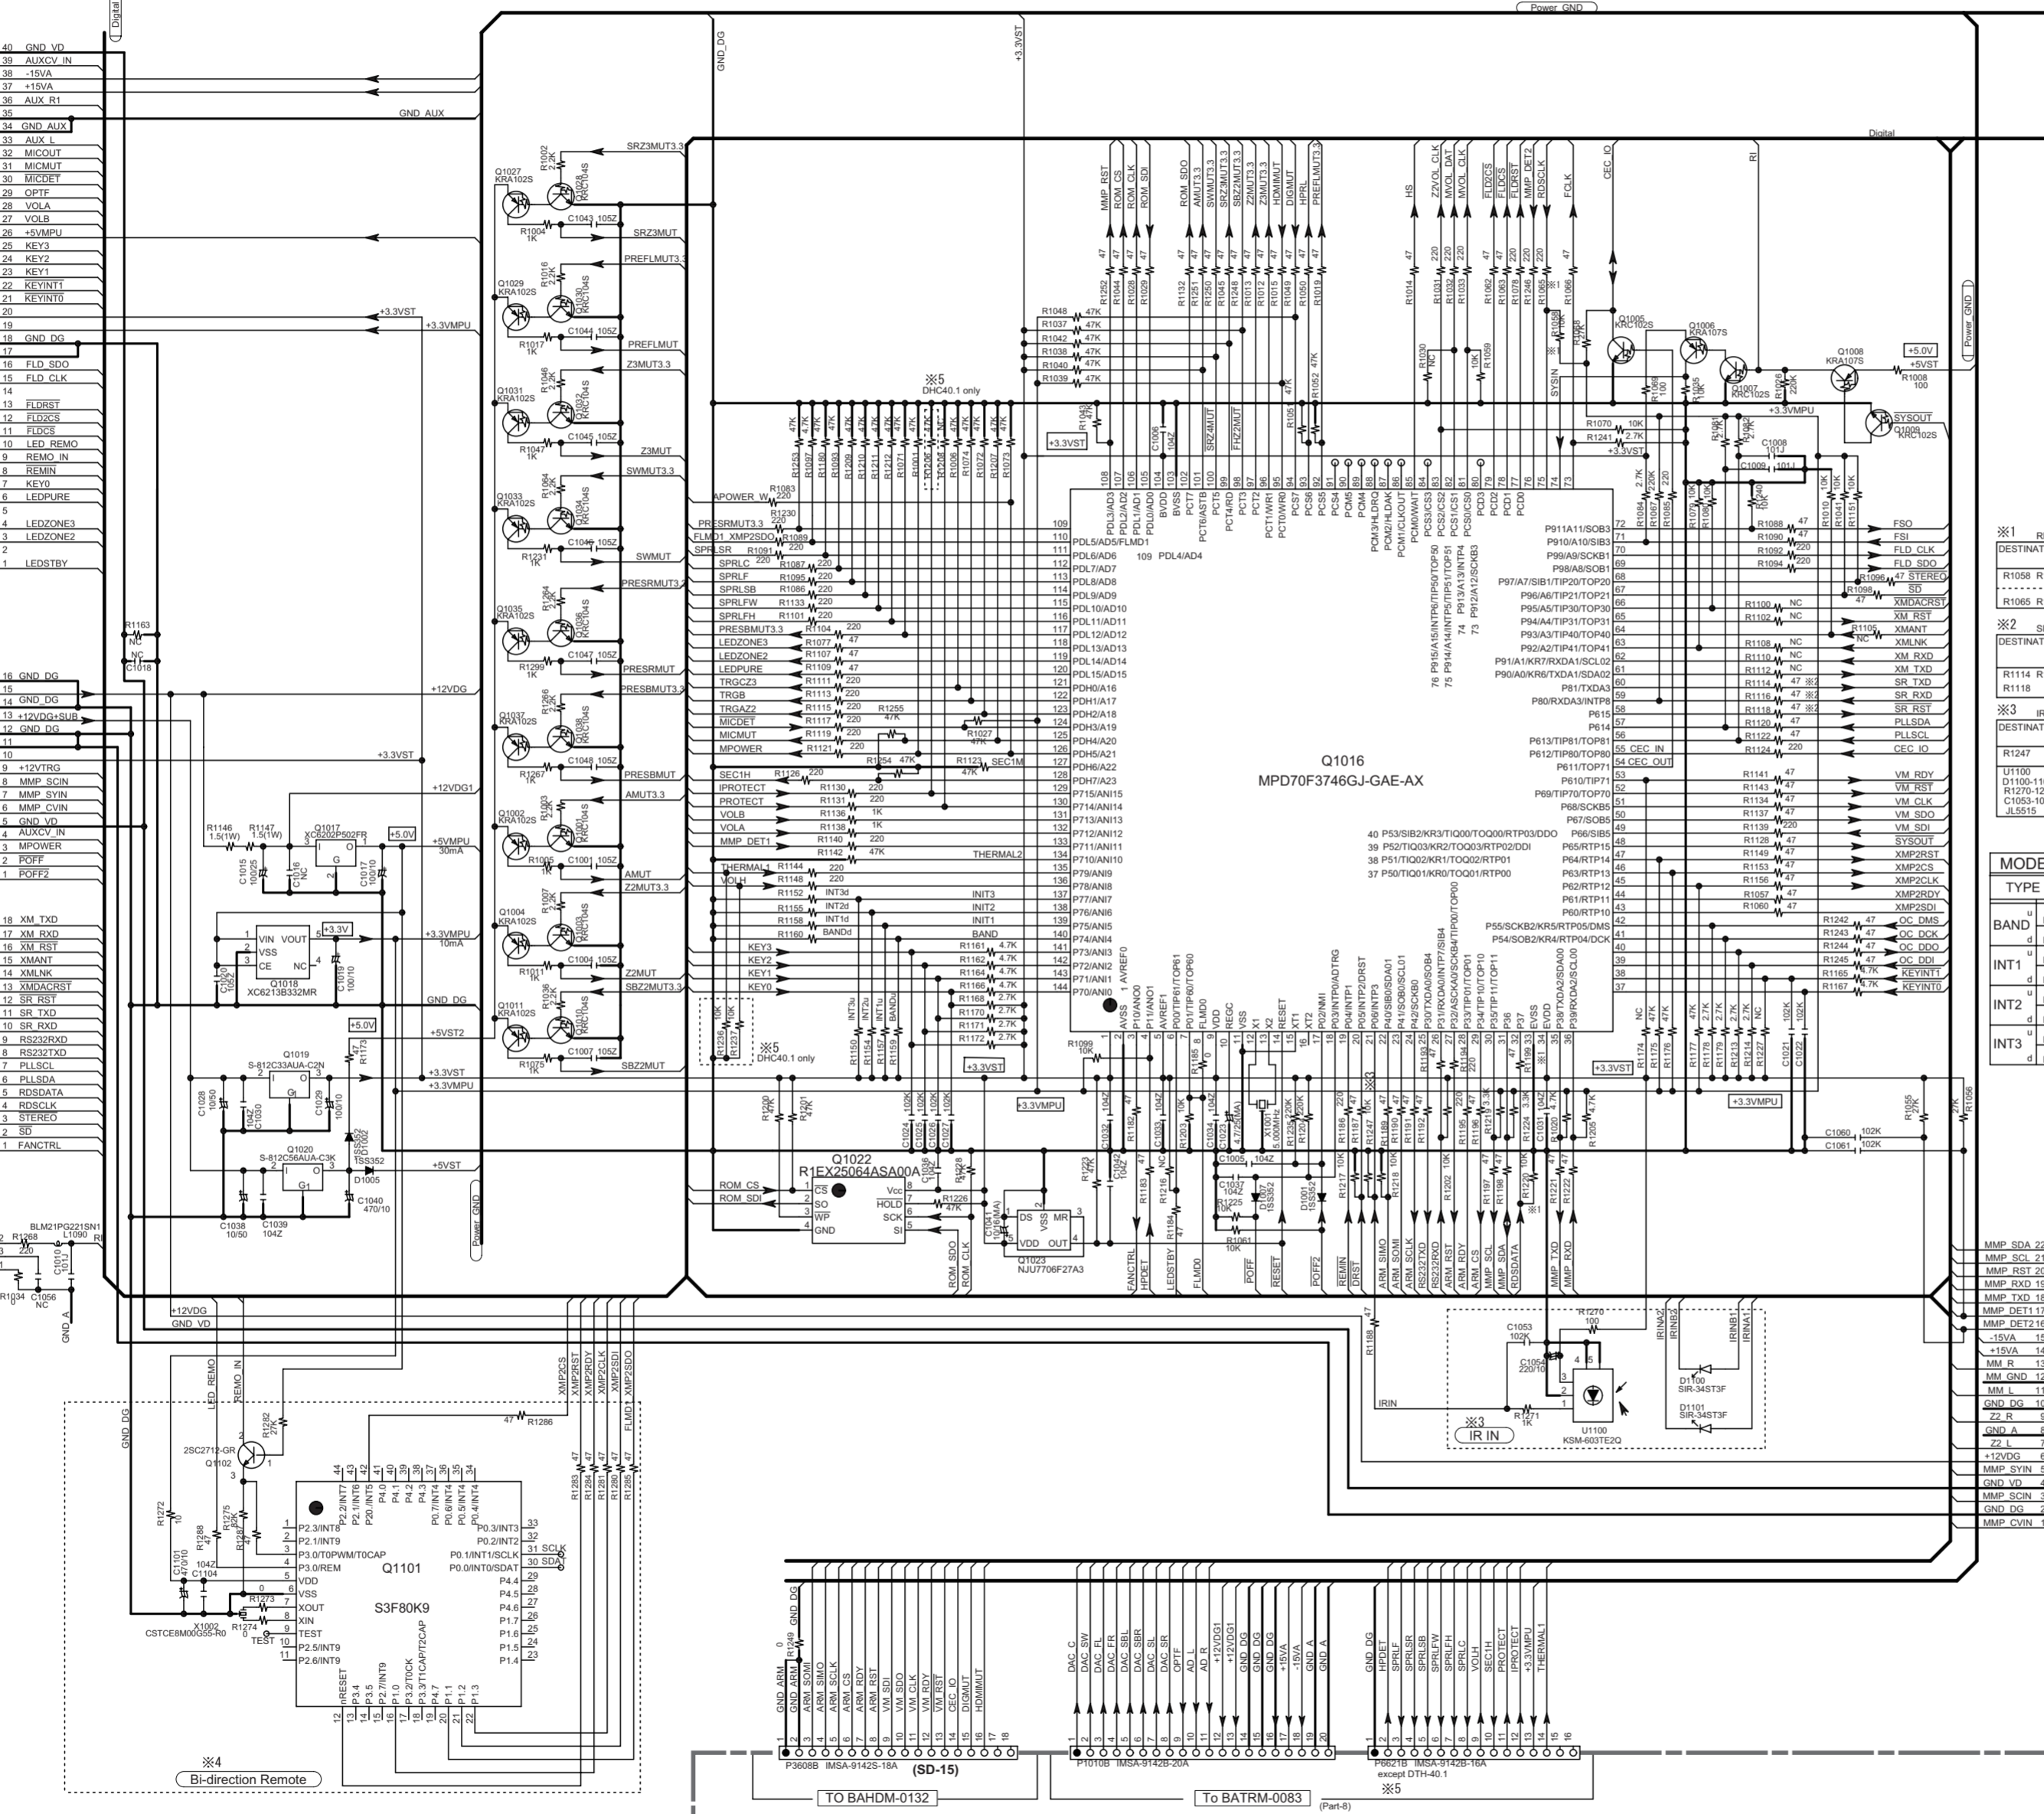

TO DEBUGGER TO FLASH WRITER BACPU-0100

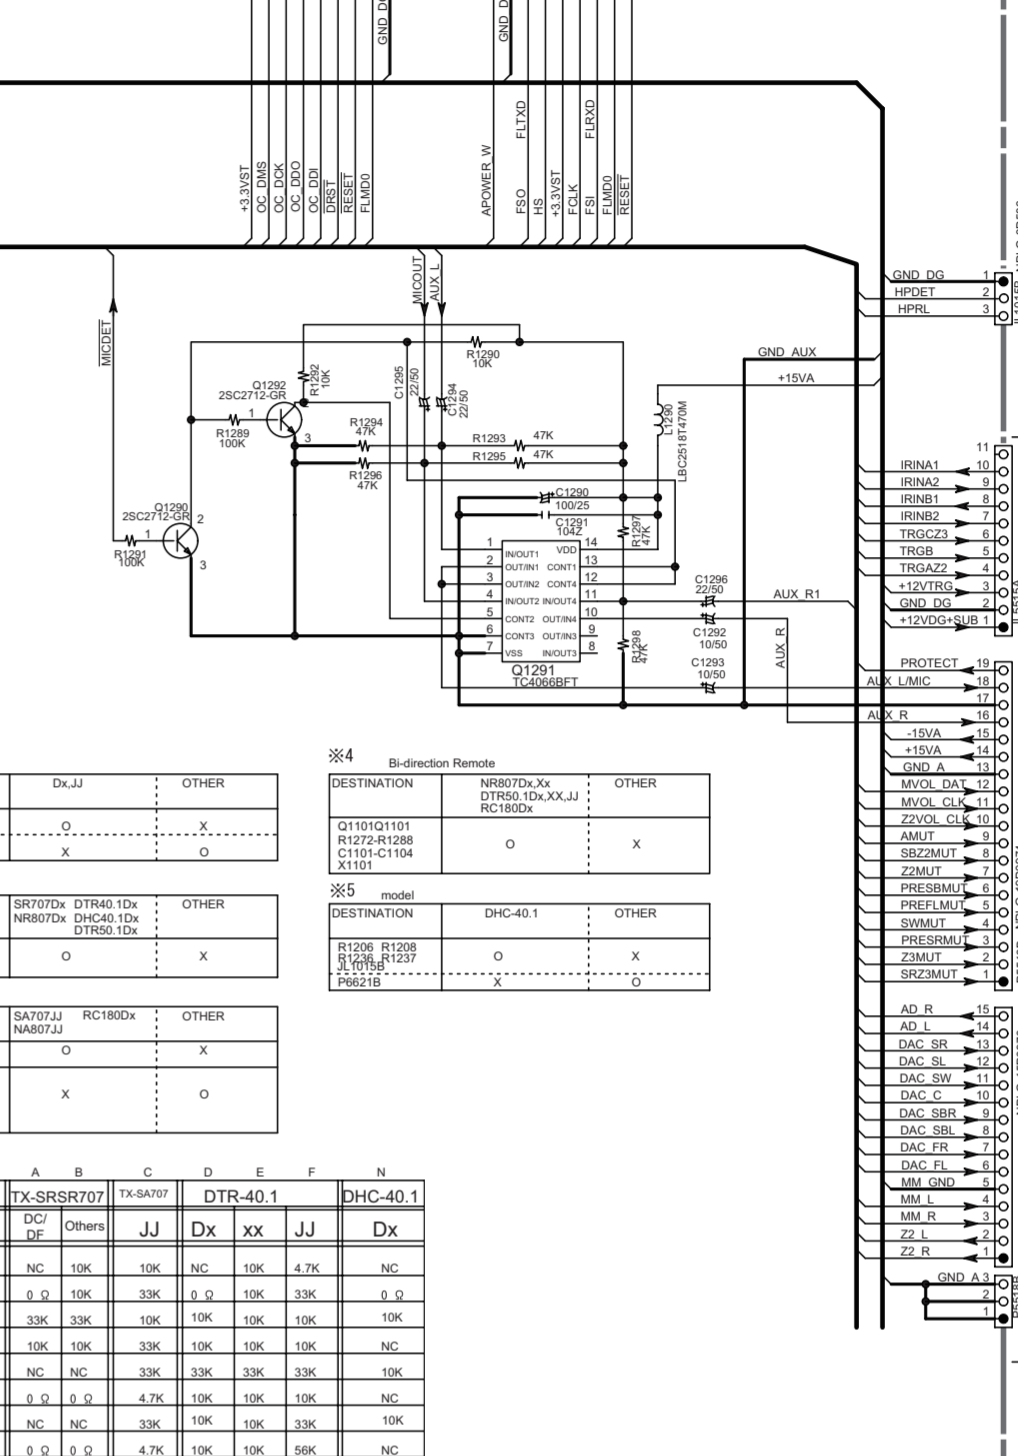

※1 RDS

DESTINATION	Dx,JJ	OTHER
R1058 R1220		X
R1059 R1199	X	

※2 SIRIUS

DESTINATION	SR707D	DTR40.1Dx	OTHER
R1114 R1116		X	
R1118	O	X	

※3 IR IN


DESTINATION	SA707J	RC180Dx	OTHER
R1247	O	X	
U1100	X	X	

※4 Bi-direction Remote

DESTINATION	NR87Dx	OTHER
Q1101Q1101		X
R1272R1288	O	X

MODEL	A	B	C	D	E	F	N		
TYPE	DC	De	Others	JJ	Dx	xx	JJ		
BAND	u	R1159	NC	10K	10K	NC	10K	4.7K	NC
INT1	u	R1180	0	0	10K	33K	0	10K	33K
INT2	u	R1157	33K	33K	33K	10K	10K	10K	10K
INT3	u	R1158	10K	10K	33K	10K	10K	10K	10K
	u	R1154	NC	NC	33K	33K	33K	33K	10K
	u	R1155	0	0	0	4.7K	10K	10K	10K
	u	R1150	NC	NC	33K	10K	10K	10K	33K
	u	R1152	0	0	0	4.7K	10K	10K	58K

U013 UNIVERSAL PORT TERMINAL PC BOARD BAETC-0103

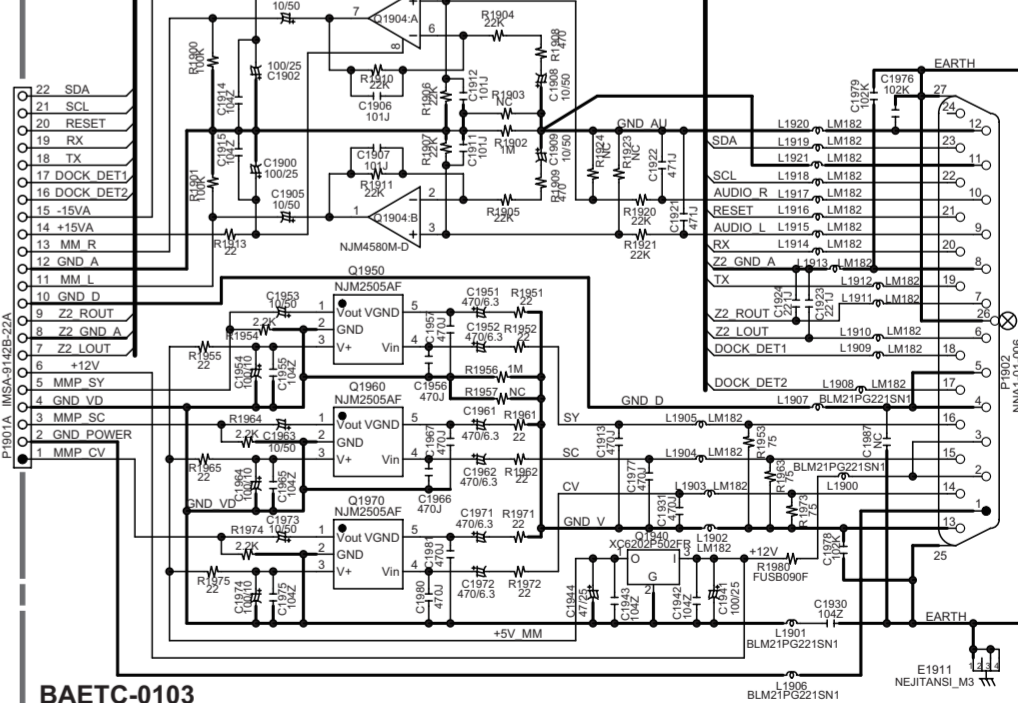

uCOM	1000-1299
U-port	1900-1999

TO BAHDM-0132 TO BATRM-0083 (Part-8)

SCHEMATIC DIAGRAM-7


1
2
3
4
5
6
7
8

To U023 HDMI-Circuit PC board (SD-15)
BAHDM-0132

To U005 Speaker terminal PC board (SD-4)
BATRM-0083

U010 DIGITAL INPUT CIRCUIT PC BOARD
BADG-0099

BADG-0099

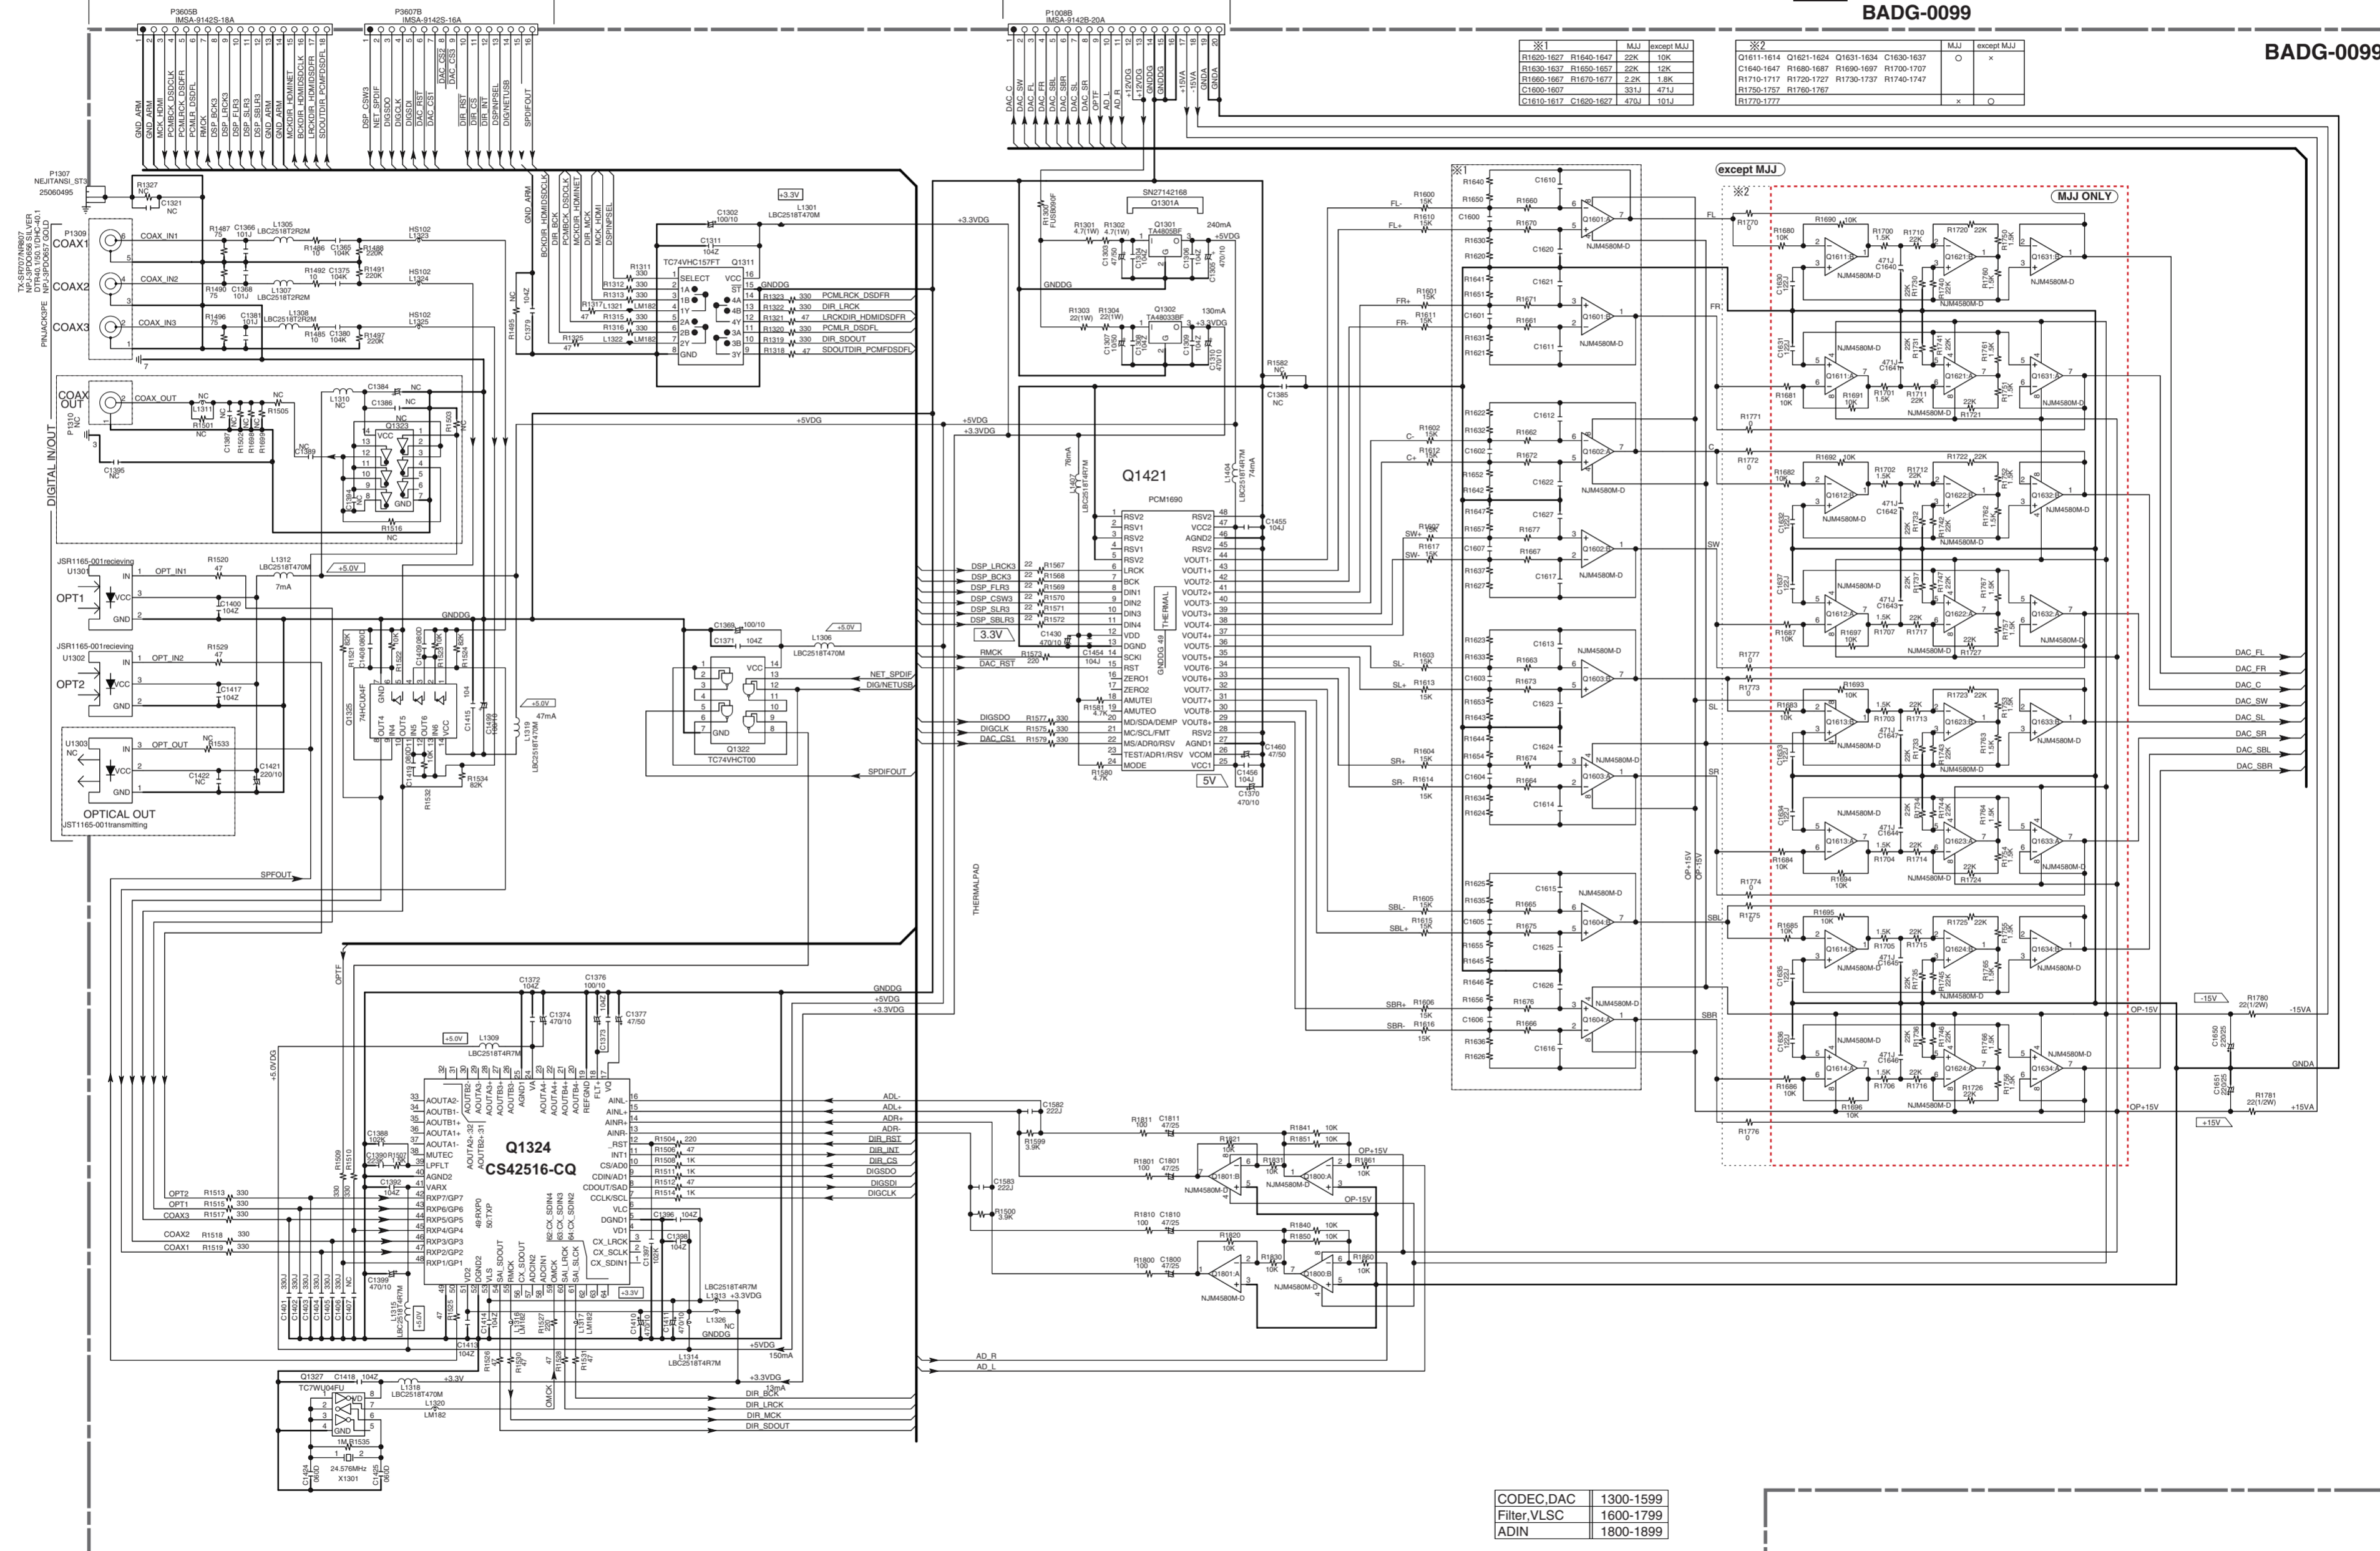


CODEC.DAC	1300-1599
Filter.VLSC	1600-1799
ADIN	1800-1899

SCHEMATIC DIAGRAM-8

U023 HDMI CIRCUIT PC BOARD BAHDM-0132-1


HDMI IN/OUT SECTION

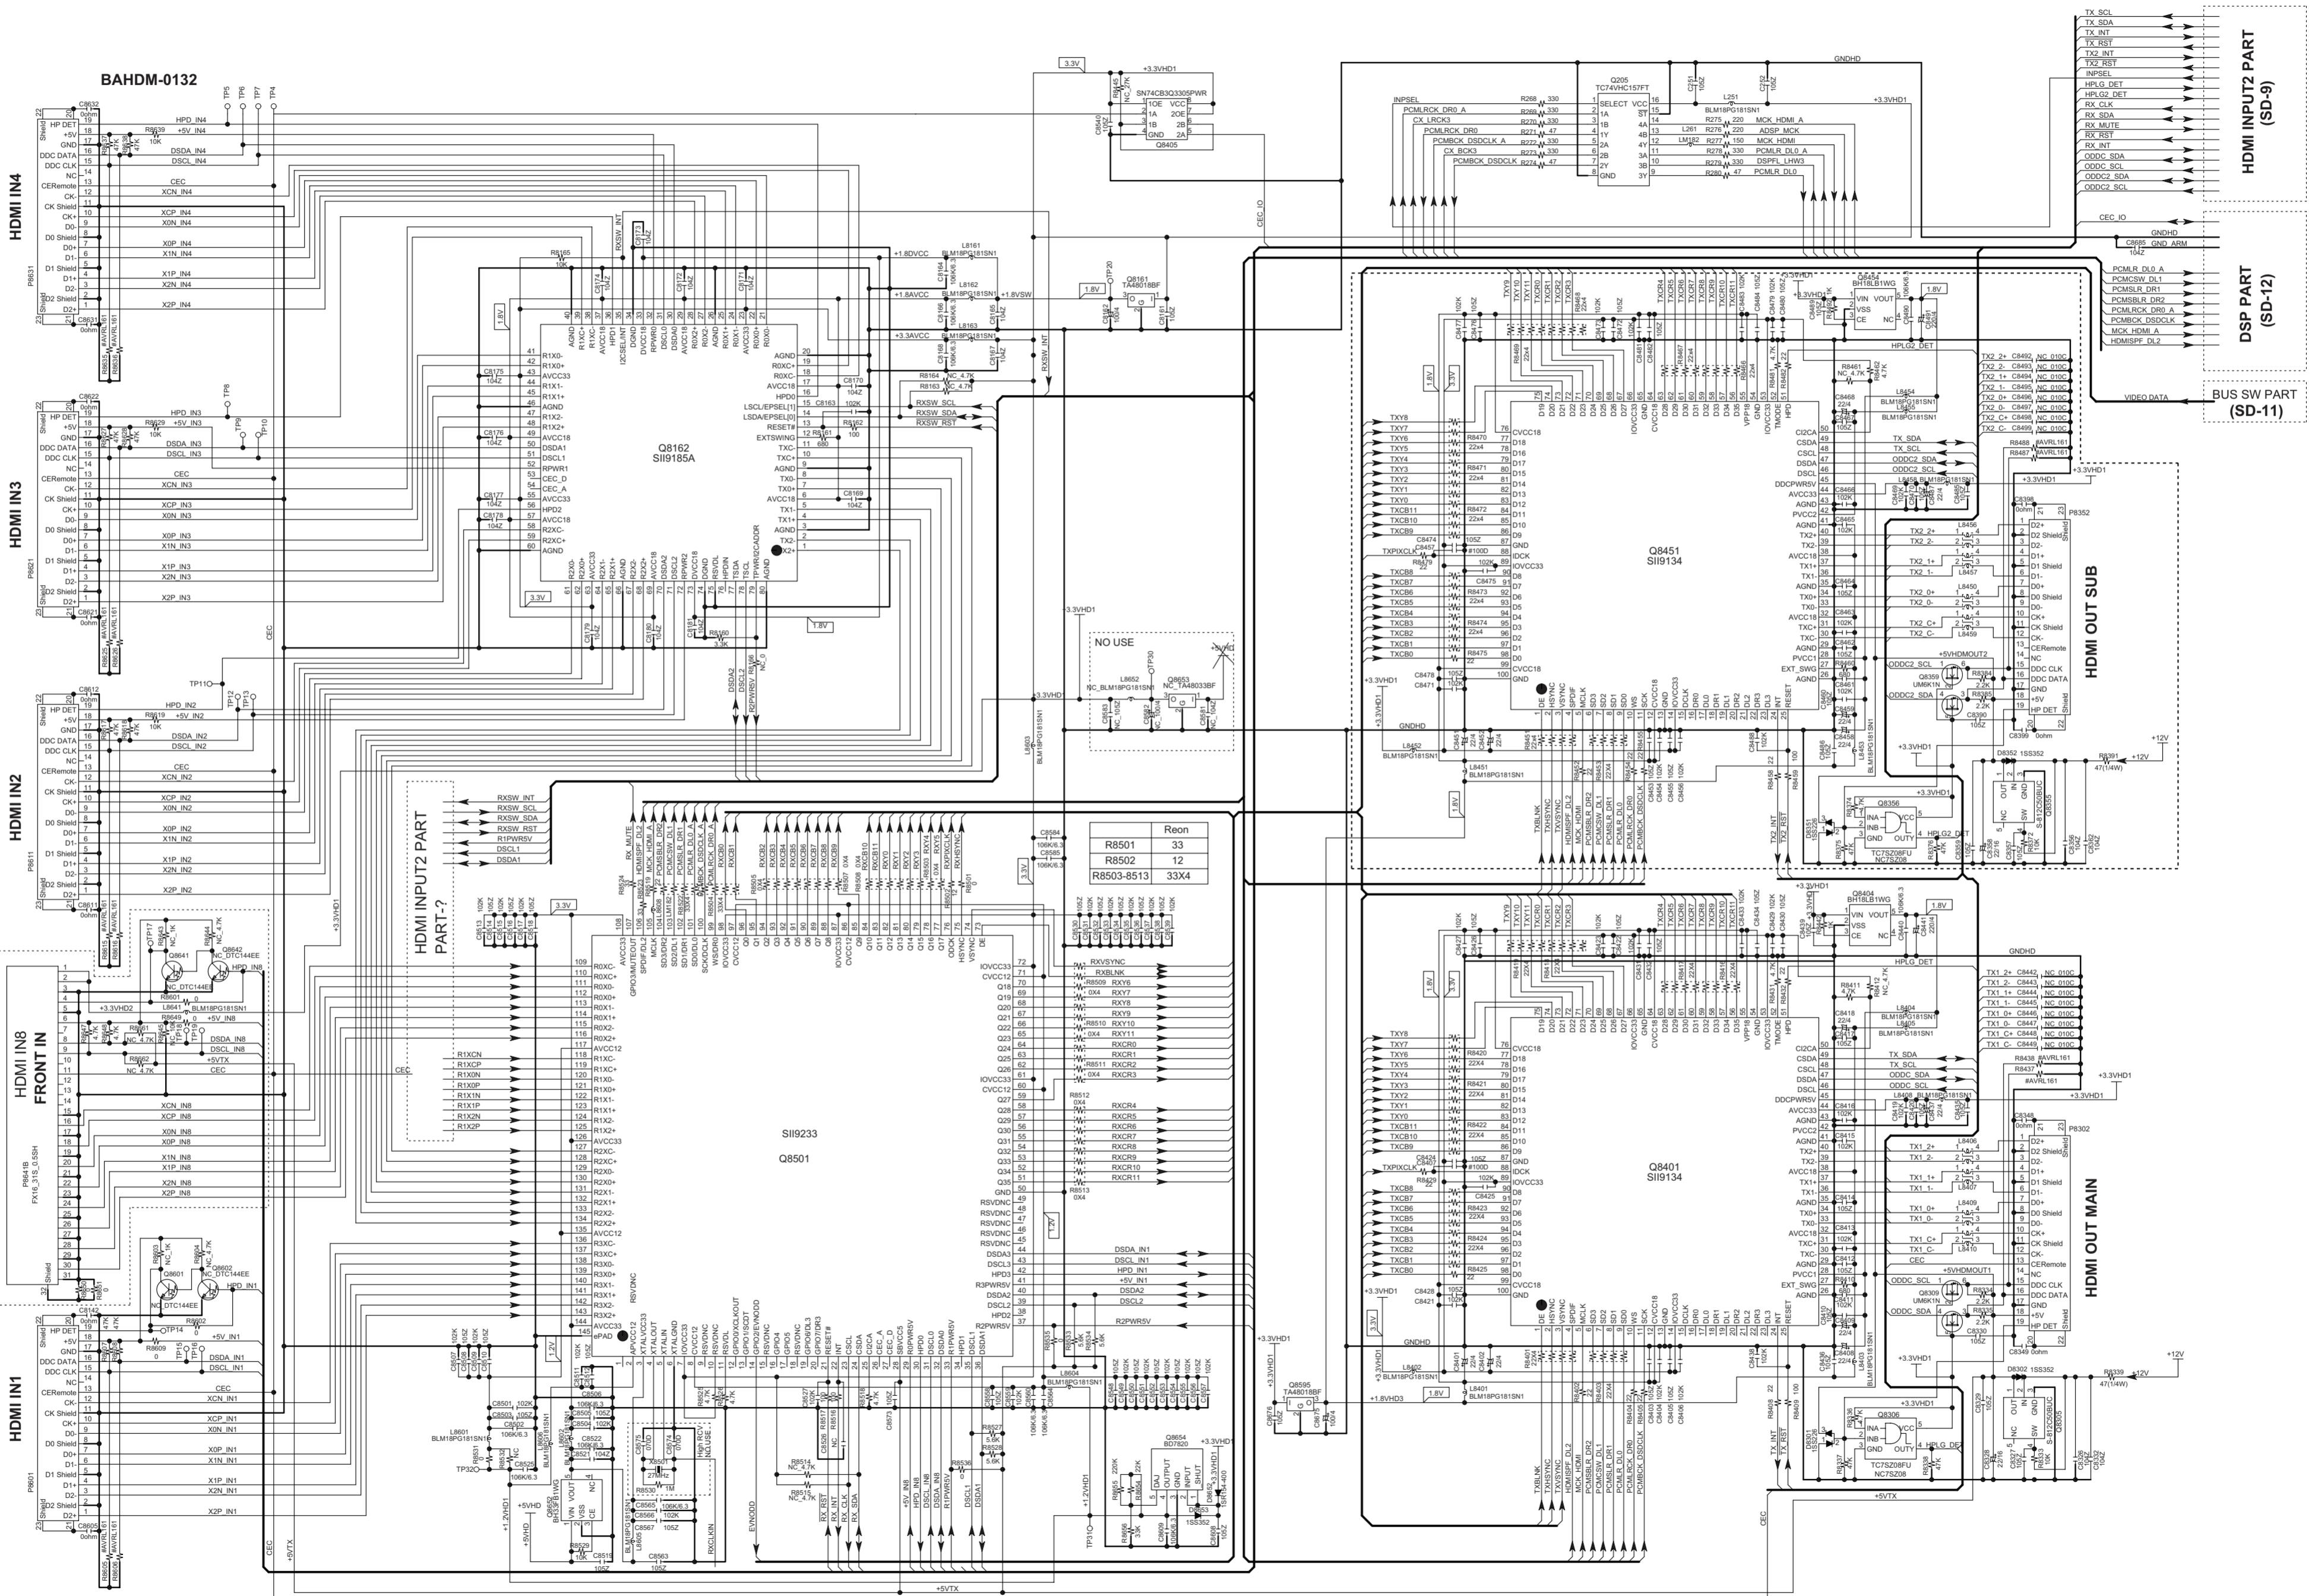

SCHEMATIC DIAGRAM-9

U023 HDMI CIRCUIT PC BOARD BAHDMI-0132-2

HDMI IN/VIDEO MICON SECTION

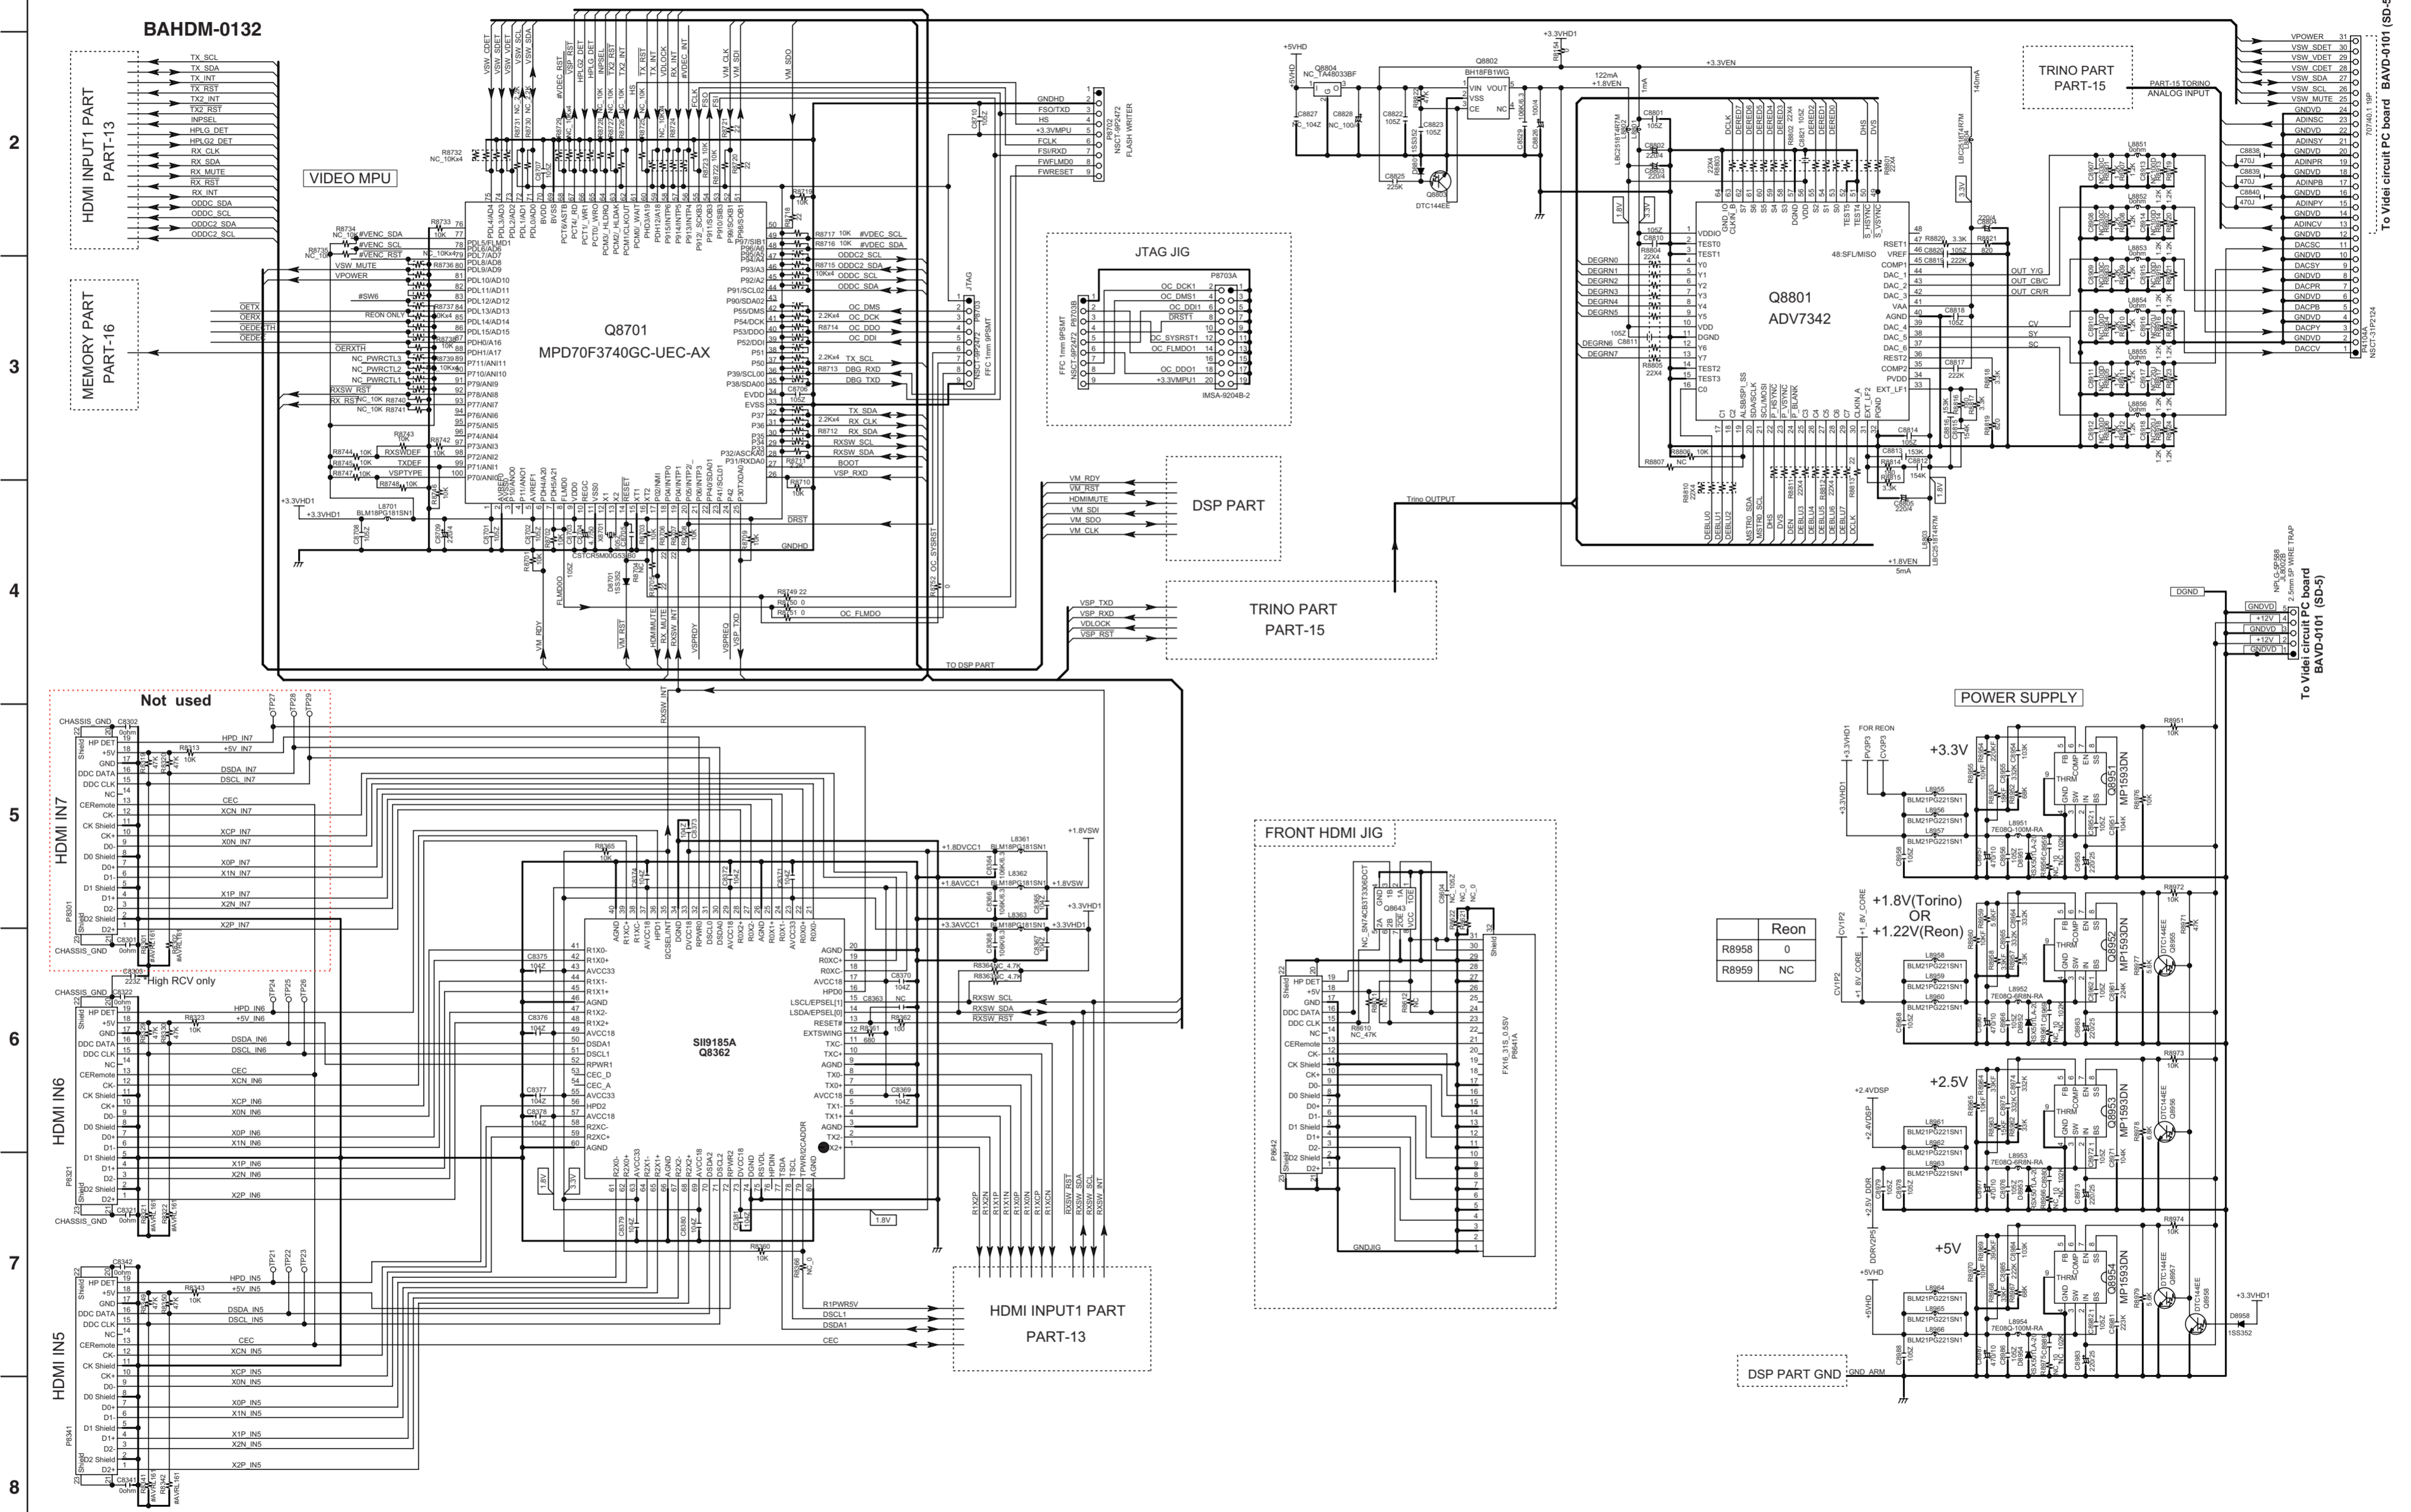


Reon	
R8958	0
R8959	NC

To Video circuit PC board BAVD-0101 (SD-5)

To Video circuit PC board BAVD-0101 (SD-5)

SCHEMATIC DIAGRAM-10

U023 HDMI CIRCUIT BOARD BAHDMI-0132-3 TORINO BOARD SECTION

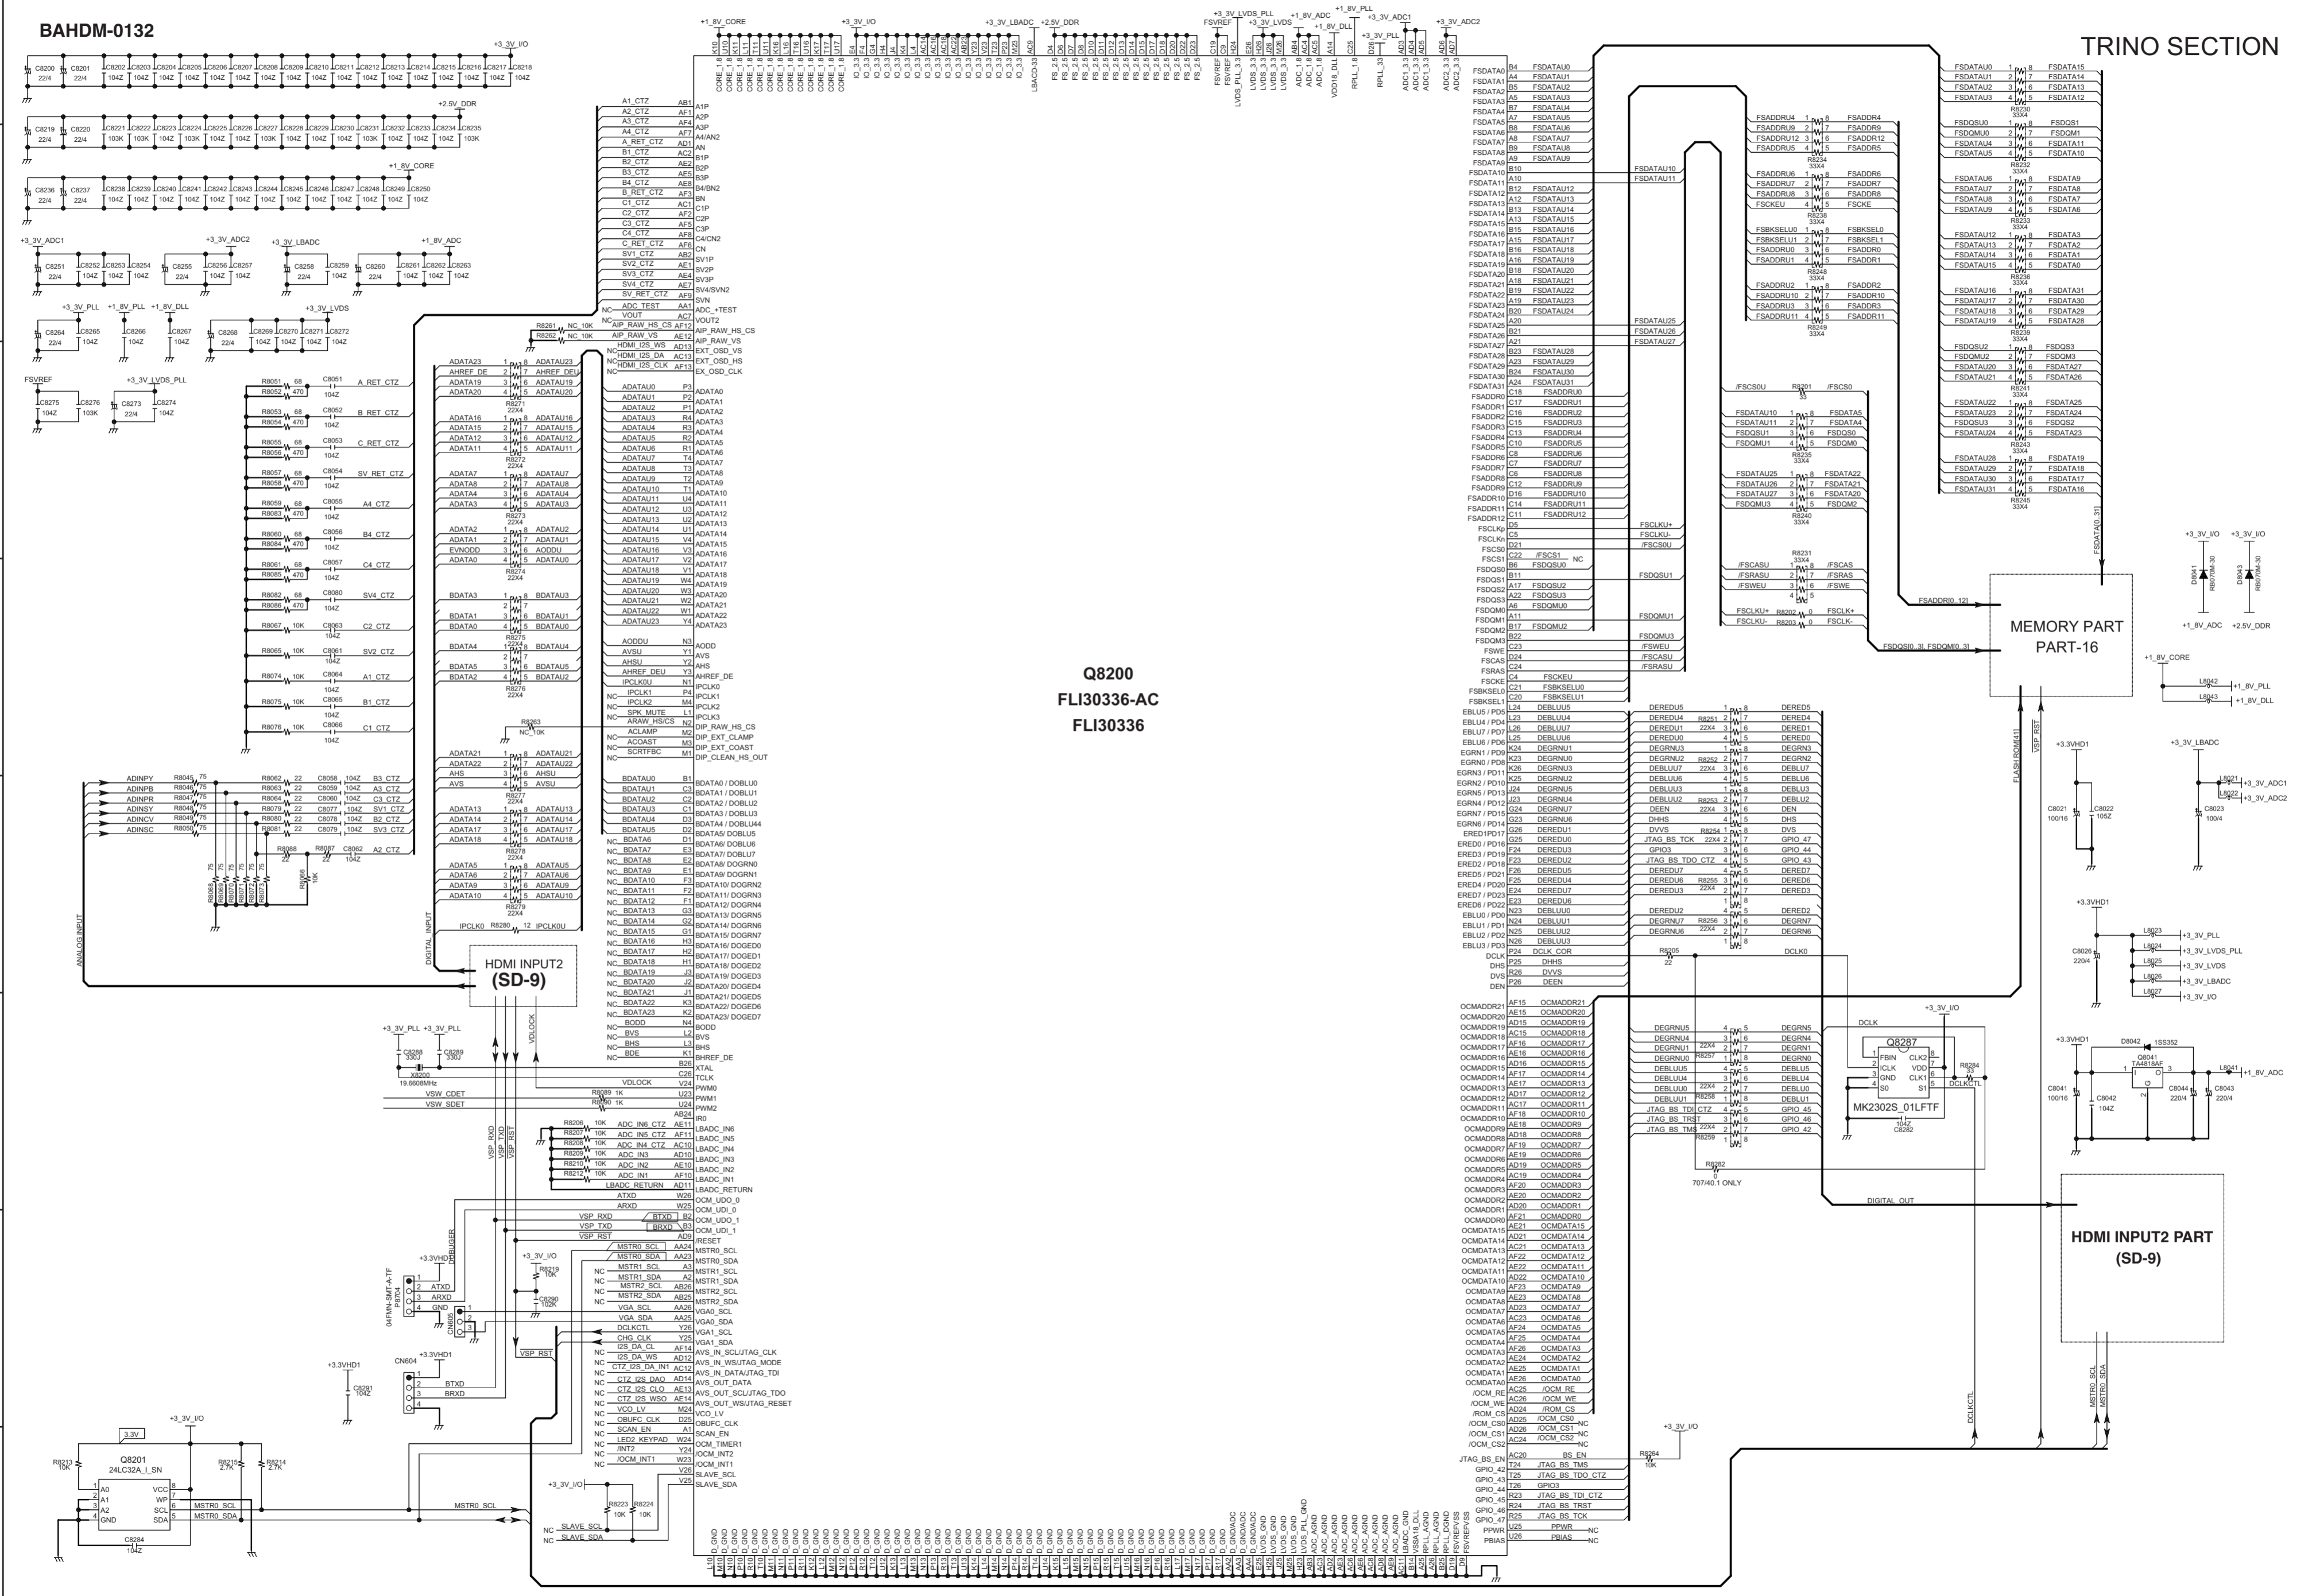

1
2
3
4
5
6
7
8

Q8200
FLI30336-AC
FLI30336

MEMORY PART
PART-16

HDMI INPUT2 PART
(SD-9)

A B C D E F G H

SCHEMATIC DIAGRAM-11

U023 HDMI CIRCUIT PC BOARD BAHDM-0132-4

TORINO BOARD MEMORY SECTION


1

2

3

4

5

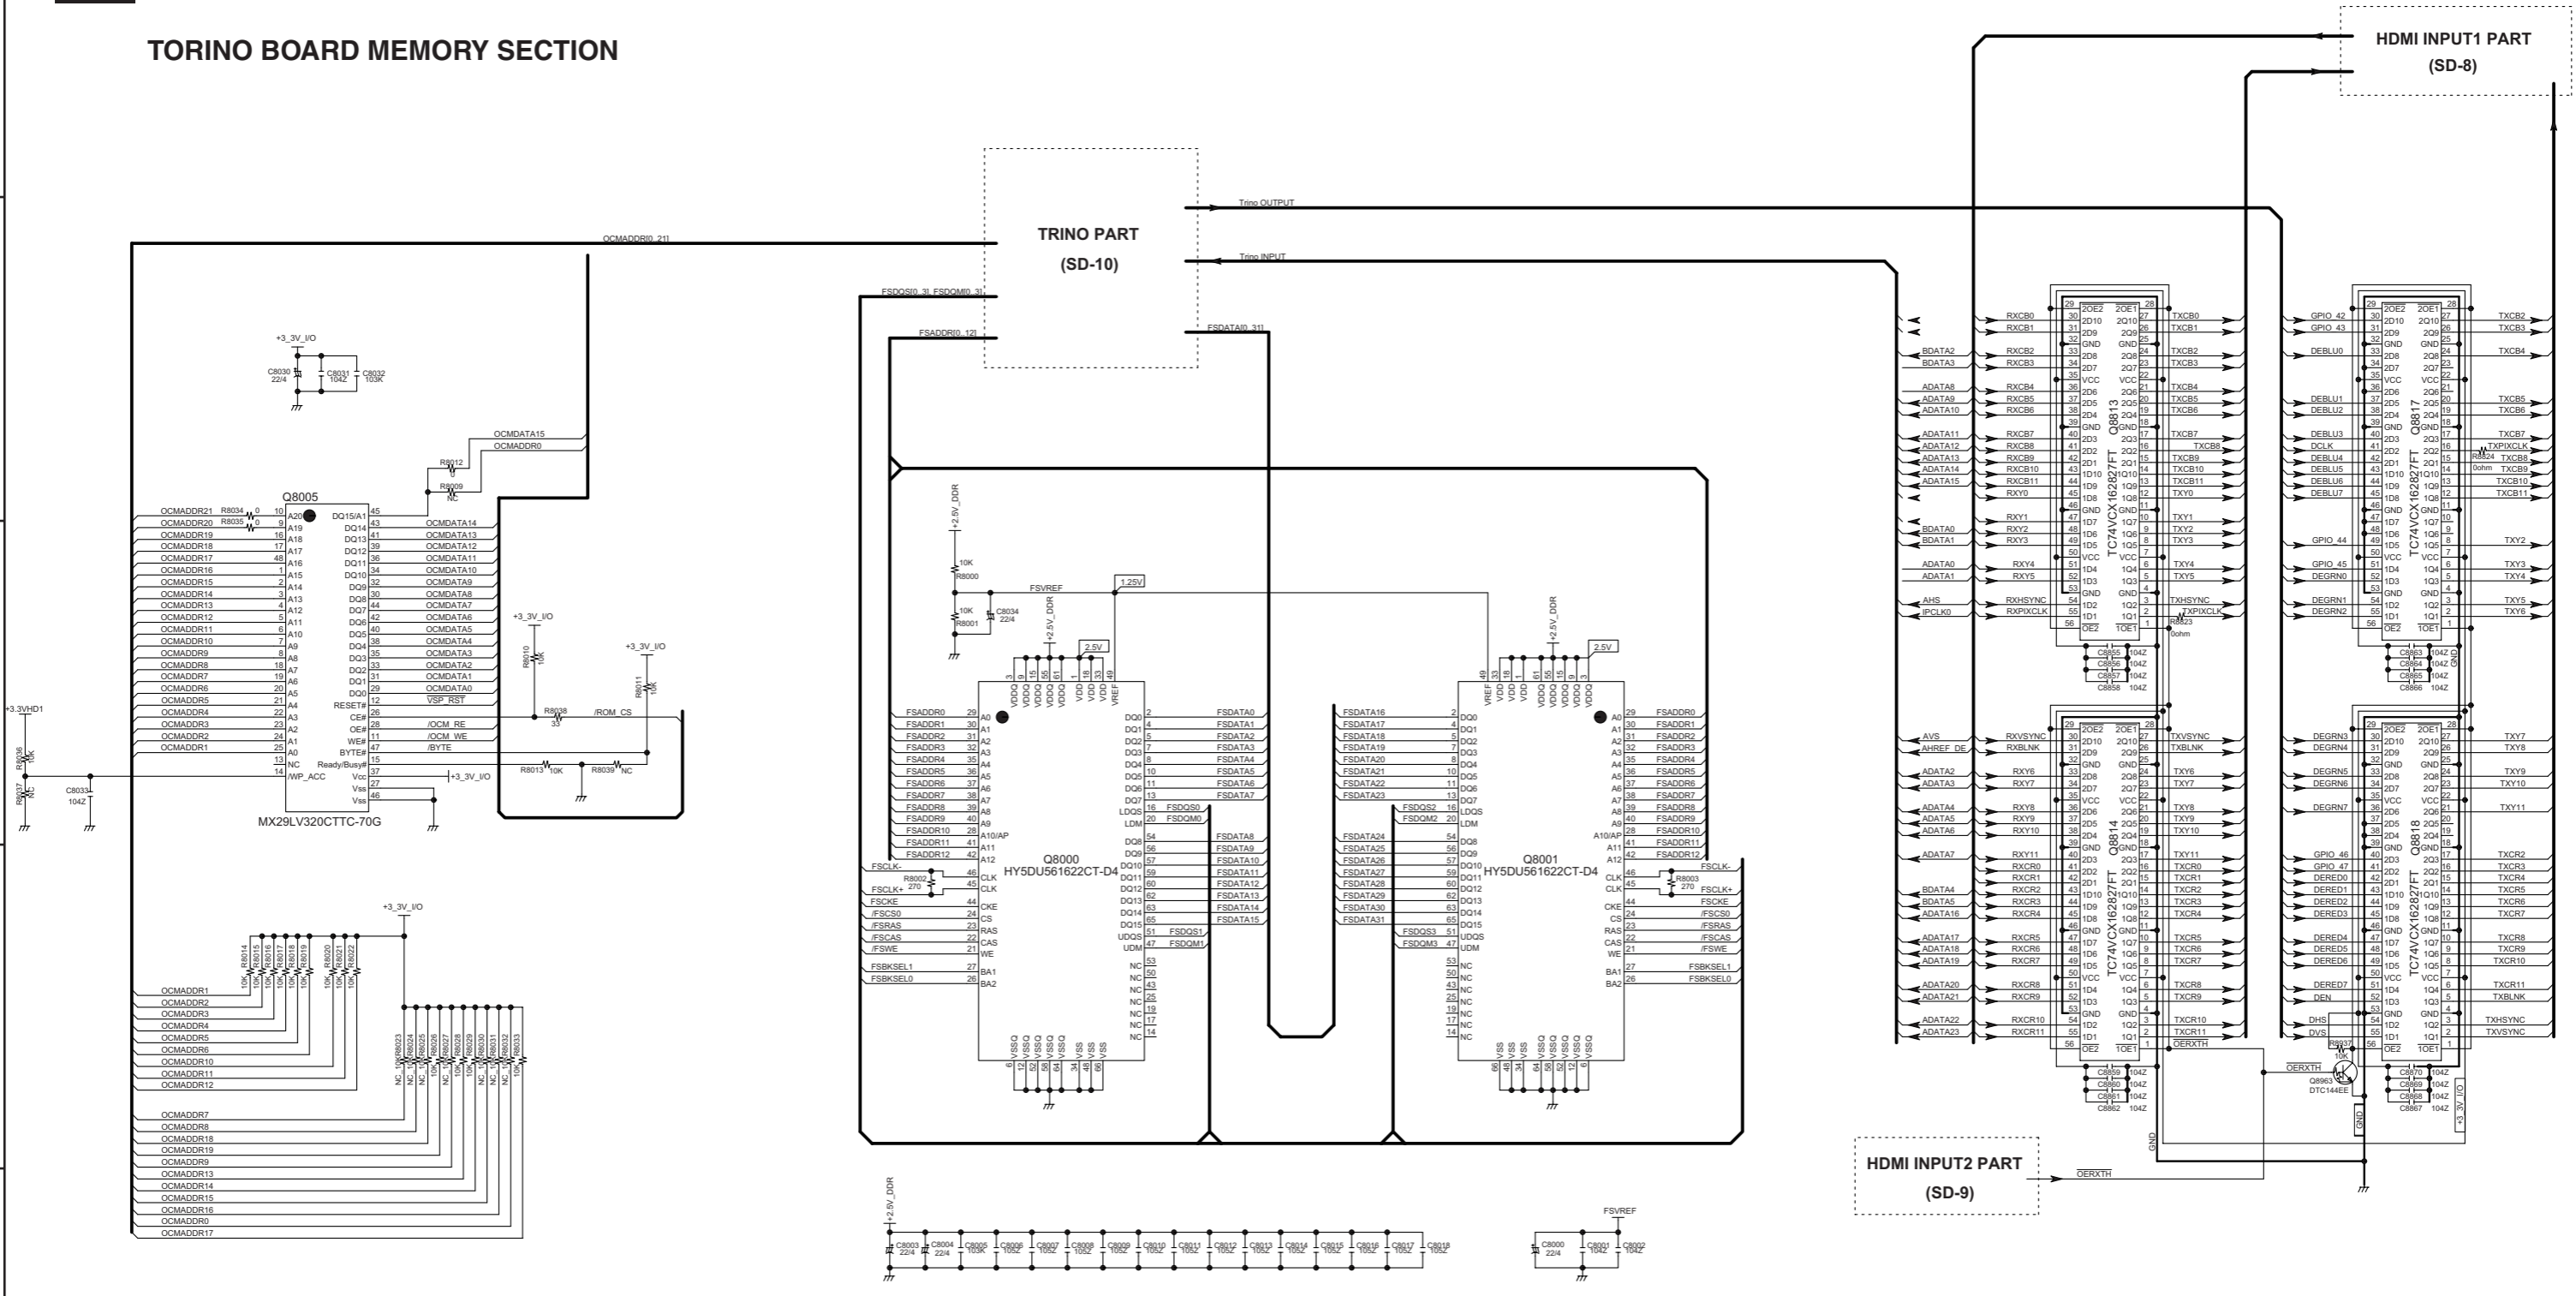

HDMI INPUT1 PART (SD-8)


HDMI INPUT2 PART (SD-9)

SCHEMATIC DIAGRAM-12 U023 HDMI CIRCUIT PC BOARD BAHDM-0132-5

NET/USB ZONE2 Section

1
2
3
4
5


SPI0 & control signals
to 2nd DSP
from HDMI Block
from DIR Block

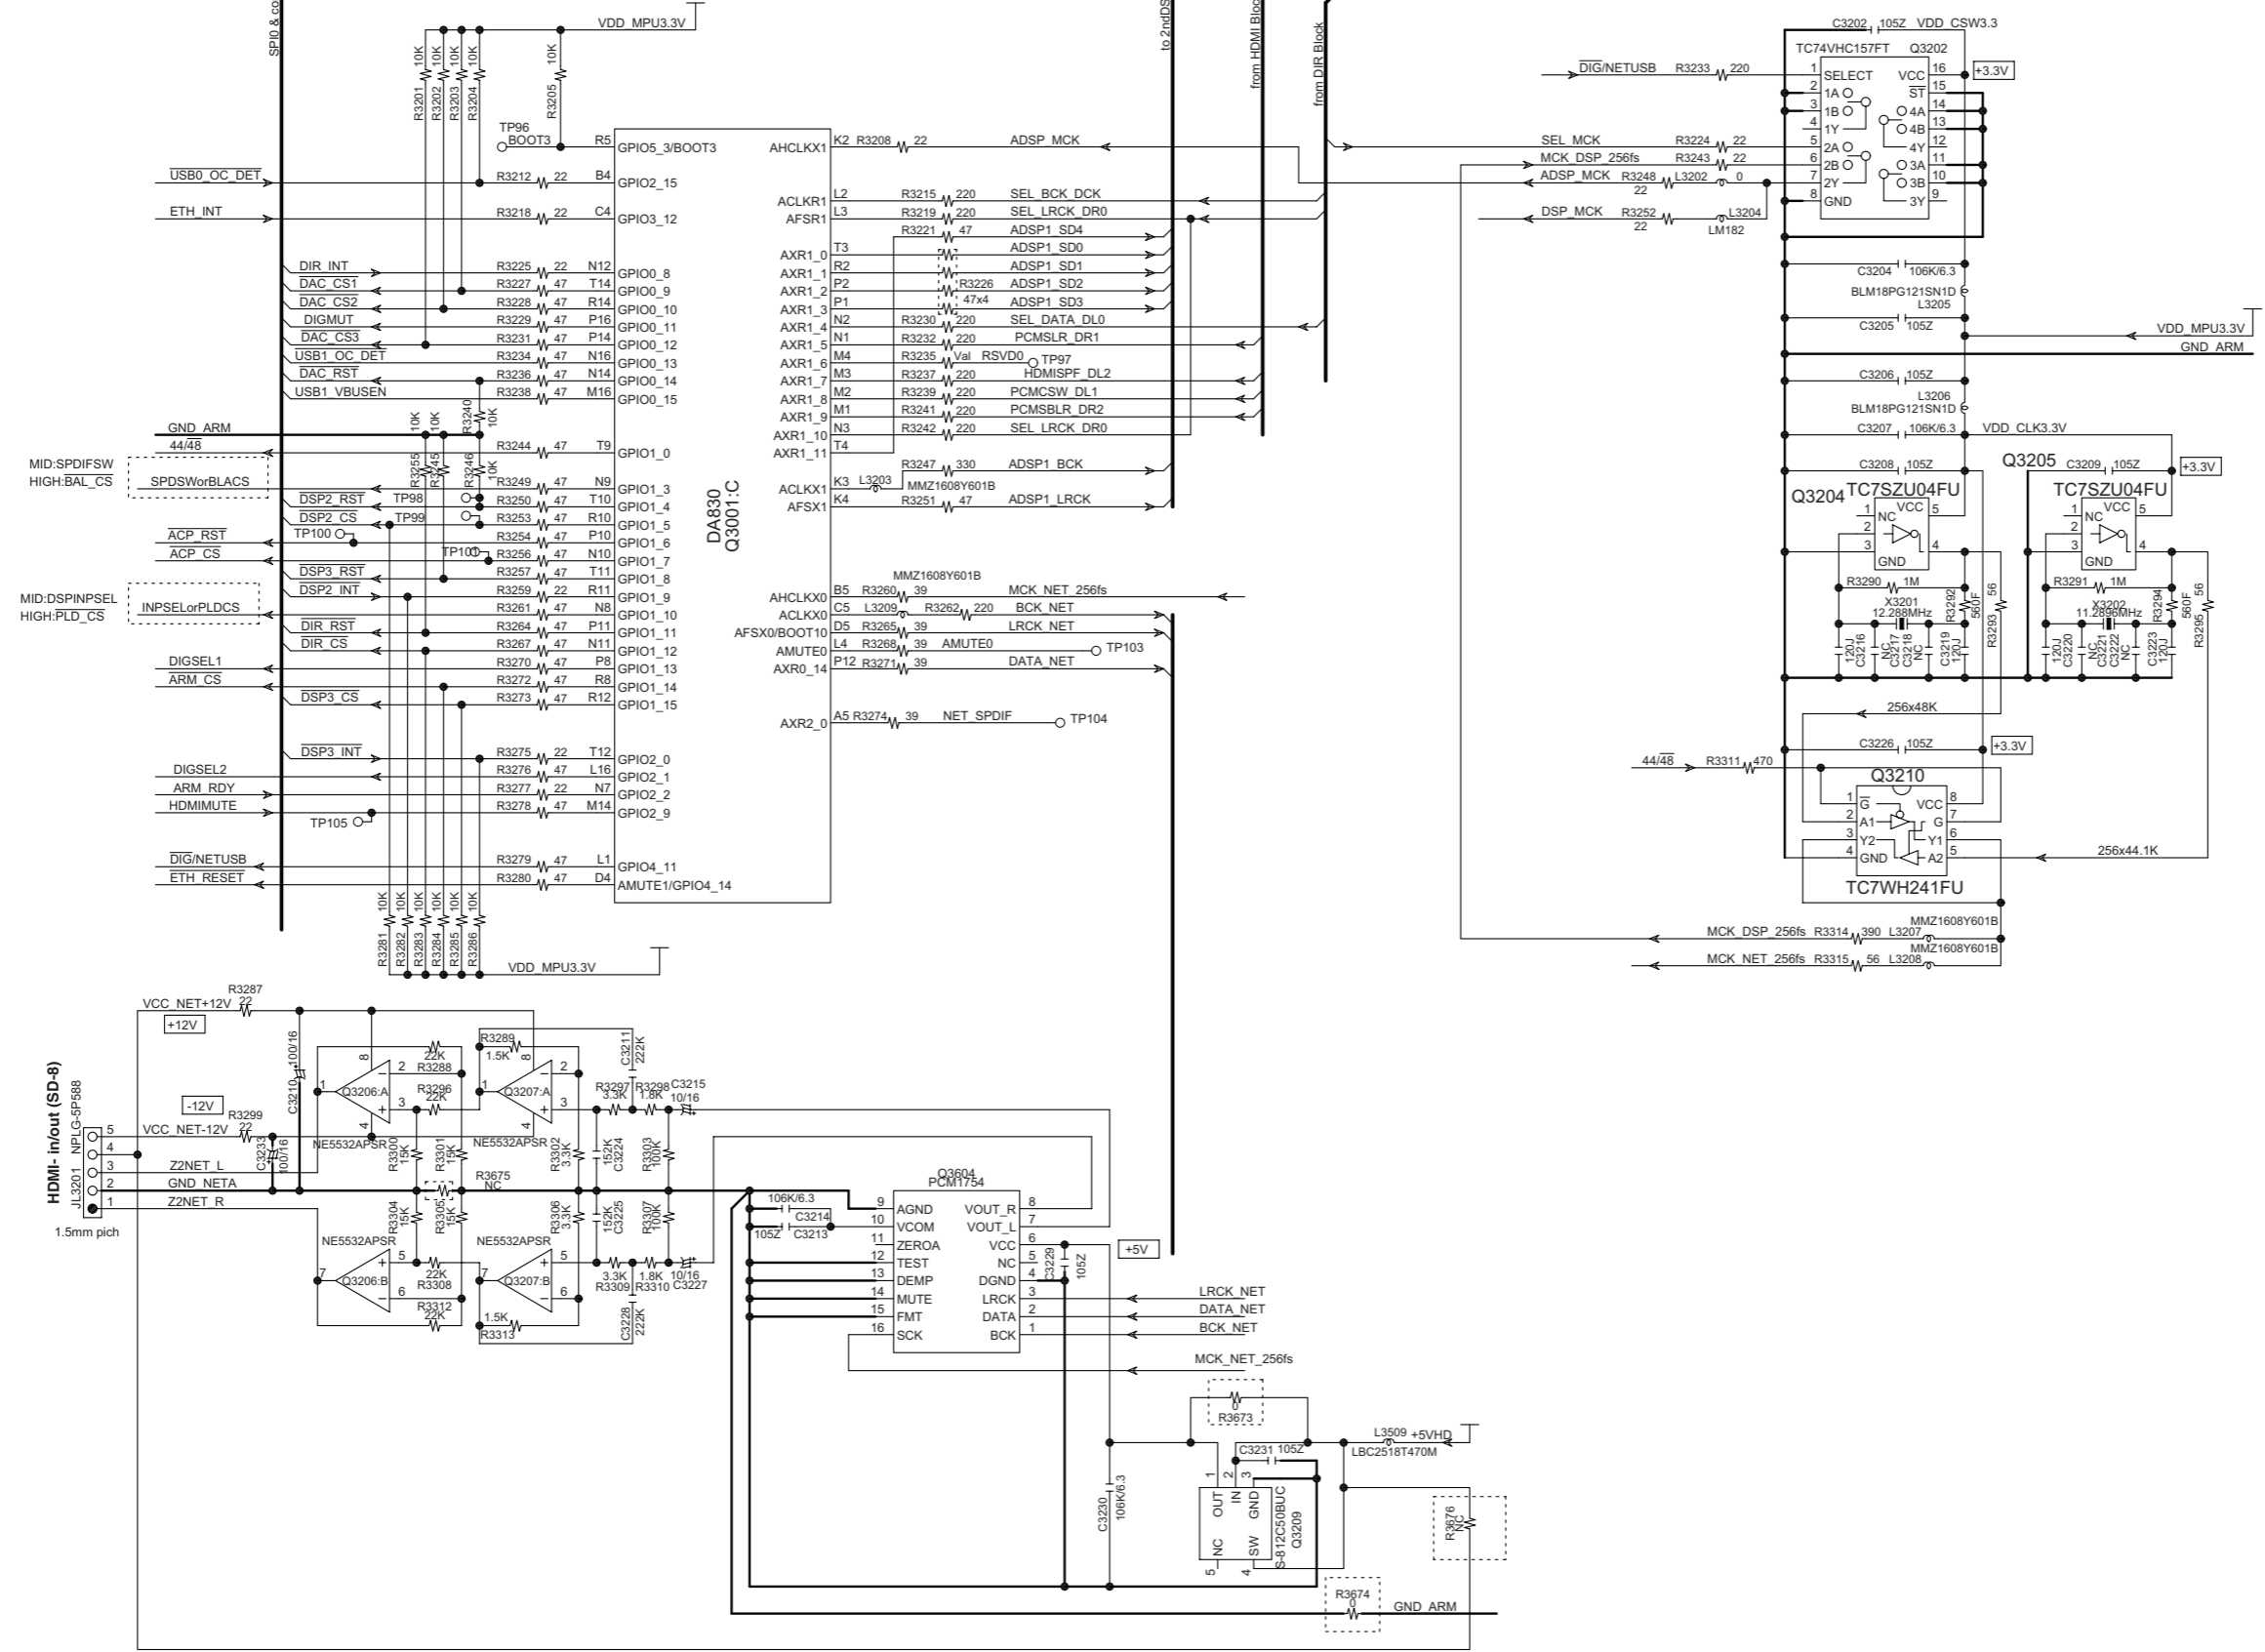

SCHEMATIC DIAGRAM-13 U023 HDMI CIRCUIT PC BOARD BAHDM-0132-6


NET/USB Power Section

R3115 or R3116	BOOT2
R3111 or R3112	BOOT5
R3109 or R3110	BOOT6
R3107 or R3108	BOOT7

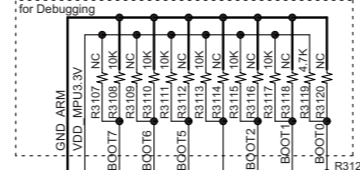

Boot Opt.			
NAND	UART1	SPI0	
BOOT7	L	H	L
BOOT1	H	L	L
BOOT0	H	L	H
BOOT3	H	L	H
BOOT2	H	L	H

BOOT3 is always pulled up.

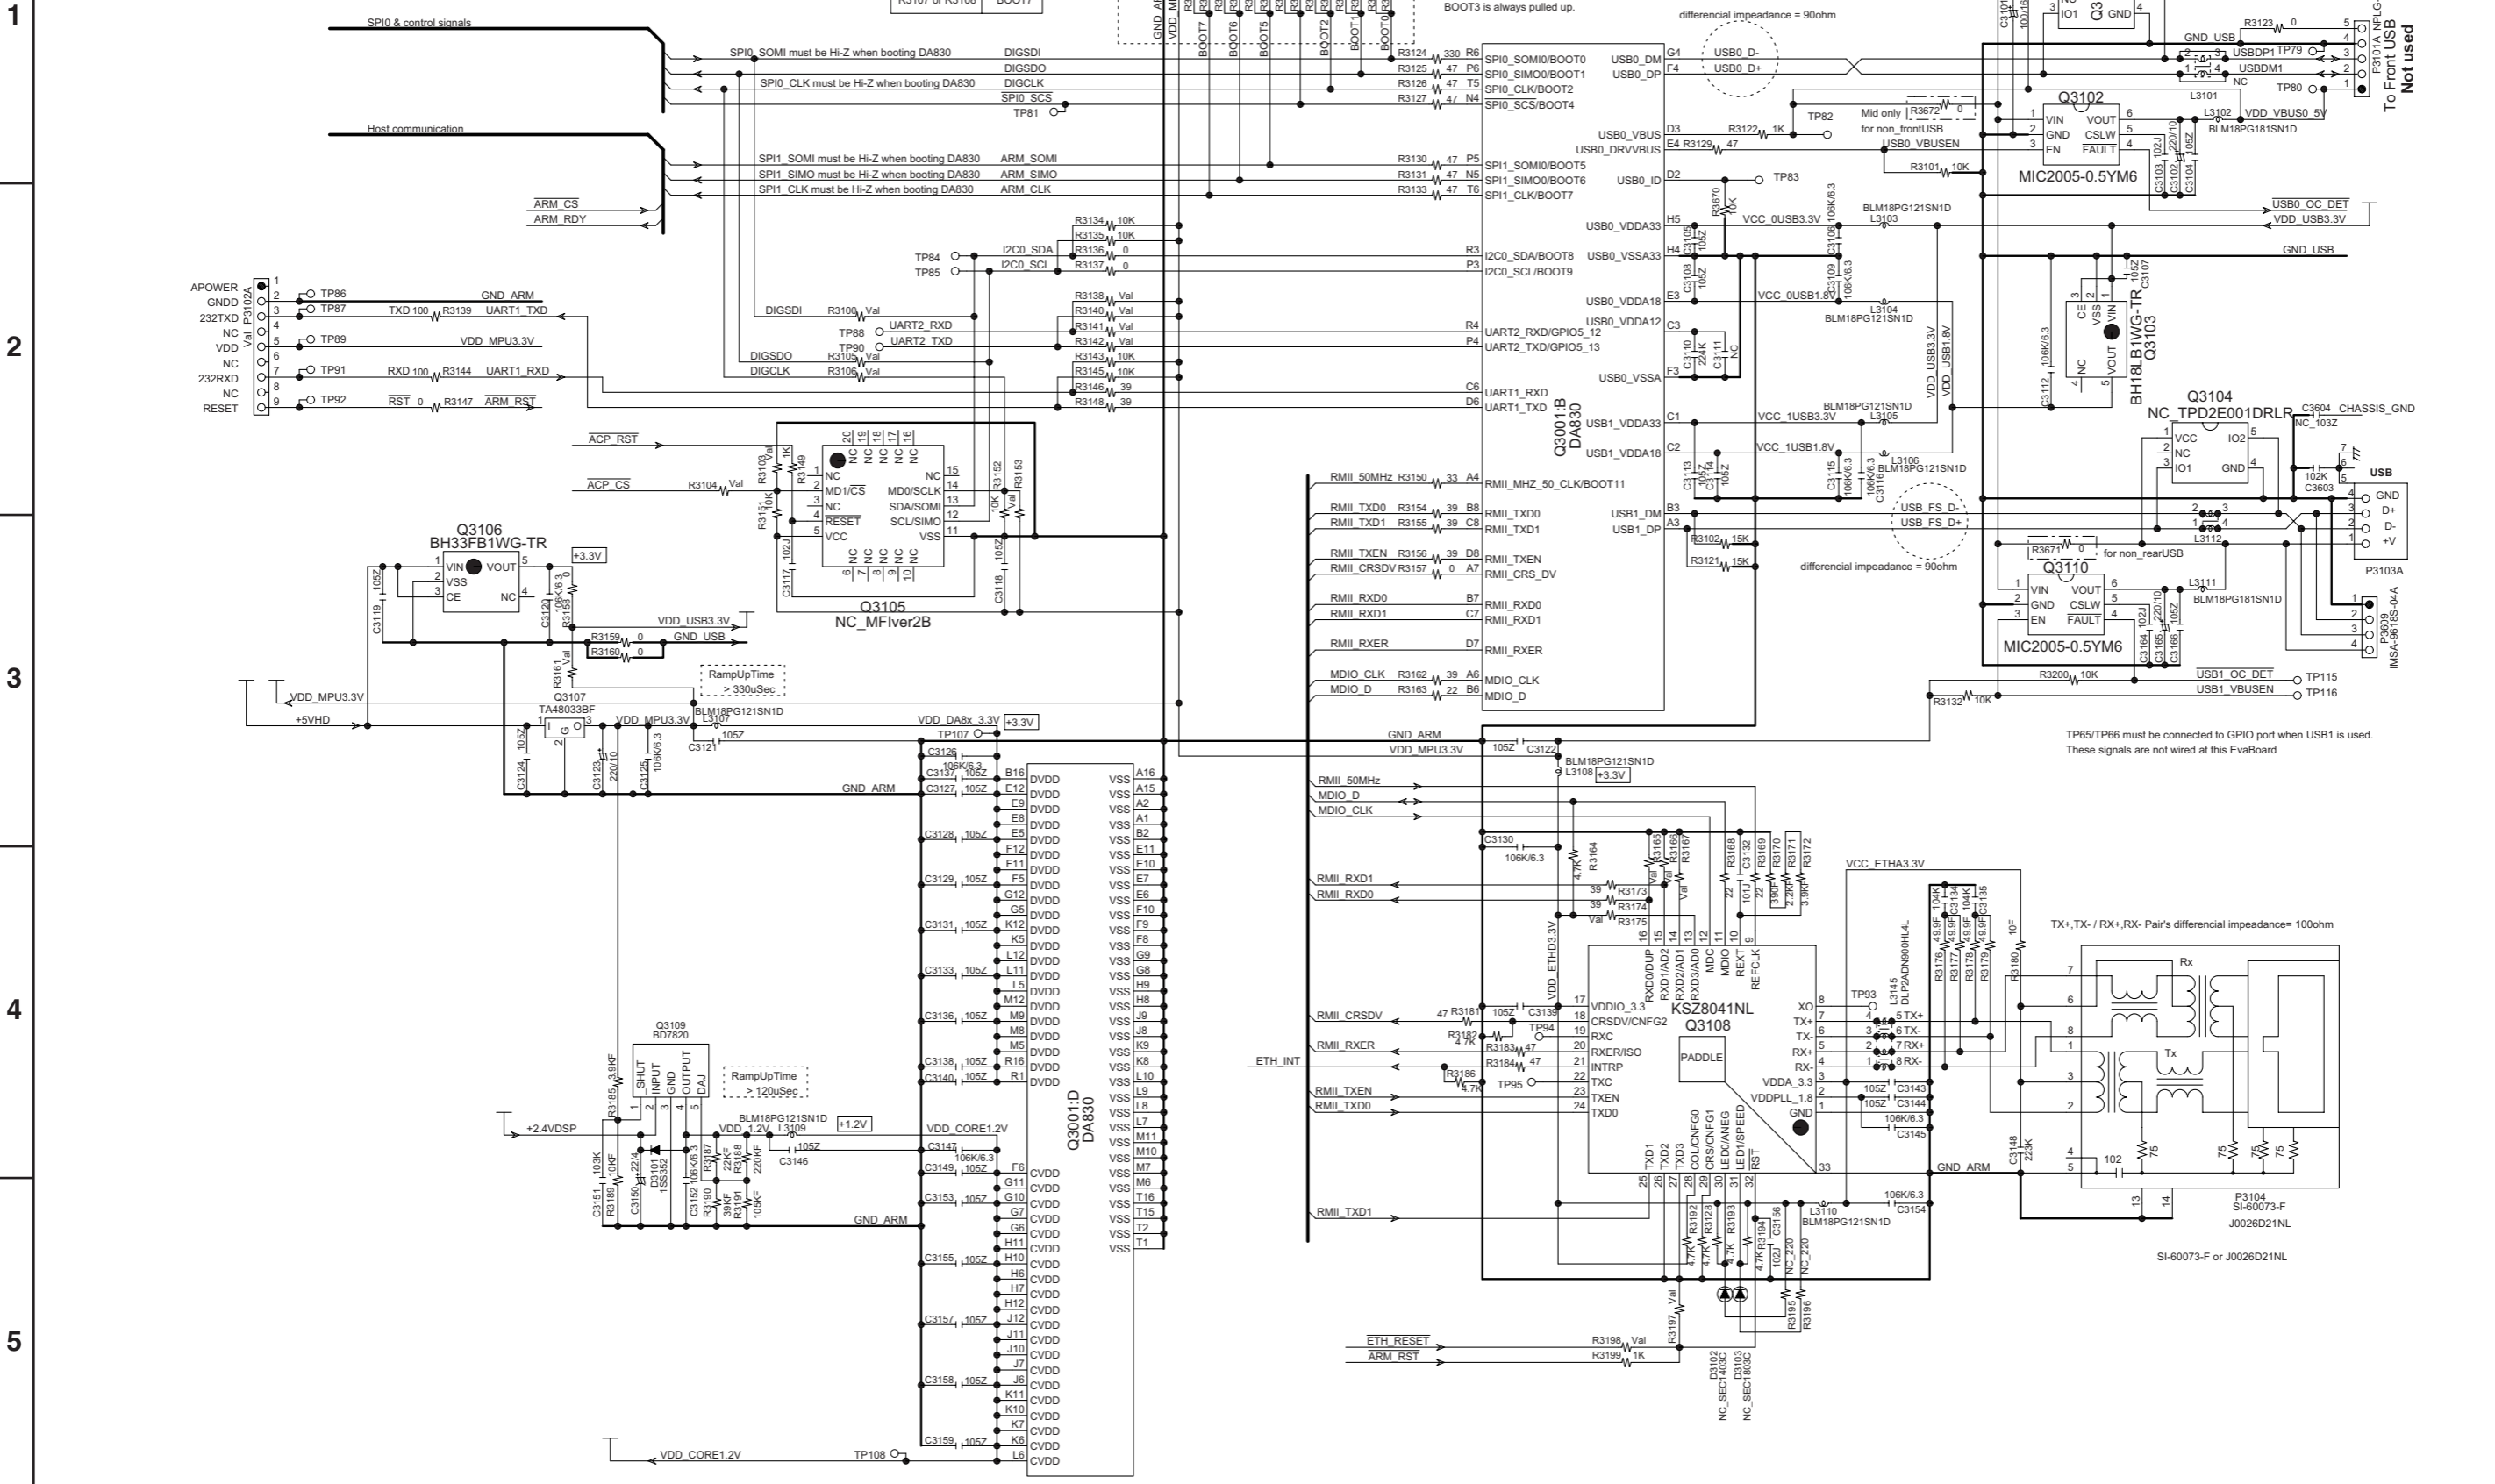

TP65/TP66 must be connected to GPIO port when USB1 is used. These signals are not wired at this EvaBoard

TX+, TX- / RX+, RX- Pair's differential impedance= 100ohm

P3104 SI-60073-F J0026D21NL
SI-60073-F or J0026D21NL

1

2

3

4

5

SCHEMATIC DIAGRAM-14
DSP MEMORY SECTION

U023 HDMI CIRCUIT PC BOARD BAHDM-0132-7


1

2

3

4

5

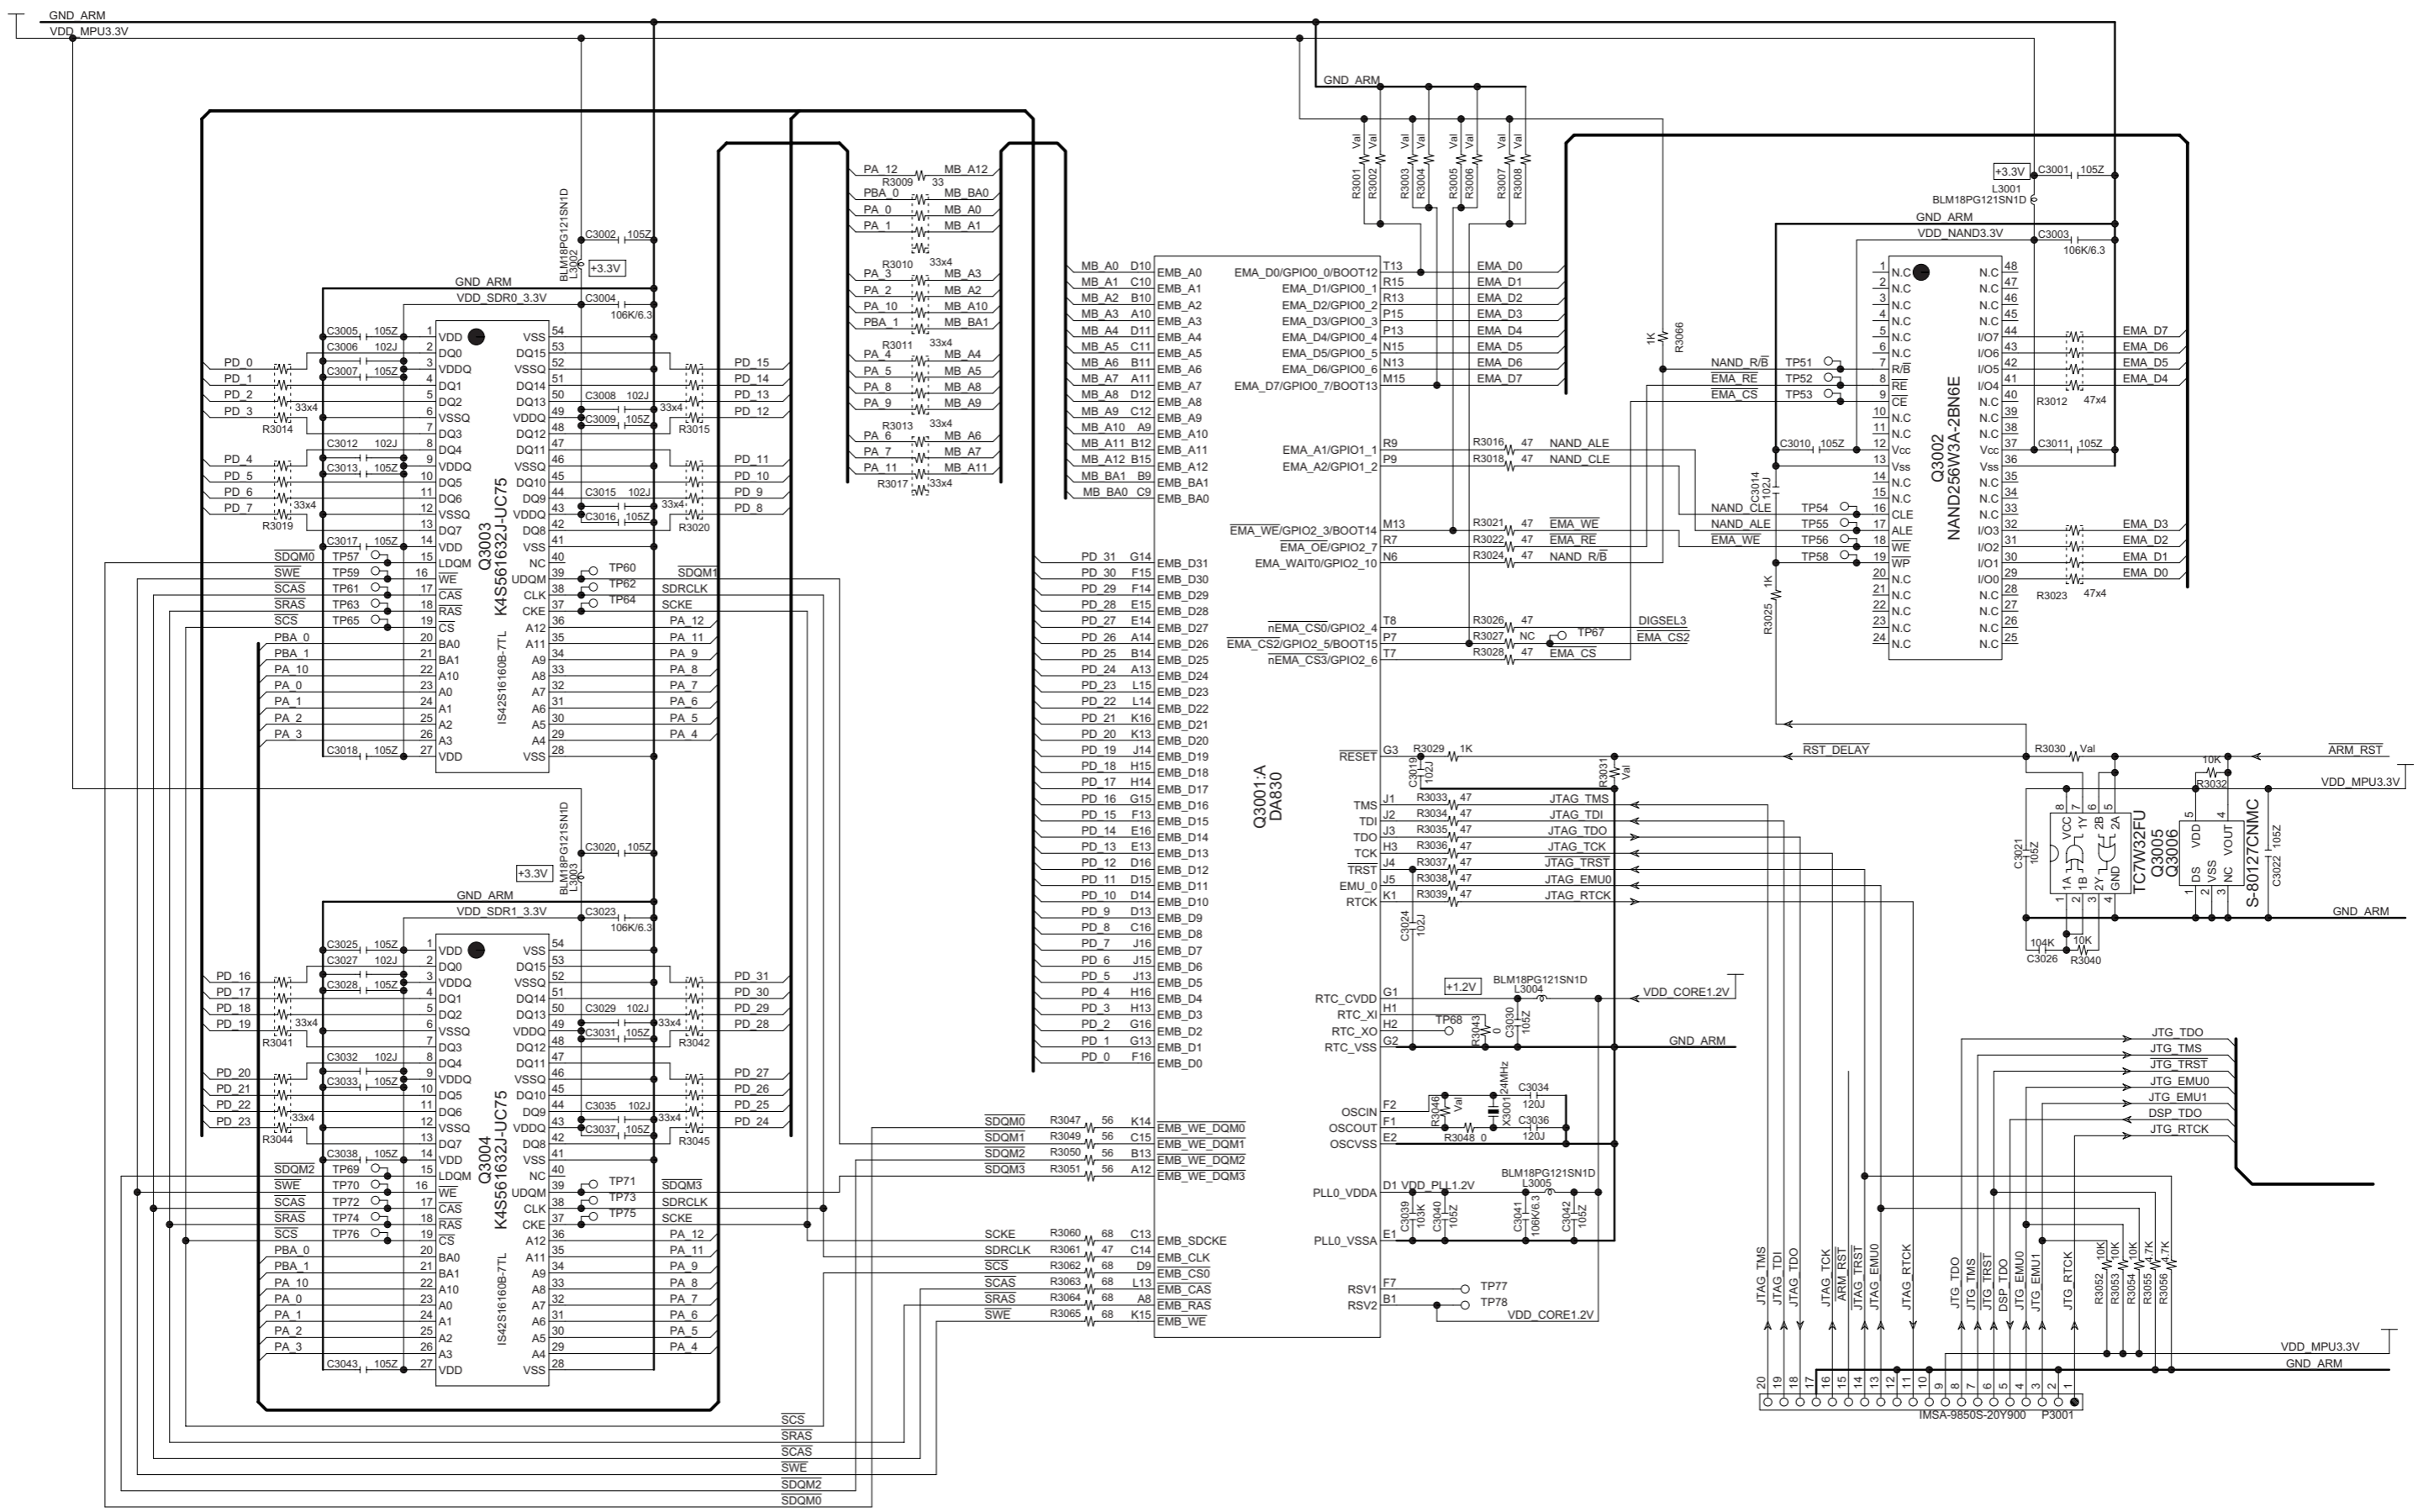

SCHEMATIC DIAGRAM-15
DSP CONNECTION SECTION


U023 HDMI CIRCUIT PC BOARD BAHDM-0132-8

1

2

3


4

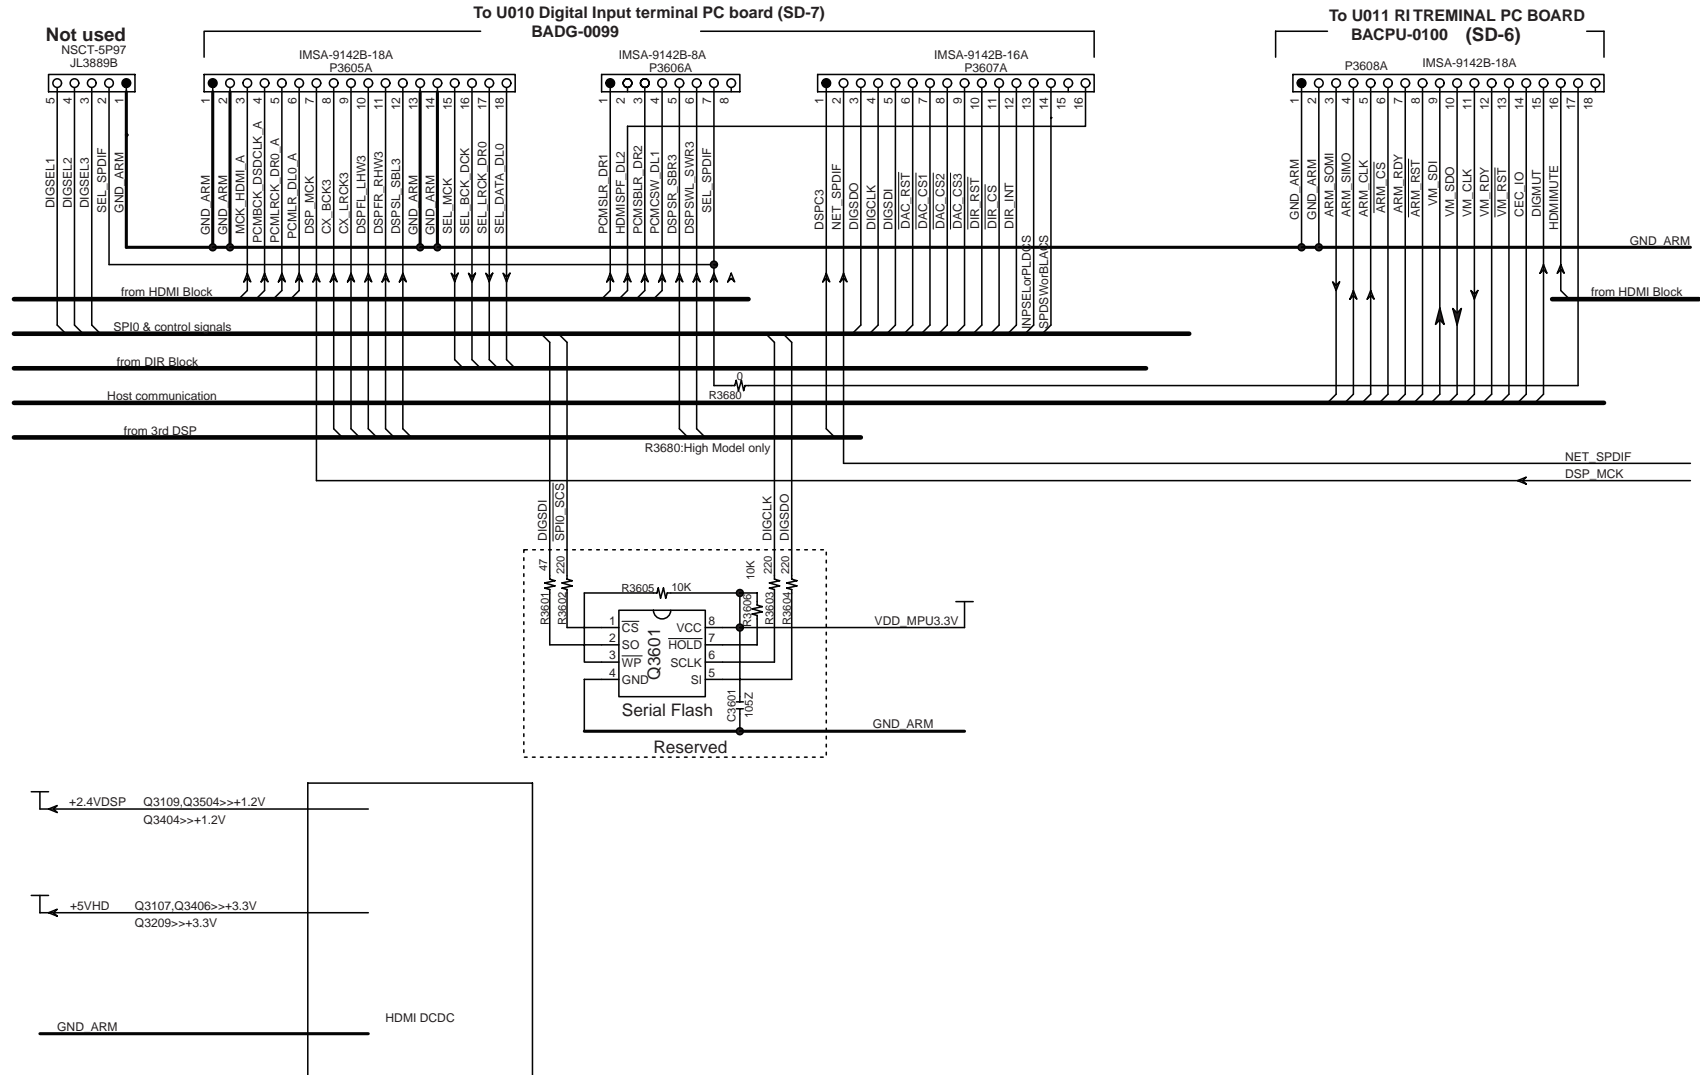

SCHEMATIC DIAGRAM-16

U023 HDMI CIRCUIT PC BOARD BAHDM-0132-9


2ND DSP SECTION

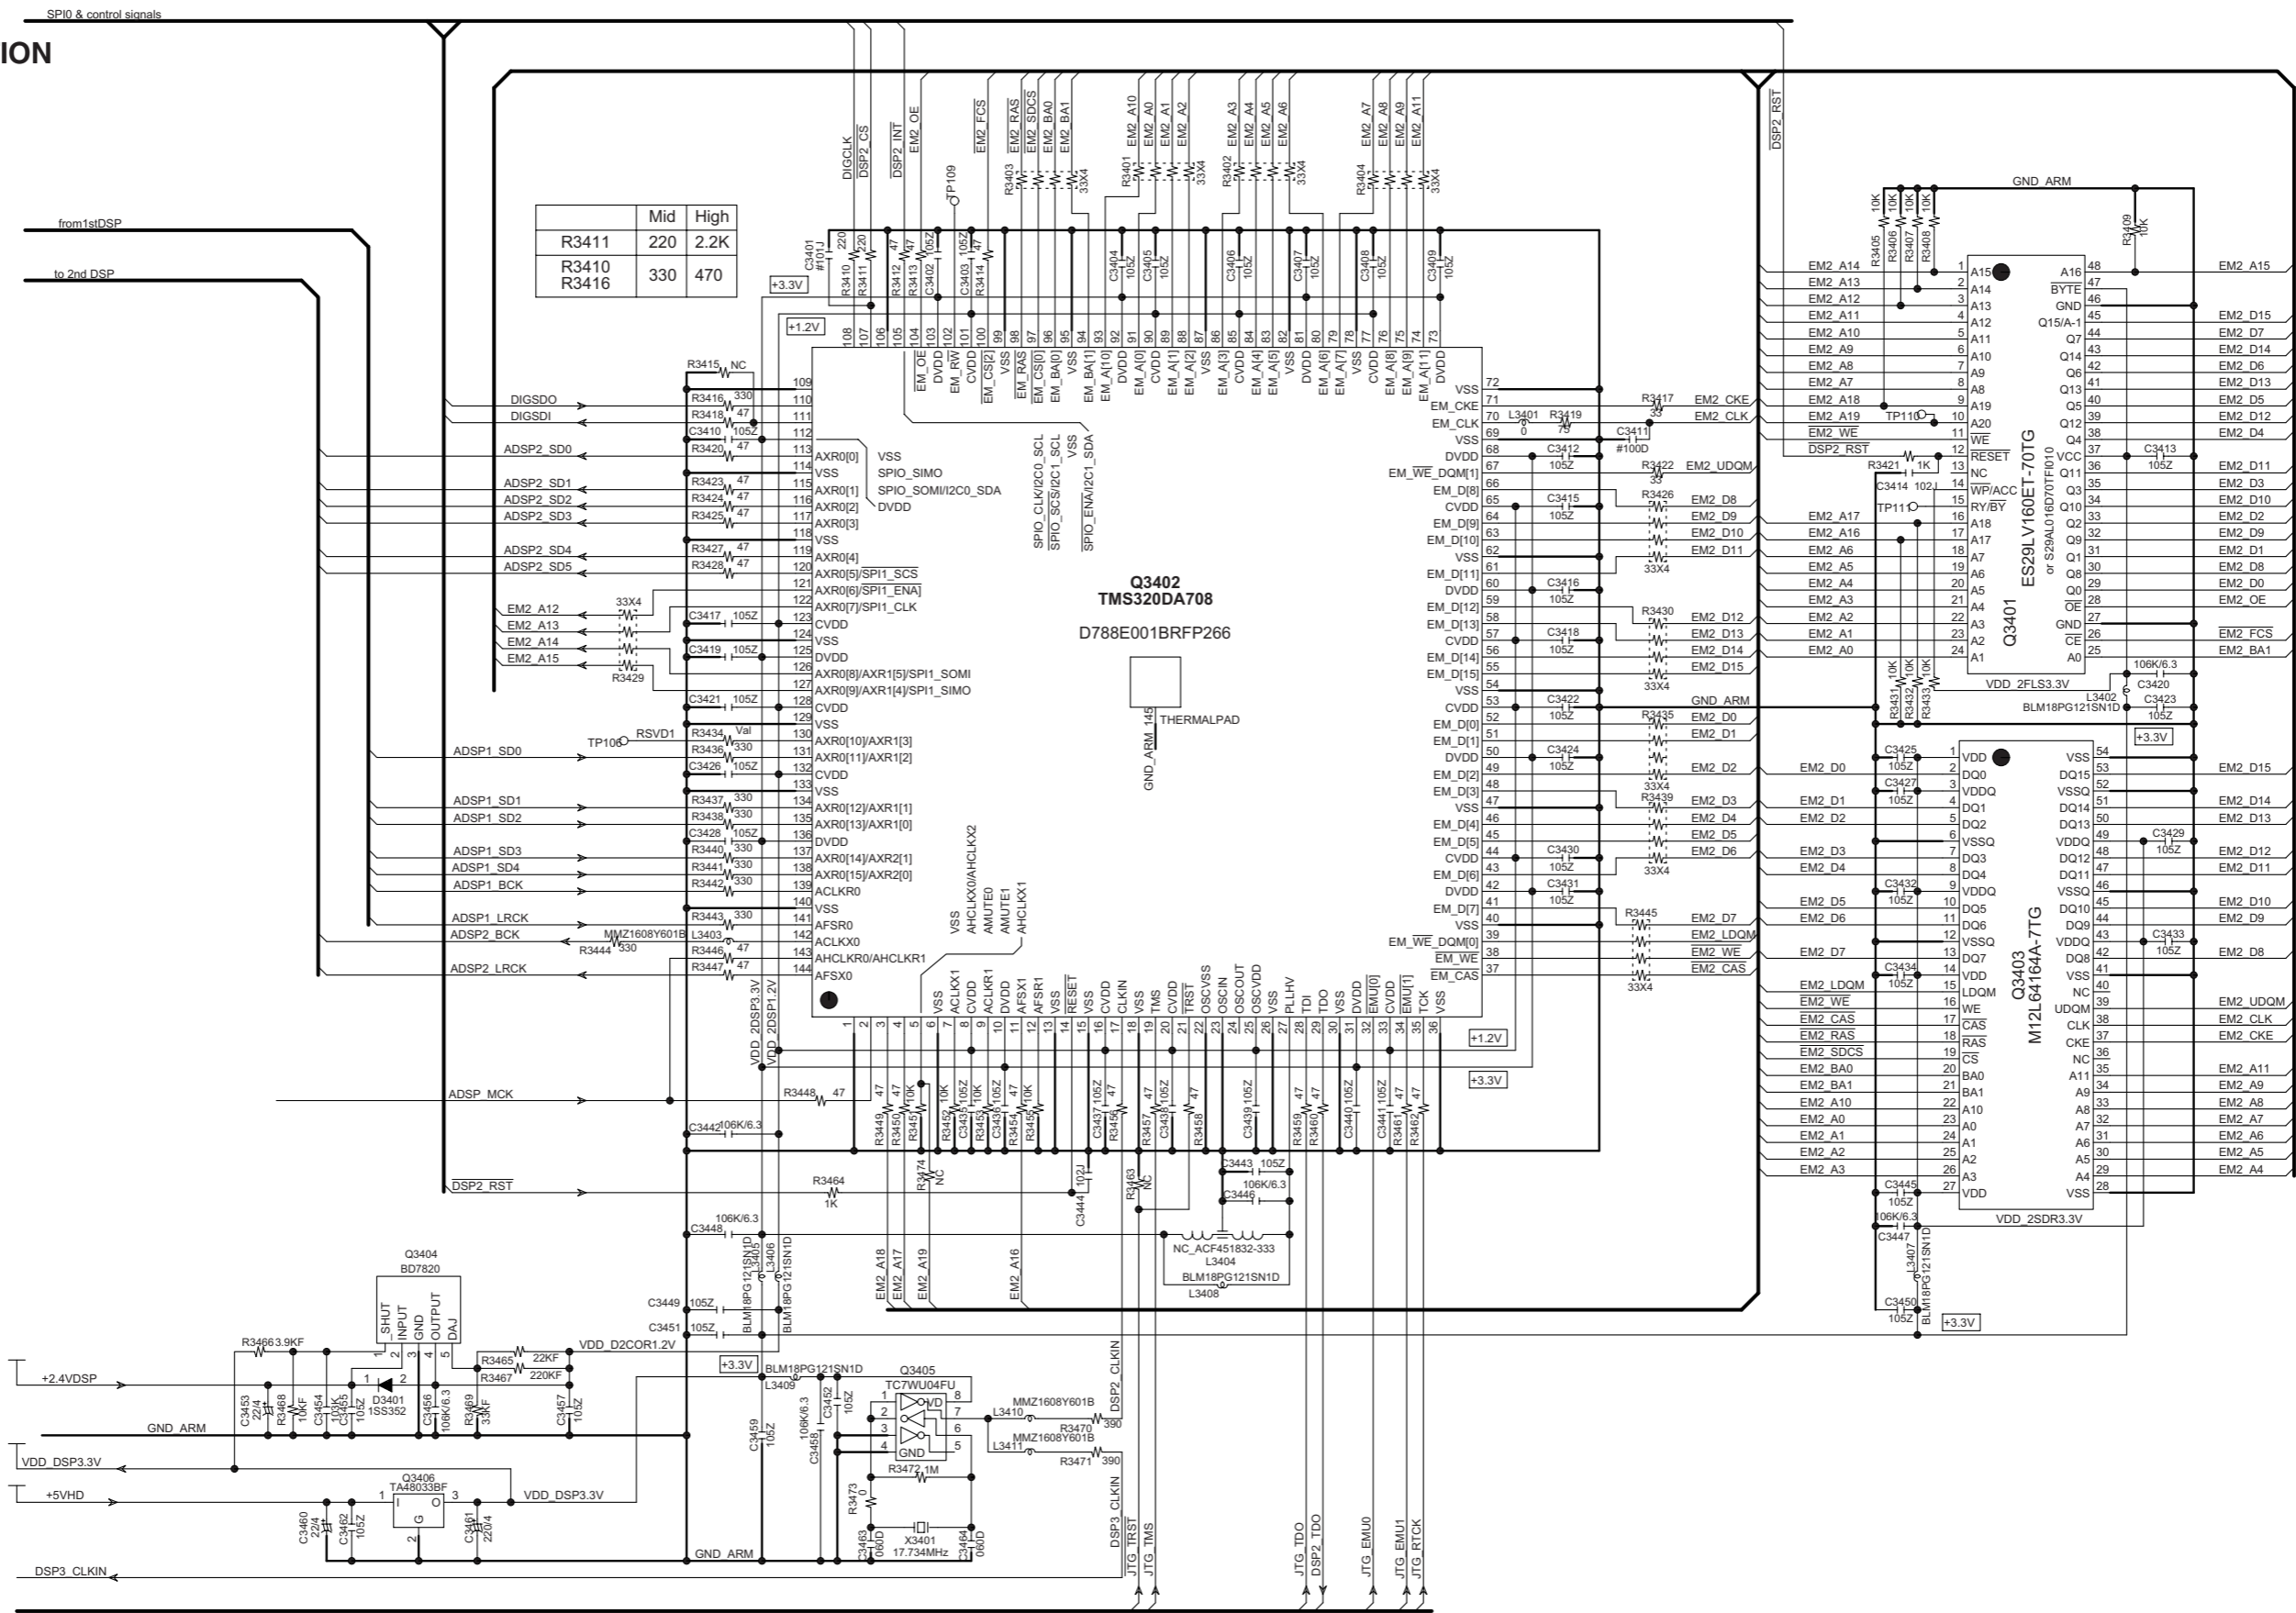

SCHEMATIC DIAGRAM-17 3RD DSP SECTION

U023 HDMI CIRCUIT PC BOARD BAHDM-0132-10

	Mid	High
R3511	220	2.2K
R3510 R3516	330	470

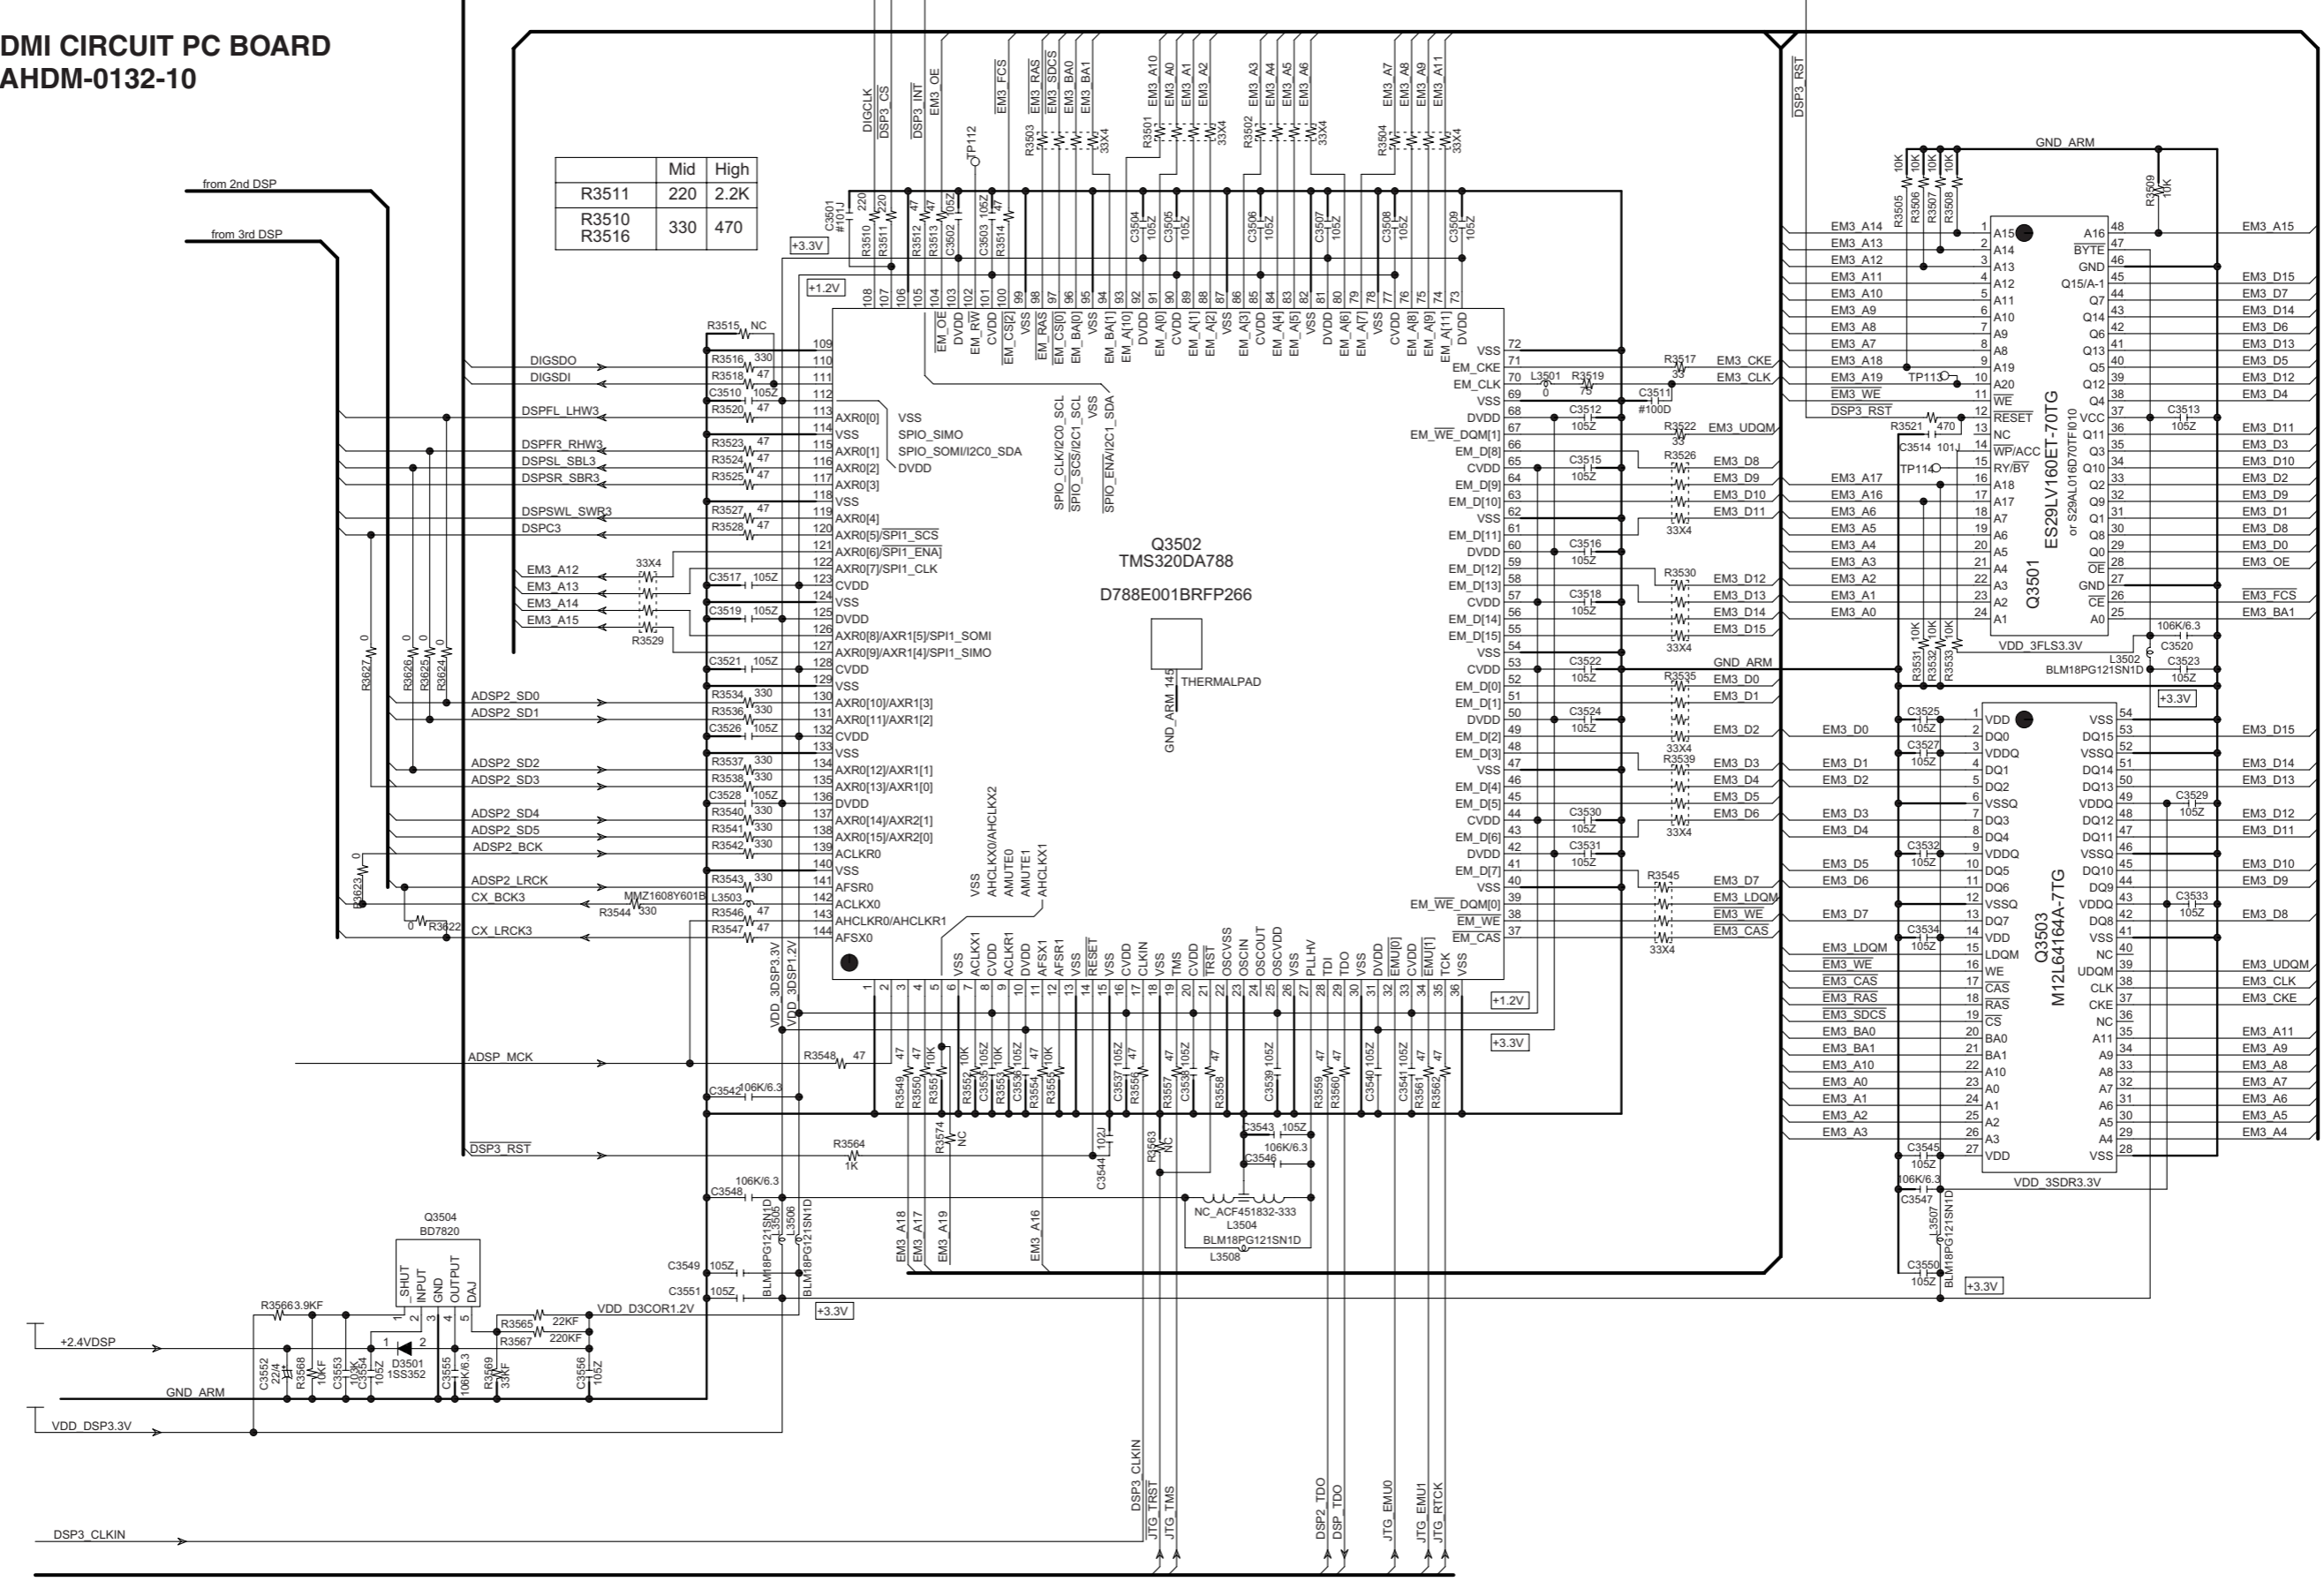

1

2

3


4

5



SCHEMATIC DIAGRAM-18

U014 DISPLAY CIRCUIT PC BOARD BADIS-0110

BADIS-0110

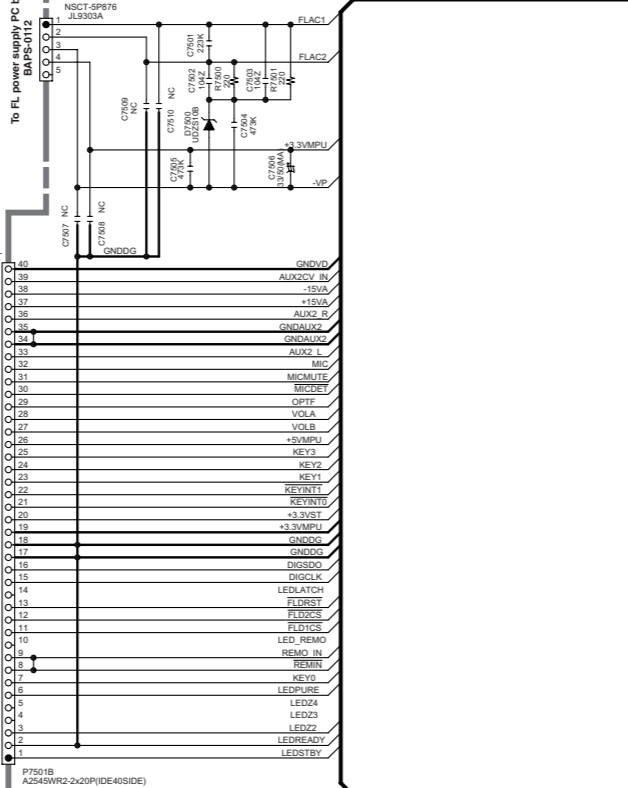


Q7500 HNA-16SL05T Q7500A FL HOLDER

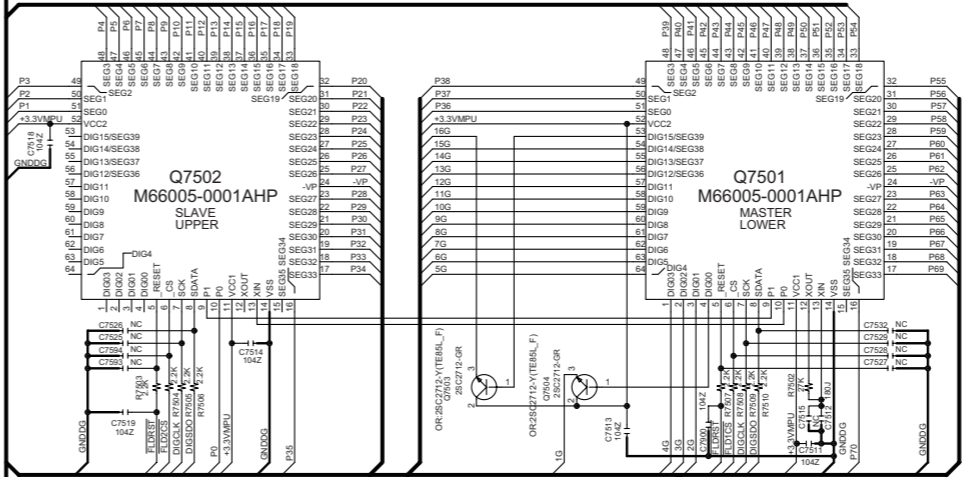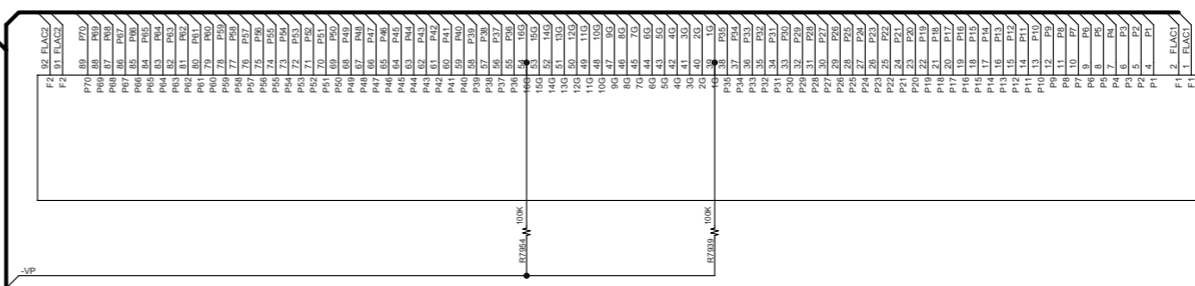


BAETC-0117


U020 Volume illuminate PC board BAETC-0116

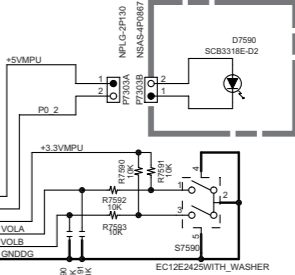



U019 AUX Input terminal PC board BAETC-0115

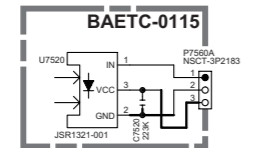


U016 FL Power supply PC board BAPS-0112

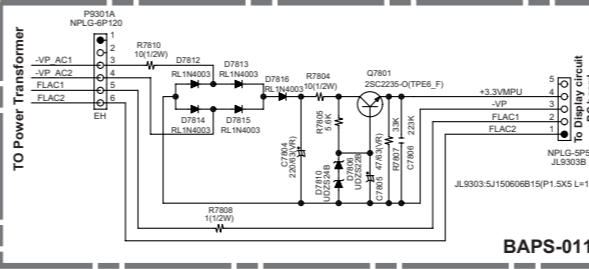

U015 Standby switch PC board BASW-0111

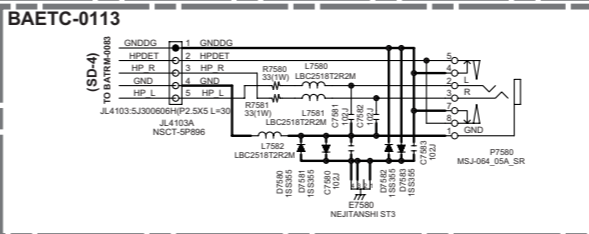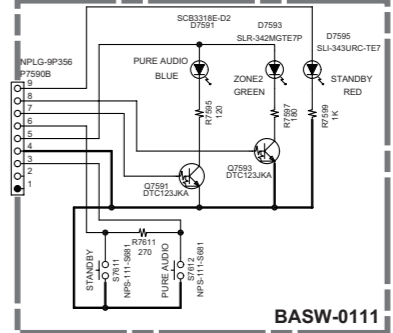

U017 Headphone terminal PC board BAETC-0113

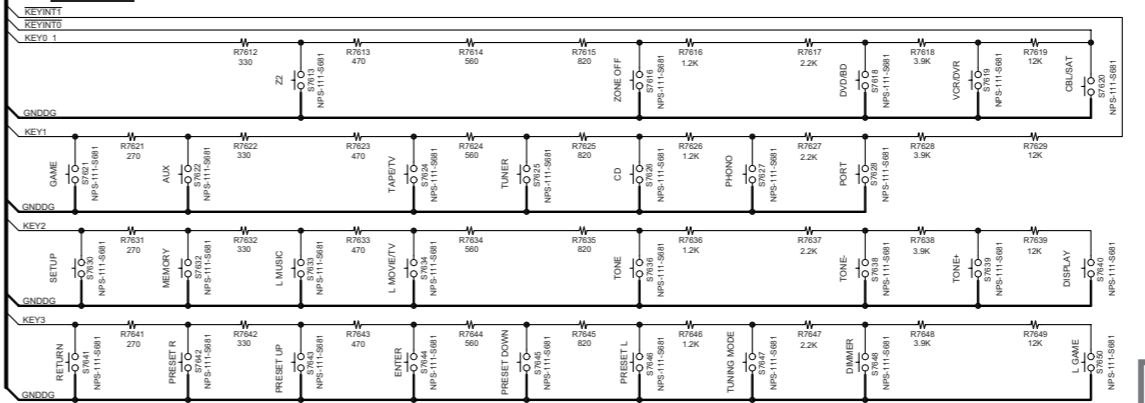


1

2

3

4

5

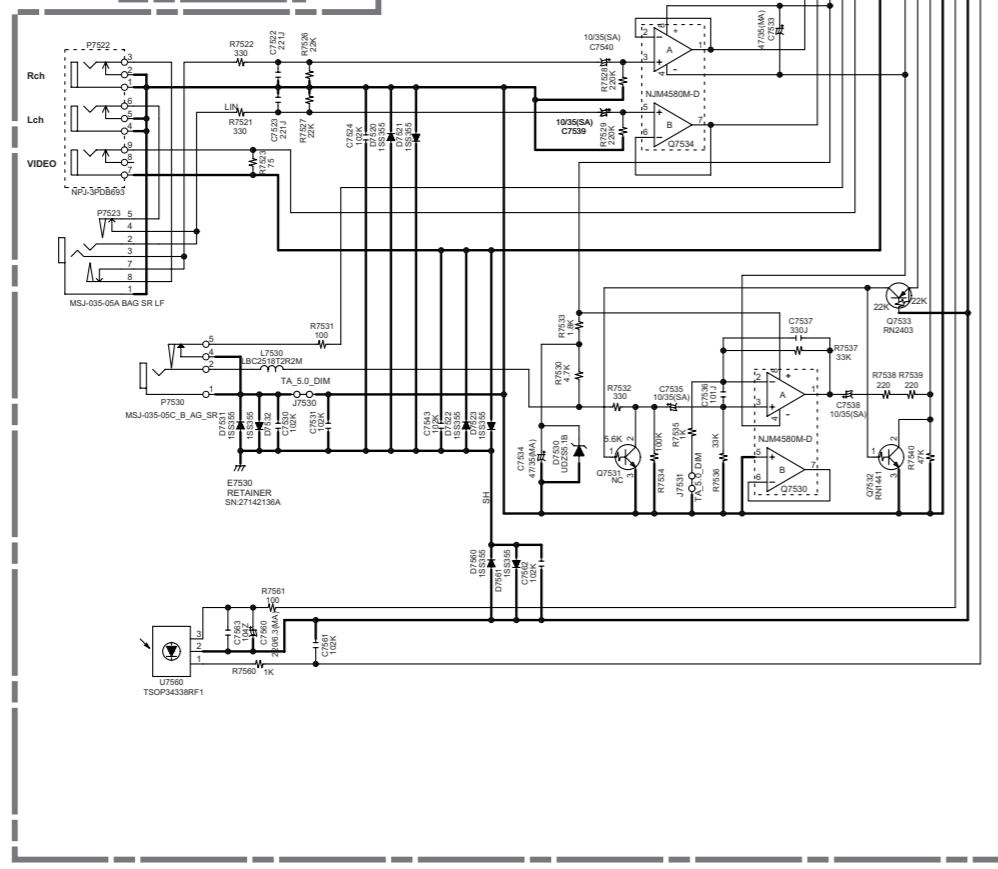


A B C D E

SCHEMATIC DIAGRAM-19



U024 FRONT HDMI TERMINAL PC BOARD
BAHDM-0290

1
2
3
4

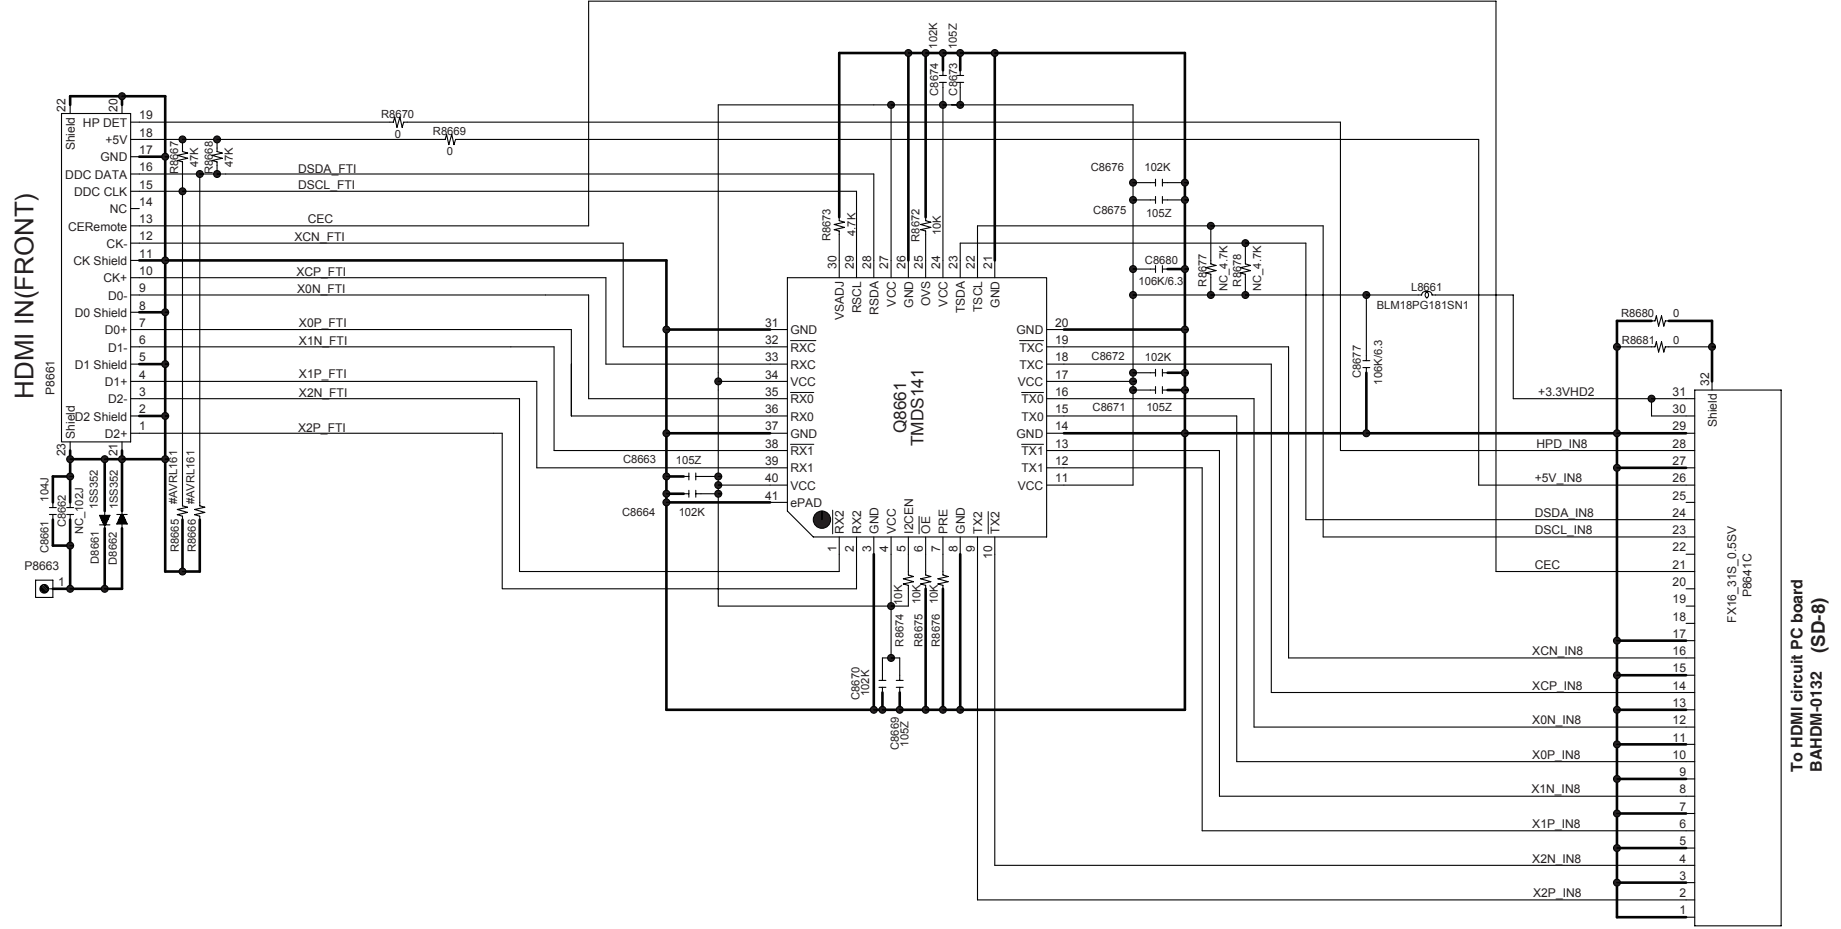

To HDMI circuit PC board
 BAHDM-0132 (SD-8)

PACKING PROCEDURE

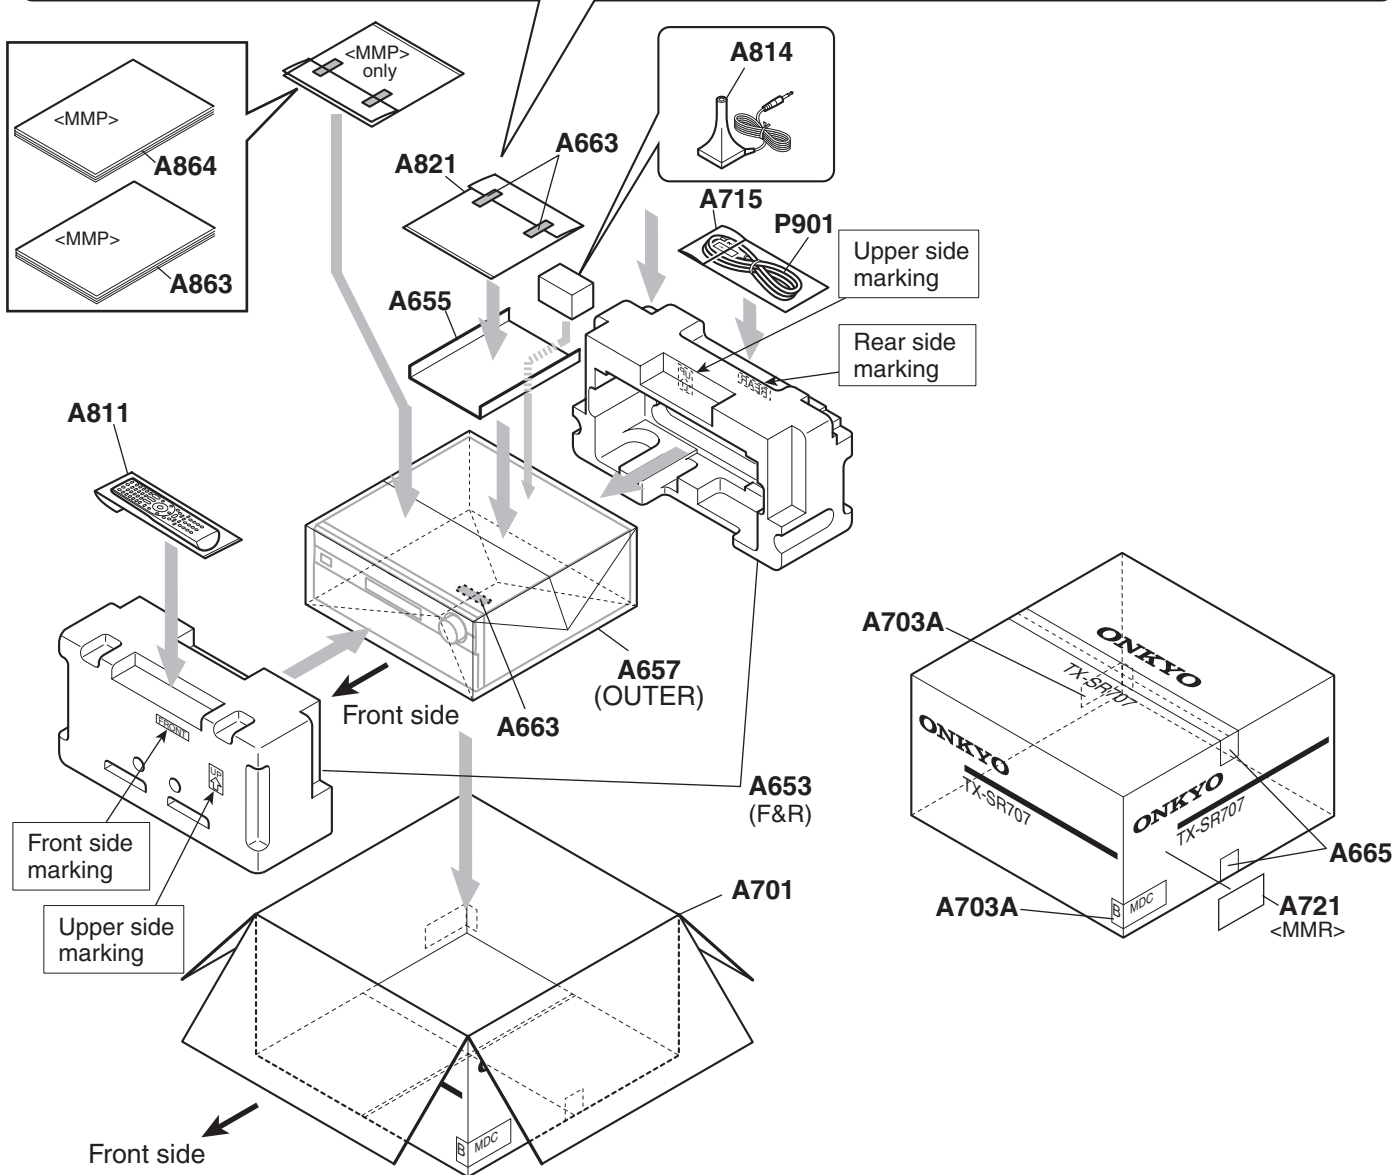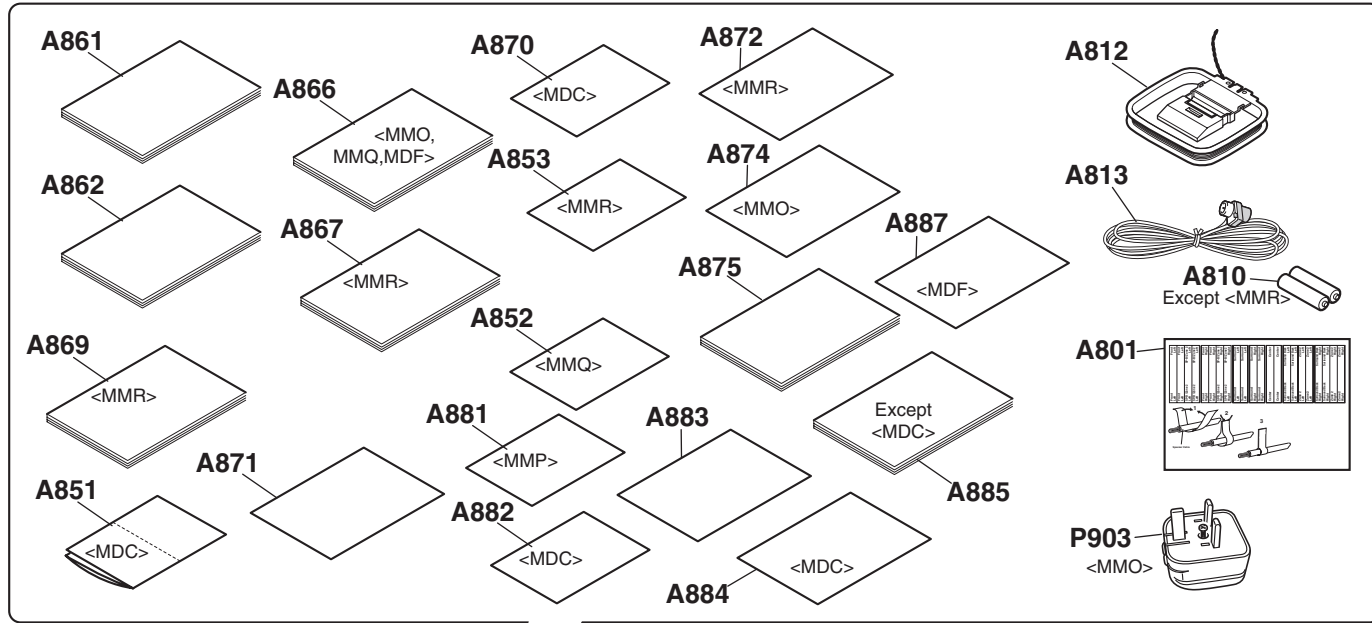

PARTS LIST

TX-SR707

<NOTES>

! : Safety mark

NSP : Not service parts

 : Black color

<S> : Silver color

<G> : Golden color

<MDC> : Canadian model

<MMO> : Saudi Arabia model

<MMP> : European model

<MDF> : Taiwan model

<MMA> : Australian model

<MMR> : China model

<MMQ> : Hongkong model

<MMB> : Britain model

NOTE : THE COMPONENTS IDENTIFIED BY THE MARK
! ARE CRITICAL FOR RISK OF FIRE AND
ELECTRIC SHOCK. REPLACE ONLY WITH PART
NUMBER SPECIFIED.

EXPLODED VIEW PARTS LIST

	REF. NO.	PART NAME	DDESCRIPTION	Q'TY	PART NO.	REMARKS
EXP V	F1 A001	CHASSIS	--	1	27100537A	NSP
EXP V	F1 A003	BOTTOM LEG	TX-SR506	4	27175441A	LEG(ELAST)
EXP V	F1 A011	SCREW	3TTB+10B(3BC)	4	838430108GR	LEG
EXP V	F1 A013	WASHER	W3*8F(3CM)	4	87613008GR	LEG(ELAST)
EXP V	F1 A015	SCREW	4TTC+8C(3BC)	4	830440089GR	TRANS
EXP V	F1 A017	SPACER	--	1	27270439	TRANS
EXP V	F1 A019	CUSHION	T10*30*10EPT	1	28141822	TRANS-BTM
EXP V	F1 A027	HEAT SINK	--	1	27160609A	
EXP V	F3 A031	SCREW	3SMS8W.SW+14B(CU)	14	801634	POWER-TR
EXP V	F1 A033	SCREW	3TTB+8B(3CM)SR	1	801637	THERMISTER
EXP V	F1 A037	RETAINER	(HT-R7)	1	27142114	
EXP V	F1 A039	RETAINER	(HT-L7)	1	27142113	
EXP V	F1 A044	SCREW	3TTB+8B(3CM)SR	2	801637	AMP0072-CLA0087
EXP V	F1 A045	SCREW	3TTB+8B(3CM)SR	4	801637	HSINK-RET(HT)

EXP V	F1	A047	SCREW	3TTB+8B(3CM)SR	2	801637	AMPPCB-RET(HT)
EXP V	F1	A049	SCREW	3TTB+8B(3CM)SR	3	801637	FFC-HOLD_PWB
EXP V	F1	A051	BRACKET	(FAN-S)	1	27131047	
EXP V	F1	A052	CUSHION	T10*10*10EPT	1	28141813	BKT(FAN-S)
EXP V	F1	A053	BUSHING	(FAN-S)	2	28170090	BKT(FAN-S)
EXP V	F1	A054	CUSHION	--	2	28141783	FAN(S)
EXP V	F1	A055	SCREW	3TTB+8B(3CM)SR	2	801637	BRACKET(FAN-S)
EXP V	F1	A057	IB CUSHION	W15*3t TAPE	1	28141585	BLOCK_CAP:0.03:MT::
EXP V	F1	A061	RETAINER	(PC)	1	27142125	AMP_PCB
EXP V	F1	A063	RIVET	P-RIVET NRP-345	2	880009	RETAINER(PC)
EXP V	F1	A065	CUSHION	--	4	28141783	AMP_PCB
EXP V	F1	A067	CUSHION	(PCB)	2	28141789	RETAINER(PC)
EXP V	F1	A071	CLAMP	WS-2NS	1	27300833	HP_CBL
EXP V	F1	A073	HOLDER	KGLS-4S	1	27190009	CHASSIS
EXP V	F1	A075	HOLDER	HOLDER KGLS-8S	5	27190480	CHASSIS
EXP V	F1	A077	HOLDER	KGPS-14RF	8	27190802	CHASSIS
EXP V	F1	A079	HOLDER	KGLS-14S	1	27190164	VIDEO<->HDMI
EXP V	F1	A081	HOLDER	HOLDER KGLS-18S	4	27190470	ASP,VIDEO
EXP V	F1	A085	HOLDER	KGLS-12RT	1	27190266	PS<->CHASSIS
EXP V	F1	A087	HOLDER	KGLS-10RT	1	27190428A	DAC<->CHASSIS
EXP V	F1	A089	HOLDER	KGLS-22RT	1	27190772	DAC<->CPUPCB
EXP V	F1	A101	SCREW	3TTB+8B(3CM)SR	1	801637	PS<->TRM
EXP V	F1	A103	SCREW	3TTB+8B(3CM)SR	8	801637	CHASSIS-RET(HT)
EXP V	F1	A115	TAPE	TAPE(CLOTH-8U)	1	29110082	REAR-P:0.02:MT::
EXP V	F1	A121	LABEL	(PT)	1	29363379-1	707TRANS
EXP V	F1	A171	REAR PANEL	TX-SR707MDC	1	27123997A	N <MDC>
EXP V	F1	A171	REAR PANEL	TX-SR707MMP	1	27123998B	N <MMO>
EXP V	F1	A171	REAR PANEL	TX-SR707MMP	1	27123998B	N <MMP>
EXP V	F1	A171	REAR PANEL	TX-SR707MMP	1	27123998B	N <MMQ>
EXP V	F1	A171	REAR PANEL	TX-SR707MDC	1	27123997A	N <MDF>
EXP V	F1	A171	REAR PANEL	TX-SR707MMP	1	27123998B	N <MMA>
EXP V	F1	A171	REAR PANEL	TX-SR707MMR	1	27123999A	N <G MMR>
EXP V	F1	A173	SCREW	3TTB+8B(3BC)	41	838430088GR	REAR PANEL

EXP V	F1	A175	SCREW	3P+6FN(3BC)	6	82143006GR	HDMI
EXP V	F1	A177	SCREW	3P+6FN(3BC)	2	82143006GR	UNI-PORT
EXP V	F1	A179	SCREW, SIRIUS	3P+6FN(3BC)	1	82143006GR	<MDC><MDF> SIRIUS
EXP V	F1	A181	BUSHING	S-RELIEF #2271	1	27300750	! <MDC><MDF>
EXP V	F1	A183	SCREW	4TTB+10B(3BC)	2	838440108GR	Except <MDC><MDF>
EXP V	F1	A189	WASHER	W3*10F(3BC)	1	87643010GR	PHONO
EXP V	F1	A191	LABEL	(SP1)	1	29390790	
EXP V	F1	A193	LABEL	(SP2)	1	29390791	
EXP V	F2	A201	F BRACKET	(B)	1	27111530C	
EXP V	F2	A201	F BRACKET	(S)	1	27111531C	<S>
EXP V	F2	A201	F BRACKET	(G)	1	27111532C	<G>
EXP V	F2	A211	KNOB	(STNBY)	1	28326663	707
EXP V	F2	A221	KNOB	(CUR)	1	28326664A	
EXP V	F2	A223	KNOB	(SEL)	1	28326665	
EXP V	F2	A251	B PLATE	.(B)	1	28133428	
EXP V	F2	A251	B PLATE	.(S)	1	28133429	<S>
EXP V	F2	A251	B PLATE	.(S)	1	28133429	<G>
EXP V	F2	A255	FACET	(VOL)	1	28200039	N
EXP V	F2	A257	SCREW	3TTB+8B(3CM)SR	1	801637	FACET(VOL)
EXP V	F1	A351	CUSHION	t5*30*5	3	28141562	IDE,HDMI
EXP V	F2	A353	CUSHION	(T3*W35*D10)	1	28141741	IDE
EXP V	F2	A357	IB CUSHION	W15*3t TAPE	1	28141585	FLTUBE:0.04:MT::
EXP V	F2	A365	SCREW	2.6TTB+8B(3BC)	27	838426088GR	707FRONT_PWB
EXP V	F2	A375	SCREW	3TTB+8B(3BC)	3	838430088GR	FPANEL-CHASSIS
EXP V	F2	A379	SCREW	3TTB+8B(3CM)SR	5	801637	FBRA<->CHASSIS
EXP V	F1	A387	SCREW	3TTB+8B(3CM)SR	1	801637	HPPCB-CHASSIS
EXP V	F1	A389	SCREW	3TTB+8B(3CM)SR	1	801637	HDMI_ETH<->CHASSIS
EXP V	F1	A395	HOLDER	KGPS-6RF	1	27191112	DISPWB(OPT)
EXP V	F2	A399	HOLDER	KGLS-4S	3	27190009	707/40.1FRONT_PWB
EXP V	F2	A401	F PANEL	707(B)DC	1	27213243A	N <B MDC>
EXP V	F2	A401	F PANEL	707(B)PP	1	27213245A	N <B MMO>
EXP V	F2	A401	F PANEL	707(B)PP	1	27213245A	N <B MMP>
EXP V	F2	A401	F PANEL	707(B)PP	1	27213245A	N <B MMQ>

EXP V	F2 A401	F PANEL	707(B)DC	1	27213243A	N <B MDF>
EXP V	F2 A401	F PANEL	707(B)PP	1	27213245A	N <B MMA>
EXP V	F2 A401	F PANEL	707(S)PP	1	27213246A	N <S MMP>
EXP V	F2 A401	F PANEL	707(S)PP	1	27213246A	N <S MMA>
EXP V	F2 A401	F PANEL	707(S)PP	1	27213246A	N <S MMO>
EXP V	F2 A401	F PANEL	707(G)MR	1	27213249A	N <G MMR>
EXP V	F2 A409	BADGE	BADGE	1	28135244	
EXP V	F2 A409	BADGE	BADGE	1	28135298	<S>
EXP V	F2 A409	BADGE	BADGE	1	28135245	<G>
EXP V	F2 A414	CLEAR PLT	(AS)707D	1	28192261A	N <MDC><MDF>
EXP V	F2 A414	CLEAR PLT	(AS)707P	1	28192262A	N Except <MDC><MDF>
EXP V	F2 A451	KNOB	(VOL)AS(B)	1	28326690	N
EXP V	F2 A451	KNOB	(VOL)AS(S)	1	28326691	<S>
EXP V	F2 A451	KNOB	(VOL)AS(G)	1	28326692	N <G>
EXP V	F2 A452	CUSHION	--	1	28141824	
EXP V	F1 A501	CUSHION	--	2	28141799	REAR PANEL
EXP V	F1 A601	COVER	(B)	1	28184972Z	 Not bent
EXP V	F1 A601	COVER	(B)		28184972	 Bent
EXP V	F1 A601	COVER	(S)		28184973	<S> Bent
EXP V	F1 A601	COVER	(G)		28184974	<G> Bent
EXP V	F1 A605	LABEL	HOOKUP-ONKYO	1	29363194	<MDC> COVER
EXP V	F1 A607	LABEL	(COVER)	1	29364123	 COVER(B)
EXP V	F1 A607	LABEL	(CAUTION)	1	29363797	<S> COVER(S)
EXP V	F1 A607	LABEL	(CAUTION)	1	29363798	<G> COVER(G)
EXP V	F1 A611	SCREW	3TTB+8B(3BC)	6	838430088GR	 COVER(B)
EXP V	F1 A611	SCREW	3TTB+8B(3CM)SR	6	801637	<S> COVER(S)/(G)
EXP V	F1 A611	SCREW	3TTB+8B(3CM)SR	6	801637	<G> COVER(S)/(G)
EXP V	F1 A895	CAP	(AUX)(B)	1	28330188A	N <B MMP> Aux input CAP
EXP V	F1 A895	CAP	(AUX)(S)	1	28330189A	N <S MMP> Aux input CAP
EXP V	F1 F4000	FUSE	4A-UL/T-233	1	252325GR	!
EXP V	F1 F4000 or	FUSE	4A-T/UL-ST2	(1)	252257GR	!
EXP V	F1 F4001	FUSE	4A-UL/T-233	1	252325GR	!
EXP V	F1 F4001 or	FUSE	4A-T/UL-ST2	(1)	252257GR	!

EXP V	F1	F6901	FUSE	15A-TUL-250V	1	252303GR	!
EXP V	F1	F6902	FUSE	15A-TUL-250V	1	252303GR	!
EXP V	F1	F901	FUSE	10A-UL/T-233	1	252330GR	! <MDC><MDF>
EXP V	F1	F901 or	FUSE	10A-T/UL-ST2	(1)	252333GR	! <MDC><MDF>
EXP V	F1	F901	FUSE	5A-SE-EAK FUSE	1	252078GR	! <MMP><MMO><MMQ> <MMA><MMR>
EXP V	F1	F901 or	FUSE	5A-SE-TL250V	(1)	252278GR	! <MMP><MMO><MMQ> <MMA><MMR>
EXP V	F1	F901A	LABEL	T5AL250V	1	29361938	<MMO><MMP> <MMA><MMR>
EXP V	F1	P103	FFC	NCFC7-111012	1	2047111012	
EXP V	F1	P4104	FFC	NCFC7-191012	1	2047191012	
EXP V	F1	P500	WIRE TIE	BSK-1	15	260208	
EXP V	F1	P6600A	P RIVET	JB-407A-C	22	880052	Except <MDC><MDF>
EXP V	F1	P691	FAN	D05X-12TL	1	24502317	
EXP V	F2	P7501	SOCKET AS	NSAS-80P1804	1	2009991167UL	N
EXP V	F1	P8641	FFC	NCFC7-31007	1	204D31007	FRONT HDMI
EXP V	F1	P901	AC CORD	AS-UC-2	1	253368BLTK	! <MDC>
EXP V	F1	P901 or	AC CORD	AS-UC-2	(1)	253368AYUN	! <MDC>
EXP V	F1	P901	AC CORD	AS-CNS	1	253429VOL	! <MDF>
EXP V			<Note>				
EXP V			Must use the same HFE rank mutually about the following parts.				
EXP V			Ref. No. : Q6050 - 6056, Q6060 - 6066				
EXP V	F3	Q6050	TR	2SC5242-O	1	2202843	!
EXP V	F3	Q6050 or	TR	2SC5242-R	(1)	2202842	!
EXP V	F3	Q6050A	ISO SHEET	AC238	2	223024	!
EXP V	F3	Q6050B	ISO SHEET	ISO SHEET	6	223041	!
EXP V	F3	Q6051	TR	2SC5242-O	1	2202843	!
EXP V	F3	Q6051 or	TR	2SC5242-R	(1)	2202842	!
EXP V	F3	Q6052	TR	2SC5242-O	1	2202843	!
EXP V	F3	Q6052 or	TR	2SC5242-R	(1)	2202842	!
EXP V	F3	Q6053	TR	2SC5242-O	1	2202843	!
EXP V	F3	Q6053 or	TR	2SC5242-R	(1)	2202842	!
EXP V	F3	Q6054	TR	2SC5242-O	1	2202843	!
EXP V	F3	Q6054 or	TR	2SC5242-R	(1)	2202842	!
EXP V	F3	Q6055	TR	2SC5242-O	1	2202843	!

EXP V	F3	Q6055 or	TR	2SC5242-R	(1)	2202842	!
EXP V	F3	Q6056	TR	2SC5242-O	1	2202843	!
EXP V	F3	Q6056 or	TR	2SC5242-R	(1)	2202842	!
EXP V	F3	Q6060	TR	2SA1962-O	1	2202833	!
EXP V	F3	Q6060 or	TR	2SA1962-R	(1)	2202832	!
EXP V	F3	Q6061	TR	2SA1962-O	1	2202833	!
EXP V	F3	Q6061 or	TR	2SA1962-R	(1)	2202832	!
EXP V	F3	Q6062	TR	2SA1962-O	1	2202833	!
EXP V	F3	Q6062 or	TR	2SA1962-R	(1)	2202832	!
EXP V	F3	Q6063	TR	2SA1962-O	1	2202833	!
EXP V	F3	Q6063 or	TR	2SA1962-R	(1)	2202832	!
EXP V	F3	Q6064	TR	2SA1962-O	1	2202833	!
EXP V	F3	Q6064 or	TR	2SA1962-R	(1)	2202832	!
EXP V	F3	Q6065	TR	2SA1962-O	1	2202833	!
EXP V	F3	Q6065 or	TR	2SA1962-R	(1)	2202832	!
EXP V	F3	Q6066	TR	2SA1962-O	1	2202833	!
EXP V	F3	Q6066 or	TR	2SA1962-R	(1)	2202832	!
EXP V	F1	T901	P TRANS	NPT-1570D	1	2301931	! <MDC><MDF>
EXP V	F1	T901	P TRANS	NPT-1570M	1	2301932	! Except <MDC><MDF>
EXP V	F1	U001	Amplifire circuit PC board a'ssy	BAAMP-0072-1A	1	1B234572-1A	N <MDC>
EXP V	F1	U001	Amplifire circuit PC board a'ssy	BAAMP-0072-1B	1	1B234572-1B	N <MMO>
EXP V	F1	U001	Amplifire circuit PC board a'ssy	BAAMP-0072-1B	1	1B234572-1B	N <MMQ>
EXP V	F1	U001	Amplifire circuit PC board a'ssy	BAAMP-0072-1A	1	1B234572-1A	N <MDF>
EXP V	F1	U001	Amplifire circuit PC board a'ssy	BAAMP-0072-1B	1	1B234572-1B	N <MMP>
EXP V	F1	U001	Amplifire circuit PC board a'ssy	BAAMP-0072-1B	1	1B234572-1B	N <MMA>
EXP V	F1	U001	Amplifire circuit PC board a'ssy	BAAMP-0072-1B	1	1B234572-1B	N <MMR>
EXP V	F1	U002	Audio in/out circuit PC board a'ssy	BAASP-0073-1A	1	1B234573-1A	N <MDC>
EXP V	F1	U002	Audio in/out circuit PC board a'ssy	BAASP-0073-1B	1	1B234573-1B	N <MMO>
EXP V	F1	U002	Audio in/out circuit PC board a'ssy	BAASP-0073-1B	1	1B234573-1B	N <MMP>
EXP V	F1	U002	Audio in/out circuit PC board a'ssy	BAASP-0073-1B	1	1B234573-1B	N <MMQ>
EXP V	F1	U002	Audio in/out circuit PC board a'ssy	BAASP-0073-1A	1	1B234573-1A	N <MDF>
EXP V	F1	U002	Audio in/out circuit PC board a'ssy	BAASP-0073-1B	1	1B234573-1B	N <MMA>
EXP V	F1	U002	Audio in/out circuit PC board a'ssy	BAASP-0073-1B	1	1B234573-1B	N <MMR>

EXP V	F1 U003	Thermister PC board a'ssy	BAETC-0074-1A	1	1B234574-1A	N <MDC>
EXP V	F1 U003	Thermister PC board a'ssy	BAETC-0074-1B	1	1B234574-1B	N <MMO>
EXP V	F1 U003	Thermister PC board a'ssy	BAETC-0074-1B	1	1B234574-1B	N <MMP>
EXP V	F1 U003	Thermister PC board a'ssy	BAETC-0074-1B	1	1B234574-1B	N <MMQ>
EXP V	F1 U003	Thermister PC board a'ssy	BAETC-0074-1A	1	1B234574-1A	N <MDF>
EXP V	F1 U003	Thermister PC board a'ssy	BAETC-0074-1B	1	1B234574-1B	N <MMA>
EXP V	F1 U003	Thermister PC board a'ssy	BAETC-0074-1B	1	1B234574-1B	N <MMR>
EXP V	F1 U004	AC Inlet terminal PC board a'ssy	BAETC-0089-1B	1	1B234589-1B	N <MMO>
EXP V	F1 U004	AC Inlet terminal PC board a'ssy	BAETC-0089-1B	1	1B234589-1B	N <MMP>
EXP V	F1 U004	AC Inlet terminal PC board a'ssy	BAETC-0089-1B	1	1B234589-1B	N <MMQ>
EXP V	F1 U004	AC Inlet terminal PC board a'ssy	BAETC-0089-1B	1	1B234589-1B	N <MMA>
EXP V	F1 U004	AC Inlet terminal PC board a'ssy	BAETC-0089-1B	1	1B234589-1B	N <MMR>
EXP V	F1 U005	Speaker terminal-1 PC board a'ssy	BATRM-0083-1A	1	1B234583-1A	N <MDC>
EXP V	F1 U005	Speaker terminal-1 PC board a'ssy	BATRM-0083-1B	1	1B234583-1B	N <MMO>
EXP V	F1 U005	Speaker terminal-1 PC board a'ssy	BATRM-0083-1B	1	1B234583-1B	N <MMP>
EXP V	F1 U005	Speaker terminal-1 PC board a'ssy	BATRM-0083-1B	1	1B234583-1B	N <MMQ>
EXP V	F1 U005	Speaker terminal-1 PC board a'ssy	BATRM-0083-1A	1	1B234583-1A	N <MDF>
EXP V	F1 U005	Speaker terminal-1 PC board a'ssy	BATRM-0083-1B	1	1B234583-1B	N <MMA>
EXP V	F1 U005	Speaker terminal-1 PC board a'ssy	BATRM-0083-1B	1	1B234583-1B	N <MMR>
EXP V	F1 U006	Primary power supply PC board a'ssy	BAPS-0084-1A	1	1B234584-1A	N <MDC>
EXP V	F1 U006	Primary power supply PC board a'ssy	BAPS-0084-1B	1	1B234584-1B	N <MMO>
EXP V	F1 U006	Primary power supply PC board a'ssy	BAPS-0084-1B	1	1B234584-1B	N <MMP>
EXP V	F1 U006	Primary power supply PC board a'ssy	BAPS-0084-1B	1	1B234584-1B	N <MMQ>
EXP V	F1 U006	Primary power supply PC board a'ssy	BAPS-0084-1B	1	1B234584-1B	N <MMA>
EXP V	F1 U006	Primary power supply PC board a'ssy	BAPS-0084-1A	1	1B234584-1A	N <MDF>
EXP V	F1 U006	Primary power supply PC board a'ssy	BAPS-0084-1B	1	1B234584-1B	N <MMR>
EXP V	F1 U007	Speaker terminal-2 PC board a'ssy	BATRM-0085-1A	1	1B234585-1A	N <MDC>
EXP V	F1 U007	Speaker terminal-2 PC board a'ssy	BATRM-0085-1B	1	1B234585-1B	N <MMO>
EXP V	F1 U007	Speaker terminal-2 PC board a'ssy	BATRM-0085-1B	1	1B234585-1B	N <MMP>
EXP V	F1 U007	Speaker terminal-2 PC board a'ssy	BATRM-0085-1B	1	1B234585-1B	N <MMQ>
EXP V	F1 U007	Speaker terminal-2 PC board a'ssy	BATRM-0085-1B	1	1B234585-1B	N <MMA>
EXP V	F1 U007	Speaker terminal-2 PC board a'ssy	BATRM-0085-1A	1	1B234585-1A	N <MDF>
EXP V	F1 U007	Speaker terminal-2 PC board a'ssy	BATRM-0085-1B	1	1B234585-1B	N <MMR>

EXP V	F1 U008	Center speaker terminal PC board a'ssy	BATRM-0086-1A	1	1B234586-1A	N <MDC>
EXP V	F1 U008	Center speaker terminal PC board a'ssy	BATRM-0086-1B	1	1B234586-1B	N <MMO>
EXP V	F1 U008	Center speaker terminal PC board a'ssy	BATRM-0086-1B	1	1B234586-1B	N <MMP>
EXP V	F1 U008	Center speaker terminal PC board a'ssy	BATRM-0086-1B	1	1B234586-1B	N <MMQ>
EXP V	F1 U008	Center speaker terminal PC board a'ssy	BATRM-0086-1B	1	1B234586-1B	N <MMA>
EXP V	F1 U008	Center speaker terminal PC board a'ssy	BATRM-0086-1A	1	1B234586-1A	N <MDF>
EXP V	F1 U008	Center speaker terminal PC board a'ssy	BATRM-0086-1B	1	1B234586-1B	N <MMR>
EXP V	F1 U009	Power amp. Input circuit PC board a'ssy	BACLA-0087-1A	1	1B234587-1A	N <MDC>
EXP V	F1 U009	Power amp. Input circuit PC board a'ssy	BACLA-0087-1B	1	1B234587-1B	N <MMO>
EXP V	F1 U009	Power amp. Input circuit PC board a'ssy	BACLA-0087-1B	1	1B234587-1B	N <MMP>
EXP V	F1 U009	Power amp. Input circuit PC board a'ssy	BACLA-0087-1B	1	1B234587-1B	N <MMQ>
EXP V	F1 U009	Power amp. Input circuit PC board a'ssy	BACLA-0087-1B	1	1B234587-1B	N <MMA>
EXP V	F1 U009	Power amp. Input circuit PC board a'ssy	BACLA-0087-1A	1	1B234587-1A	N <MDF>
EXP V	F1 U009	Power amp. Input circuit PC board a'ssy	BACLA-0087-1B	1	1B234587-1B	N <MMR>
EXP V	F1 U010	Digital input circuit PC board a'ssy	BADG-0099-1A	1	1B234599-1A	N <MDC>
EXP V	F1 U010	Digital input circuit PC board a'ssy	BADG-0099-1B	1	1B234599-1B	N <MMO>
EXP V	F1 U010	Digital input circuit PC board a'ssy	BADG-0099-1B	1	1B234599-1B	N <MMP>
EXP V	F1 U010	Digital input circuit PC board a'ssy	BADG-0099-1B	1	1B234599-1B	N <MMQ>
EXP V	F1 U010	Digital input circuit PC board a'ssy	BADG-0099-1A	1	1B234599-1A	N <MDF>
EXP V	F1 U010	Digital input circuit PC board a'ssy	BADG-0099-1B	1	1B234599-1B	N <MMA>
EXP V	F1 U010	Digital input circuit PC board a'ssy	BADG-0099-1B	1	1B234599-1B	N <MMR>
EXP V	F1 U011	RI terminal PC board a'ssy	BACPU-0100-1A	1	1B234500-1A	N <MDC>
EXP V	F1 U011	RI terminal PC board a'ssy	BACPU-0100-1B	1	1B234500-1B	N <MMO>
EXP V	F1 U011	RI terminal PC board a'ssy	BACPU-0100-1B	1	1B234500-1B	N <MMP>
EXP V	F1 U011	RI terminal PC board a'ssy	BACPU-0100-1B	1	1B234500-1B	N <MMQ>
EXP V	F1 U011	RI terminal PC board a'ssy	BACPU-0100-1A	1	1B234500-1A	N <MDF>
EXP V	F1 U011	RI terminal PC board a'ssy	BACPU-0100-1B	1	1B234500-1B	N <MMA>
EXP V	F1 U011	RI terminal PC board a'ssy	BACPU-0100-1B	1	1B234500-1B	N <MMR>
EXP V	F1 U012	Video circuit PC board a'ssy	BAVD-0101-1A	1	1B234501-1A	N <MDC>
EXP V	F1 U012	Video circuit PC board a'ssy	BAVD-0101-1B	1	1B234501-1B	N <MMO>
EXP V	F1 U012	Video circuit PC board a'ssy	BAVD-0101-1B	1	1B234501-1B	N <MMP>
EXP V	F1 U012	Video circuit PC board a'ssy	BAVD-0101-1B	1	1B234501-1B	N <MMQ>
EXP V	F1 U012	Video circuit PC board a'ssy	BAVD-0101-1A	1	1B234501-1A	N <MDF>

EXP V	F1	U012	Video circuit PC board a'ssy	BAVD-0101-1B	1	1B234501-1B	N <MMA>
EXP V	F1	U012	Video circuit PC board a'ssy	BAVD-0101-1B	1	1B234501-1B	N <MMR>
EXP V	F1	U013	Universal port terminal PC board a'ssy	BAETC-0103-1A	1	1B234503-1A	N <MDC>
EXP V	F1	U013	Universal port terminal PC board a'ssy	BAETC-0103-1B	1	1B234503-1B	N <MMO>
EXP V	F1	U013	Universal port terminal PC board a'ssy	BAETC-0103-1B	1	1B234503-1B	N <MMP>
EXP V	F1	U013	Universal port terminal PC board a'ssy	BAETC-0103-1B	1	1B234503-1B	N <MMQ>
EXP V	F1	U013	Universal port terminal PC board a'ssy	BAETC-0103-1A	1	1B234503-1A	N <MDF>
EXP V	F1	U013	Universal port terminal PC board a'ssy	BAETC-0103-1B	1	1B234503-1B	N <MMA>
EXP V	F1	U013	Universal port terminal PC board a'ssy	BAETC-0103-1B	1	1B234503-1B	N <MMR>
EXP V	F2	U014	Display circuit PC board a'ssy	BADIS-0110-1A	1	1B234510-1A	N All Destinations
EXP V	F2	U015	Standby switch PC board a'ssy	BASW-0111-1A	1	1B234511-1A	N All Destinations
EXP V	F2	U016	FL power supply PC board a'ssy	BAPS-0112-1A	1	1B234512-1A	N All Destinations
EXP V	F1	U017	Headphone terminal PC board a'ssy	BAETC-0113-1A	1	1B234513-1A	N All Destinations
EXP V	F1	U018	FFC Support PC board	BAETC-0114-1A	1	1B234514-1A	N All Destinations
EXP V	F2	U019	AUX input terminal PC board a'ssy	BAETC-0115-1A	1	1B234515-1A	N All Destinations
EXP V	F2	U020	Volume illuminate PC board a'ssy	BAETC-0116-1A	1	1B234516-1A	N All Destinations
EXP V	F1	U021	Support-1 PC board	BAETC-0117-1A	1	1B234517-1A	N All Destinations
EXP V	F2	U022	Support-2 PC board	BAETC-0118-1A	1	1B234518-1A	N All Destinations
EXP V	F1	U023	HDMI circuit PC board a'ssy	BAHDM-0132-1A	1	1B234532-1A	N All Destinations
EXP V	F2	U024	Front HDMI terminal PC board a'ssy	BAHDM-0290-1A	1	1B234590-1A	N All Destinations
EXP V	F1	U030	TUNER UNIT	FAEH06-A01US	1	240166	<MDC><MDF>
EXP V	F1	U030	TUNER UNIT	FAEH06-E01EX	1	240165	Except <MDC>

PACKING VIEW PARTS LIST

TX-SR707

	REF. NO.	PART NAME	DRESCRIPTION	Q'TY	PART NO.	REMARKS
PKG	A653	PAD	ASTXSR707	1	29092462A	707/40.1
PKG	A655	SHEET	(PAD)	1	29096065A	707/40.1
PKG	A657	SHEET	1300*650	1	29095966	
PKG	A663	TAPE	(SEROHAN)NITTO NO.29	1	29110149	:0.3:MT::
PKG	A665	PP TAPE	W50 SBT-70	1	29110200	:1.6:MT::
PKG	A701	CARTON	TXSR707DC	1	29055003	N <MDC><MDF>
PKG	A701	CARTON	TXSR707MP	1	29055004	N Except <MDC><MDF>

PKG	A704A	UPC LABEL	TXSR707BMDC	{ 1 }	29390772	N <BMDC>
PKG	A704A	EAN LABEL	TXSR707BMMO	{ 1 }	29390778A	N <B MMO>
PKG	A704A	EAN LABEL	TXSR707BMMP	{ 1 }	29390774A	N <B MMP>
PKG	A704A	EAN LABEL	TXSR707BMMQ	{ 1 }	29390781	N <B MMQ>
PKG	A704A	EAN LABEL	TXSR707BMDF	{ 1 }	29390780	N <B MDF>
PKG	A704A	EAN LABEL	TXSR707BMMA	{ 1 }	29390776A	N <B MMA>
PKG	A704A	EAN LABEL	TXSR707SMMP	{ 1 }	29390775A	N <S MMP>
PKG	A704A	EAN LABEL	TXSR707SMMA	{ 1 }	29390777A	N <S MMA>
PKG	A704A	EAN LABEL	TXSR707SMMO	{ 1 }	29390779A	N <S MMO>
PKG	A704A	EAN LABEL	TXSR707GMMR	{ 1 }	29390782	N <G MMR>
PKG	A715	POLY BAG	w250xd350	1	29100250A	<MDC<MDF> AC CODE
PKG	A801	LABEL	(SPCABLE)2009	1	29390881	
PKG	A810	BATTERY	R6/AA(UM-3)	2	3010194	Except <MMR>
PKG	A810 or	BATTERY	R6/AA(UM-3)	(2)	3010054	
PKG	A811	REMO CON	RC-742M	1	24140742	N
PKG	A812	ANT COIL	NMA-3057	1	232140	
PKG	A813	FM ANT AS	Type W	1	292191	
PKG	A814	MIC	MIC-7000	1	245044	
PKG	A821	POLY BAG	D250xd300xW300(t0.04)	1	29100256A	Manual,ACC
PKG	A851	WRNTY CARD	(ONKYO)	1	29365135	<MDC>
PKG	A852	WRNTY CARD	MGQ	1	29365099A	<MMQ>
PKG	A853	WRNTY CARD	(ONKYO-CH)	1	29365098B	<MMR>
PKG	A854	LABEL	(APV)	1	29390190	<MMR>
PKG	A861	INS MANUAL	En(TX-SR707)	1	29400008	N
PKG	A862	INS MANUAL	U2FrEs(TX-SR707)	1	29400009	N <MDC>
PKG	A862	INS MANUAL	U2FrEs(TX-SR707)	1	29400009	N <MMP>
PKG	A863	INS MANUAL	U2ItDe(TX-SR707)	1	29400010	N <MMP>
PKG	A864	INS MANUAL	U2NISv(TX-SR707)	1	29400011	N <MMP>
PKG	A866	INS MANUAL	Ct(TX-SR707)	1	29400013	N <MMO><MMQ><MDF>
PKG	A867	INS MANUAL	Cs(TX-SR707)	1	29400014	N <MMR>
PKG	A869	INS MANUAL	Ar(TX-SR707)	1	29400016	N <MMO>
PKG	A870	INS MANUAL	U3EnFrEs(SIRIUS)	1	29400017	N <MDC>
PKG	A871	INS MANUAL	En(QSS)(TX-SR707)	1	29400018	N

PKG	A872	INS MANUAL	Cs(QSS)(TX-SR707)	1	29400019	N <MMR>
PKG	A874	INS MANUAL	(QC ImportantSheet)	1	29344267A	<MMO>
PKG	A875	INS MANUAL	U9(RC736/737/738/739)	1	29344962	
PKG	A881	INST SHEET	WEEE	1	29355537A	<MMP>
PKG	A882	HANDBILL	(SIRIUS)	1	29380149	<MDC>
PKG	A883	INST SHEET	En(2009E_RIHD)	1	29355745	
PKG	A884	INST SHEET	U2FrEs(2009E_RIHD)	1	29355746	<MDC>
PKG	A885	INST SHEET	U8(2009E_RIHD)	1	29355747	Except <MDC>
PKG	A887	INST SHEET	Ct(CHUISI_MDF)	1	29355749	<MDF>
PKG	A890	HANDBILL	(UP-A1)US	1	29380155	<MDC>
PKG	A890	HANDBILL	(UP-A1)EU	1	29380156	<MMP>
PKG	P903	CV PLUG	SCP-13A-BLK(UK)	1	25056591	! <MMO>
PKG	P901	AC CORD	AS-CEE-3	1	253298VOL	! <MMO>
PKG	P901	AC CORD	AS-CEE-3	1	253298VOL	! <MMP>
PKG	P901	AC CORD	AS-BS	1	253425YUN	! <MMQ>
PKG	P901	AC CORD	AS-SAA	1	253391VOL	! <MMA>
PKG	P901	AC CORD	AS-CCC	1	253358VOL	! <MMR>

PRINTED CIRCUIT BOARD PARTS LIST

TX-SR707

U001	Amplifire circuit PC board	BAAMP-0072-1A/1B
U002	Audio in/out circuit PC board	BAASP-0073-1A/1B
U003	Thermister PC board	BAETC-0074-1A/1B
U004	AC Inlet terminal PC board	BAETC-0089-1B

PCB	NO.	PART NAME	DESCRIPTION	Q'TY	PART NO.	REMARKS
AMP0072	C4604	C-CERA C	CC725CH1H-101J1	1	342101014R1	
AMP0072	C4605	C-CERA C	CK725F1E-104Z1	1	332161040R1	
AMP0072	C5503	UPZ C	2AUPZTF221JE	1	376332214T	
AMP0072	C5504	UPZ C	2AUPZTF221JE	1	376332214T	
AMP0072	C5505	C-CERA C	CC725CH1H-221J1	1	342102214R1	
AMP0072	C5506	C-CERA C	CC725CH1H-221J1	1	342102214R1	

AMP0072	C5507	C-CERA C	CC725CH1H-221J1	1	342102214R1	
AMP0072	C5508	C-CERA C	CC725CH1H-221J1	1	342102214R1	
AMP0072	C5509	C-CERA C	CC725CH1H-221J1	1	342102214R1	V3
AMP0072	C5510	C-CERA C	CC725CH1H-221J1	1	342102214R1	V3
AMP0072	C5511	C-CERA C	CC725CH1H-221J1	1	342102214R1	V2OUT
AMP0072	C5512	C-CERA C	CC725CH1H-221J1	1	342102214R1	V2OUT
AMP0072	C5513	C-CERA C	CC725CH1H-221J1	1	342102214R1	
AMP0072	C5514	C-CERA C	CC725CH1H-221J1	1	342102214R1	
AMP0072	C5515	C-CERA C	CC725CH1H-221J1	1	342102214R1	
AMP0072	C5516	C-CERA C	CC725CH1H-221J1	1	342102214R1	
AMP0072	C5519	UPZ C	2AUPZTF221JE	1	376332214T	
AMP0072	C5520	UPZ C	2AUPZTF221JE	1	376332214T	
AMP0072	C5527	C-CERA C	CC725CH1H-221J1	1	342102214R1	
AMP0072	C5528	C-CERA C	CC725CH1H-221J1	1	342102214R1	
AMP0072	C5529	C-CERA C	CC725CH1H-221J1	1	342102214R1	
AMP0072	C5530	C-CERA C	CC725CH1H-221J1	1	342102214R1	
AMP0072	C5531	C-CERA C	CC725CH1H-221J1	1	342102214R1	
AMP0072	C5532	C-CERA C	CC725CH1H-221J1	1	342102214R1	
AMP0072	C5533	C-CERA C	CC725CH1H-221J1	1	342102214R1	
AMP0072	C5534	C-CERA C	CC725CH1H-221J1	1	342102214R1	
AMP0072	C5540	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
AMP0072	C5541	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
AMP0072	C5542	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
AMP0072	C5548	C-CERA C	CK725F1E-104Z1	1	332161040R1	
AMP0072	C5549	C-CERA C	CK725F1E-104Z1	1	332161040R1	
AMP0072	C5550	C-CERA C	CK725B1H-152K1	1	332101525R1	
AMP0072	C5551	C-CERA C	CK725B1H-152K1	1	332101525R1	
AMP0072	C5555	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
AMP0072	C5559	TF C	ECQ-V50V-473J	1	374724734T	
AMP0072	C5560	TF C	ECQ-V50V-473J	1	374724734T	
AMP0072	C5561	TF C	ECQ-V50V-224J	1	374722244T	
AMP0072	C5562	TF C	ECQ-V50V-224J	1	374722244T	
AMP0072	C5563	TF C	ECQ-V50V-223J	1	374722234T	

AMP0072	C5564	TF C	ECQ-V50V-223J	1	374722234T
AMP0072	C5569	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5570	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5571	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5572	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5573	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5574	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5575	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5576	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5579	C-CERA C	CC725CH1H-102J1	1	342101024R1
AMP0072	C5580	UTSP C	CE04W10V-470M(UTSP)	1	397534717T
AMP0072	C5581	UTSP C	CE04W10V-470M(UTSP)	1	397534717T
AMP0072	C5582	C-CERA C	CC725CH1H-102J1	1	342101024R1
AMP0072	C5583	C-CERA C	CC725CH1H-102J1	1	342101024R1
AMP0072	C5584	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
AMP0072	C5585	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
AMP0072	C5586	UTSP C	CE04W10V-220M(UTSP)	1	397532217T
AMP0072	C5587	UTSP C	CE04W10V-220M(UTSP)	1	397532217T
AMP0072	C5588	TF C	ECQ-V50V-123J	1	374721234T
AMP0072	C5589	TF C	ECQ-V50V-123J	1	374721234T
AMP0072	C5590	C-CERA C	CC725CH1H-101J1	1	342101014R1
AMP0072	C5591	C-CERA C	CC725CH1H-101J1	1	342101014R1
AMP0072	C5592	MKT C	B32529C0332J289	1	376493324T
AMP0072	C5593	MKT C	B32529C0332J289	1	376493324T
AMP0072	C5594	C-CERA C	CC725CH1H-101J1	1	342101014R1
AMP0072	C5595	C-CERA C	CC725CH1H-101J1	1	342101014R1
AMP0072	C5596	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
AMP0072	C5597	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
AMP0072	C5598	C-CERA C	CC725CH1H-102J1	1	342101024R1
AMP0072	C5600	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5601	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5602	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5603	UTSP C	CE04W50V 47M(UTSP)	1	397584707T

AMP0072	C5604	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5605	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5606	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5607	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5608	C-FILM C	ECHU50V-561J	1	373025614R2
AMP0072	C5609	C-FILM C	ECHU50V-561J	1	373025614R2
AMP0072	C5610	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5611	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5612	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5613	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5614	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5615	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5630	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5631	C-CERA C	CC725CH1H-221J1	1	342102214R1
AMP0072	C5632	TF C	ECQ-V50V-103J	1	374721034T
AMP0072	C5660	MMT C	MMT50V-334J	1	375523344T
AMP0072	C5661	VR C	CE04W35V-470M(VR)	1	394664717T
AMP0072	C5662	VR C	CE04W35V-1000M(VR)	1	394661027S
AMP0072	C5666	UTSP C	CE04W25V-220M(UTSP)	1	397552217T
AMP0072	C5667	UTSP C	CE04W25V-220M(UTSP)	1	397552217T
AMP0072	C5670	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5671	UTSP C	CE04W50V-220M(UTSP)	1	397582217T
AMP0072	C5672	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
AMP0072	C5673	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
AMP0072	C5674	UTSP C	CE04W10V-470M(UTSP)	1	397534717T
AMP0072	C5675	UTSP C	CE04W10V-470M(UTSP)	1	397534717T
AMP0072	C5679	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5680	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5684	UTSP C	CE04W25V-220M(UTSP)	1	397552217T
AMP0072	C5685	UTSP C	CE04W25V-220M(UTSP)	1	397552217T
AMP0072	C5686	UTSP C	CE04W25V-220M(UTSP)	1	397552217T
AMP0072	C5687	UTSP C	CE04W25V-220M(UTSP)	1	397552217T
AMP0072	C5695	UTSP C	CE04W50V 47M(UTSP)	1	397584707T

AMP0072	C5696	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5697	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5698	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5707	C-CERA C	CC725CH1H-221J1	1	342102214R1
AMP0072	C5708	C-CERA C	CC725CH1H-221J1	1	342102214R1
AMP0072	C5709	C-CERA C	CC725CH1H-221J1	1	342102214R1
AMP0072	C5724	C-CERA C	CC725CH1H-221J1	1	342102214R1
AMP0072	C5738	UTSP C	CE04W10V-100M(UTSP)	1	397531017T
AMP0072	C5739	UTSP C	CE04W25V-220M(UTSP)	1	397552217T
AMP0072	C5905	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5906	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C5907	C-CERA C	CC725CH1H-221J1	1	342102214R1
AMP0072	C5908	C-CERA C	CC725CH1H-221J1	1	342102214R1
AMP0072	C5910	C-CERA C	CK725B1H-152K1	1	332101525R1
AMP0072	C5911	C-CERA C	CK725B1H-152K1	1	332101525R1
AMP0072	C6020	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C6021	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C6022	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C6023	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C6024	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C6025	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C6026	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
AMP0072	C6050	TF C	ECQ-V50V-104J	1	374721044T
AMP0072	C6051	TF C	ECQ-V50V-104J	1	374721044T
AMP0072	C6052	TF C	ECQ-V50V-104J	1	374721044T
AMP0072	C6053	TF C	ECQ-V50V-104J	1	374721044T
AMP0072	C6054	TF C	ECQ-V50V-104J	1	374721044T
AMP0072	C6055	TF C	ECQ-V50V-104J	1	374721044T
AMP0072	C6056	TF C	ECQ-V50V-104J	1	374721044T
AMP0072	C6701	UTSP C	CE04W10V-220M(UTSP)	1	397532217T
AMP0072	C6703	C-CERA C	CK725F1H-104Z1	1	332151040R1
AMP0072	C6704	UTSP C	CE04W50V-1M(UTSP)	1	397580107T
AMP0072	C6706	UTSP C	CE04W25V-47M(UTSP)	1	397554707T

AMP0072	C6710	C-CERA C	CK725F1A-105Z1	1	332181050R1
AMP0072	C6713	C-CERA C	CK725F1H-104Z1	1	332151040R1
AMP0072	C6714	UTSP C	CE04W50V-2.2M(UTSP)	1	397580227T
AMP0072	C6901	ELECT C	CE69W63V-12000MA	1	3504423
AMP0072	C6902	ELECT C	CE69W63V-12000MA	1	3504423
AMP0072	C6911	C-CERA C	CC725CH1H-102J1	1	342101024R1
AMP0072	C6912	TF C	ECQ-V100V-334J	1	374733344T
AMP0072	C6913	TF C	ECQ-V100V-334J	1	374733344T
AMP0072	C6915	TF C	ECQ-V50V-104J	1	374721044T
AMP0072	C6916	TF C	ECQ-V50V-104J	1	374721044T
AMP0072	D4600	C-DIODE	1SS352	1	223234R2
AMP0072	D4601	C-DIODE	1SS352	1	223234R2
AMP0072	D4606	DIODE	RL1N4003	1	22380260T
AMP0072	D5500	ZENER D	MTZJ7.5B	1	224470752T
AMP0072	D5501	ZENER D	MTZJ7.5B	1	224470752T
AMP0072	D5507	C-DIODE	1SS352	1	223234R2
AMP0072	D5507 or	C-DIODE	KDS4148U	(1)	223283R2
AMP0072	D5507 or	C-DIODE	1SS355	(1)	223269R2
AMP0072	D5507 or	C-DIODE	MA2J1110GL	(1)	223302R2
AMP0072	D5508	C-DIODE	1SS352	1	223234R2
AMP0072	D5508 or	C-DIODE	KDS4148U	(1)	223283R2
AMP0072	D5508 or	C-DIODE	1SS355	(1)	223269R2
AMP0072	D5508 or	C-DIODE	MA2J1110GL	(1)	223302R2
AMP0072	D5511	C-DIODE	1SS352	1	223234R2
AMP0072	D5512	C-DIODE	1SS352	1	223234R2
AMP0072	D5513	C-DIODE	1SS352	1	223234R2
AMP0072	D5514	C-DIODE	1SS352	1	223234R2
AMP0072	D5517	C-DIODE	1SS352	1	223234R2
AMP0072	D5517 or	C-DIODE	KDS4148U	(1)	223283R2
AMP0072	D5517 or	C-DIODE	1SS355	(1)	223269R2
AMP0072	D5517 or	C-DIODE	MA2J1110GL	(1)	223302R2
AMP0072	D5518	C-DIODE	1SS352	1	223234R2
AMP0072	D5518 or	C-DIODE	KDS4148U	(1)	223283R2

AMP0072	D5518 or	C-DIODE	ISS355	(1)	223269R2
AMP0072	D5518 or	C-DIODE	MA2J1110GL	(1)	223302R2
AMP0072	D5520	C-DIODE	ISS352	1	223234R2
AMP0072	D5521	ZENER D	UDZS8.2B	1	224550820R2
AMP0072	D5522	ZENER D	UDZS3.6B	1	224550360R2
AMP0072	D5523	C-DIODE	ISS352	1	223234R2
AMP0072	D5601	C-DIODE	S1NB60-4062	1	22380318R2
AMP0072	D6000	C-DIODE	ISS352	1	223234R2
AMP0072	D6000 or	C-DIODE	KDS4148U	(1)	223283R2
AMP0072	D6000 or	C-DIODE	MA2J1110GL	(1)	223302R2
AMP0072	D6001	C-DIODE	ISS352	1	223234R2
AMP0072	D6001 or	C-DIODE	KDS4148U	(1)	223283R2
AMP0072	D6001 or	C-DIODE	ISS355	(1)	223269R2
AMP0072	D6001 or	C-DIODE	MA2J1110GL	(1)	223302R2
AMP0072	D6002	C-DIODE	ISS352	1	223234R2
AMP0072	D6002 or	C-DIODE	KDS4148U	(1)	223283R2
AMP0072	D6002 or	C-DIODE	ISS355	(1)	223269R2
AMP0072	D6002 or	C-DIODE	MA2J1110GL	(1)	223302R2
AMP0072	D6003	C-DIODE	ISS352	1	223234R2
AMP0072	D6003 or	C-DIODE	KDS4148U	(1)	223283R2
AMP0072	D6003 or	C-DIODE	ISS355	(1)	223269R2
AMP0072	D6003 or	C-DIODE	MA2J1110GL	(1)	223302R2
AMP0072	D6004	C-DIODE	ISS352	1	223234R2
AMP0072	D6004 or	C-DIODE	KDS4148U	(1)	223283R2
AMP0072	D6004 or	C-DIODE	ISS355	(1)	223269R2
AMP0072	D6004 or	C-DIODE	MA2J1110GL	(1)	223302R2
AMP0072	D6005	C-DIODE	ISS352	1	223234R2
AMP0072	D6005 or	C-DIODE	KDS4148U	(1)	223283R2
AMP0072	D6005 or	C-DIODE	ISS355	(1)	223269R2
AMP0072	D6005 or	C-DIODE	MA2J1110GL	(1)	223302R2
AMP0072	D6006	C-DIODE	ISS352	1	223234R2
AMP0072	D6006 or	C-DIODE	KDS4148U	(1)	223283R2
AMP0072	D6006 or	C-DIODE	ISS355	(1)	223269R2

AMP0072	D6006 or	C-DIODE	MA2J1110GL	(1)	223302R2	
AMP0072	D6701	C-DIODE	1SS352	1	223234R2	
AMP0072	D6701 or	C-DIODE	KDS4148U	(1)	223283R2	
AMP0072	D6701 or	C-DIODE	1SS355	(1)	223269R2	
AMP0072	D6701 or	C-DIODE	MA2J1110GL	(1)	223302R2	
AMP0072	D6702	C-DIODE	1SS352	1	223234R2	
AMP0072	D6702 or	C-DIODE	KDS4148U	(1)	223283R2	
AMP0072	D6702 or	C-DIODE	1SS355	(1)	223269R2	
AMP0072	D6702 or	C-DIODE	MA2J1110GL	(1)	223302R2	
AMP0072	D6703	ZENER D	UDZS3.6B	1	224550360R2	
AMP0072	D6704	ZENER D	UDZS3.6B	1	224550360R2	
AMP0072	D6713	ZENER D	UDZS3.6B	1	224550360R2	
AMP0072	D6901	DIODE	D10XB60H	1	22380337	
AMP0072	D6901A	HEAT SINK	RAD-196	1	27160545	
AMP0072	D6901B	TAPE	TAPE(CLOTH-8U)	1	29110082	:12:CM
AMP0072	D6901C	SCREW	3P+10FN(3BC)	2	82143010GR	
AMP0072	D6902	C-DIODE	1SS352	1	223234R2	
AMP0072	D6902 or	C-DIODE	KDS4148U	(1)	223283R2	
AMP0072	D6902 or	C-DIODE	1SS355	(1)	223269R2	
AMP0072	D6902 or	C-DIODE	MA2J1110GL	(1)	223302R2	
AMP0072	D6903	DIODE	D10XB60H	1	22380337	
AMP0072	E5507A	TRM	NTM-1P232(M1700)	1	25060301	
AMP0072	E5509A	TRM	NTM-1P232(M1700)	1	25060301	
AMP0072	E5519	TRM-423(SCREW)	NEJITANSI ST3	1	25060495	
AMP0072	E5520	TRM-423(SCREW)	NEJITANSI ST3	1	25060495	
AMP0072	F6901A	FUSE HOLDER	SN5051	1	250113	S1H
AMP0072	F6901B	FUSE HOLDER	SN5051	1	250113	S1H
AMP0072	F6902A	FUSE HOLDER	SN5051	1	250113	S1H
AMP0072	F6902B	FUSE HOLDER	SN5051	1	250113	S1H
AMP0072	JL104	JUMPER LEAD	JL9 150 B	1	9J150606B15	
AMP0072	JL104A	WIRE HOL	NSCT-9P880	1	25051093	
AMP0072	JL5514	JUMPER LEAD	JL7 150 H	1	7J150606H	
AMP0072	JL5514A	WIRE HOL	NSCT-7P898	1	25051111	

AMP0072	JL5514B	SOCKET	NSCT-7P99	1	25050271
AMP0072	JL5515B	WIRE TRAP	NPLG-11P594	1	25055632
AMP0072	JL6402	JUMPER LEAD	JL3 300 B	1	3J300606B15
AMP0072	JL6402A	WIRE HOL	NSCT-3P874	1	25051087
AMP0072	JL6402B	WIRE HOL	NSCT-3P874	1	25051087
AMP0072	JL6600	JUMPER LEAD	JL7 250 H	1	7J250606H
AMP0072	JL6600A	WIRE HOL	NSCT-7P898	1	25051111
AMP0072	JL6603	JUMPER LEAD	JL9 200 H	1	9J200606H
AMP0072	JL6603A	WIRE HOL	NSCT-9P900	1	25051113
AMP0072	JL6606B	WIRE TRAP	NPLG-7P590	1	25055628
AMP0072	JL6620	JUMPER LEAD	JL7 200 B	1	7J200606B15
AMP0072	JL6620A	WIRE HOL	NSCT-7P878	1	25051091
AMP0072	L4602	EMIFIL	BK1608LM182-T	1	230958R1
AMP0072	L4603	EMIFIL	BK1608LM182-T	1	230958R1
AMP0072	L6000	FR CORE	*	1	5597-45502
AMP0072	L6001	FR CORE	*	1	5597-45502
AMP0072	L6002	FR CORE	*	1	5597-45502
AMP0072	L6003	FR CORE	*	1	5597-45502
AMP0072	L6004	FR CORE	*	1	5597-45502
AMP0072	L6005	FR CORE	*	1	5597-45502
AMP0072	L6006	FR CORE	*	1	5597-45502
AMP0072	L6010	FR CORE	*	1	5597-45502
AMP0072	L6011	FR CORE	*	1	5597-45502
AMP0072	L6012	FR CORE	*	1	5597-45502
AMP0072	L6013	FR CORE	*	1	5597-45502
AMP0072	L6014	FR CORE	*	1	5597-45502
AMP0072	L6015	FR CORE	*	1	5597-45502
AMP0072	L6016	FR CORE	*	1	5597-45502
AMP0072	P4602	ST JACK	HSJ1002-01-6020	1	25045647
AMP0072	P5500	PIN JACK	NPJ-2PDWR558	1	25045776
AMP0072	P5501	PIN JACK	NPJ-6PDWWRRR561	1	25045779
AMP0072	P5502	PIN JACK	NPJ-6PDWWRRR561	1	25045779
AMP0072	P5503	PIN JACK	NPJ-6PDWWRRR561	1	25045779

AMP0072	P5504	PIN JACK	NPJ-1PDG699	1	25045933	N
AMP0072	P5505	PIN JACK	NPJ-6PDLENTP701	1	25045935	N
AMP0072	P5506	PIN JACK	NPJ-2PDWR558	1	25045776	
AMP0072	P5509	CRIMP AS	CRIMP AS	1	2069925170UL	
AMP0072	P5510A	SOCKET AS	NSAS-26P1742	1	2009991118UL	
AMP0072	P5510B	PLUG	NPLG-13P360	1	25055377	
AMP0072	P5510C	CRIMP AS	CRIMP SR805_2	1	20799170UL	
AMP0072	P5510D	CRIMP AS	CRIMP SR805_1	1	20799169UL	
AMP0072	P5512	SOCKET	NSCT-15P2195	1	25052298	
AMP0072	P5513	SOCKET	NSCT-19P2199	1	25052302	
AMP0072	P5516	HOLDER	HOLDER(CLAMP)	1	27190540-1	
AMP0072	P5518	SOCKET	NSCT-3P2183	1	25052286	
AMP0072	P6000B	PLUG	NPLG-7P0962	1	25056012	
AMP0072	P6001B	PLUG	NPLG-7P0962	1	25056012	
AMP0072	P6002B	PLUG	NPLG-7P0962	1	25056012	
AMP0072	P6003B	PLUG	NPLG-7P0962	1	25056012	
AMP0072	P6004B	PLUG	NPLG-7P0962	1	25056012	
AMP0072	P6005B	PLUG	NPLG-7P0962	1	25056012	
AMP0072	P6006B	PLUG	NPLG-7P0962	1	25056012	
AMP0072	P6011A	RETAINER	(BUS-D)	1	27142115A	
AMP0072	P6020	HOLDER	HOLDER(CLAMP)	1	27190540-1	
AMP0072	P6080	PLUG	NPLG-2P130	1	25055146	
AMP0072	P6081	PLUG	NPLG-2P130	1	25055146	
AMP0072	P6082	PLUG	NPLG-2P130	1	25055146	
AMP0072	P6083	PLUG	NPLG-2P130	1	25055146	
AMP0072	P6084	PLUG	NPLG-2P130	1	25055146	
AMP0072	P6085	PLUG	NPLG-2P130	1	25055146	
AMP0072	P6086	PLUG	NPLG-2P130	1	25055146	
AMP0072	P6900	CRIMP AS	CRIMP AS	1	2069925170UL	
AMP0072	P6901	CRIMP AS	CRIMP AS	1	2069925142UL	
AMP0072	P6902	CRIMP AS	CRIMP AS	1	2069925208UL	
AMP0072	P6950	PLUG	NPLG-5P152	1	25055168	
AMP0072	P907	AC INLET	NPLG-2P913	1	25055960	Except <MDC><MDF>

AMP0072	P921	SOCKET AS	NSAS-2P1796	1	2009991162UL	N Except <MDC><MDF>
AMP0072	Q4600	TR	2SB1240-R	1	2213794T	
AMP0072	Q4601	TR	KRC102S	1	2216190R2	
AMP0072	Q5501	IC	R2A15220FP	1	22242600R3	N
AMP0072	Q5503	IC	NJM4580M-D	1	22241448R2	
AMP0072	Q5600	TR	RN1441	1	2215410R2	
AMP0072	Q5601	TR	RN1441	1	2215410R2	
AMP0072	Q5602	TR	RN1441	1	2215410R2	
AMP0072	Q5603	TR	RN1441	1	2215410R2	
AMP0072	Q5604	TR	RN1441	1	2215410R2	
AMP0072	Q5605	TR	RN1441	1	2215410R2	
AMP0072	Q5606	TR	RN1441	1	2215410R2	
AMP0072	Q5607	TR	RN1441	1	2215410R2	
AMP0072	Q5610	TR	RN1441	1	2215410R2	
AMP0072	Q5611	TR	RN1441	1	2215410R2	
AMP0072	Q5612	TR	RN1441	1	2215410R2	
AMP0072	Q5613	TR	RN1441	1	2215410R2	
AMP0072	Q5614	TR	RN1441	1	2215410R2	
AMP0072	Q5615	TR	RN1441	1	2215410R2	
AMP0072	Q5616	TR	RN1441	1	2215410R2	
AMP0072	Q5617	TR	RN1441	1	2215410R2	
AMP0072	Q5618	IC	NJM4580M-D	1	22241448R2	
AMP0072	Q5630	IC	NJM4580M-D	1	22241448R2	
AMP0072	Q5632	TR	RN1441	1	2215410R2	
AMP0072	Q5633	TR	RN1441	1	2215410R2	
AMP0072	Q5636	TR	RN1441	1	2215410R2	
AMP0072	Q5637	TR	RN1441	1	2215410R2	
AMP0072	Q5640	TR	RN1441	1	2215410R2	
AMP0072	Q5641	TR	RN1441	1	2215410R2	
AMP0072	Q5645	TR	2SC2712-GR	1	2213145R2	
AMP0072	Q5646	TR	2SC2712-GR	1	2213145R2	
AMP0072	Q5647	TR	2SA1162-GR	1	2214375R2	
AMP0072	Q5670	IC	78M15HF(NJM78M15FA)	1	222780155JRC	

AMP0072	Q5670 or	IC	UPC78M15AHF-AZ	(1)	222780155NEC	
AMP0072	Q5670A	HEAT SINK	RAD-252	1	27160641	N
AMP0072	Q5670B	SCREW	3P+10FN(3BC)	2	82143010GR	
AMP0072	Q5671	IC	79M15HF(NJM79M15FA)	1	222790155JRC	
AMP0072	Q5671 or	IC	UPC79M15HF-AZ	(1)	222790155NEC	
AMP0072	Q5671 or	IC	79M15F(AN79M15F)	(1)	222790155MAT	
AMP0072	Q5684	TR	2SC2235-O(TPE6_F)	1	2211653T	
AMP0072	Q5685	TR	2SA965-O(TPE6_F)	1	2211643T	
AMP0072	Q5903	TR	RN1441	1	2215410R2	
AMP0072	Q5904	TR	RN1441	1	2215410R2	
AMP0072	Q6000	TR	2SC1740S-S	1	2213285T	
AMP0072	Q6001	TR	2SC1740S-S	1	2213285T	
AMP0072	Q6002	TR	2SC1740S-S	1	2213285T	
AMP0072	Q6003	TR	2SC1740S-S	1	2213285T	
AMP0072	Q6004	TR	2SC1740S-S	1	2213285T	
AMP0072	Q6005	TR	2SC1740S-S	1	2213285T	
AMP0072	Q6006	TR	2SC1740S-S	1	2213285T	
AMP0072	Q6010	TR	2SC1740S-S	1	2213285T	
AMP0072	Q6011	TR	2SC1740S-S	1	2213285T	
AMP0072	Q6012	TR	2SC1740S-S	1	2213285T	
AMP0072	Q6013	TR	2SC1740S-S	1	2213285T	
AMP0072	Q6014	TR	2SC1740S-S	1	2213285T	
AMP0072	Q6015	TR	2SC1740S-S	1	2213285T	
AMP0072	Q6016	TR	2SC1740S-S	1	2213285T	
AMP0072	Q6030	TR	2SC2229-Y(TPE6_F)	1	2211634T	
AMP0072	Q6030 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T	CURRENT SENS
AMP0072	Q6031	TR	2SC2229-Y(TPE6_F)	1	2211634T	
AMP0072	Q6031 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T	
AMP0072	Q6032	TR	2SC2229-Y(TPE6_F)	1	2211634T	
AMP0072	Q6032 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T	
AMP0072	Q6033	TR	2SC2229-Y(TPE6_F)	1	2211634T	
AMP0072	Q6033 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T	
AMP0072	Q6034	TR	2SC2229-Y(TPE6_F)	1	2211634T	

AMP0072	Q6034 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T
AMP0072	Q6035	TR	2SC2229-Y(TPE6_F)	1	2211634T
AMP0072	Q6035 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T
AMP0072	Q6036	TR	2SC2229-Y(TPE6_F)	1	2211634T
AMP0072	Q6036 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T
AMP0072	Q6040	TR	2SA949-O(TPE6_F)	1	2211353T
AMP0072	Q6040 or	TR	2SA949-Y(TPE6_F)	(1)	2211354T
AMP0072	Q6041	TR	2SA949-O(TPE6_F)	1	2211353T
AMP0072	Q6041 or	TR	2SA949-Y(TPE6_F)	(1)	2211354T
AMP0072	Q6042	TR	2SA949-O(TPE6_F)	1	2211353T
AMP0072	Q6042 or	TR	2SA949-Y(TPE6_F)	(1)	2211354T
AMP0072	Q6043	TR	2SA949-O(TPE6_F)	1	2211353T
AMP0072	Q6043 or	TR	2SA949-Y(TPE6_F)	(1)	2211354T
AMP0072	Q6044	TR	2SA949-O(TPE6_F)	1	2211353T
AMP0072	Q6044 or	TR	2SA949-Y(TPE6_F)	(1)	2211354T
AMP0072	Q6045	TR	2SA949-O(TPE6_F)	1	2211353T
AMP0072	Q6045 or	TR	2SA949-Y(TPE6_F)	(1)	2211354T
AMP0072	Q6046	TR	2SA949-O(TPE6_F)	1	2211353T
AMP0072	Q6046 or	TR	2SA949-Y(TPE6_F)	(1)	2211354T
AMP0072	Q6070	TR	2SC2229-O(TPE6_F)	1	2211633T
AMP0072	Q6070 or	TR	2SC2229-Y(TPE6_F)	(1)	2211634T
AMP0072	Q6071	TR	2SC2229-O(TPE6_F)	1	2211633T
AMP0072	Q6071 or	TR	2SC2229-Y(TPE6_F)	(1)	2211634T
AMP0072	Q6072	TR	2SC2229-O(TPE6_F)	1	2211633T
AMP0072	Q6072 or	TR	2SC2229-Y(TPE6_F)	(1)	2211634T
AMP0072	Q6073	TR	2SC2229-O(TPE6_F)	1	2211633T
AMP0072	Q6073 or	TR	2SC2229-Y(TPE6_F)	(1)	2211634T
AMP0072	Q6074	TR	2SC2229-O(TPE6_F)	1	2211633T
AMP0072	Q6074 or	TR	2SC2229-Y(TPE6_F)	(1)	2211634T
AMP0072	Q6075	TR	2SC2229-O(TPE6_F)	1	2211633T
AMP0072	Q6075 or	TR	2SC2229-Y(TPE6_F)	(1)	2211634T
AMP0072	Q6076	TR	2SC2229-O(TPE6_F)	1	2211633T
AMP0072	Q6076 or	TR	2SC2229-Y(TPE6_F)	(1)	2211634T

AMP0072	Q6100	TR	2SA1930(ONK_Q)	1	2203000
AMP0072	Q6100 or	TR	2SA2140-Q_P	(1)	2217151
AMP0072	Q6101	TR	2SA1930(ONK_Q)	1	2203000
AMP0072	Q6101 or	TR	2SA2140-Q_P	(1)	2217151
AMP0072	Q6102	TR	2SA1930(ONK_Q)	1	2203000
AMP0072	Q6102 or	TR	2SA2140-Q_P	(1)	2217151
AMP0072	Q6103	TR	2SA1930(ONK_Q)	1	2203000
AMP0072	Q6103 or	TR	2SA2140-Q_P	(1)	2217151
AMP0072	Q6104	TR	2SA1930(ONK_Q)	1	2203000
AMP0072	Q6104 or	TR	2SA2140-Q_P	(1)	2217151
AMP0072	Q6105	TR	2SA1930(ONK_Q)	1	2203000
AMP0072	Q6105 or	TR	2SA2140-Q_P	(1)	2217151
AMP0072	Q6106	TR	2SA1930(ONK_Q)	1	2203000
AMP0072	Q6106 or	TR	2SA2140-Q_P	(1)	2217151
AMP0072	Q6110	TR	2SC5171(ONK_Q)	1	2203010
AMP0072	Q6110 or	TR	2SC5993-Q_P	(1)	2217161
AMP0072	Q6111	TR	2SC5171(ONK_Q)	1	2203010
AMP0072	Q6111 or	TR	2SC5993-Q_P	(1)	2217161
AMP0072	Q6112	TR	2SC5171(ONK_Q)	1	2203010
AMP0072	Q6112 or	TR	2SC5993-Q_P	(1)	2217161
AMP0072	Q6113	TR	2SC5171(ONK_Q)	1	2203010
AMP0072	Q6113 or	TR	2SC5993-Q_P	(1)	2217161
AMP0072	Q6114	TR	2SC5171(ONK_Q)	1	2203010
AMP0072	Q6114 or	TR	2SC5993-Q_P	(1)	2217161
AMP0072	Q6115	TR	2SC5171(ONK_Q)	1	2203010
AMP0072	Q6115 or	TR	2SC5993-Q_P	(1)	2217161
AMP0072	Q6116	TR	2SC5171(ONK_Q)	1	2203010
AMP0072	Q6116 or	TR	2SC5993-Q_P	(1)	2217161
AMP0072	Q6380	IC	LM61CIZ	1	22242212
AMP0072	Q6380A	RETAINER	(PTH)	1	27141884-1
AMP0072	Q6701	TR	2SC2712-GR	1	2213145R2
AMP0072	Q6701 or	TR	KTC3875-GR	(1)	2216175R2
AMP0072	Q6702	TR	2SC2712-GR	1	2213145R2

AMP0072	Q6702 or	TR	KTC3875-GR	(1)	2216175R2	
AMP0072	Q6703	TR	2SA1163-BL(TE85L_F)	1	2216756R2	
AMP0072	Q6707	TR	2SC2712-GR	1	2213145R2	
AMP0072	Q6707 or	TR	KTC3875-GR	(1)	2216175R2	
AMP0072	Q6713	TR	2SA1163-BL(TE85L_F)	1	2216756R2	
AMP0072	R4600	C-CARBON R	RN72K1J-039JE	1	435030394R1	
AMP0072	R4601	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R4602	C-CARBON R	RN72K1J-102JE	1	435031024R1	
AMP0072	R4608	C-CARBON R	RN72K1J-101JE	1	435031014R1	
AMP0072	R4609	C-CARBON R	RN72K1J-000JE	1	435030004R1	
AMP0072	R4611	C-CARBON R	RN72K1J-000JE	1	435030004R1	
AMP0072	R4615	C-CARBON R	RN72K1J-000JE	1	435030004R1	
AMP0072	R4616	C-CARBON R	RN72K1J-000JE	1	435030004R1	
AMP0072	R5503	C-CARBON R	RN72K1J-331JE	1	435033314R1	
AMP0072	R5504	C-CARBON R	RN72K1J-331JE	1	435033314R1	
AMP0072	R5505	C-CARBON R	RN72K1J-331JE	1	435033314R1	
AMP0072	R5506	C-CARBON R	RN72K1J-331JE	1	435033314R1	
AMP0072	R5507	C-CARBON R	RN72K1J-331JE	1	435033314R1	
AMP0072	R5508	C-CARBON R	RN72K1J-331JE	1	435033314R1	
AMP0072	R5509	C-CARBON R	RN72K1J-331JE	1	435033314R1	V3
AMP0072	R5510	C-CARBON R	RN72K1J-331JE	1	435033314R1	V3
AMP0072	R5511	C-CARBON R	RN72K1J-331JE	1	435033314R1	V2OUT
AMP0072	R5512	C-CARBON R	RN72K1J-331JE	1	435033314R1	V2OUT
AMP0072	R5513	C-CARBON R	RN72K1J-331JE	1	435033314R1	
AMP0072	R5514	C-CARBON R	RN72K1J-331JE	1	435033314R1	
AMP0072	R5515	C-CARBON R	RN72K1J-331JE	1	435033314R1	
AMP0072	R5516	C-CARBON R	RN72K1J-331JE	1	435033314R1	
AMP0072	R5519	C-CARBON R	RN72K1J-331JE	1	435033314R1	
AMP0072	R5520	C-CARBON R	RN72K1J-331JE	1	435033314R1	
AMP0072	R5521	C-CARBON R	RN72K1J-000JE	1	435030004R1	
AMP0072	R5522	C-CARBON R	RN72K1J-000JE	1	435030004R1	
AMP0072	R5526	C-CARBON R	RN72K1J-101JE	1	435031014R1	
AMP0072	R5527	C-CARBON R	RN72K1J-101JE	1	435031014R1	Z2_R

AMP0072	R5528	C-CARBON R	RN72K1J-101JE	1	435031014R1	Z2_L
AMP0072	R5529	C-CARBON R	RN72K1J-101JE	1	435031014R1	
AMP0072	R5530	C-CARBON R	RN72K1J-101JE	1	435031014R1	
AMP0072	R5531	C-CARBON R	RN72K1J-101JE	1	435031014R1	PRE_SW
AMP0072	R5532	C-CARBON R	RN72K1J-101JE	1	435031014R1	
AMP0072	R5533	C-CARBON R	RN72K1J-101JE	1	435031014R1	
AMP0072	R5534	C-CARBON R	RN72K1J-101JE	1	435031014R1	
AMP0072	R5535	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5540	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5543	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5544	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5545	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5546	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5547	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5548	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5549	C-CARBON R	RN72K1J-224JE	1	435032244R1	V3
AMP0072	R5550	C-CARBON R	RN72K1J-224JE	1	435032244R1	V3
AMP0072	R5551	C-CARBON R	RN72K1J-224JE	1	435032244R1	V2OUT
AMP0072	R5552	C-CARBON R	RN72K1J-224JE	1	435032244R1	V2OUT
AMP0072	R5553	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5554	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5555	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5556	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5557	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5558	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5559	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5560	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5561	C-CARBON R	RN72K1J-000JE	1	435030004R1	
AMP0072	R5562	C-CARBON R	RN72K1J-000JE	1	435030004R1	
AMP0072	R5563	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5564	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5565	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5567	C-CARBON R	RN72K1J-224JE	1	435032244R1	Z2LINE

AMP0072	R5568	C-CARBON R	RN72K1J-223JE	1	435032234R1	Z2LINE
AMP0072	R5569	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5570	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5571	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5572	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5573	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5574	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5575	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5576	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5577	C-CARBON R	RN72K1J-104JE	1	435031044R1	
AMP0072	R5578	C-CARBON R	RN72K1J-104JE	1	435031044R1	
AMP0072	R5579	C-CARBON R	RN72K1J-104JE	1	435031044R1	
AMP0072	R5580	C-CARBON R	RN72K1J-104JE	1	435031044R1	XM
AMP0072	R5582	C-CARBON R	RN72K1J-224JE	1	435032244R1	Sirius
AMP0072	R5583	C-CARBON R	RN72K1J-224JE	1	435032244R1	Sirius
AMP0072	R5585	C-CARBON R	RN72K1J-472JE	1	435034724R1	
AMP0072	R5586	C-CARBON R	RN72K1J-472JE	1	435034724R1	
AMP0072	R5587	C-CARBON R	RN72K1J-103JE	1	435031034R1	
AMP0072	R5588	C-CARBON R	RN72K1J-103JE	1	435031034R1	
AMP0072	R5590	C-CARBON R	RN72K1J-223JE	1	435032234R1	
AMP0072	R5591	C-CARBON R	RN72K1J-223JE	1	435032234R1	
AMP0072	R5592	C-CARBON R	RN72K1J-332JE	1	435033324R1	
AMP0072	R5593	C-CARBON R	RN72K1J-332JE	1	435033324R1	
AMP0072	R5594	C-CARBON R	RN72K1J-331JE	1	435033314R1	
AMP0072	R5595	C-CARBON R	RN72K1J-331JE	1	435033314R1	
AMP0072	R5596	C-CARBON R	RN72K1J-123JE	1	435031234R1	
AMP0072	R5597	C-CARBON R	RN72K1J-123JE	1	435031234R1	
AMP0072	R5598	C-CARBON R	RN72K1J-103JE	1	435031034R1	
AMP0072	R5599	C-CARBON R	RN72K1J-103JE	1	435031034R1	
AMP0072	R5600	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5601	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5602	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R5603	C-CARBON R	RN72K1J-224JE	1	435032244R1	

AMP0072	R5604	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5605	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5606	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5607	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5608	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5609	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5610	C-CARBON R	RN72K1J-121JE	1	435031214R1
AMP0072	R5611	C-CARBON R	RN72K1J-121JE	1	435031214R1
AMP0072	R5612	C-CARBON R	RN72K1J-121JE	1	435031214R1
AMP0072	R5613	C-CARBON R	RN72K1J-121JE	1	435031214R1
AMP0072	R5614	C-CARBON R	RN72K1J-121JE	1	435031214R1
AMP0072	R5615	C-CARBON R	RN72K1J-121JE	1	435031214R1
AMP0072	R5616	C-CARBON R	RN72K1J-121JE	1	435031214R1
AMP0072	R5617	C-CARBON R	RN72K1J-121JE	1	435031214R1
AMP0072	R5620	C-CARBON R	RN72K1J-101JE	1	435031014R1
AMP0072	R5621	C-CARBON R	RN72K1J-101JE	1	435031014R1
AMP0072	R5622	C-CARBON R	RN72K1J-101JE	1	435031014R1
AMP0072	R5623	C-CARBON R	RN72K1J-101JE	1	435031014R1
AMP0072	R5624	C-CARBON R	RN72K1J-101JE	1	435031014R1
AMP0072	R5625	C-CARBON R	RN72K1J-101JE	1	435031014R1
AMP0072	R5626	C-CARBON R	RN72K1J-101JE	1	435031014R1
AMP0072	R5627	C-CARBON R	RN72K1J-101JE	1	435031014R1
AMP0072	R5630	C-CARBON R	RN72K1J-221JE	1	435032214R1
AMP0072	R5631	C-CARBON R	RN72K1J-473JE	1	435034734R1
AMP0072	R5632	C-CARBON R	RN72K1J-153JE	1	435031534R1
AMP0072	R5633	C-CARBON R	RN72K1J-122JE	1	435031224R1
AMP0072	R5634	C-CARBON R	RN72K1J-103JE	1	435031034R1
AMP0072	R5637	METAL O R	RS1/2WBJ-10	1	443521004T
AMP0072	R5638	METAL O R	RS1/2WBJ-10	1	443521004T
AMP0072	R5639	C-CARBON R	RN72K1J-331JE	1	435033314R1
AMP0072	R5640	C-CARBON R	RN72K1J-331JE	1	435033314R1
AMP0072	R5641	C-CARBON R	RN72K1J-563JE	1	435035634R1
AMP0072	R5642	C-CARBON R	RN72K1J-563JE	1	435035634R1

AMP0072	R5643	C-CARBON R	RN72K1J-474JE	1	435034744R1
AMP0072	R5644	C-CARBON R	RN72K1J-474JE	1	435034744R1
AMP0072	R5645	C-CARBON R	RN72K1J-561JE	1	435035614R1
AMP0072	R5646	C-CARBON R	RN72K1J-561JE	1	435035614R1
AMP0072	R5647	C-CARBON R	RN72K1J-274JE	1	435032744R1
AMP0072	R5648	C-CARBON R	RN72K1J-274JE	1	435032744R1
AMP0072	R5649	C-CARBON R	RN72K1J-223JE	1	435032234R1
AMP0072	R5650	C-CARBON R	RN72K1J-223JE	1	435032234R1
AMP0072	R5651	C-CARBON R	RN72K1J-122JE	1	435031224R1
AMP0072	R5652	C-CARBON R	RN72K1J-122JE	1	435031224R1
AMP0072	R5653	C-CARBON R	RN72K1J-101JE	1	435031014R1
AMP0072	R5654	C-CARBON R	RN72K1J-101JE	1	435031014R1
AMP0072	R5655	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5656	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5657	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5658	C-CARBON R	RN72K1J-122JE	1	435031224R1
AMP0072	R5659	C-CARBON R	RN72K1J-122JE	1	435031224R1
AMP0072	R5660	METAL R	RNU1WCJ-1.5	1	453630154T
AMP0072	R5661	METAL R	RNU1WCJ-1.5	1	453630154T
AMP0072	R5663	METAL R	RNU1WCJ-6.8	1	453630684T
AMP0072	R5664	METAL R	RNU1WCJ-6.8	1	453630684T
AMP0072	R5666	CARBON R	R16J-22	1	417342204T
AMP0072	R5667	CARBON R	R16J-22	1	417342204T
AMP0072	R5669	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5672	C-CARBON R	RN72K1J-100JE	1	435031004R1
AMP0072	R5673	C-CARBON R	RN72K1J-100JE	1	435031004R1
AMP0072	R5675	METAL O R	RS1WBJ-22	1	443622204T
AMP0072	R5676	METAL O R	RS1WBJ-22	1	443622204T
AMP0072	R5677	METAL O R	RS1WBJ-22	1	443622204T
AMP0072	R5678	METAL O R	RS1WBJ-22	1	443622204T
AMP0072	R5679	CARBON R	R16J-1.2K	1	417341224T
AMP0072	R5681	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5682	C-CARBON R	RN72K1J-224JE	1	435032244R1

AMP0072	R5683	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5684	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5685	CARBON R	R16J-1.2K	1	417341224T
AMP0072	R5692	C-CARBON R	RN72K1J-104JE	1	435031044R1
AMP0072	R5695	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5696	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5711	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5712	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5714	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5715	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5716	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5732	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5733	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5734	C-CARBON R	RN72K1J-391JE	1	435033914R1
AMP0072	R5735	C-CARBON R	RN72K1J-391JE	1	435033914R1
AMP0072	R5738	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5739	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5740	C-CARBON R	RN72K1J-391JE	1	435033914R1
AMP0072	R5741	C-CARBON R	RN72K1J-391JE	1	435033914R1
AMP0072	R5744	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5745	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5746	C-CARBON R	RN72K1J-391JE	1	435033914R1
AMP0072	R5747	C-CARBON R	RN72K1J-391JE	1	435033914R1
AMP0072	R5788	C-CARBON R	RN72K1J-472JE	1	435034724R1
AMP0072	R5789	C-CARBON R	RN72K1J-103JE	1	435031034R1
AMP0072	R5790	C-CARBON R	RN72K1J-123JE	1	435031234R1
AMP0072	R5791	C-CARBON R	RN72K1J-223JE	1	435032234R1
AMP0072	R5792	C-CARBON R	RN72K1J-103JE	1	435031034R1
AMP0072	R5793	C-CARBON R	RN72K1J-333JE	1	435033334R1
AMP0072	R5794	C-CARBON R	RN72K1J-333JE	1	435033334R1
AMP0072	R5795	C-CARBON R	RN72K1J-333JE	1	435033334R1
AMP0072	R5796	C-CARBON R	RN72K1J-682JE	1	435036824R1
AMP0072	R5797	C-CARBON R	RN72K1J-104JE	1	435031044R1

AMP0072	R5798	CARBON R	R16J-12K	1	417341234T
AMP0072	R5800	C-CARBON R	RN72K1J-102JE	1	435031024R1
AMP0072	R5801	C-CARBON R	RN72K1J-102JE	1	435031024R1
AMP0072	R5813	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5815	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5816	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5817	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5818	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5819	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5820	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5821	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5822	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5823	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5824	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5825	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5826	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5827	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5828	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5829	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5830	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5831	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5832	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5833	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5834	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5835	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5836	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5839	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5840	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5841	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5842	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5843	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5844	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5845	C-CARBON R	RN72K1J-000JE	1	435030004R1

AMP0072	R5846	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5847	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5848	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5849	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5850	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5851	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5852	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5853	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5854	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5855	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5856	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5857	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5858	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5859	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5860	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5861	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5863	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5864	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5865	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5866	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5867	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5868	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5871	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5872	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5873	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5874	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5875	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5876	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5877	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5878	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5879	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5880	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5881	C-CARBON R	RN72K1J-000JE	1	435030004R1

AMP0072	R5883	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5884	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5885	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5886	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5887	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5889	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5890	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5892	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5893	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5902	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5904	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5905	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5906	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5907	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5908	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5909	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5910	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5911	C-CARBON R	RN72K1J-102JE	1	435031024R1
AMP0072	R5912	C-CARBON R	RN72K1J-102JE	1	435031024R1
AMP0072	R5913	C-CARBON R	RN72K1J-101JE	1	435031014R1
AMP0072	R5914	C-CARBON R	RN72K1J-101JE	1	435031014R1
AMP0072	R5915	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5916	C-CARBON R	RN72K1J-224JE	1	435032244R1
AMP0072	R5917	C-CARBON R	RN72K1J-101JE	1	435031014R1
AMP0072	R5918	C-CARBON R	RN72K1J-101JE	1	435031014R1
AMP0072	R5919	C-CARBON R	RN72K1J-222JE	1	435032224R1
AMP0072	R5920	C-CARBON R	RN72K1J-222JE	1	435032224R1
AMP0072	R5921	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5922	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5923	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5924	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5925	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5928	C-CARBON R	RN72K1J-000JE	1	435030004R1

AMP0072	R5929	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5930	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5931	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5932	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5933	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5934	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5935	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5936	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5937	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5938	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5939	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5940	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5941	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5942	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R5943	C-CARBON R	RN72K1J-000JE	1	435030004R1
AMP0072	R6000	CARBON R	R16J-4.7K	1	417344724T
AMP0072	R6001	CARBON R	R16J-4.7K	1	417344724T
AMP0072	R6002	CARBON R	R16J-4.7K	1	417344724T
AMP0072	R6003	CARBON R	R16J-4.7K	1	417344724T
AMP0072	R6004	CARBON R	R16J-4.7K	1	417344724T
AMP0072	R6005	CARBON R	R16J-4.7K	1	417344724T
AMP0072	R6006	CARBON R	R16J-4.7K	1	417344724T
AMP0072	R6010	CARBON R	R16J-3.3K	1	417343324T
AMP0072	R6011	CARBON R	R16J-3.3K	1	417343324T
AMP0072	R6012	CARBON R	R16J-3.3K	1	417343324T
AMP0072	R6013	CARBON R	R16J-3.3K	1	417343324T
AMP0072	R6014	CARBON R	R16J-3.3K	1	417343324T
AMP0072	R6015	CARBON R	R16J-3.3K	1	417343324T
AMP0072	R6016	CARBON R	R16J-3.3K	1	417343324T
AMP0072	R6030	CARBON R	R16J-2.2K	1	417342224T
AMP0072	R6031	CARBON R	R16J-2.2K	1	417342224T
AMP0072	R6032	CARBON R	R16J-2.2K	1	417342224T
AMP0072	R6033	CARBON R	R16J-2.2K	1	417342224T

AMP0072	R6034	CARBON R	R16J-2.2K	1	417342224T
AMP0072	R6035	CARBON R	R16J-2.2K	1	417342224T
AMP0072	R6036	CARBON R	R16J-2.2K	1	417342224T
AMP0072	R6040	TRIM R	N06HR2KBC	1	5210390T
AMP0072	R6041	TRIM R	N06HR2KBC	1	5210390T
AMP0072	R6042	TRIM R	N06HR2KBC	1	5210390T
AMP0072	R6043	TRIM R	N06HR2KBC	1	5210390T
AMP0072	R6044	TRIM R	N06HR2KBC	1	5210390T
AMP0072	R6045	TRIM R	N06HR2KBC	1	5210390T
AMP0072	R6046	TRIM R	N06HR2KBC	1	5210390T
AMP0072	R6050	CARBON R	R16J-2.7K	1	417342724T
AMP0072	R6051	CARBON R	R16J-2.7K	1	417342724T
AMP0072	R6052	CARBON R	R16J-2.7K	1	417342724T
AMP0072	R6053	CARBON R	R16J-2.7K	1	417342724T
AMP0072	R6054	CARBON R	R16J-2.7K	1	417342724T
AMP0072	R6055	CARBON R	R16J-2.7K	1	417342724T
AMP0072	R6056	CARBON R	R16J-2.7K	1	417342724T
AMP0072	R6070	NF CARBON R	R25J-82	1	415478204T
AMP0072	R6071	NF CARBON R	R25J-82	1	415478204T
AMP0072	R6072	NF CARBON R	R25J-82	1	415478204T
AMP0072	R6073	NF CARBON R	R25J-82	1	415478204T
AMP0072	R6074	NF CARBON R	R25J-82	1	415478204T
AMP0072	R6075	NF CARBON R	R25J-82	1	415478204T
AMP0072	R6076	NF CARBON R	R25J-82	1	415478204T
AMP0072	R6080	CARBON R	R16J-10	1	417341004T
AMP0072	R6081	CARBON R	R16J-10	1	417341004T
AMP0072	R6082	CARBON R	R16J-10	1	417341004T
AMP0072	R6083	CARBON R	R16J-10	1	417341004T
AMP0072	R6084	CARBON R	R16J-10	1	417341004T
AMP0072	R6085	CARBON R	R16J-10	1	417341004T
AMP0072	R6086	CARBON R	R16J-10	1	417341004T
AMP0072	R6090	CARBON R	R16J-10	1	417341004T
AMP0072	R6091	CARBON R	R16J-10	1	417341004T

AMP0072	R6092	CARBON R	R16J-10	1	417341004T
AMP0072	R6093	CARBON R	R16J-10	1	417341004T
AMP0072	R6094	CARBON R	R16J-10	1	417341004T
AMP0072	R6095	CARBON R	R16J-10	1	417341004T
AMP0072	R6096	CARBON R	R16J-10	1	417341004T
AMP0072	R6100	METAL PR	MPR5W+5W 0R22	1	4000233
AMP0072	R6100 or	METAL PR	RGC55 0.22	(1)	4000132
AMP0072	R6101	METAL PR	MPR5W+5W 0R22	1	4000233
AMP0072	R6101 or	METAL PR	RGC55 0.22	(1)	4000132
AMP0072	R6102	METAL PR	MPR5W+5W 0R22	1	4000233
AMP0072	R6102 or	METAL PR	RGC55 0.22	(1)	4000132
AMP0072	R6103	METAL PR	MPR5W+5W 0R22	1	4000233
AMP0072	R6103 or	METAL PR	RGC55 0.22	(1)	4000132
AMP0072	R6104	METAL PR	MPR5W+5W 0R22	1	4000233
AMP0072	R6104 or	METAL PR	RGC55 0.22	(1)	4000132
AMP0072	R6105	METAL PR	MPR5W+5W 0R22	1	4000233
AMP0072	R6105 or	METAL PR	RGC55 0.22	(1)	4000132
AMP0072	R6106	METAL PR	MPR5W+5W 0R22	1	4000233
AMP0072	R6106 or	METAL PR	RGC55 0.22	(1)	4000132
AMP0072	R6140	C-CARBON R	RN72K1J-563JE	1	435035634R1
AMP0072	R6141	C-CARBON R	RN72K1J-563JE	1	435035634R1
AMP0072	R6142	C-CARBON R	RN72K1J-563JE	1	435035634R1
AMP0072	R6143	C-CARBON R	RN72K1J-563JE	1	435035634R1
AMP0072	R6144	C-CARBON R	RN72K1J-563JE	1	435035634R1
AMP0072	R6145	C-CARBON R	RN72K1J-563JE	1	435035634R1
AMP0072	R6146	C-CARBON R	RN72K1J-563JE	1	435035634R1
AMP0072	R6150	C-CARBON R	RN72K1J-103JE	1	435031034R1
AMP0072	R6151	C-CARBON R	RN72K1J-103JE	1	435031034R1
AMP0072	R6152	C-CARBON R	RN72K1J-103JE	1	435031034R1
AMP0072	R6153	C-CARBON R	RN72K1J-103JE	1	435031034R1
AMP0072	R6154	C-CARBON R	RN72K1J-103JE	1	435031034R1
AMP0072	R6155	C-CARBON R	RN72K1J-103JE	1	435031034R1
AMP0072	R6156	C-CARBON R	RN72K1J-103JE	1	435031034R1

AMP0072	R6160	CARBON R	R16J-33K	1	417343334T
AMP0072	R6161	CARBON R	R16J-33K	1	417343334T
AMP0072	R6162	CARBON R	R16J-33K	1	417343334T
AMP0072	R6163	CARBON R	R16J-33K	1	417343334T
AMP0072	R6164	CARBON R	R16J-33K	1	417343334T
AMP0072	R6165	CARBON R	R16J-33K	1	417343334T
AMP0072	R6166	CARBON R	R16J-33K	1	417343334T
AMP0072	R6170	CARBON R	R16J-47K	1	417344734T
AMP0072	R6171	CARBON R	R16J-47K	1	417344734T
AMP0072	R6172	CARBON R	R16J-47K	1	417344734T
AMP0072	R6173	CARBON R	R16J-47K	1	417344734T
AMP0072	R6174	CARBON R	R16J-47K	1	417344734T
AMP0072	R6175	CARBON R	R16J-47K	1	417344734T
AMP0072	R6176	CARBON R	R16J-47K	1	417344734T
AMP0072	R6180	CARBON R	R16J-47K	1	417344734T
AMP0072	R6181	CARBON R	R16J-47K	1	417344734T
AMP0072	R6182	CARBON R	R16J-47K	1	417344734T
AMP0072	R6183	CARBON R	R16J-47K	1	417344734T
AMP0072	R6184	CARBON R	R16J-47K	1	417344734T
AMP0072	R6185	CARBON R	R16J-47K	1	417344734T
AMP0072	R6186	CARBON R	R16J-47K	1	417344734T
AMP0072	R6197	METAL O R	RS1/2WBJ-33	1	443523304T
AMP0072	R6250	NF CARBON R	R25J-120	1	415471214T
AMP0072	R6251	NF CARBON R	R25J-120	1	415471214T
AMP0072	R6252	NF CARBON R	R25J-120	1	415471214T
AMP0072	R6253	NF CARBON R	R25J-120	1	415471214T
AMP0072	R6254	NF CARBON R	R25J-120	1	415471214T
AMP0072	R6255	NF CARBON R	R25J-120	1	415471214T
AMP0072	R6256	NF CARBON R	R25J-120	1	415471214T
AMP0072	R6260	NF CARBON R	R25J-120	1	415471214T
AMP0072	R6261	NF CARBON R	R25J-120	1	415471214T
AMP0072	R6262	NF CARBON R	R25J-120	1	415471214T
AMP0072	R6263	NF CARBON R	R25J-120	1	415471214T

AMP0072	R6264	NF CARBON R	R25J-120	1	415471214T
AMP0072	R6265	NF CARBON R	R25J-120	1	415471214T
AMP0072	R6266	NF CARBON R	R25J-120	1	415471214T
AMP0072	R6270	NF CARBON R	R25J-18	1	415471804T
AMP0072	R6271	NF CARBON R	R25J-18	1	415471804T
AMP0072	R6272	NF CARBON R	R25J-18	1	415471804T
AMP0072	R6273	NF CARBON R	R25J-18	1	415471804T
AMP0072	R6274	NF CARBON R	R25J-18	1	415471804T
AMP0072	R6275	NF CARBON R	R25J-18	1	415471804T
AMP0072	R6276	NF CARBON R	R25J-18	1	415471804T
AMP0072	R6280	NF CARBON R	R25J-18	1	415471804T
AMP0072	R6281	NF CARBON R	R25J-18	1	415471804T
AMP0072	R6282	NF CARBON R	R25J-18	1	415471804T
AMP0072	R6283	NF CARBON R	R25J-18	1	415471804T
AMP0072	R6284	NF CARBON R	R25J-18	1	415471804T
AMP0072	R6285	NF CARBON R	R25J-18	1	415471804T
AMP0072	R6286	NF CARBON R	R25J-18	1	415471804T
AMP0072	R6290	NF CARBON R	R25J-2.2	1	415470224T
AMP0072	R6291	NF CARBON R	R25J-2.2	1	415470224T
AMP0072	R6292	NF CARBON R	R25J-2.2	1	415470224T
AMP0072	R6293	NF CARBON R	R25J-2.2	1	415470224T
AMP0072	R6294	NF CARBON R	R25J-2.2	1	415470224T
AMP0072	R6295	NF CARBON R	R25J-2.2	1	415470224T
AMP0072	R6296	NF CARBON R	R25J-2.2	1	415470224T
AMP0072	R6300	NF CARBON R	R25J-2.2	1	415470224T
AMP0072	R6301	NF CARBON R	R25J-2.2	1	415470224T
AMP0072	R6302	NF CARBON R	R25J-2.2	1	415470224T
AMP0072	R6303	NF CARBON R	R25J-2.2	1	415470224T
AMP0072	R6304	NF CARBON R	R25J-2.2	1	415470224T
AMP0072	R6305	NF CARBON R	R25J-2.2	1	415470224T
AMP0072	R6306	NF CARBON R	R25J-2.2	1	415470224T
AMP0072	R6310	NF CARBON R	R25J-10	1	415471004T
AMP0072	R6311	NF CARBON R	R25J-10	1	415471004T

AMP0072	R6312	NF CARBON R	R25J-10	1	415471004T	
AMP0072	R6313	NF CARBON R	R25J-10	1	415471004T	
AMP0072	R6314	NF CARBON R	R25J-10	1	415471004T	
AMP0072	R6315	NF CARBON R	R25J-10	1	415471004T	
AMP0072	R6316	NF CARBON R	R25J-10	1	415471004T	
AMP0072	R6701	C-CARBON R	RN72K1J-223JE	1	435032234R1	
AMP0072	R6702	C-CARBON R	RN72K1J-103JE	1	435031034R1	
AMP0072	R6704	C-CARBON R	RN72K1J-473JE	1	435034734R1	
AMP0072	R6706	C-CARBON R	RN72K1J-224JE	1	435032244R1	
AMP0072	R6708	C-CARBON R	RN72K1J-333JE	1	435033334R1	
AMP0072	R6709	C-CARBON R	RN72K1J-392JE	1	435033924R1	
AMP0072	R6710	C-CARBON R	RN72K1J-123JE	1	435031234R1	
AMP0072	R6712	C-CARBON R	RN72K1J-103JE	1	435031034R1	
AMP0072	R6714	C-CARBON R	RN72K1J-333JE	1	435033334R1	
AMP0072	R6716	C-CARBON R	RN72K1J-563JE	1	435035634R1	
AMP0072	R6902	C-CARBON R	RN72K1J-102JE	1	435031024R1	
AMP0072	R6903	C-CARBON R	RN72K1J-473JE	1	435034734R1	
AMP0072	R6907	C-CARBON R	RN72K1J-000JE	1	435030004R1	
AMP0072	RL6901	RELAY	NRL-1P10A-DC12-140	1	25065584	! TV-8
AMP0072	RL6902	RELAY	NRL-1P10A-DC12-140	1	25065584	! TV-8

U005	Speaker terminal PC board	BATRM-0083-1A/1B
U006	Primary power supply PC board	BAPS-0084-1A/1B
U007	Speaker terminal-2 PC board	BATRM-0085-1A/1B
U008	Center speaker terminal PC board	BATRM-0086-1A/1B
U009	Power amp. Input circuit PC board	BACLA-0087-1A/1B

PCB	NO.	PART NAME	DESCRIPTION	Q'TY	PART NO.	REMARKS
TRM0083-1B	C5000	UPZ C	2AUPZTF101JE	1	376331014T	
TRM0083-1B	C5000	UPZ C	2AUPZTF101JE	1	376331014T	
TRM0083-1B	C5001	UPZ C	2AUPZTF101JE	1	376331014T	
TRM0083-1B	C5002	UPZ C	2AUPZTF101JE	1	376331014T	
TRM0083-1B	C5003	UPZ C	2AUPZTF101JE	1	376331014T	

TRM0083-1B	C5004	UPZ C	2AUPZTF101JE	1	376331014T
TRM0083-1B	C5005	UPZ C	2AUPZTF101JE	1	376331014T
TRM0083-1B	C5006	UPZ C	2AUPZTF101JE	1	376331014T
TRM0083-1B	C5010	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
TRM0083-1B	C5011	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
TRM0083-1B	C5012	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
TRM0083-1B	C5013	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
TRM0083-1B	C5014	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
TRM0083-1B	C5015	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
TRM0083-1B	C5016	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
TRM0083-1B	C5020	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
TRM0083-1B	C5021	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
TRM0083-1B	C5022	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
TRM0083-1B	C5023	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
TRM0083-1B	C5024	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
TRM0083-1B	C5025	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
TRM0083-1B	C5026	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
TRM0083-1B	C5040	UTSP C	CE04W10V-470M(UTSP)	1	397534717T
TRM0083-1B	C5041	UTSP C	CE04W10V-470M(UTSP)	1	397534717T
TRM0083-1B	C5042	UTSP C	CE04W10V-470M(UTSP)	1	397534717T
TRM0083-1B	C5043	UTSP C	CE04W10V-470M(UTSP)	1	397534717T
TRM0083-1B	C5044	UTSP C	CE04W10V-470M(UTSP)	1	397534717T
TRM0083-1B	C5045	UTSP C	CE04W10V-470M(UTSP)	1	397534717T
TRM0083-1B	C5046	UTSP C	CE04W10V-470M(UTSP)	1	397534717T
TRM0083-1B	C5050	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
TRM0083-1B	C5051	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
TRM0083-1B	C5052	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
TRM0083-1B	C5053	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
TRM0083-1B	C5054	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
TRM0083-1B	C5055	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
TRM0083-1B	C5056	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
TRM0083-1B	C5080	CERA C	CC45SL50V-040C	1	345020401T
TRM0083-1B	C5081	CERA C	CC45SL50V-040C	1	345020401T

TRM0083-1B	C5082	CERA C	CC45SL50V-040C	1	345020401T
TRM0083-1B	C5083	CERA C	CC45SL50V-040C	1	345020401T
TRM0083-1B	C5084	CERA C	CC45SL50V-040C	1	345020401T
TRM0083-1B	C5085	CERA C	CC45SL50V-040C	1	345020401T
TRM0083-1B	C5086	CERA C	CC45SL50V-040C	1	345020401T
TRM0083-1B	C5090	UPZ C	2AUPZTF101JE	1	376331014T
TRM0083-1B	C5091	UPZ C	2AUPZTF101JE	1	376331014T
TRM0083-1B	C5092	UPZ C	2AUPZTF101JE	1	376331014T
TRM0083-1B	C5093	UPZ C	2AUPZTF101JE	1	376331014T
TRM0083-1B	C5094	UPZ C	2AUPZTF101JE	1	376331014T
TRM0083-1B	C5095	UPZ C	2AUPZTF101JE	1	376331014T
TRM0083-1B	C5096	UPZ C	2AUPZTF101JE	1	376331014T
TRM0083-1B	C5100	VR C	CE04W100V-22M(VR)	1	394692207T
TRM0083-1B	C5101	VR C	CE04W100V-22M(VR)	1	394692207T
TRM0083-1B	C5102	VR C	CE04W100V-22M(VR)	1	394692207T
TRM0083-1B	C5103	VR C	CE04W100V-22M(VR)	1	394692207T
TRM0083-1B	C5104	VR C	CE04W100V-22M(VR)	1	394692207T
TRM0083-1B	C5105	VR C	CE04W100V-22M(VR)	1	394692207T
TRM0083-1B	C5106	VR C	CE04W100V-22M(VR)	1	394692207T
TRM0083-1B	C5110	VR C	CE04W100V-22M(VR)	1	394692207T
TRM0083-1B	C5111	VR C	CE04W100V-22M(VR)	1	394692207T
TRM0083-1B	C5112	VR C	CE04W100V-22M(VR)	1	394692207T
TRM0083-1B	C5113	VR C	CE04W100V-22M(VR)	1	394692207T
TRM0083-1B	C5114	VR C	CE04W100V-22M(VR)	1	394692207T
TRM0083-1B	C5115	VR C	CE04W100V-22M(VR)	1	394692207T
TRM0083-1B	C5116	VR C	CE04W100V-22M(VR)	1	394692207T
TRM0083-1B	C6600	TF C	ECQ-V50V-103J	1	374721034T
TRM0083-1B	C6602	TF C	ECQ-V50V-103J	1	374721034T
TRM0083-1B	C6603	TF C	ECQ-V50V-103J	1	374721034T
TRM0083-1B	C6605	TF C	ECQ-V50V-103J	1	374721034T
TRM0083-1B	C6607	TF C	ECQ-V50V-103J	1	374721034T
TRM0083-1B	C6609	TF C	ECQ-V50V-103J	1	374721034T
TRM0083-1B	C6630	TF C	ECQ-V50V-473J	1	374724734T

TRM0083-1B	C6631	TF C	ECQ-V50V-473J	1	374724734T
TRM0083-1B	C6632	TF C	ECQ-V50V-473J	1	374724734T
TRM0083-1B	C6633	TF C	ECQ-V50V-473J	1	374724734T
TRM0083-1B	C6634	TF C	ECQ-V50V-473J	1	374724734T
TRM0083-1B	C6635	TF C	ECQ-V50V-473J	1	374724734T
TRM0083-1B	C6636	TF C	ECQ-V50V-473J	1	374724734T
TRM0083-1B	C6640	MKT C	B32529C0472J289	1	376494724T
TRM0083-1B	C6641	MKT C	B32529C0472J289	1	376494724T
TRM0083-1B	C6642	MKT C	B32529C0472J289	1	376494724T
TRM0083-1B	C6643	MKT C	B32529C0472J289	1	376494724T
TRM0083-1B	C6644	MKT C	B32529C0472J289	1	376494724T
TRM0083-1B	C6645	MKT C	B32529C0472J289	1	376494724T
TRM0083-1B	C6646	MKT C	B32529C0472J289	1	376494724T
TRM0083-1B	C6647	MKT C	B32529C0472J289	1	376494724T
TRM0083-1B	C6648	MKT C	B32529C0472J289	1	376494724T
TRM0083-1B	C6649	MKT C	B32529C0472J289	1	376494724T
TRM0083-1B	C6650	MKT C	B32529C0102J289	1	376491024T
TRM0083-1B	C6651	MKT C	B32529C0102J289	1	376491024T
TRM0083-1B	C6652	MKT C	B32529C0102J289	1	376491024T
TRM0083-1B	C6653	MKT C	B32529C0102J289	1	376491024T
TRM0083-1B	C6654	MKT C	B32529C0102J289	1	376491024T
TRM0083-1B	C6655	MKT C	B32529C0102J289	1	376491024T
TRM0083-1B	C6656	MKT C	B32529C0102J289	1	376491024T
TRM0083-1B	C6657	MKT C	B32529C0102J289	1	376491024T
TRM0083-1B	C6658	MKT C	B32529C0102J289	1	376491024T
TRM0083-1B	C6659	MKT C	B32529C0102J289	1	376491024T
TRM0083-1B	C6660	MKT C	B32529C0102J289	1	376491024T
TRM0083	C901	IS C	ECQU2A103MLC	1	3800039S
TRM0083	C901 or	IS C	RE275V-103M	(1)	3500196S
TRM0083	C901 or	IS C	LE103-C3.5	(1)	3800042S
TRM0083	C902	TF C	ECQ-V50V-104J	1	374721044T
TRM0083	C903	PLA C	MKP R46 104M	1	3800041S
TRM0083	C911	MKT C	B32529C0102J289	1	376491024T

TRM0083	C921	TF C	ECQ-V50V-223J	1	374722234T
TRM0083	C922	UTSP C	CE04W25V-470M(UTSP)	1	397554717T
TRM0083	C930	UTSP C	CE04W25V-220M(UTSP)	1	397552217T
TRM0083	C933	UTSP C	CE04W50V-4.7M(UTSP)	1	397580477T
TRM0083-1B	D5000	ZENER D	MTZJ5.6B	1	224470562T
TRM0083-1B	D5001	ZENER D	MTZJ5.6B	1	224470562T
TRM0083-1B	D5002	ZENER D	MTZJ5.6B	1	224470562T
TRM0083-1B	D5003	ZENER D	MTZJ5.6B	1	224470562T
TRM0083-1B	D5004	ZENER D	MTZJ5.6B	1	224470562T
TRM0083-1B	D5005	ZENER D	MTZJ5.6B	1	224470562T
TRM0083-1B	D5006	ZENER D	MTZJ5.6B	1	224470562T
TRM0083-1B	D6600	DIODE	1SS133	1	223163T
TRM0083-1B	D6603	DIODE	1SS133	1	223163T
TRM0083-1B	D6605	DIODE	1SS133	1	223163T
TRM0083-1B	D6607	DIODE	1SS133	1	223163T
TRM0083-1B	D6609	DIODE	1SS133	1	223163T
TRM0083-1B	D6610	DIODE	1SS133	1	223163T
TRM0083	D911	DIODE	1SS133	1	223163T
TRM0083	D912	DIODE	1SS133	1	223163T
TRM0083	D921	DIODE	1SS133	1	223163T
TRM0083	D922	DIODE	1SS133	1	223163T
TRM0083	D923	DIODE	1SS133	1	223163T
TRM0083	D924	DIODE	1SS133	1	223163T
TRM0083	D925	DIODE	1SS133	1	223163T
TRM0083	D930	DIODE	1SS133	1	223163T
TRM0083	D931	DIODE	1SS133	1	223163T
TRM0083	D933	DIODE	1SS133	1	223163T
TRM0083	D934	ZENER D	MTZJ3.6B	1	224470362T
TRM0083	D935	DIODE	1SS133	1	223163T
TRM0083-1B	E5507B	TRM	NTM-1P233(M1969)	1	25060302
TRM0083-1B	E5509B	TRM	NTM-1P233(M1969)	1	25060302
TRM0083	E6611	TRM	NTM-1P232(M1700)	1	25060301
TRM0083-1B	E6612	TRM-423(SCREW)	NEJITANSI ST3	1	25060495

TRM0083	E901	TRM-423(SCREW)	NEJITANSI ST3	1	25060495
TRM0083	E902	TRM	NTM-1P233(M1969)	1	25060302
TRM0083-1B	F901C	FUSE HOL	NSCT-1P2031	1	25052133T
TRM0083-1B	F901D	FUSE HOL	NSCT-1P2031	1	25052133T
TRM0083-1B	JL4103A	SOCKET	NSCT-5P97	1	25050269
TRM0083-1B	JL6600B	SOCKET	NSCT-7P99	1	25050271
TRM0083-1B	JL6603B	SOCKET	NSCT-9P101	1	25050273
TRM0083-1B	JL6604	JUMPER LEAD	JL11 100 B	1	1J100606B15
TRM0083-1B	JL6604A	WIRE HOL	NSCT-11P882	1	25051095
TRM0083-1B	JL6604B	WIRE TRAP	NPLG-11P594	1	25055632
TRM0083-1B	JL6606	JUMPER LEAD	JL7 150 UL2651#24	1	7J150606B15
TRM0083-1B	JL6606A	WIRE HOL	NSCT-7P878	1	25051091
TRM0083-1B	JL6607	JUMPER LEAD	JL3 100 B(6-6)	1	3J100606B15
TRM0083-1B	JL6607A	WIRE HOL	NSCT-3P874	1	25051087
TRM0083-1B	JL6607B	WIRE HOL	NSCT-3P874	1	25051087
TRM0083-1B	JL6620B	WIRE TRAP	NPLG-7P590	1	25055628
TRM0083	JL901	JUMPER LEAD	JL5 200B(6-6)	1	5J200606B15
TRM0083	JL901A	WIRE HOL	NSCT-5P876	1	25051089
TRM0083-1B	L6600	S COIL	SC-0.8X11.5X12.5T-6.5L	1	231393S
TRM0083-1B	L6601	S COIL	SC-0.8X11.5X12.5T-6.5L	1	231393S
TRM0083-1B	L6602	S COIL	SC-0.8X11.5X12.5T-6.5L	1	231393S
TRM0083-1B	L6603	S COIL	SC-0.8X11.5X12.5T-6.5L	1	231393S
TRM0083-1B	L6604	S COIL	SC-0.8X11.5X12.5T-6.5L	1	231393S
TRM0083-1B	L6605	S COIL	SC-0.8X11.5X12.5T-6.5L	1	231393S
TRM0083-1B	L6606	S COIL	SC-0.8X11.5X12.5T-6.5L	1	231393S
TRM0083	P1008B	SOCKET	IMSA-9142S-20A	1	25053232
TRM0083	P1010B	SOCKET	IMSA-9142S-20A	1	25053232
TRM0083-1B	P6000A	SOCKET	NSCT-7P2187	1	25052290
TRM0083-1B	P6001A	SOCKET	NSCT-7P2187	1	25052290
TRM0083-1B	P6002A	SOCKET	NSCT-7P2187	1	25052290
TRM0083-1B	P6003A	SOCKET	NSCT-7P2187	1	25052290
TRM0083-1B	P6004A	SOCKET	NSCT-7P2187	1	25052290
TRM0083-1B	P6005A	SOCKET	NSCT-7P2187	1	25052290

TRM0083-1B	P6006A	SOCKET	NSCT-7P2187	1	25052290	
TRM0083-1B	P6600	TRM	NTM-2PDMCR400	1	25060472	
TRM0083-1B	P6601	TRM	NTM-2PDMCR400	1	25060472	RED/BLK
TRM0083-1B	P6602	TRM	NTM-2PDMCR400	1	25060472	
TRM0083-1B	P6603	TRM	NTM-2PDMCR400	1	25060472	
TRM0083-1B	P6604	TRM	NTM-2PDMCR400	1	25060472	
TRM0083-1B	P6605	TRM	NTM-2PDMCR400	1	25060472	
TRM0083-1B	P6606	TRM	NTM-2PDMCR400	1	25060472	
TRM0083-1B	P6607	TRM	NTM-2PDMCR400	1	25060472	SPZ2L
TRM0083-1B	P6608	TRM	NTM-2PDMCR400	1	25060472	SPZ2R:
TRM0083-1B	P6609	TRM	NTM-2PDMCR400	1	25060472	
TRM0083-1B	P6610	TRM	NTM-2PDMCR400	1	25060472	
TRM0083-1B	P6621	SOCKET	IMSA-9142S-16A	1	25053230	
TRM0083	P911	PLUG	NPLG-2P631	1	25055675	TRANS PRI
TRM0083	P911 or	PLUG	1-1123724-2	(1)	25056402	TRANS PRI
TRM0083	P921C	PLUG	NPLG-2P631	1	25055675	AC CORD
TRM0083	P921C or	PLUG	1-1123724-2	(1)	25056402	
TRM0083-1B	Q5000	TR	2SC2240-BL(TPE2_F)	1	2211406T	
TRM0083-1B	Q5001	TR	2SC2240-BL(TPE2_F)	1	2211406T	
TRM0083-1B	Q5002	TR	2SC2240-BL(TPE2_F)	1	2211406T	
TRM0083-1B	Q5003	TR	2SC2240-BL(TPE2_F)	1	2211406T	
TRM0083-1B	Q5004	TR	2SC2240-BL(TPE2_F)	1	2211406T	
TRM0083-1B	Q5005	TR	2SC2240-BL(TPE2_F)	1	2211406T	
TRM0083-1B	Q5006	TR	2SC2240-BL(TPE2_F)	1	2211406T	
TRM0083-1B	Q5010	TR	2SC2240-BL(TPE2_F)	1	2211406T	
TRM0083-1B	Q5011	TR	2SC2240-BL(TPE2_F)	1	2211406T	
TRM0083-1B	Q5012	TR	2SC2240-BL(TPE2_F)	1	2211406T	
TRM0083-1B	Q5013	TR	2SC2240-BL(TPE2_F)	1	2211406T	
TRM0083-1B	Q5014	TR	2SC2240-BL(TPE2_F)	1	2211406T	
TRM0083-1B	Q5015	TR	2SC2240-BL(TPE2_F)	1	2211406T	
TRM0083-1B	Q5016	TR	2SC2240-BL(TPE2_F)	1	2211406T	
TRM0083-1B	Q5030	TR	2SA949-Y(TPE6_F)	1	2211354T	
TRM0083-1B	Q5031	TR	2SA949-Y(TPE6_F)	1	2211354T	

TRM0083-1B	Q5032	TR	2SA949-Y(TPE6_F)	1	2211354T
TRM0083-1B	Q5033	TR	2SA949-Y(TPE6_F)	1	2211354T
TRM0083-1B	Q5034	TR	2SA949-Y(TPE6_F)	1	2211354T
TRM0083-1B	Q5035	TR	2SA949-Y(TPE6_F)	1	2211354T
TRM0083-1B	Q5036	TR	2SA949-Y(TPE6_F)	1	2211354T
TRM0083-1B	Q5040	TR	2SA949-Y(TPE6_F)	1	2211354T
TRM0083-1B	Q5041	TR	2SA949-Y(TPE6_F)	1	2211354T
TRM0083-1B	Q5042	TR	2SA949-Y(TPE6_F)	1	2211354T
TRM0083-1B	Q5043	TR	2SA949-Y(TPE6_F)	1	2211354T
TRM0083-1B	Q5044	TR	2SA949-Y(TPE6_F)	1	2211354T
TRM0083-1B	Q5045	TR	2SA949-Y(TPE6_F)	1	2211354T
TRM0083-1B	Q5046	TR	2SA949-Y(TPE6_F)	1	2211354T
TRM0083-1B	Q5050	TR	2SC2240-BL(TPE2_F)	1	2211406T
TRM0083-1B	Q5050 or	TR	2SC2240-GR	(1)	2211405T
TRM0083-1B	Q5051	TR	2SC2240-BL(TPE2_F)	1	2211406T
TRM0083-1B	Q5051 or	TR	2SC2240-GR	(1)	2211405T
TRM0083-1B	Q5052	TR	2SC2240-BL(TPE2_F)	1	2211406T
TRM0083-1B	Q5052 or	TR	2SC2240-GR	(1)	2211405T
TRM0083-1B	Q5053	TR	2SC2240-BL(TPE2_F)	1	2211406T
TRM0083-1B	Q5053 or	TR	2SC2240-GR	(1)	2211405T
TRM0083-1B	Q5054	TR	2SC2240-BL(TPE2_F)	1	2211406T
TRM0083-1B	Q5054 or	TR	2SC2240-GR	(1)	2211405T
TRM0083-1B	Q5055	TR	2SC2240-BL(TPE2_F)	1	2211406T
TRM0083-1B	Q5055 or	TR	2SC2240-GR	(1)	2211405T
TRM0083-1B	Q5056	TR	2SC2240-BL(TPE2_F)	1	2211406T
TRM0083-1B	Q5056 or	TR	2SC2240-GR	(1)	2211405T
TRM0083-1B	Q5060	TR	2SA949-Y(TPE6_F)	1	2211354T
TRM0083-1B	Q5061	TR	2SA949-Y(TPE6_F)	1	2211354T
TRM0083-1B	Q5062	TR	2SA949-Y(TPE6_F)	1	2211354T
TRM0083-1B	Q5063	TR	2SA949-Y(TPE6_F)	1	2211354T
TRM0083-1B	Q5064	TR	2SA949-Y(TPE6_F)	1	2211354T
TRM0083-1B	Q5065	TR	2SA949-Y(TPE6_F)	1	2211354T
TRM0083-1B	Q5066	TR	2SA949-Y(TPE6_F)	1	2211354T

TRM0083-1B	Q5070	TR	2SC2229-Y(TPE6_F)	1	2211634T
TRM0083-1B	Q5071	TR	2SC2229-Y(TPE6_F)	1	2211634T
TRM0083-1B	Q5072	TR	2SC2229-Y(TPE6_F)	1	2211634T
TRM0083-1B	Q5073	TR	2SC2229-Y(TPE6_F)	1	2211634T
TRM0083-1B	Q5074	TR	2SC2229-Y(TPE6_F)	1	2211634T
TRM0083-1B	Q5075	TR	2SC2229-Y(TPE6_F)	1	2211634T
TRM0083-1B	Q5076	TR	2SC2229-Y(TPE6_F)	1	2211634T
TRM0083-1B	Q6601	TR	RN1226	1	2214680T
TRM0083-1B	Q6602	TR	RN1226	1	2214680T
TRM0083-1B	Q6603	TR	RN1226	1	2214680T
TRM0083-1B	Q6604	TR	RN1226	1	2214680T
TRM0083-1B	Q6605	TR	RN1226	1	2214680T
TRM0083-1B	Q6606	TR	RN1226	1	2214680T
TRM0083-1B	R5000	CARBON R	R16J-1.5K	1	417341524T
TRM0083-1B	R5001	CARBON R	R16J-1.5K	1	417341524T
TRM0083-1B	R5002	CARBON R	R16J-1.5K	1	417341524T
TRM0083-1B	R5003	CARBON R	R16J-1.5K	1	417341524T
TRM0083-1B	R5004	CARBON R	R16J-1.5K	1	417341524T
TRM0083-1B	R5005	CARBON R	R16J-1.5K	1	417341524T
TRM0083-1B	R5006	CARBON R	R16J-1.5K	1	417341524T
TRM0083-1B	R5010	CARBON R	R16J-33K	1	417343334T
TRM0083-1B	R5011	CARBON R	R16J-33K	1	417343334T
TRM0083-1B	R5012	CARBON R	R16J-33K	1	417343334T
TRM0083-1B	R5013	CARBON R	R16J-33K	1	417343334T
TRM0083-1B	R5014	CARBON R	R16J-33K	1	417343334T
TRM0083-1B	R5015	CARBON R	R16J-33K	1	417343334T
TRM0083-1B	R5016	CARBON R	R16J-33K	1	417343334T
TRM0083-1B	R5020	CARBON R	R16J-330	1	417343314T
TRM0083-1B	R5021	CARBON R	R16J-330	1	417343314T
TRM0083-1B	R5022	CARBON R	R16J-330	1	417343314T
TRM0083-1B	R5023	CARBON R	R16J-330	1	417343314T
TRM0083-1B	R5024	CARBON R	R16J-330	1	417343314T
TRM0083-1B	R5025	CARBON R	R16J-330	1	417343314T

TRM0083-1B	R5026	CARBON R	R16J-330	1	417343314T
TRM0083-1B	R5030	CARBON R	R16J-33K	1	417343334T
TRM0083-1B	R5031	CARBON R	R16J-33K	1	417343334T
TRM0083-1B	R5032	CARBON R	R16J-33K	1	417343334T
TRM0083-1B	R5033	CARBON R	R16J-33K	1	417343334T
TRM0083-1B	R5034	CARBON R	R16J-33K	1	417343334T
TRM0083-1B	R5035	CARBON R	R16J-33K	1	417343334T
TRM0083-1B	R5036	CARBON R	R16J-33K	1	417343334T
TRM0083-1B	R5040	CARBON R	R16J-1K	1	417341024T
TRM0083-1B	R5041	CARBON R	R16J-1K	1	417341024T
TRM0083-1B	R5042	CARBON R	R16J-1K	1	417341024T
TRM0083-1B	R5043	CARBON R	R16J-1K	1	417341024T
TRM0083-1B	R5044	CARBON R	R16J-1K	1	417341024T
TRM0083-1B	R5045	CARBON R	R16J-1K	1	417341024T
TRM0083-1B	R5046	CARBON R	R16J-1K	1	417341024T
TRM0083-1B	R5050	CARBON R	R16J-5.6K	1	417345624T
TRM0083-1B	R5051	CARBON R	R16J-5.6K	1	417345624T
TRM0083-1B	R5052	CARBON R	R16J-5.6K	1	417345624T
TRM0083-1B	R5053	CARBON R	R16J-5.6K	1	417345624T
TRM0083-1B	R5054	CARBON R	R16J-5.6K	1	417345624T
TRM0083-1B	R5055	CARBON R	R16J-5.6K	1	417345624T
TRM0083-1B	R5056	CARBON R	R16J-5.6K	1	417345624T
TRM0083-1B	R5060	CARBON R	R16J-2.7K	1	417342724T
TRM0083-1B	R5061	CARBON R	R16J-2.7K	1	417342724T
TRM0083-1B	R5062	CARBON R	R16J-2.7K	1	417342724T
TRM0083-1B	R5063	CARBON R	R16J-2.7K	1	417342724T
TRM0083-1B	R5064	CARBON R	R16J-2.7K	1	417342724T
TRM0083-1B	R5065	CARBON R	R16J-2.7K	1	417342724T
TRM0083-1B	R5066	CARBON R	R16J-2.7K	1	417342724T
TRM0083-1B	R5080	NF CARBON R	R25J-1.0K	1	415471024T
TRM0083-1B	R5081	NF CARBON R	R25J-1.0K	1	415471024T
TRM0083-1B	R5082	NF CARBON R	R25J-1.0K	1	415471024T
TRM0083-1B	R5083	NF CARBON R	R25J-1.0K	1	415471024T

TRM0083-1B	R5084	NF CARBON R	R25J-1.0K	1	415471024T
TRM0083-1B	R5085	NF CARBON R	R25J-1.0K	1	415471024T
TRM0083-1B	R5086	NF CARBON R	R25J-1.0K	1	415471024T
TRM0083-1B	R5090	CARBON R	R16J-100K	1	417341044T
TRM0083-1B	R5091	CARBON R	R16J-100K	1	417341044T
TRM0083-1B	R5092	CARBON R	R16J-100K	1	417341044T
TRM0083-1B	R5093	CARBON R	R16J-100K	1	417341044T
TRM0083-1B	R5094	CARBON R	R16J-100K	1	417341044T
TRM0083-1B	R5095	CARBON R	R16J-100K	1	417341044T
TRM0083-1B	R5096	CARBON R	R16J-100K	1	417341044T
TRM0083-1B	R5100	CARBON R	R16J-100K	1	417341044T
TRM0083-1B	R5101	CARBON R	R16J-100K	1	417341044T
TRM0083-1B	R5102	CARBON R	R16J-100K	1	417341044T
TRM0083-1B	R5103	CARBON R	R16J-100K	1	417341044T
TRM0083-1B	R5104	CARBON R	R16J-100K	1	417341044T
TRM0083-1B	R5105	CARBON R	R16J-100K	1	417341044T
TRM0083-1B	R5106	CARBON R	R16J-100K	1	417341044T
TRM0083-1B	R5110	CARBON R	R16J-2.2K	1	417342224T
TRM0083-1B	R5111	CARBON R	R16J-2.2K	1	417342224T
TRM0083-1B	R5112	CARBON R	R16J-2.2K	1	417342224T
TRM0083-1B	R5113	CARBON R	R16J-2.2K	1	417342224T
TRM0083-1B	R5114	CARBON R	R16J-2.2K	1	417342224T
TRM0083-1B	R5115	CARBON R	R16J-2.2K	1	417342224T
TRM0083-1B	R5116	CARBON R	R16J-2.2K	1	417342224T
TRM0083-1B	R5120	CARBON R	R16J-2.2K	1	417342224T
TRM0083-1B	R5121	CARBON R	R16J-2.2K	1	417342224T
TRM0083-1B	R5122	CARBON R	R16J-2.2K	1	417342224T
TRM0083-1B	R5123	CARBON R	R16J-2.2K	1	417342224T
TRM0083-1B	R5124	CARBON R	R16J-2.2K	1	417342224T
TRM0083-1B	R5125	CARBON R	R16J-2.2K	1	417342224T
TRM0083-1B	R5126	CARBON R	R16J-2.2K	1	417342224T
TRM0083-1B	R5130	CARBON R	R16J-18K	1	417341834T
TRM0083-1B	R5131	CARBON R	R16J-18K	1	417341834T

TRM0083-1B	R5132	CARBON R	R16J-18K	1	417341834T
TRM0083-1B	R5133	CARBON R	R16J-18K	1	417341834T
TRM0083-1B	R5134	CARBON R	R16J-18K	1	417341834T
TRM0083-1B	R5135	CARBON R	R16J-18K	1	417341834T
TRM0083-1B	R5136	CARBON R	R16J-18K	1	417341834T
TRM0083-1B	R5140	NF CARBON R	R25J-820	1	415478214T
TRM0083-1B	R5141	NF CARBON R	R25J-820	1	415478214T
TRM0083-1B	R5142	NF CARBON R	R25J-820	1	415478214T
TRM0083-1B	R5143	NF CARBON R	R25J-820	1	415478214T
TRM0083-1B	R5144	NF CARBON R	R25J-820	1	415478214T
TRM0083-1B	R5145	NF CARBON R	R25J-820	1	415478214T
TRM0083-1B	R5146	NF CARBON R	R25J-820	1	415478214T
TRM0083-1B	R5150	NF CARBON R	R25J-1.0K	1	415471024T
TRM0083-1B	R5151	NF CARBON R	R25J-1.0K	1	415471024T
TRM0083-1B	R5152	NF CARBON R	R25J-1.0K	1	415471024T
TRM0083-1B	R5153	NF CARBON R	R25J-1.0K	1	415471024T
TRM0083-1B	R5154	NF CARBON R	R25J-1.0K	1	415471024T
TRM0083-1B	R5155	NF CARBON R	R25J-1.0K	1	415471024T
TRM0083-1B	R5156	NF CARBON R	R25J-1.0K	1	415471024T
TRM0083-1B	R5160	NF CARBON R	R25J-820	1	415478214T
TRM0083-1B	R5161	NF CARBON R	R25J-820	1	415478214T
TRM0083-1B	R5162	NF CARBON R	R25J-820	1	415478214T
TRM0083-1B	R5163	NF CARBON R	R25J-820	1	415478214T
TRM0083-1B	R5164	NF CARBON R	R25J-820	1	415478214T
TRM0083-1B	R5165	NF CARBON R	R25J-820	1	415478214T
TRM0083-1B	R5166	NF CARBON R	R25J-820	1	415478214T
TRM0083-1B	R5170	NF CARBON R	R25J-820	1	415478214T
TRM0083-1B	R5171	NF CARBON R	R25J-820	1	415478214T
TRM0083-1B	R5172	NF CARBON R	R25J-820	1	415478214T
TRM0083-1B	R5173	NF CARBON R	R25J-820	1	415478214T
TRM0083-1B	R5174	NF CARBON R	R25J-820	1	415478214T
TRM0083-1B	R5175	NF CARBON R	R25J-820	1	415478214T
TRM0083-1B	R5176	NF CARBON R	R25J-820	1	415478214T

TRM0083-1B	R5180	NF CARBON R	R25J-10	1	415471004T
TRM0083-1B	R5181	NF CARBON R	R25J-10	1	415471004T
TRM0083-1B	R5182	NF CARBON R	R25J-10	1	415471004T
TRM0083-1B	R5183	NF CARBON R	R25J-10	1	415471004T
TRM0083-1B	R5184	NF CARBON R	R25J-10	1	415471004T
TRM0083-1B	R5185	NF CARBON R	R25J-10	1	415471004T
TRM0083-1B	R5186	NF CARBON R	R25J-10	1	415471004T
TRM0083-1B	R5190	NF CARBON R	R25J-10	1	415471004T
TRM0083-1B	R5191	NF CARBON R	R25J-10	1	415471004T
TRM0083-1B	R5192	NF CARBON R	R25J-10	1	415471004T
TRM0083-1B	R5193	NF CARBON R	R25J-10	1	415471004T
TRM0083-1B	R5194	NF CARBON R	R25J-10	1	415471004T
TRM0083-1B	R5195	NF CARBON R	R25J-10	1	415471004T
TRM0083-1B	R5196	NF CARBON R	R25J-10	1	415471004T
TRM0083-1B	R5200	CARBON R	R16J-18K	1	417341834T
TRM0083-1B	R5201	CARBON R	R16J-18K	1	417341834T
TRM0083-1B	R5202	CARBON R	R16J-18K	1	417341834T
TRM0083-1B	R5203	CARBON R	R16J-18K	1	417341834T
TRM0083-1B	R5204	CARBON R	R16J-18K	1	417341834T
TRM0083-1B	R5205	CARBON R	R16J-18K	1	417341834T
TRM0083-1B	R5206	CARBON R	R16J-18K	1	417341834T
TRM0083-1B	R5210	NF CARBON R	R25J-120	1	415471214T
TRM0083-1B	R5211	NF CARBON R	R25J-120	1	415471214T
TRM0083-1B	R5212	NF CARBON R	R25J-120	1	415471214T
TRM0083-1B	R5213	NF CARBON R	R25J-120	1	415471214T
TRM0083-1B	R5214	NF CARBON R	R25J-120	1	415471214T
TRM0083-1B	R5215	NF CARBON R	R25J-120	1	415471214T
TRM0083-1B	R5216	NF CARBON R	R25J-120	1	415471214T
TRM0083-1B	R5220	NF CARBON R	R25J-120	1	415471214T
TRM0083-1B	R5221	NF CARBON R	R25J-120	1	415471214T
TRM0083-1B	R5222	NF CARBON R	R25J-120	1	415471214T
TRM0083-1B	R5223	NF CARBON R	R25J-120	1	415471214T
TRM0083-1B	R5224	NF CARBON R	R25J-120	1	415471214T

TRM0083-1B	R5225	NF CARBON R	R25J-120	1	415471214T
TRM0083-1B	R5226	NF CARBON R	R25J-120	1	415471214T
TRM0083-1B	R5300	CARBON R	R16J-330	1	417343314T
TRM0083-1B	R5301	CARBON R	R16J-330	1	417343314T
TRM0083-1B	R5302	CARBON R	R16J-330	1	417343314T
TRM0083-1B	R5303	CARBON R	R16J-330	1	417343314T
TRM0083-1B	R5304	CARBON R	R16J-330	1	417343314T
TRM0083-1B	R5305	CARBON R	R16J-330	1	417343314T
TRM0083-1B	R5306	CARBON R	R16J-330	1	417343314T
TRM0083-1B	R5310	CARBON R	R16J-330	1	417343314T
TRM0083-1B	R5311	CARBON R	R16J-330	1	417343314T
TRM0083-1B	R5312	CARBON R	R16J-330	1	417343314T
TRM0083-1B	R5313	CARBON R	R16J-330	1	417343314T
TRM0083-1B	R5314	CARBON R	R16J-330	1	417343314T
TRM0083-1B	R5315	CARBON R	R16J-330	1	417343314T
TRM0083-1B	R5316	CARBON R	R16J-330	1	417343314T
TRM0083-1B	R6600	CARBON R	R16J-22	1	417342204T
TRM0083-1B	R6601	CARBON R	R16J-22	1	417342204T
TRM0083-1B	R6602	CARBON R	R16J-22	1	417342204T
TRM0083-1B	R6603	CARBON R	R16J-22	1	417342204T
TRM0083-1B	R6604	CARBON R	R16J-22	1	417342204T
TRM0083-1B	R6605	CARBON R	R16J-22	1	417342204T
TRM0083-1B	R6606	CARBON R	R16J-22	1	417342204T
TRM0083-1B	R6610	CARBON R	R16J-22	1	417342204T
TRM0083-1B	R6611	CARBON R	R16J-22	1	417342204T
TRM0083-1B	R6612	CARBON R	R16J-22	1	417342204T
TRM0083-1B	R6613	CARBON R	R16J-22	1	417342204T
TRM0083-1B	R6614	CARBON R	R16J-22	1	417342204T
TRM0083-1B	R6615	CARBON R	R16J-22	1	417342204T
TRM0083-1B	R6616	CARBON R	R16J-22	1	417342204T
TRM0083-1B	R6630	METAL R	RNU1WCJ-8.2	1	453630824T
TRM0083-1B	R6631	METAL R	RNU1WCJ-8.2	1	453630824T
TRM0083-1B	R6632	METAL R	RNU1WCJ-8.2	1	453630824T

TRM0083-1B	R6633	METAL R	RNU1WCJ-8.2	1	453630824T	
TRM0083-1B	R6634	METAL R	RNU1WCJ-8.2	1	453630824T	
TRM0083-1B	R6635	METAL R	RNU1WCJ-8.2	1	453630824T	
TRM0083-1B	R6636	METAL R	RNU1WCJ-8.2	1	453630824T	
TRM0083-1B	R6690	METAL R	RNU1WCJ-8.2	1	453630824T	
TRM0083-1B	R6691	METAL O R	RS1/2WBJ-390	1	443523914T	
TRM0083-1B	R6692	METAL O R	RS1/2WBJ-390	1	443523914T	
TRM0083	R921	METAL O R	RS1/2WBJ-47	1	443524704T	PRI RL
TRM0083	R922	METAL O R	RS1/2WBJ-68	1	443526804T	PRI RL
TRM0083	R934	CARBON R	R16J-33K	1	417343334T	
TRM0083-1B	RL6600	RELAY	NRL-2P5A-DC24-193	1	25065703	!
TRM0083-1B	RL6602	RELAY	NRL-2P5A-DC24-193	1	25065703	!
TRM0083-1B	RL6603	RELAY	NRL-2P5A-DC24-193	1	25065703	!
TRM0083-1B	RL6605	RELAY	NRL-2P5A-DC24-193	1	25065703	!
TRM0083-1B	RL6607	RELAY	NRL-2P5A-DC24-193	1	25065703	!
TRM0083-1B	RL6609	RELAY	NRL-2P5A-DC24-193	1	25065703	!
TRM0083	RL901	RELAY	NRL-1P10A-DC9-186	1	25065683	! TV-8
TRM0083-1B	T902	P TRANS	NPT-1520JQ	1	2301812A	Except <MDC><MDF>
TRM0083-1B	T902	P TRANS	NPT-1520GQ	1	2301813A	Except <MDC><MDF>

U010	Digital input circuit PC board
U011	RI terminal PC board
U012	Video circuit PC board
U013	Universal port terminal PC board

BADG-0099-1A
BACPU-0100-1A
BAVD-0101-1A
BAETC-0103-1A

PCB	NO.	PART NAME	DESCRIPTION	Q'TY	PART NO.	REMARKS
DG0099	C1	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	Except <MDC><MDF>
DG0099	C1001	C-CERA C	CK725F1A-105Z1	1	332181050R1	
DG0099	C1004	C-CERA C	CK725F1A-105Z1	1	332181050R1	
DG0099	C1005	C-CERA C	CK725F1E-104Z1	1	332161040R1	
DG0099	C1006	C-CERA C	CK725F1E-104Z1	1	332161040R1	
DG0099	C1007	C-CERA C	CK725F1A-105Z1	1	332181050R1	

DG0099	C1008	C-CERA C	CC725CH1H-101J1	1	342101014R1	
DG0099	C1009	C-CERA C	CC725CH1H-101J1	1	342101014R1	
DG0099	C101	C-CERA C	CC725CH1H-221J1	1	342102214R1	Except <MDC><MDF>
DG0099	C1010	C-CERA C	CC725CH1H-101J1	1	342101014R1	
DG0099	C1015	UTSP C	CE04W25V-100M(UTSP)	1	397551017T	
DG0099	C1017	UTSP C	CE04W10V-100M(UTSP)	1	397531017T	
DG0099	C1019	UTSP C	CE04W10V-100M(UTSP)	1	397531017T	
DG0099	C102	C-CERA C	CC725CH1H-331J1	1	342103314R1	Except <MDC><MDF>
DG0099	C1020	C-CERA C	CK725F1A-105Z1	1	332181050R1	
DG0099	C1021	C-CERA C	CK725B1H-102K1	1	332101025R1	
DG0099	C1022	C-CERA C	CK725B1H-102K1	1	332101025R1	
DG0099	C1023	ELECT C	CE04W25V-4.7M(MA)	1	355750479T	
DG0099	C1024	C-CERA C	CK725B1H-102K1	1	332101025R1	
DG0099	C1025	C-CERA C	CK725B1H-102K1	1	332101025R1	
DG0099	C1026	C-CERA C	CK725B1H-102K1	1	332101025R1	
DG0099	C1027	C-CERA C	CK725B1H-102K1	1	332101025R1	
DG0099	C1028	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
DG0099	C1029	UTSP C	CE04W10V-100M(UTSP)	1	397531017T	
DG0099	C103	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	Except <MDC><MDF>
DG0099	C1030	C-CERA C	CK725F1E-104Z1	1	332161040R1	
DG0099	C1031	C-CERA C	CK725F1E-104Z1	1	332161040R1	
DG0099	C1032	C-CERA C	CK725F1E-104Z1	1	332161040R1	
DG0099	C1033	C-CERA C	CK725F1E-104Z1	1	332161040R1	
DG0099	C1034	C-CERA C	CK725F1E-104Z1	1	332161040R1	
DG0099	C1036	C-CERA C	CK725F1E-104Z1	1	332161040R1	
DG0099	C1037	C-CERA C	CK725F1E-104Z1	1	332161040R1	
DG0099	C1038	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
DG0099	C1039	C-CERA C	CK725F1E-104Z1	1	332161040R1	
DG0099	C104	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	Except <MDC><MDF>
DG0099	C1040	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
DG0099	C1041	ELECT C	CE04W16V-10M	1	355741009T	
DG0099	C1042	C-CERA C	CK725F1E-104Z1	1	332161040R1	
DG0099	C1043	C-CERA C	CK725F1A-105Z1	1	332181050R1	

DG0099	C1044	C-CERA C	CK725F1A-105Z1	1	332181050R1	
DG0099	C1045	C-CERA C	CK725F1A-105Z1	1	332181050R1	
DG0099	C1046	C-CERA C	CK725F1A-105Z1	1	332181050R1	
DG0099	C1047	C-CERA C	CK725F1A-105Z1	1	332181050R1	
DG0099	C1048	C-CERA C	CK725F1A-105Z1	1	332181050R1	
DG0099	C105	C-CERA C	CK725B1H-103K1	1	332101035R1	Except <MDC><MDF>
DG0099	C1053	C-CERA C	CK725B1H-102K1	1	332101025R1	
DG0099	C1054	UTSP C	CE04W10V-220M(UTSP)	1	397532217T	
DG0099	C106	C-CERA C	CC725CH1H-331J1	1	342103314R1	Except <MDC><MDF>
DG0099	C1060	C-CERA C	CK725B1H-102K1	1	332101025R1	
DG0099	C1061	C-CERA C	CK725B1H-102K1	1	332101025R1	
DG0099	C107	C-CERA C	CK725F1E-104Z1	1	332161040R1	Except <MDC><MDF>
DG0099	C108	C-CERA C	CC725CH1H-150J1	1	342101504R1	Except <MDC><MDF>
DG0099	C109	C-CERA C	CC725CH1H-150J1	1	342101504R1	Except <MDC><MDF>
DG0099	C110	C-CERA C	CK725F1A-105Z1	1	332181050R1	Except <MDC><MDF>
DG0099	C1290	UTSP C	CE04W25V-100M(UTSP)	1	397551017T	
DG0099	C1291	C-CERA C	CK725F1E-104Z1	1	332161040R1	
DG0099	C1292	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
DG0099	C1293	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
DG0099	C1294	UTSP C	CE04W50V-22M(UTSP)	1	397582207T	
DG0099	C1295	UTSP C	CE04W50V-22M(UTSP)	1	397582207T	
DG0099	C1296	UTSP C	CE04W50V-22M(UTSP)	1	397582207T	
DG0099	C1302	UTSP C	CE04W10V-100M(UTSP)	1	397531017T	
DG0099	C1303	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
DG0099	C1304	C-CERA C	CK725F1E-104Z1	1	332161040R1	
DG0099	C1305	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
DG0099	C1306	C-CERA C	CK725F1E-104Z1	1	332161040R1	
DG0099	C1307	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
DG0099	C1308	C-CERA C	CK725F1E-104Z1	1	332161040R1	
DG0099	C1309	C-CERA C	CK725F1E-104Z1	1	332161040R1	
DG0099	C1310	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
DG0099	C1311	C-CERA C	CK725F1E-104Z1	1	332161040R1	
DG0099	C1365	C-CERA C	CK725B1C-104K1	1	332121045R1	

DG0099	C1366	C-CERA C	CC725CH1H-101J1	1	342101014R1
DG0099	C1368	C-CERA C	CC725CH1H-101J1	1	342101014R1
DG0099	C1369	UTSP C	CE04W10V-100M(UTSP)	1	397531017T
DG0099	C1370	UTSP C	CE04W10V-470M(UTSP)	1	397534717T
DG0099	C1371	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C1372	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C1373	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C1374	UTSP C	CE04W10V-470M(UTSP)	1	397534717T
DG0099	C1375	C-CERA C	CK725B1C-104K1	1	332121045R1
DG0099	C1376	UTSP C	CE04W10V-100M(UTSP)	1	397531017T
DG0099	C1377	UTSJ C	CE04W50V-47M(UTSJ)	1	398084707T
DG0099	C1379	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C1380	C-CERA C	CK725B1C-104K1	1	332121045R1
DG0099	C1381	C-CERA C	CC725CH1H-101J1	1	342101014R1
DG0099	C1388	C-CERA C	CK725B1H-102K1	1	332101025R1
DG0099	C1390	C-CERA C	CK725B1H-223K1	1	332102235R1
DG0099	C1392	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C1396	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C1397	C-CERA C	CK725B1H-102K1	1	332101025R1
DG0099	C1398	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C1399	UTSP C	CE04W10V-470M(UTSP)	1	397534717T
DG0099	C1400	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C1401	C-CERA C	CC725CH1H-330J1	1	342103304R1
DG0099	C1402	C-CERA C	CC725CH1H-330J1	1	342103304R1
DG0099	C1403	C-CERA C	CC725CH1H-330J1	1	342103304R1
DG0099	C1404	C-CERA C	CC725CH1H-330J1	1	342103304R1
DG0099	C1405	C-CERA C	CC725CH1H-330J1	1	342103304R1
DG0099	C1406	C-CERA C	CC725CH1H-330J1	1	342103304R1
DG0099	C1408	C-CERA C	CC725CH1H-080D1	1	342100802R1
DG0099	C1409	C-CERA C	CC725CH1H-080D1	1	342100802R1
DG0099	C1410	UTSP C	CE04W10V-470M(UTSP)	1	397534717T
DG0099	C1411	UTSP C	CE04W10V-470M(UTSP)	1	397534717T
DG0099	C1413	C-CERA C	CK725F1E-104Z1	1	332161040R1

DG0099	C1414	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C1415	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C1417	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C1418	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C1419	C-CERA C	CC725CH1H-080D1	1	342100802R1
DG0099	C1421	UTSP C	CE04W10V-220M(UTSP)	1	397532217T
DG0099	C1424	C-CERA C	CC725CH1H-060D1	1	342100602R1
DG0099	C1425	C-CERA C	CC725CH1H-060D1	1	342100602R1
DG0099	C1430	UTSP C	CE04W10V-470M(UTSP)	1	397534717T
DG0099	C1454	C-FILM C	ECHU16V-104J	1	373041044R2
DG0099	C1455	C-FILM C	ECHU16V-104J	1	373041044R2
DG0099	C1456	C-FILM C	ECHU16V-104J	1	373041044R2
DG0099	C1460	UTSJ C	CE04W50V-47M(UTSJ)	1	398084707T
DG0099	C1499	UTSP C	CE04W10V-100M(UTSP)	1	397531017T
DG0099	C1582	C-FILM C	ECHU50V-222J	1	373022224R2
DG0099	C1583	C-FILM C	ECHU50V-222J	1	373022224R2
DG0099	C1600	UPZ C	2AUPZTF471JE	1	376334714T
DG0099	C1601	UPZ C	2AUPZTF471JE	1	376334714T
DG0099	C1602	UPZ C	2AUPZTF471JE	1	376334714T
DG0099	C1603	UPZ C	2AUPZTF471JE	1	376334714T
DG0099	C1604	UPZ C	2AUPZTF471JE	1	376334714T
DG0099	C1605	UPZ C	2AUPZTF471JE	1	376334714T
DG0099	C1606	UPZ C	2AUPZTF471JE	1	376334714T
DG0099	C1607	UPZ C	2AUPZTF471JE	1	376334714T
DG0099	C1610	CERA C	CC45SL50V-101J	1	345021014T
DG0099	C1611	CERA C	CC45SL50V-101J	1	345021014T
DG0099	C1612	CERA C	CC45SL50V-101J	1	345021014T
DG0099	C1613	CERA C	CC45SL50V-101J	1	345021014T
DG0099	C1614	CERA C	CC45SL50V-101J	1	345021014T
DG0099	C1615	CERA C	CC45SL50V-101J	1	345021014T
DG0099	C1616	CERA C	CC45SL50V-101J	1	345021014T
DG0099	C1617	CERA C	CC45SL50V-101J	1	345021014T
DG0099	C1620	CERA C	CC45SL50V-101J	1	345021014T

DG0099	C1621	CERA C	CC45SL50V-101J	1	345021014T
DG0099	C1622	CERA C	CC45SL50V-101J	1	345021014T
DG0099	C1623	CERA C	CC45SL50V-101J	1	345021014T
DG0099	C1624	CERA C	CC45SL50V-101J	1	345021014T
DG0099	C1625	CERA C	CC45SL50V-101J	1	345021014T
DG0099	C1626	CERA C	CC45SL50V-101J	1	345021014T
DG0099	C1627	CERA C	CC45SL50V-101J	1	345021014T
DG0099	C1650	UTSP C	CE04W25V-220M(UTSP)	1	397552217T
DG0099	C1651	UTSP C	CE04W25V-220M(UTSP)	1	397552217T
DG0099	C1800	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
DG0099	C1801	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
DG0099	C1810	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
DG0099	C1811	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
DG0099	C1900	UTSP C	CE04W25V-100M(UTSP)	1	397551017T
DG0099	C1902	UTSP C	CE04W25V-100M(UTSP)	1	397551017T
DG0099	C1904	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
DG0099	C1905	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
DG0099	C1906	C-CERA C	CC725CH1H-101J1	1	342101014R1
DG0099	C1907	C-CERA C	CC725CH1H-101J1	1	342101014R1
DG0099	C1908	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
DG0099	C1909	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
DG0099	C1911	C-CERA C	CC725CH1H-101J1	1	342101014R1
DG0099	C1912	C-CERA C	CC725CH1H-101J1	1	342101014R1
DG0099	C1913	C-CERA C	CC725CH1H-470J1	1	342104704R1
DG0099	C1914	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C1915	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C1921	C-CERA C	CC725CH1H-471J1	1	342104714R1
DG0099	C1922	C-CERA C	CC725CH1H-471J1	1	342104714R1
DG0099	C1923	C-CERA C	CC725CH1H-221J1	1	342102214R1
DG0099	C1924	C-CERA C	CC725CH1H-221J1	1	342102214R1
DG0099	C1930	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C1931	C-CERA C	CC725CH1H-470J1	1	342104704R1
DG0099	C1941	UTSP C	CE04W25V-100M(UTSP)	1	397551017T

DG0099	C1942	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C1943	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C1944	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
DG0099	C1951	VR C	CE04W6.3V-470M(VR)	1	394624717T
DG0099	C1952	VR C	CE04W6.3V-470M(VR)	1	394624717T
DG0099	C1953	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
DG0099	C1954	UTSP C	CE04W10V-100M(UTSP)	1	397531017T
DG0099	C1955	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C1956	C-CERA C	CC725CH1H-470J1	1	342104704R1
DG0099	C1957	C-CERA C	CC725CH1H-470J1	1	342104704R1
DG0099	C1961	VR C	CE04W6.3V-470M(VR)	1	394624717T
DG0099	C1962	VR C	CE04W6.3V-470M(VR)	1	394624717T
DG0099	C1963	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
DG0099	C1964	UTSP C	CE04W10V-100M(UTSP)	1	397531017T
DG0099	C1965	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C1966	C-CERA C	CC725CH1H-470J1	1	342104704R1
DG0099	C1967	C-CERA C	CC725CH1H-470J1	1	342104704R1
DG0099	C1971	VR C	CE04W6.3V-470M(VR)	1	394624717T
DG0099	C1972	VR C	CE04W6.3V-470M(VR)	1	394624717T
DG0099	C1973	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
DG0099	C1974	UTSP C	CE04W10V-100M(UTSP)	1	397531017T
DG0099	C1975	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C1976	C-CERA C	CK725B1H-102K1	1	332101025R1
DG0099	C1977	C-CERA C	CC725CH1H-470J1	1	342104704R1
DG0099	C1978	C-CERA C	CK725B1H-102K1	1	332101025R1
DG0099	C1979	C-CERA C	CK725B1H-102K1	1	332101025R1
DG0099	C1980	C-CERA C	CC725CH1H-470J1	1	342104704R1
DG0099	C1981	C-CERA C	CC725CH1H-470J1	1	342104704R1
DG0099	C2	VR C	CE04W16V-100M(VR)	1	394641017T
DG0099	C4000	UTSP C	CE04W50V-4.7M(UTSP)	1	397580477T
DG0099	C4001	VR C	CE04W16V-470M(VR)	1	394644717T
DG0099	C4002	UTSP C	CE04W10V-470M(UTSP)	1	397534717T
DG0099	C4003	TF C	ECQ-V50V-334J	1	374723344T

DG0099	C4004	UTSP C	CE04W10V-470M(UTSP)	1	397534717T
DG0099	C4005	C-CERA C	CK725B1H-223K1	1	332102235R1
DG0099	C4006	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C4007	ELECT C	CE04W35V-4700M(VZ)	1	394564727S
DG0099	C4009	TF C	ECQ-V50V-334J	1	374723344T
DG0099	C4010	TF C	ECQ-V50V-334J	1	374723344T
DG0099	C4012	TF C	ECQ-V50V-334J	1	374723344T
DG0099	C4013	ELECT C	CE04W35V-4700M(VZ)	1	394564727S
DG0099	C4100	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
DG0099	C4101	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
DG0099	C4102	UTSP C	CE04W50V-10M(UTSP)	1	397581007T
DG0099	C4103	UTSP C	CE04W50V-2.2M(UTSP)	1	397580227T
DG0099	C4111	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C4112	C-CERA C	CK725B1H-102K1	1	332101025R1
DG0099	C4114	UTSP C	CE04W50V-1M(UTSP)	1	397580107T
DG0099	C4115	VR C	CE04W6.3V-470M(VR)	1	394624717T
DG0099	C4117	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C4119	VR C	CE04W6.3V-470M(VR)	1	394624717T
DG0099	C4121	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C4122	UTSP C	CE04W50V-1M(UTSP)	1	397580107T
DG0099	C4123	UTSP C	CE04W50V-2.2M(UTSP)	1	397580227T
DG0099	C4129	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C4131	C-CERA C	CK725B1H-102K1	1	332101025R1
DG0099	C4132	VR C	CE04W6.3V-470M(VR)	1	394624717T
DG0099	C4133	UTSP C	CE04W50V-1M(UTSP)	1	397580107T
DG0099	C4134	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C4135	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
DG0099	C4136	C-CERA C	CK725B1H-102K1	1	332101025R1
DG0099	C4137	C-CERA C	CK725B0J-106K	1	332091065R2
DG0099	C4138	VR C	CE04W6.3V-470M(VR)	1	394624717T
DG0099	C4139	UTSP C	CE04W50V-22M(UTSP)	1	397582207T
DG0099	C4140	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C4141	UTSP C	CE04W50V-1M(UTSP)	1	397580107T

DG0099	C4143	VR C	CE04W6.3V-470M(VR)	1	394624717T
DG0099	C4144	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C4145	UTSP C	CE04W50V-2.2M(UTSP)	1	397580227T
DG0099	C4146	VR C	CE04W6.3V-470M(VR)	1	394624717T
DG0099	C4150	VR C	CE04W6.3V-470M(VR)	1	394624717T
DG0099	C4151	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
DG0099	C4152	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
DG0099	C4154	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C4156	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
DG0099	C4157	VR C	CE04W6.3V-470M(VR)	1	394624717T
DG0099	C4159	C-CERA C	CK725B1H-102K1	1	332101025R1
DG0099	C4160	VR C	CE04W6.3V-470M(VR)	1	394624717T
DG0099	C4161	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C4162	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C4163	VR C	CE04W6.3V-470M(VR)	1	394624717T
DG0099	C4167	C-CERA C	CK725F1A-105Z1	1	332181050R1
DG0099	C4168	UTSP C	CE04W50V-1M(UTSP)	1	397580107T
DG0099	C4169	UTSP C	CE04W50V-2.2M(UTSP)	1	397580227T
DG0099	C4173	VR C	CE04W6.3V-470M(VR)	1	394624717T
DG0099	C4174	C-CERA C	CK725B1H-102K1	1	332101025R1
DG0099	C4175	C-CERA C	CK725F1A-105Z1	1	332181050R1
DG0099	C4176	UTSP C	CE04W50V-1M(UTSP)	1	397580107T
DG0099	C4179	UTSP C	CE04W50V-2.2M(UTSP)	1	397580227T
DG0099	C4183	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C4184	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
DG0099	C4186	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
DG0099	C4187	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
DG0099	C4191	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C4192	UTSP C	CE04W50V-1M(UTSP)	1	397580107T
DG0099	C4193	C-CERA C	CC725CH1H-151J1	1	342101514R1
DG0099	C4194	C-CERA C	CC725CH1H-151J1	1	342101514R1
DG0099	C4195	C-CERA C	CC725CH1H-151J1	1	342101514R1
DG0099	C4196	C-CERA C	CK725B1H-102K1	1	332101025R1

DG0099	C4197	C-CERA C	CK725F1A-105Z1	1	332181050R1
DG0099	C4198	UTSP C	CE04W50V-1M(UTSP)	1	397580107T
DG0099	C4199	UTSP C	CE04W50V-2.2M(UTSP)	1	397580227T
DG0099	C4200	UTSP C	CE04W50V-1M(UTSP)	1	397580107T
DG0099	C4202	C-CERA C	CK725F1A-105Z1	1	332181050R1
DG0099	C4203	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
DG0099	C4205	UTSP C	CE04W50V-1M(UTSP)	1	397580107T
DG0099	C4206	UTSP C	CE04W50V-2.2M(UTSP)	1	397580227T
DG0099	C4207	UTSP C	CE04W50V-1M(UTSP)	1	397580107T
DG0099	C4209	C-CERA C	CK725B1H-102K1	1	332101025R1
DG0099	C4211	VR C	CE04W6.3V-470M(VR)	1	394624717T
DG0099	C4212	C-CERA C	CC725CH1H-151J1	1	342101514R1
DG0099	C4213	C-CERA C	CC725CH1H-151J1	1	342101514R1
DG0099	C4214	C-CERA C	CC725CH1H-151J1	1	342101514R1
DG0099	C4215	UTSP C	CE04W25V-47M(UTSP)	1	397554707T
DG0099	C4218	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C4219	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C4223	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C4226	VR C	CE04W6.3V-470M(VR)	1	394624717T
DG0099	C4228	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C4234	VR C	CE04W6.3V-470M(VR)	1	394624717T
DG0099	C4235	VR C	CE04W6.3V-470M(VR)	1	394624717T
DG0099	C4250	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C4251	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C4252	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C4253	C-CERA C	CC725CH1H-101J1	1	342101014R1
DG0099	C4254	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C4255	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C4256	C-CERA C	CK725F1E-104Z1	1	332161040R1
DG0099	C4500	UTSP C	CE04W25V-220M(UTSP)	1	397552217T
DG0099	C4502	UTSP C	CE04W25V-220M(UTSP)	1	397552217T
DG0099	C4503	UTSP C	CE04W25V-220M(UTSP)	1	397552217T
DG0099	C47	ELECT C	CE04W35V-10M(S)	1	353761009T

DG0099	C4700	UTSP C	CE04W50V-1M(UTSP)	1	397580107T	
DG0099	C4701	UTSP C	CE04W50V-1M(UTSP)	1	397580107T	
DG0099	C4702	VR C	CE04W16V-100M(VR)	1	394641017T	
DG0099	C4703	C-CERA C	CK725F1E-104Z1	1	332161040R1	
DG0099	C4704	UTSP C	CE04W50V-1M(UTSP)	1	397580107T	
DG0099	C4705	UTSP C	CE04W50V-1M(UTSP)	1	397580107T	
DG0099	C4706	C-CERA C	CK725B1H-102K1	1	332101025R1	
DG0099	C48	ELECT C	CE04W35V-10M(S)	1	353761009T	
DG0099	C52	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	<MDC><MDF>
DG0099	C53	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	<MDC><MDF>
DG0099	C7	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
DG0099	D1001	C-DIODE	1SS352	1	223234R2	
DG0099	D1001 or	C-DIODE	KDS4148U	(1)	223283R2	
DG0099	D1001 or	C-DIODE	MA2J111	(1)	223279R2	
DG0099	D1002	C-DIODE	1SS352	1	223234R2	
DG0099	D1002 or	C-DIODE	KDS4148U	(1)	223283R2	
DG0099	D1002 or	C-DIODE	MA2J111	(1)	223279R2	
DG0099	D1005	C-DIODE	1SS352	1	223234R2	
DG0099	D1005 or	C-DIODE	KDS4148U	(1)	223283R2	
DG0099	D1005 or	C-DIODE	MA2J111	(1)	223279R2	
DG0099	D1007	C-DIODE	1SS352	1	223234R2	
DG0099	D1007 or	C-DIODE	KDS4148U	(1)	223283R2	
DG0099	D1007 or	C-DIODE	MA2J111	(1)	223279R2	
DG0099	D1100	SPCF D	SIR-34ST3F	1	225456	
DG0099	D1101	SPCF D	SIR-34ST3F	1	225456	
DG0099	D4001	C-DIODE	1SS352	1	223234R2	
DG0099	D4001 or	C-DIODE	KDS4148U	(1)	223283R2	
DG0099	D4001 or	C-DIODE	MA2J111	(1)	223279R2	
DG0099	D4002	ZENER D	UDZS5.6B	1	224550560R2	
DG0099	D4002 or	ZENER D	MAZ8056-M	(1)	224750562R2	
DG0099	D4003	C-DIODE	1SS352	1	223234R2	
DG0099	D4003 or	C-DIODE	KDS4148U	(1)	223283R2	
DG0099	D4003 or	C-DIODE	MA2J111	(1)	223279R2	

DG0099	D4004	DIODE	D5SBA20	1	22380130F
DG0099	D4005	DIODE	RB070M-30	1	22380361R2
DG0099	D4006	DIODE	RL1N4003	1	22380260T
DG0099	D4009	DIODE	D3SBA20	1	22380271F
DG0099	D4010	C-DIODE	ISS352	1	223234R2
DG0099	D4010 or	C-DIODE	KDS4148U	(1)	223283R2
DG0099	D4010 or	C-DIODE	MA2J111	(1)	223279R2
DG0099	D4015	C-DIODE	ISS352	1	223234R2
DG0099	D4015 or	C-DIODE	KDS4148U	(1)	223283R2
DG0099	D4015 or	C-DIODE	MA2J111	(1)	223279R2
DG0099	D4016	C-DIODE	ISS352	1	223234R2
DG0099	D4016 or	C-DIODE	KDS4148U	(1)	223283R2
DG0099	D4016 or	C-DIODE	MA2J111	(1)	223279R2
DG0099	D4017	ZENER D	UDZS3.3B	1	224550330R2
DG0099	D4500	C-DIODE	ISS352	1	223234R2
DG0099	D4500 or	C-DIODE	KDS4148U	(1)	223283R2
DG0099	D4500 or	C-DIODE	MA2J111	(1)	223279R2
DG0099	D4501	C-DIODE	ISS352	1	223234R2
DG0099	D4501 or	C-DIODE	KDS4148U	(1)	223283R2
DG0099	D4501 or	C-DIODE	MA2J111	(1)	223279R2
DG0099	D4606	DIODE	RL1N4003	1	22380260T
DG0099	E1911	TRM-423(SCREW)	NEJITANSI ST3	1	25060495
DG0099	F4000A	FUSE HOL	NSCT-1P2031	1	25052133T
DG0099	F4000B	FUSE HOL	NSCT-1P2031	1	25052133T
DG0099	F4001A	FUSE HOL	NSCT-1P2031	1	25052133T
DG0099	F4001B	FUSE HOL	NSCT-1P2031	1	25052133T
DG0099	JL104B	WIRE TRAP	NPLG-9P592	1	25055630
DG0099	JL5515	JUMPER LEAD	JL11 400 B	1	1J400606B15
DG0099	JL5515A	WIRE HOL	NSCT-11P882	1	25051095
DG0099	JL8002	JUMPER LEAD	JL5 200 H	1	5J200606H
DG0099	JL8002A	WIRE HOL	NSCT-5P896	1	25051109
DG0099	JL901B	WIRE TRAP	NPLG-5P588	1	25055626
DG0099	L1090	CHOKO COIL	BLM21PG221SN1	1	230949R2

DG0099	L1290	CHOKE COIL	LBC2518T470M	1	231364M470R2
DG0099	L1301	CHOKE COIL	LBC2518T470M	1	231364M470R2
DG0099	L1305	CHOKE COIL	LBC2518T2R2M	1	231364M022R2
DG0099	L1306	CHOKE COIL	LBC2518T470M	1	231364M470R2
DG0099	L1307	CHOKE COIL	LBC2518T2R2M	1	231364M022R2
DG0099	L1308	CHOKE COIL	LBC2518T2R2M	1	231364M022R2
DG0099	L1309	CHOKE COIL	LBC2518T4R7M	1	231364M047R2
DG0099	L1312	CHOKE COIL	LBC2518T470M	1	231364M470R2
DG0099	L1313	CHOKE COIL	LBC2518T4R7M	1	231364M047R2
DG0099	L1314	CHOKE COIL	LBC2518T4R7M	1	231364M047R2
DG0099	L1315	CHOKE COIL	LBC2518T4R7M	1	231364M047R2
DG0099	L1316	EMIFIL	BK1608LM182-T	1	230958R1
DG0099	L1317	EMIFIL	BK1608LM182-T	1	230958R1
DG0099	L1318	CHOKE COIL	LBC2518T470M	1	231364M470R2
DG0099	L1319	CHOKE COIL	LBC2518T470M	1	231364M470R2
DG0099	L1320	EMIFIL	BK1608LM182-T	1	230958R1
DG0099	L1321	EMIFIL	BK1608LM182-T	1	230958R1
DG0099	L1322	EMIFIL	BK1608LM182-T	1	230958R1
DG0099	L1323	EMIFIL	BK1608HS102-T	1	230955R2
DG0099	L1324	EMIFIL	BK1608HS102-T	1	230955R2
DG0099	L1325	EMIFIL	BK1608HS102-T	1	230955R2
DG0099	L1404	CHOKE COIL	LBC2518T4R7M	1	231364M047R2
DG0099	L1407	CHOKE COIL	LBC2518T4R7M	1	231364M047R2
DG0099	L1900	CHOKE COIL	BLM21PG221SN1	1	230949R2
DG0099	L1901	CHOKE COIL	BLM21PG221SN1	1	230949R2
DG0099	L1902	EMIFIL	BK1608LM182-T	1	230958R1
DG0099	L1903	EMIFIL	BK1608LM182-T	1	230958R1
DG0099	L1904	EMIFIL	BK1608LM182-T	1	230958R1
DG0099	L1905	EMIFIL	BK1608LM182-T	1	230958R1
DG0099	L1906	CHOKE COIL	BLM21PG221SN1	1	230949R2
DG0099	L1907	CHOKE COIL	BLM21PG221SN1	1	230949R2
DG0099	L1908	EMIFIL	BK1608LM182-T	1	230958R1
DG0099	L1909	EMIFIL	BK1608LM182-T	1	230958R1

DG0099	L1910	EMIFIL	BK1608LM182-T	1	230958R1	
DG0099	L1911	EMIFIL	BK1608LM182-T	1	230958R1	
DG0099	L1912	EMIFIL	BK1608LM182-T	1	230958R1	
DG0099	L1913	EMIFIL	BK1608LM182-T	1	230958R1	
DG0099	L1914	EMIFIL	BK1608LM182-T	1	230958R1	
DG0099	L1915	EMIFIL	BK1608LM182-T	1	230958R1	
DG0099	L1916	EMIFIL	BK1608LM182-T	1	230958R1	
DG0099	L1917	EMIFIL	BK1608LM182-T	1	230958R1	
DG0099	L1918	EMIFIL	BK1608LM182-T	1	230958R1	
DG0099	L1919	EMIFIL	BK1608LM182-T	1	230958R1	
DG0099	L1920	EMIFIL	BK1608LM182-T	1	230958R1	
DG0099	L1921	EMIFIL	BK1608LM182-T	1	230958R1	
DG0099	L4000	COIL	0182-7310-470K-RB	1	231389	
DG0099	L4001	CHOKO COIL	LBC2518T4R7M	1	231364M047R2	
DG0099	L4005	CHOKO COIL	LBC2518T4R7M	1	231364M047R2	
DG0099	L4700	CHOKO COIL	LBC2518T470M	1	231364M470R2	
DG0099	L5	CHOKO COIL	LBC2518T100M	1	231364M100R2	
DG0099	P1004A	SOCKET	NSCT-9P2243	1	25052346	
DG0099	P1008B	PLUG	IMSA-9142B-20A	1	25056600	
DG0099	P1010B	PLUG	IMSA-9142B-20A	1	25056600	
DG0099	P103B	SOCKET	NSCT-11P2104	1	25052207	
DG0099	P1208	ST JACK	MSJ-035-22	1	25045887	
DG0099	P1307	TRM-423(SCREW)	NEJITANSI ST3	1	25060495	
DG0099	P1309	PIN JACK	NPJ-3PDO656	1	25045884	
DG0099	P1309 or	PIN JACK	NPJ-3PDO465	(1)	25045666	
DG0099	P1901A	PLUG	IMSA-9142B-22A	1	25056601	N DG to MMP
DG0099	P1901B	SOCKET	IMSA-9142S-22A	1	25053233	N DG to MMP
DG0099	P1902	SOCKET	NNA1-01-006	1	25053357	
DG0099	P3605B	SOCKET	IMSA-9142S-18A	1	25053231	
DG0099	P3607B	SOCKET	IMSA-9142S-16A	1	25053230	
DG0099	P3608B	SOCKET	IMSA-9142S-18A	1	25053231	
DG0099	P4000B	PLUG	NPLG-5P119	1	25055135	
DG0099	P4100A	PLUG	IMSA-9142B-16A	1	25056598	

DG0099	P4100B	SOCKET	IMSA-9142S-16A	1	25053230	
DG0099	P4101A	PLUG	IMSA-9142B-18A	1	25056599	
DG0099	P4101B	SOCKET	IMSA-9142S-18A	1	25053231	
DG0099	P4104A	SOCKET	NSCT-19P2112	1	25052215	
DG0099	P4110	PIN JACK	NPJ-9PDGLRGLRGLR563	1	25045781	
DG0099	P4110 or	PIN JACK	NPJ-9PDGLR519	(1)	25045731	
DG0099	P4112	PIN JACK	NPJ-10PDBY621	1	25045842	
DG0099	P4112 or	PIN JACK	NPJ-10PDBY478	(1)	25045681	
DG0099	P4113	PIN JACK	NPJ-10PDBY621	1	25045842	
DG0099	P4113 or	PIN JACK	NPJ-10PDBY478	(1)	25045681	
DG0099	P4114	PIN JACK	NPJ-10PDBY621	1	25045842	
DG0099	P4114 or	PIN JACK	NPJ-10PDBY478	(1)	25045681	
DG0099	P4118	TRM-423(SCREW)	NEJITANSI ST3	1	25060495	
DG0099	P4119	RETAINER	(JOINT)	1	27142069	
DG0099	P4501	PLUG	NPLG-2P83	1	25055099	
DG0099	P4700	SOCKET	MDS-09P-V-01(DSUB9P)	1	25053363	N
DG0099	P5512B	PLUG	NPLG-15P0970	1	25056020	DG to ASP
DG0099	P5513B	PLUG	NPLG-19P0974	1	25056024	DG to ASP
DG0099	P5518B	PLUG	NPLG-3P0958	1	25056008	DG to ASP
DG0099	P6621B	PLUG	IMSA-9142B-16A	1	25056598	except DHC / DG to TRM
DG0099	P7501A	PLUG	A2545WR2-2x20P(IDE40SIDE)	1	25056643	N
DG0099	P8	SOCKET	2MJ-3516-002	1	25053355	<MDC><MDF>
DG0099	Q10	IC	NJM4580M-D	1	22241448R2	<MDC><MDF>
DG0099	Q1001	TR	KRC104S	1	2216210R2	
DG0099	Q1001 or	TR	RN1404	(1)	2214490R2	
DG0099	Q1002	TR	KRA102S	1	2216220R2	
DG0099	Q1002 or	TR	RN2402	(1)	2214530R2	
DG0099	Q1003	TR	KRC104S	1	2216210R2	
DG0099	Q1003 or	TR	RN1404	(1)	2214490R2	
DG0099	Q1004	TR	KRA102S	1	2216220R2	
DG0099	Q1004 or	TR	RN2402	(1)	2214530R2	
DG0099	Q1005	TR	KRC102S	1	2216190R2	
DG0099	Q1005 or	TR	DTC114EKA	(1)	2216250R2	

DG0099	Q1005 or	TR	RN1402	(1)	2214470R2	
DG0099	Q1006	TR	KRA107S	1	2216350R2	
DG0099	Q1006 or	TR	DTA114YKA	(1)	2216480R2	
DG0099	Q1006 or	TR	RN2407(TE85L_F)	(1)	2216360R2	
DG0099	Q1007	TR	KRC102S	1	2216190R2	
DG0099	Q1007 or	TR	DTC114EKA	(1)	2216250R2	
DG0099	Q1007 or	TR	RN1402	(1)	2214470R2	
DG0099	Q1008	TR	KRA107S	1	2216350R2	
DG0099	Q1008 or	TR	DTA114YKA	(1)	2216480R2	
DG0099	Q1008 or	TR	RN2407(TE85L_F)	(1)	2216360R2	
DG0099	Q1009	TR	KRC102S	1	2216190R2	
DG0099	Q1009 or	TR	DTC114EKA	(1)	2216250R2	
DG0099	Q1009 or	TR	RN1402	(1)	2214470R2	
DG0099	Q101	IC	LC72725KV-TLM-E	1	22242584R2	Except <MDC><MDF>
DG0099	Q1010	TR	KRC104S	1	2216210R2	
DG0099	Q1010 or	TR	RN1404	(1)	2214490R2	
DG0099	Q1011	TR	KRA102S	1	2216220R2	
DG0099	Q1011 or	TR	RN2402	(1)	2214530R2	
DG0099	Q1016	IC (MAIN MICROPROCESSOR)	MPD70F3746GJ-GAE-AX(0298)	1	222W0079R302980	
DG0099	Q1017	IC	XC6202P502FR	1	22242331R2	
DG0099	Q1018	IC	XC6213B332MR	1	22242277R2	
DG0099	Q1019	IC	S-812C33AUA-C2N	1	22242222R2	
DG0099	Q102	IC	S-812C33AUA-C2N	1	22242222R2	Except <MDC><MDF>
DG0099	Q1020	IC	S-812C56AUA-C3K	1	22242207R2	
DG0099	Q1022	IC	R1EX25064ASA00A	1	22242581R2	
DG0099	Q1023	IC	NJU7706F27A3	1	22242614R2	
DG0099	Q1027	TR	KRA102S	1	2216220R2	
DG0099	Q1028	TR	KRC104S	1	2216210R2	
DG0099	Q1029	TR	KRA102S	1	2216220R2	
DG0099	Q1030	TR	KRC104S	1	2216210R2	
DG0099	Q1031	TR	KRA102S	1	2216220R2	
DG0099	Q1032	TR	KRC104S	1	2216210R2	
DG0099	Q1033	TR	KRA102S	1	2216220R2	

DG0099	Q1034	TR	KRC104S	1	2216210R2	
DG0099	Q1035	TR	KRA102S	1	2216220R2	
DG0099	Q1036	TR	KRC104S	1	2216210R2	
DG0099	Q1037	TR	KRA102S	1	2216220R2	
DG0099	Q1038	TR	KRC104S	1	2216210R2	
DG0099	Q1290	TR	2SC2712-GR	1	2213145R2	
DG0099	Q1291	IC	TC4066BFT	1	22284066MR2TO	
DG0099	Q1292	TR	2SC2712-GR	1	2213145R2	
DG0099	Q1301	IC	TA4805BF(TE16L_NQ)	1	22278005DBR2TO	
DG0099	Q1301A	RETAINER	(REG)	1	27142168	N
DG0099	Q1302	IC	TA48033BF(TE16L_NQ)	1	22278033DBR2TO	
DG0099	Q1311	IC	TC74VHC157FT	1	22274157ER2TO	
DG0099	Q1322	IC	TC74VHCT00AFT (EKJ)	1	22274000G1R2TO	
DG0099	Q1322 or	IC	TC74VHCT00AFT	(1)	22274000GR2TO	
DG0099	Q1324	IC	CS42516-CQZ(R)-D	1	22242294R2	
DG0099	Q1325	IC	74HCU04F	1	222740046R2	
DG0099	Q1325 or	IC	TC74HCU04AF	(1)	222740046R2TO	
DG0099	Q1327	IC	TC7WU04FU(TE12L_F)	1	22240935R2	
DG0099	Q1421	IC	PCM1690DCAR	1	22242599R2	N
DG0099	Q1601	IC	NJM4580M-D	1	22241448R2	
DG0099	Q1602	IC	NJM4580M-D	1	22241448R2	
DG0099	Q1603	IC	NJM4580M-D	1	22241448R2	
DG0099	Q1604	IC	NJM4580M-D	1	22241448R2	
DG0099	Q1800	IC	NJM4580M-D	1	22241448R2	
DG0099	Q1801	IC	NJM4580M-D	1	22241448R2	
DG0099	Q1904	IC	NJM4580M-D	1	22241448R2	
DG0099	Q1940	IC	XC6202P502FR	1	22242331R2	
DG0099	Q1950	IC	NJM2505AF	1	22242490R2	
DG0099	Q1960	IC	NJM2505AF	1	22242490R2	
DG0099	Q1970	IC	NJM2505AF	1	22242490R2	
DG0099	Q2	IC	78M09HF(NJM78M09FA)	1	222780095JRC	
DG0099	Q4000	TR	KRC105S	1	2217290R2	
DG0099	Q4000 or	TR	RN1405	(1)	2214500R2	

DG0099	Q4001	IC	78M05(NJM78M05FA)	1	222780055JRC
DG0099	Q4002	IC	SI8008TM	1	22242323R2
DG0099	Q4003	TR	KRC105S	1	2217290R2
DG0099	Q4003 or	TR	RN1405	(1)	2214500R2
DG0099	Q4100	IC	NJW1325	1	22242596R3
DG0099	Q4101	TR ARRAY	UM6K1N	1	226066R2
DG0099	Q4502	TR	2SA950-Y	1	2211504T
DG0099	Q4502 or	TR	2SA950-O	(1)	2211503T
DG0099	Q4503	TR	2SC1815-GR	1	2211255T
DG0099	Q4504	TR	2SA854S-R	1	2217394T
DG0099	Q4504 or	TR	2SB1240-R	(1)	2213794T
DG0099	Q4700	IC	ICL3221ECVZ	1	22242268R2
DG0099	Q9	IC	NJM4580M-D	1	22241448R2
DG0099	R1001	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1002	C-CARBON R	RN72K1J-222JE	1	435032224R1
DG0099	R1003	C-CARBON R	RN72K1J-222JE	1	435032224R1
DG0099	R1004	C-CARBON R	RN72K1J-102JE	1	435031024R1
DG0099	R1005	C-CARBON R	RN72K1J-102JE	1	435031024R1
DG0099	R1006	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1007	C-CARBON R	RN72K1J-222JE	1	435032224R1
DG0099	R1008	C-CARBON R	RN72K1J-101JE	1	435031014R1
DG0099	R1010	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1011	C-CARBON R	RN72K1J-102JE	1	435031024R1
DG0099	R1012	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1013	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1014	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1015	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1016	C-CARBON R	RN72K1J-222JE	1	435032224R1
DG0099	R1017	C-CARBON R	RN72K1J-102JE	1	435031024R1
DG0099	R1019	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1020	C-CARBON R	RN72K1J-472JE	1	435034724R1
DG0099	R1026	C-CARBON R	RN72K1J-224JE	1	435032244R1
DG0099	R1027	C-CARBON R	RN72K1J-473JE	1	435034734R1

DG0099	R1028	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1029	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1031	C-CARBON R	RN72K1J-221JE	1	435032214R1
DG0099	R1032	C-CARBON R	RN72K1J-221JE	1	435032214R1
DG0099	R1033	C-CARBON R	RN72K1J-221JE	1	435032214R1
DG0099	R1034	C-CARBON R	RN72K1J-000JE	1	435030004R1
DG0099	R1035	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1036	C-CARBON R	RN72K1J-222JE	1	435032224R1
DG0099	R1037	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1038	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1039	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1040	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1041	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1042	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1043	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1044	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1045	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1046	C-CARBON R	RN72K1J-222JE	1	435032224R1
DG0099	R1047	C-CARBON R	RN72K1J-102JE	1	435031024R1
DG0099	R1048	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1049	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1050	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1051	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1052	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1055	C-CARBON R	RN72K1J-273JE	1	435032734R1
DG0099	R1056	C-CARBON R	RN72K1J-273JE	1	435032734R1
DG0099	R1057	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1058	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1059	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1060	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1061	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1062	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1063	C-CARBON R	RN72K1J-470JE	1	435034704R1

DG0099	R1064	C-CARBON R	RN72K1J-222JE	1	435032224R1
DG0099	R1065	C-CARBON R	RN72K1J-221JE	1	435032214R1
DG0099	R1066	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1067	C-CARBON R	RN72K1J-224JE	1	435032244R1
DG0099	R1068	C-CARBON R	RN72K1J-273JE	1	435032734R1
DG0099	R1069	C-CARBON R	RN72K1J-101JE	1	435031014R1
DG0099	R1070	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1071	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1072	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1073	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1074	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1075	C-CARBON R	RN72K1J-102JE	1	435031024R1
DG0099	R1077	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1078	C-CARBON R	RN72K1J-221JE	1	435032214R1
DG0099	R1079	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1080	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1081	C-CARBON R	RN72K1J-272JE	1	435032724R1
DG0099	R1082	C-CARBON R	RN72K1J-272JE	1	435032724R1
DG0099	R1083	C-CARBON R	RN72K1J-221JE	1	435032214R1
DG0099	R1084	C-CARBON R	RN72K1J-272JE	1	435032724R1
DG0099	R1085	C-CARBON R	RN72K1J-221JE	1	435032214R1
DG0099	R1086	C-CARBON R	RN72K1J-221JE	1	435032214R1
DG0099	R1087	C-CARBON R	RN72K1J-221JE	1	435032214R1
DG0099	R1088	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1089	C-CARBON R	RN72K1J-221JE	1	435032214R1
DG0099	R1090	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1091	C-CARBON R	RN72K1J-221JE	1	435032214R1
DG0099	R1092	C-CARBON R	RN72K1J-221JE	1	435032214R1
DG0099	R1093	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1094	C-CARBON R	RN72K1J-221JE	1	435032214R1
DG0099	R1095	C-CARBON R	RN72K1J-221JE	1	435032214R1
DG0099	R1096	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1097	C-CARBON R	RN72K1J-472JE	1	435034724R1

DG0099	R1098	C-CARBON R	RN72K1J-470JE	1	435034704R1	
DG0099	R1099	C-CARBON R	RN72K1J-103JE	1	435031034R1	
DG0099	R11	METAL O R	RS1/2WBJ-10	1	443521004T	<MDC><MDF>
DG0099	R1101	C-CARBON R	RN72K1J-221JE	1	435032214R1	
DG0099	R1104	C-CARBON R	RN72K1J-221JE	1	435032214R1	
DG0099	R1107	C-CARBON R	RN72K1J-470JE	1	435034704R1	
DG0099	R1109	C-CARBON R	RN72K1J-470JE	1	435034704R1	
DG0099	R1111	C-CARBON R	RN72K1J-221JE	1	435032214R1	
DG0099	R1113	C-CARBON R	RN72K1J-221JE	1	435032214R1	
DG0099	R1114	C-CARBON R	RN72K1J-470JE	1	435034704R1	<MDC><MDF>
DG0099	R1115	C-CARBON R	RN72K1J-221JE	1	435032214R1	
DG0099	R1116	C-CARBON R	RN72K1J-470JE	1	435034704R1	<MDC><MDF>
DG0099	R1117	C-CARBON R	RN72K1J-221JE	1	435032214R1	
DG0099	R1118	C-CARBON R	RN72K1J-470JE	1	435034704R1	<MDC><MDF>
DG0099	R1119	C-CARBON R	RN72K1J-221JE	1	435032214R1	
DG0099	R1120	C-CARBON R	RN72K1J-470JE	1	435034704R1	
DG0099	R1121	C-CARBON R	RN72K1J-221JE	1	435032214R1	
DG0099	R1122	C-CARBON R	RN72K1J-470JE	1	435034704R1	
DG0099	R1123	C-CARBON R	RN72K1J-473JE	1	435034734R1	
DG0099	R1124	C-CARBON R	RN72K1J-221JE	1	435032214R1	
DG0099	R1126	C-CARBON R	RN72K1J-221JE	1	435032214R1	
DG0099	R1128	C-CARBON R	RN72K1J-470JE	1	435034704R1	
DG0099	R1130	C-CARBON R	RN72K1J-221JE	1	435032214R1	
DG0099	R1131	C-CARBON R	RN72K1J-221JE	1	435032214R1	
DG0099	R1132	C-CARBON R	RN72K1J-470JE	1	435034704R1	
DG0099	R1133	C-CARBON R	RN72K1J-221JE	1	435032214R1	
DG0099	R1134	C-CARBON R	RN72K1J-470JE	1	435034704R1	
DG0099	R1136	C-CARBON R	RN72K1J-102JE	1	435031024R1	
DG0099	R1137	C-CARBON R	RN72K1J-470JE	1	435034704R1	
DG0099	R1138	C-CARBON R	RN72K1J-102JE	1	435031024R1	
DG0099	R1139	C-CARBON R	RN72K1J-221JE	1	435032214R1	
DG0099	R1140	C-CARBON R	RN72K1J-221JE	1	435032214R1	
DG0099	R1141	C-CARBON R	RN72K1J-470JE	1	435034704R1	

DG0099	R1142	C-CARBON R	RN72K1J-473JE	1	435034734R1	
DG0099	R1143	C-CARBON R	RN72K1J-470JE	1	435034704R1	
DG0099	R1144	C-CARBON R	RN72K1J-221JE	1	435032214R1	
DG0099	R1146	METAL R	RNU1WCJ-1.5	1	453630154T	
DG0099	R1147	METAL R	RNU1WCJ-1.5	1	453630154T	
DG0099	R1148	C-CARBON R	RN72K1J-221JE	1	435032214R1	
DG0099	R1149	C-CARBON R	RN72K1J-470JE	1	435034704R1	
DG0099	R1151	C-CARBON R	RN72K1J-103JE	1	435031034R1	
DG0099	R1152	C-CARBON R	RN72K1J-000JE	1	435030004R1	INT3_D
DG0099	R1153	C-CARBON R	RN72K1J-470JE	1	435034704R1	
DG0099	R1155	C-CARBON R	RN72K1J-000JE	1	435030004R1	INT2_D
DG0099	R1156	C-CARBON R	RN72K1J-470JE	1	435034704R1	
DG0099	R1157	C-CARBON R	RN72K1J-333JE	1	435033334R1	INT1_U
DG0099	R1158	C-CARBON R	RN72K1J-103JE	1	435031034R1	INT1_D
DG0099	R1159	C-CARBON R	RN72K1J-103JE	1	435031034R1	<MDC><MDF>
DG0099	R1160	C-CARBON R	RN72K1J-000JE	1	435030004R1	<MDC><MDF>
DG0099	R1160	C-CARBON R	RN72K1J-103JE	1	435031034R1	Except <MDC><MDF>
DG0099	R1161	C-CARBON R	RN72K1J-472JE	1	435034724R1	
DG0099	R1162	C-CARBON R	RN72K1J-472JE	1	435034724R1	
DG0099	R1164	C-CARBON R	RN72K1J-472JE	1	435034724R1	
DG0099	R1165	C-CARBON R	RN72K1J-472JE	1	435034724R1	
DG0099	R1166	C-CARBON R	RN72K1J-472JE	1	435034724R1	
DG0099	R1167	C-CARBON R	RN72K1J-472JE	1	435034724R1	
DG0099	R1168	C-CARBON R	RN72K1J-272JE	1	435032724R1	
DG0099	R1170	C-CARBON R	RN72K1J-272JE	1	435032724R1	
DG0099	R1171	C-CARBON R	RN72K1J-272JE	1	435032724R1	
DG0099	R1172	C-CARBON R	RN72K1J-272JE	1	435032724R1	
DG0099	R1173	C-CARBON R	RN72K1J-470JE	1	435034704R1	
DG0099	R1175	C-CARBON R	RN72K1J-473JE	1	435034734R1	
DG0099	R1176	C-CARBON R	RN72K1J-473JE	1	435034734R1	
DG0099	R1177	C-CARBON R	RN72K1J-473JE	1	435034734R1	
DG0099	R1178	C-CARBON R	RN72K1J-272JE	1	435032724R1	
DG0099	R1179	C-CARBON R	RN72K1J-272JE	1	435032724R1	

DG0099	R1180	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1182	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1183	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1184	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1185	C-CARBON R	RN72K1J-000JE	1	435030004R1
DG0099	R1186	C-CARBON R	RN72K1J-221JE	1	435032214R1
DG0099	R1187	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1188	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1189	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1190	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1191	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1192	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1193	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1194	C-CARBON R	RN72K1J-221JE	1	435032214R1
DG0099	R1195	C-CARBON R	RN72K1J-221JE	1	435032214R1
DG0099	R1196	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1197	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1198	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1199	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1200	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1201	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1202	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1203	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1204	C-CARBON R	RN72K1J-224JE	1	435032244R1
DG0099	R1205	C-CARBON R	RN72K1J-472JE	1	435034724R1
DG0099	R1207	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1209	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1210	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1211	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1212	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1213	C-CARBON R	RN72K1J-272JE	1	435032724R1
DG0099	R1214	C-CARBON R	RN72K1J-272JE	1	435032724R1
DG0099	R1217	C-CARBON R	RN72K1J-103JE	1	435031034R1

DG0099	R1218	C-CARBON R	RN72K1J-103JE	1	435031034R1	
DG0099	R1219	C-CARBON R	RN72K1J-332JE	1	435033324R1	
DG0099	R1220	C-CARBON R	RN72K1J-103JE	1	435031034R1	<MDC><MDF>
DG0099	R1221	C-CARBON R	RN72K1J-470JE	1	435034704R1	
DG0099	R1222	C-CARBON R	RN72K1J-470JE	1	435034704R1	
DG0099	R1223	C-CARBON R	RN72K1J-473JE	1	435034734R1	
DG0099	R1224	C-CARBON R	RN72K1J-332JE	1	435033324R1	
DG0099	R1225	C-CARBON R	RN72K1J-103JE	1	435031034R1	
DG0099	R1226	C-CARBON R	RN72K1J-473JE	1	435034734R1	
DG0099	R1228	C-CARBON R	RN72K1J-473JE	1	435034734R1	
DG0099	R1230	C-CARBON R	RN72K1J-221JE	1	435032214R1	
DG0099	R1231	C-CARBON R	RN72K1J-102JE	1	435031024R1	
DG0099	R1235	C-CARBON R	RN72K1J-224JE	1	435032244R1	
DG0099	R1240	C-CARBON R	RN72K1J-103JE	1	435031034R1	
DG0099	R1241	C-CARBON R	RN72K1J-272JE	1	435032724R1	
DG0099	R1242	C-CARBON R	RN72K1J-470JE	1	435034704R1	
DG0099	R1243	C-CARBON R	RN72K1J-470JE	1	435034704R1	
DG0099	R1244	C-CARBON R	RN72K1J-470JE	1	435034704R1	
DG0099	R1245	C-CARBON R	RN72K1J-470JE	1	435034704R1	
DG0099	R1246	C-CARBON R	RN72K1J-221JE	1	435032214R1	
DG0099	R1248	C-CARBON R	RN72K1J-470JE	1	435034704R1	
DG0099	R1249	C-CARBON R	RN72K1J-000JE	1	435030004R1	
DG0099	R1250	C-CARBON R	RN72K1J-470JE	1	435034704R1	
DG0099	R1251	C-CARBON R	RN72K1J-470JE	1	435034704R1	
DG0099	R1252	C-CARBON R	RN72K1J-470JE	1	435034704R1	
DG0099	R1253	C-CARBON R	RN72K1J-473JE	1	435034734R1	
DG0099	R1254	C-CARBON R	RN72K1J-473JE	1	435034734R1	
DG0099	R1255	C-CARBON R	RN72K1J-473JE	1	435034734R1	
DG0099	R1264	C-CARBON R	RN72K1J-222JE	1	435032224R1	
DG0099	R1266	C-CARBON R	RN72K1J-222JE	1	435032224R1	
DG0099	R1267	C-CARBON R	RN72K1J-102JE	1	435031024R1	
DG0099	R1268	C-CARBON R	RN72K1J-221JE	1	435032214R1	
DG0099	R1270	C-CARBON R	RN72K1J-101JE	1	435031014R1	

DG0099	R1271	C-CARBON R	RN72K1J-102JE	1	435031024R1
DG0099	R1284	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1285	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1286	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1289	C-CARBON R	RN72K1J-104JE	1	435031044R1
DG0099	R1290	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1291	C-CARBON R	RN72K1J-104JE	1	435031044R1
DG0099	R1292	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1293	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1294	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1295	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1296	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1297	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1298	C-CARBON R	RN72K1J-473JE	1	435034734R1
DG0099	R1299	C-CARBON R	RN72K1J-102JE	1	435031024R1
DG0099	R1300	THERMISTOR	FUSB090F	1	4000252T
DG0099	R1301	METAL R	RNU1WCJ-4.7	1	453630474T
DG0099	R1302	METAL R	RNU1WCJ-4.7	1	453630474T
DG0099	R1303	METAL O R	RS1WBJ-22	1	443622204T
DG0099	R1304	METAL O R	RS1WBJ-22	1	443622204T
DG0099	R1311	C-CARBON R	RN72K1J-331JE	1	435033314R1
DG0099	R1312	C-CARBON R	RN72K1J-331JE	1	435033314R1
DG0099	R1313	C-CARBON R	RN72K1J-331JE	1	435033314R1
DG0099	R1315	C-CARBON R	RN72K1J-331JE	1	435033314R1
DG0099	R1316	C-CARBON R	RN72K1J-331JE	1	435033314R1
DG0099	R1317	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1318	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1319	C-CARBON R	RN72K1J-331JE	1	435033314R1
DG0099	R1320	C-CARBON R	RN72K1J-331JE	1	435033314R1
DG0099	R1321	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1322	C-CARBON R	RN72K1J-331JE	1	435033314R1
DG0099	R1323	C-CARBON R	RN72K1J-331JE	1	435033314R1
DG0099	R1325	C-CARBON R	RN72K1J-470JE	1	435034704R1

DG0099	R1485	C-CARBON R	RN72K1J-100JE	1	435031004R1
DG0099	R1486	C-CARBON R	RN72K1J-100JE	1	435031004R1
DG0099	R1487	C-CARBON R	RN72K1J-750JE	1	435037504R1
DG0099	R1488	C-CARBON R	RN72K1J-224JE	1	435032244R1
DG0099	R1490	C-CARBON R	RN72K1J-750JE	1	435037504R1
DG0099	R1491	C-CARBON R	RN72K1J-224JE	1	435032244R1
DG0099	R1492	C-CARBON R	RN72K1J-100JE	1	435031004R1
DG0099	R1496	C-CARBON R	RN72K1J-750JE	1	435037504R1
DG0099	R1497	C-CARBON R	RN72K1J-224JE	1	435032244R1
DG0099	R1500	C-CARBON R	RN72K1J-392JE	1	435033924R1
DG0099	R1504	C-CARBON R	RN72K1J-221JE	1	435032214R1
DG0099	R1506	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1507	C-CARBON R	RN72K1J-152JE	1	435031524R1
DG0099	R1508	C-CARBON R	RN72K1J-102JE	1	435031024R1
DG0099	R1509	C-CARBON R	RN72K1J-331JE	1	435033314R1
DG0099	R1510	C-CARBON R	RN72K1J-331JE	1	435033314R1
DG0099	R1511	C-CARBON R	RN72K1J-102JE	1	435031024R1
DG0099	R1512	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1513	C-CARBON R	RN72K1J-331JE	1	435033314R1
DG0099	R1514	C-CARBON R	RN72K1J-102JE	1	435031024R1
DG0099	R1515	C-CARBON R	RN72K1J-331JE	1	435033314R1
DG0099	R1517	C-CARBON R	RN72K1J-331JE	1	435033314R1
DG0099	R1518	C-CARBON R	RN72K1J-331JE	1	435033314R1
DG0099	R1519	C-CARBON R	RN72K1J-331JE	1	435033314R1
DG0099	R1520	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1521	C-CARBON R	RN72K1J-823JE	1	435038234R1
DG0099	R1522	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1523	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1524	C-CARBON R	RN72K1J-823JE	1	435038234R1
DG0099	R1525	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1526	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1527	C-CARBON R	RN72K1J-221JE	1	435032214R1
DG0099	R1528	C-CARBON R	RN72K1J-470JE	1	435034704R1

DG0099	R1529	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1530	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1531	C-CARBON R	RN72K1J-470JE	1	435034704R1
DG0099	R1532	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1534	C-CARBON R	RN72K1J-823JE	1	435038234R1
DG0099	R1535	C-CARBON R	RN72K1J-105JE	1	435031054R1
DG0099	R1567	C-CARBON R	RN72K1J-220JE	1	435032204R1
DG0099	R1568	C-CARBON R	RN72K1J-220JE	1	435032204R1
DG0099	R1569	C-CARBON R	RN72K1J-220JE	1	435032204R1
DG0099	R1570	C-CARBON R	RN72K1J-220JE	1	435032204R1
DG0099	R1571	C-CARBON R	RN72K1J-220JE	1	435032204R1
DG0099	R1572	C-CARBON R	RN72K1J-220JE	1	435032204R1
DG0099	R1573	C-CARBON R	RN72K1J-221JE	1	435032214R1
DG0099	R1575	C-CARBON R	RN72K1J-331JE	1	435033314R1
DG0099	R1577	C-CARBON R	RN72K1J-331JE	1	435033314R1
DG0099	R1579	C-CARBON R	RN72K1J-331JE	1	435033314R1
DG0099	R1580	C-CARBON R	RN72K1J-472JE	1	435034724R1
DG0099	R1581	C-CARBON R	RN72K1J-472JE	1	435034724R1
DG0099	R1599	C-CARBON R	RN72K1J-392JE	1	435033924R1
DG0099	R1600	C-CARBON R	RN72K1J-153JE	1	435031534R1
DG0099	R1601	C-CARBON R	RN72K1J-153JE	1	435031534R1
DG0099	R1602	C-CARBON R	RN72K1J-153JE	1	435031534R1
DG0099	R1603	C-CARBON R	RN72K1J-153JE	1	435031534R1
DG0099	R1604	C-CARBON R	RN72K1J-153JE	1	435031534R1
DG0099	R1605	C-CARBON R	RN72K1J-153JE	1	435031534R1
DG0099	R1606	C-CARBON R	RN72K1J-153JE	1	435031534R1
DG0099	R1607	C-CARBON R	RN72K1J-153JE	1	435031534R1
DG0099	R1610	C-CARBON R	RN72K1J-153JE	1	435031534R1
DG0099	R1611	C-CARBON R	RN72K1J-153JE	1	435031534R1
DG0099	R1612	C-CARBON R	RN72K1J-153JE	1	435031534R1
DG0099	R1613	C-CARBON R	RN72K1J-153JE	1	435031534R1
DG0099	R1614	C-CARBON R	RN72K1J-153JE	1	435031534R1
DG0099	R1615	C-CARBON R	RN72K1J-153JE	1	435031534R1

DG0099	R1616	C-CARBON R	RN72K1J-153JE	1	435031534R1
DG0099	R1617	C-CARBON R	RN72K1J-153JE	1	435031534R1
DG0099	R1620	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1621	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1622	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1623	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1624	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1625	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1626	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1627	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1630	C-CARBON R	RN72K1J-123JE	1	435031234R1
DG0099	R1631	C-CARBON R	RN72K1J-123JE	1	435031234R1
DG0099	R1632	C-CARBON R	RN72K1J-123JE	1	435031234R1
DG0099	R1633	C-CARBON R	RN72K1J-123JE	1	435031234R1
DG0099	R1634	C-CARBON R	RN72K1J-123JE	1	435031234R1
DG0099	R1635	C-CARBON R	RN72K1J-123JE	1	435031234R1
DG0099	R1636	C-CARBON R	RN72K1J-123JE	1	435031234R1
DG0099	R1637	C-CARBON R	RN72K1J-123JE	1	435031234R1
DG0099	R1640	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1641	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1642	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1643	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1644	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1645	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1646	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1647	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1650	C-CARBON R	RN72K1J-123JE	1	435031234R1
DG0099	R1651	C-CARBON R	RN72K1J-123JE	1	435031234R1
DG0099	R1652	C-CARBON R	RN72K1J-123JE	1	435031234R1
DG0099	R1653	C-CARBON R	RN72K1J-123JE	1	435031234R1
DG0099	R1654	C-CARBON R	RN72K1J-123JE	1	435031234R1
DG0099	R1655	C-CARBON R	RN72K1J-123JE	1	435031234R1
DG0099	R1656	C-CARBON R	RN72K1J-123JE	1	435031234R1

DG0099	R1657	C-CARBON R	RN72K1J-123JE	1	435031234R1
DG0099	R1660	C-CARBON R	RN72K1J-182JE	1	435031824R1
DG0099	R1660	C-CARBON R	RN72K1J-182JE	1	435031824R1
DG0099	R1661	C-CARBON R	RN72K1J-182JE	1	435031824R1
DG0099	R1662	C-CARBON R	RN72K1J-182JE	1	435031824R1
DG0099	R1663	C-CARBON R	RN72K1J-182JE	1	435031824R1
DG0099	R1664	C-CARBON R	RN72K1J-182JE	1	435031824R1
DG0099	R1665	C-CARBON R	RN72K1J-182JE	1	435031824R1
DG0099	R1666	C-CARBON R	RN72K1J-182JE	1	435031824R1
DG0099	R1667	C-CARBON R	RN72K1J-182JE	1	435031824R1
DG0099	R1670	C-CARBON R	RN72K1J-182JE	1	435031824R1
DG0099	R1671	C-CARBON R	RN72K1J-182JE	1	435031824R1
DG0099	R1672	C-CARBON R	RN72K1J-182JE	1	435031824R1
DG0099	R1673	C-CARBON R	RN72K1J-182JE	1	435031824R1
DG0099	R1674	C-CARBON R	RN72K1J-182JE	1	435031824R1
DG0099	R1675	C-CARBON R	RN72K1J-182JE	1	435031824R1
DG0099	R1676	C-CARBON R	RN72K1J-182JE	1	435031824R1
DG0099	R1677	C-CARBON R	RN72K1J-182JE	1	435031824R1
DG0099	R1770	C-CARBON R	RN72K1J-000JE	1	435030004R1
DG0099	R1771	C-CARBON R	RN72K1J-000JE	1	435030004R1
DG0099	R1772	C-CARBON R	RN72K1J-000JE	1	435030004R1
DG0099	R1773	C-CARBON R	RN72K1J-000JE	1	435030004R1
DG0099	R1774	C-CARBON R	RN72K1J-000JE	1	435030004R1
DG0099	R1775	C-CARBON R	RN72K1J-000JE	1	435030004R1
DG0099	R1776	C-CARBON R	RN72K1J-000JE	1	435030004R1
DG0099	R1777	C-CARBON R	RN72K1J-000JE	1	435030004R1
DG0099	R1780	METAL O R	RS1/2WBJ-22	1	443522204T
DG0099	R1781	METAL O R	RS1/2WBJ-22	1	443522204T
DG0099	R1800	C-CARBON R	RN72K1J-101JE	1	435031014R1
DG0099	R1801	C-CARBON R	RN72K1J-101JE	1	435031014R1
DG0099	R1810	C-CARBON R	RN72K1J-101JE	1	435031014R1
DG0099	R1811	C-CARBON R	RN72K1J-101JE	1	435031014R1
DG0099	R1820	C-CARBON R	RN72K1J-103JE	1	435031034R1

DG0099	R1821	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1830	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1831	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1840	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1841	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1850	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1851	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1860	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1861	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R1900	C-CARBON R	RN72K1J-104JE	1	435031044R1
DG0099	R1901	C-CARBON R	RN72K1J-104JE	1	435031044R1
DG0099	R1902	C-CARBON R	RN72K1J-105JE	1	435031054R1
DG0099	R1904	C-CARBON R	RN72K1J-223JE	1	435032234R1
DG0099	R1905	C-CARBON R	RN72K1J-223JE	1	435032234R1
DG0099	R1906	C-CARBON R	RN72K1J-223JE	1	435032234R1
DG0099	R1907	C-CARBON R	RN72K1J-223JE	1	435032234R1
DG0099	R1908	C-CARBON R	RN72K1J-471JE	1	435034714R1
DG0099	R1909	C-CARBON R	RN72K1J-471JE	1	435034714R1
DG0099	R1910	C-CARBON R	RN72K1J-223JE	1	435032234R1
DG0099	R1911	C-CARBON R	RN72K1J-223JE	1	435032234R1
DG0099	R1912	C-CARBON R	RN72K1J-220JE	1	435032204R1
DG0099	R1913	C-CARBON R	RN72K1J-220JE	1	435032204R1
DG0099	R1920	C-CARBON R	RN72K1J-223JE	1	435032234R1
DG0099	R1921	C-CARBON R	RN72K1J-223JE	1	435032234R1
DG0099	R1951	C-CARBON R	RN72K1J-220JE	1	435032204R1
DG0099	R1952	C-CARBON R	RN72K1J-220JE	1	435032204R1
DG0099	R1953	C-CARBON R	RN72K1J-750JE	1	435037504R1
DG0099	R1954	C-CARBON R	RN72K1J-222JE	1	435032224R1
DG0099	R1955	C-CARBON R	RN72K1J-220JE	1	435032204R1
DG0099	R1956	C-CARBON R	RN72K1J-105JE	1	435031054R1
DG0099	R1961	C-CARBON R	RN72K1J-220JE	1	435032204R1
DG0099	R1962	C-CARBON R	RN72K1J-220JE	1	435032204R1
DG0099	R1963	C-CARBON R	RN72K1J-750JE	1	435037504R1

DG0099	R1964	C-CARBON R	RN72K1J-222JE	1	435032224R1	
DG0099	R1965	C-CARBON R	RN72K1J-220JE	1	435032204R1	
DG0099	R1971	C-CARBON R	RN72K1J-220JE	1	435032204R1	
DG0099	R1972	C-CARBON R	RN72K1J-220JE	1	435032204R1	
DG0099	R1973	C-CARBON R	RN72K1J-750JE	1	435037504R1	
DG0099	R1974	C-CARBON R	RN72K1J-222JE	1	435032224R1	
DG0099	R1975	C-CARBON R	RN72K1J-220JE	1	435032204R1	
DG0099	R1980	THERMISTOR	FUSB090F	1	4000252T	
DG0099	R39	C-CARBON R	RN72K1J-220JE	1	435032204R1	<MDC><MDF>
DG0099	R4000	METAL R	RNU1/2WCJ-4.7	1	453530474T	
DG0099	R4001	C-CARBON R	RN72K1J-682JE	1	435036824R1	
DG0099	R4002	METAL R	RNU1WCJ-0.22	1	453632294T	
DG0099	R4003	METAL R	RNU1/2WCJ-0.47	1	453534794T	
DG0099	R4004	C-CARBON R	RN72K1J-562JE	1	435035624R1	
DG0099	R4005	C-CARBON R	RN72K1J-152JE	1	435031524R1	
DG0099	R4006	C-CARBON R	RN72K1J-102JE	1	435031024R1	
DG0099	R4007	C-CARBON R	RN72K1J-392JE	1	435033924R1	
DG0099	R4008	C-CARBON R	RN72K2E-022JE	1	435220224R1	
DG0099	R4022	METAL O R	RS2WBJ-3.3	1	441720334F	
DG0099	R4024	C-CARBON R	RN72K1J-470JE	1	435034704R1	
DG0099	R41	C-CARBON R	RN72K1J-220JE	1	435032204R1	<MDC><MDF>
DG0099	R4106	C-CARBON R	RN72K1J-000JE	1	435030004R1	
DG0099	R4107	C-CARBON R	RN72K1J-000JE	1	435030004R1	
DG0099	R4108	C-CARBON R	RN72K1J-101JE	1	435031014R1	
DG0099	R4109	C-CARBON R	RN72K1J-000JE	1	435030004R1	
DG0099	R4110	C-CARBON R	RN72K1J-750JE	1	435037504R1	
DG0099	R4111	C-CARBON R	RN72K1J-392JE	1	435033924R1	
DG0099	R4112	C-CARBON R	RN72K1J-750JE	1	435037504R1	
DG0099	R4113	C-CARBON R	RN72K1J-101JE	1	435031014R1	
DG0099	R4115	C-CARBON R	RN72K1J-750JE	1	435037504R1	
DG0099	R4116	C-CARBON R	RN72K1J-000JE	1	435030004R1	
DG0099	R4117	C-CARBON R	RN72K1J-750JE	1	435037504R1	
DG0099	R4118	C-CARBON R	RN72K1J-000JE	1	435030004R1	

DG0099	R4119	C-CARBON R	RN72K2E-022JE	1	435220224R1
DG0099	R4120	C-CARBON R	RN72K1J-750JE	1	435037504R1
DG0099	R4121	C-CARBON R	RN72K1J-750JE	1	435037504R1
DG0099	R4122	C-CARBON R	RN72K1J-750JE	1	435037504R1
DG0099	R4123	C-CARBON R	RN72K1J-104JE	1	435031044R1
DG0099	R4124	C-CARBON R	RN72K1J-750JE	1	435037504R1
DG0099	R4125	C-CARBON R	RN72K1J-104JE	1	435031044R1
DG0099	R4126	C-CARBON R	RN72K1J-750JE	1	435037504R1
DG0099	R4127	C-CARBON R	RN72K1J-104JE	1	435031044R1
DG0099	R4135	C-CARBON R	RN72K1J-750JE	1	435037504R1
DG0099	R4136	C-CARBON R	RN72K1J-750JE	1	435037504R1
DG0099	R4137	C-CARBON R	RN72K1J-750JE	1	435037504R1
DG0099	R4138	C-CARBON R	RN72K2E-022JE	1	435220224R1
DG0099	R4139	C-CARBON R	RN72K1J-750JE	1	435037504R1
DG0099	R4140	C-CARBON R	RN72K1J-750JE	1	435037504R1
DG0099	R4141	C-CARBON R	RN72K1J-750JE	1	435037504R1
DG0099	R4142	C-CARBON R	RN72K1J-750JE	1	435037504R1
DG0099	R4143	C-CARBON R	RN72K1J-750JE	1	435037504R1
DG0099	R4144	C-CARBON R	RN72K1J-750JE	1	435037504R1
DG0099	R4145	C-CARBON R	RN72K1J-104JE	1	435031044R1
DG0099	R4146	C-CARBON R	RN72K1J-104JE	1	435031044R1
DG0099	R4147	C-CARBON R	RN72K1J-104JE	1	435031044R1
DG0099	R4148	C-CARBON R	RN72K1J-392JE	1	435033924R1
DG0099	R4149	C-CARBON R	RN72K1J-750JE	1	435037504R1
DG0099	R4150	C-CARBON R	RN72K1J-750JE	1	435037504R1
DG0099	R4151	C-CARBON R	RN72K1J-750JE	1	435037504R1
DG0099	R4152	C-CARBON R	RN72K1J-101JE	1	435031014R1
DG0099	R4153	C-CARBON R	RN72K1J-101JE	1	435031014R1
DG0099	R4155	C-CARBON R	RN72K1J-750JE	1	435037504R1
DG0099	R4156	C-CARBON R	RN72K1J-750JE	1	435037504R1
DG0099	R4157	C-CARBON R	RN72K1J-750JE	1	435037504R1
DG0099	R4159	C-CARBON R	RN72K1J-750JE	1	435037504R1
DG0099	R4160	C-CARBON R	RN72K2E-022JE	1	435220224R1

DG0099	R4161	C-CARBON R	RN72K1J-750JE	1	435037504R1
DG0099	R4162	C-CARBON R	RN72K1J-750JE	1	435037504R1
DG0099	R4163	C-CARBON R	RN72K1J-104JE	1	435031044R1
DG0099	R4164	C-CARBON R	RN72K1J-104JE	1	435031044R1
DG0099	R4165	C-CARBON R	RN72K1J-104JE	1	435031044R1
DG0099	R4166	C-CARBON R	RN72K1J-104JE	1	435031044R1
DG0099	R4167	C-CARBON R	RN72K1J-104JE	1	435031044R1
DG0099	R4168	C-CARBON R	RN72K1J-101JE	1	435031014R1
DG0099	R4169	C-CARBON R	RN72K1J-101JE	1	435031014R1
DG0099	R4170	C-CARBON R	RN72K2E-022JE	1	435220224R1
DG0099	R4171	C-CARBON R	RN72K2E-022JE	1	435220224R1
DG0099	R4172	C-CARBON R	RN72K1J-682JE	1	435036824R1
DG0099	R4173	C-CARBON R	RN72K1J-682JE	1	435036824R1
DG0099	R4174	C-CARBON R	RN72K2E-022JE	1	435220224R1
DG0099	R4175	C-CARBON R	RN72K1J-000JE	1	435030004R1
DG0099	R4176	C-CARBON R	RN72K1J-000JE	1	435030004R1
DG0099	R4177	C-CARBON R	RN72K1J-000JE	1	435030004R1
DG0099	R4181	C-CARBON R	RN72K1J-000JE	1	435030004R1
DG0099	R4182	C-CARBON R	RN72K1J-000JE	1	435030004R1
DG0099	R4183	C-CARBON R	RN72K1J-000JE	1	435030004R1
DG0099	R4187	C-CARBON R	RN72K1J-104JE	1	435031044R1
DG0099	R4189	C-CARBON R	RN72K1J-104JE	1	435031044R1
DG0099	R4200	C-CARBON R	RN72K1J-104JE	1	435031044R1
DG0099	R4201	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R4202	C-CARBON R	RN72K1J-101JE	1	435031014R1
DG0099	R4205	C-CARBON R	RN72K1J-101JE	1	435031014R1
DG0099	R4206	C-CARBON R	RN72K1J-000JE	1	435030004R1
DG0099	R4207	C-CARBON R	RN72K2E-022JE	1	435220224R1
DG0099	R4208	C-CARBON R	RN72K1J-104JE	1	435031044R1
DG0099	R4209	C-CARBON R	RN72K1J-392JE	1	435033924R1
DG0099	R4211	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R4212	C-CARBON R	RN72K1J-103JE	1	435031034R1
DG0099	R4215	C-CARBON R	RN72K1J-105JE	1	435031054R1

DG0099	R4216	C-CARBON R	RN72K1J-105JE	1	435031054R1	
DG0099	R4217	C-CARBON R	RN72K1J-105JE	1	435031054R1	
DG0099	R4218	C-CARBON R	RN72K1J-105JE	1	435031054R1	
DG0099	R4219	C-CARBON R	RN72K1J-105JE	1	435031054R1	
DG0099	R4220	C-CARBON R	RN72K1J-105JE	1	435031054R1	
DG0099	R4221	C-CARBON R	RN72K1J-105JE	1	435031054R1	
DG0099	R4222	C-CARBON R	RN72K1J-105JE	1	435031054R1	
DG0099	R4223	C-CARBON R	RN72K1J-105JE	1	435031054R1	
DG0099	R4224	C-CARBON R	RN72K1J-105JE	1	435031054R1	
DG0099	R4225	C-CARBON R	RN72K1J-105JE	1	435031054R1	
DG0099	R4226	C-CARBON R	RN72K1J-105JE	1	435031054R1	
DG0099	R4227	C-CARBON R	RN72K1J-682JE	1	435036824R1	
DG0099	R4228	C-CARBON R	RN72K1J-222JE	1	435032224R1	
DG0099	R4229	C-CARBON R	RN72K1J-331JE	1	435033314R1	
DG0099	R4233	C-CARBON R	RN72K1J-222JE	1	435032224R1	
DG0099	R4235	C-CARBON R	RN72K1J-222JE	1	435032224R1	
DG0099	R4238	C-CARBON R	RN72K1J-222JE	1	435032224R1	
DG0099	R4258	C-CARBON R	RN72K2E-022JE	1	435220224R1	
DG0099	R43	C-CARBON R	RN72K1J-000JE	1	435030004R1	<MDC><MDF>
DG0099	R44	NF CARBON R	R25J-10	1	415471004T	
DG0099	R45	NF CARBON R	R25J-10	1	415471004T	
DG0099	R4505	C-CARBON R	RN72K1J-223JE	1	435032234R1	
DG0099	R4506	C-CARBON R	RN72K1J-122JE	1	435031224R1	
DG0099	R4507	C-CARBON R	RN72K1J-473JE	1	435034734R1	
DG0099	R4508	C-CARBON R	RN72K1J-182JE	1	435031824R1	
DG0099	R4509	C-CARBON R	RN72K1J-331JE	1	435033314R1	
DG0099	R4510	C-CARBON R	RN72K1J-562JE	1	435035624R1	
DG0099	R4511	METAL R	RNU1WCJ-1	1	453630104T	
DG0099	R46	C-CARBON R	RN72K1J-103JE	1	435031034R1	Except <MDC><MDF>
DG0099	R47	C-CARBON R	RN72K1J-101JE	1	435031014R1	Except <MDC><MDF>
DG0099	R4700	C-CARBON R	RN72K1J-103JE	1	435031034R1	
DG0099	R4701	C-CARBON R	RN72K1J-103JE	1	435031034R1	
DG0099	R4702	C-CARBON R	RN72K1J-331JE	1	435033314R1	

DG0099	R4703	C-CARBON R	RN72K1J-331JE	1	435033314R1	
DG0099	R4704	C-CARBON R	RN72K1J-103JE	1	435031034R1	
DG0099	R4705	C-CARBON R	RN72K1J-331JE	1	435033314R1	
DG0099	R4707	C-CARBON R	RN72K1J-331JE	1	435033314R1	
DG0099	R48	C-CARBON R	RN72K1J-101JE	1	435031014R1	Except <MDC><MDF>
DG0099	R49	C-CARBON R	RN72K1J-103JE	1	435031034R1	<MDC><MDF>
DG0099	R50	C-CARBON R	RN72K1J-103JE	1	435031034R1	<MDC><MDF>
DG0099	R51	C-CARBON R	RN72K1J-273JE	1	435032734R1	<MDC><MDF>
DG0099	R52	C-CARBON R	RN72K1J-273JE	1	435032734R1	<MDC><MDF>
DG0099	R53	C-CARBON R	RN72K1J-223JE	1	435032234R1	<MDC><MDF>
DG0099	R54	C-CARBON R	RN72K1J-103JE	1	435031034R1	<MDC><MDF>
DG0099	R55	C-CARBON R	RN72K1J-103JE	1	435031034R1	<MDC><MDF>
DG0099	R56	C-CARBON R	RN72K1J-223JE	1	435032234R1	<MDC><MDF>
DG0099	R57	C-CARBON R	RN72K1J-103JE	1	435031034R1	<MDC><MDF>
DG0099	R58	C-CARBON R	RN72K1J-103JE	1	435031034R1	<MDC><MDF>
DG0099	R59	C-CARBON R	RN72K1J-103JE	1	435031034R1	<MDC><MDF>
DG0099	R60	C-CARBON R	RN72K1J-103JE	1	435031034R1	<MDC><MDF>
DG0099	R61	C-CARBON R	RN72K1J-103JE	1	435031034R1	<MDC><MDF>
DG0099	R62	C-CARBON R	RN72K1J-103JE	1	435031034R1	<MDC><MDF>
DG0099	R63	C-CARBON R	RN72K1J-103JE	1	435031034R1	<MDC><MDF>
DG0099	R64	C-CARBON R	RN72K1J-103JE	1	435031034R1	<MDC><MDF>
DG0099	U1100	REMO SENS	KSM-603TE2Q	1	24130018	
DG0099	U1301	PHT CP	JSR1165-001recieving	1	24120143	
DG0099	U1302	PHT CP	JSR1165-001recieving	1	24120143	
DG0099	X1001	CERA LOCK	CSTCR5M00G53-B0	1	3010356R2	
DG0099	X101	CRYSTAL	HC-49S 4.332MHz	1	3010469T	Except <MDC><MDF>
DG0099	X1301	CRYSTAL	HC-49US24.576MHz	1	3010423T	

U014	Display circuit PC board
U015	Standby switch PC board
U016	FL power supply PC board
U017	Headphone terminal PC board
U018	FFC Support PC board

BADIS-0110-1A
BASW-0111-1A
BAPS-0112-1A
BAETC-0113-1A
BAETC-0114-1A

U019	AUX input terminal PC board	BAETC-0115-1A
U020	Volume illuminate PC board	BAETC-0116-1A
U021	Support-1 PC board	BAETC-0117-1A
U022	Support-2 PC board	BAETC-0118-1A

PCB	NO.	PART NAME	DESCRIPTION	Q'TY	PART NO.	REMARKS
DIS0110	C7501	C-CERA C	CK725B1H-223K1	1	332102235R1	
DIS0110	C7502	C-CERA C	CK725F1E-104Z1	1	332161040R1	
DIS0110	C7503	C-CERA C	CK725F1E-104Z1	1	332161040R1	
DIS0110	C7504	C-CERA C	CK725B1H-473K1	1	332104735R1	
DIS0110	C7505	C-CERA C	CK725B1H-473K1	1	332104735R1	
DIS0110	C7506	ELECT C	CE04W50V-33M	1	355783309T	
DIS0110	C7511	C-CERA C	CK725F1E-104Z1	1	332161040R1	
DIS0110	C7512	C-CERA C	CC725CH1H-180J1	1	342101804R1	
DIS0110	C7513	C-CERA C	CK725F1E-104Z1	1	332161040R1	
DIS0110	C7514	C-CERA C	CK725F1E-104Z1	1	332161040R1	
DIS0110	C7518	C-CERA C	CK725F1E-104Z1	1	332161040R1	
DIS0110	C7519	C-CERA C	CK725F1E-104Z1	1	332161040R1	
DIS0110	C7520	C-CERA C	CK725B1H-223K1	1	332102235R1	
DIS0110	C7521	ELECT C	CE04W6.3V-100M	1	355721019T	
DIS0110	C7522	C-CERA C	CC725CH1H-221J1	1	342102214R1	
DIS0110	C7523	C-CERA C	CC725CH1H-221J1	1	342102214R1	
DIS0110	C7524	C-CERA C	CK725B1H-102K1	1	332101025R1	
DIS0110	C7530	C-CERA C	CK725B1H-102K1	1	332101025R1	
DIS0110	C7531	C-CERA C	CK725B1H-102K1	1	332101025R1	
DIS0110	C7533	ELECT C	CE04W35V-47M	1	355764709T	
DIS0110	C7534	ELECT C	CE04W35V-47M	1	355764709T	
DIS0110	C7535	ELECT C	CE04W35V-10M(S)	1	353761009T	
DIS0110	C7537	C-CERA C	CC725CH1H-330J1	1	342103304R1	
DIS0110	C7538	ELECT C	CE04W35V-10M(S)	1	353761009T	
DIS0110	C7539	ELECT C	CE04W35V-10M(S)	1	353761009T	
DIS0110	C7540	ELECT C	CE04W35V-10M(S)	1	353761009T	
DIS0110	C7543	C-CERA C	CK725B1H-102K1	1	332101025R1	

DIS0110	C7560	ELECT C	CE04W6.3V-220M	1	355722219T
DIS0110	C7561	C-CERA C	CK725B1H-102K1	1	332101025R1
DIS0110	C7562	C-CERA C	CK725B1H-102K1	1	332101025R1
DIS0110	C7563	C-CERA C	CK725F1E-104Z1	1	332161040R1
DIS0110	C7580	MKT C	B32529C0102J289	1	376491024T
DIS0110	C7581	MKT C	B32529C0102J289	1	376491024T
DIS0110	C7582	MKT C	B32529C0102J289	1	376491024T
DIS0110	C7583	MKT C	B32529C0102J289	1	376491024T
DIS0110	C7590	C-CERA C	CK725B1H-103K1	1	332101035R1
DIS0110	C7591	C-CERA C	CK725B1H-103K1	1	332101035R1
DIS0110	C7804	VR C	CE04W63V-220M(VR)	1	394672217T
DIS0110	C7805	VR C	CE04W63V-47M(VR)	1	394674707T
DIS0110	C7806	C-CERA C	CK725B1H-223K1	1	332102235R1
DIS0110	C7900	C-CERA C	CK725F1E-104Z1	1	332161040R1
DIS0110	D7500	ZENER D	UDZS10B	1	224551000R2
DIS0110	D7520	C-DIODE	1SS355	1	223269R2
DIS0110	D7520 or	C-DIODE	1SS352	(1)	223234R2
DIS0110	D7520 or	C-DIODE	KDS4148U	(1)	223283R2
DIS0110	D7520 or	C-DIODE	MA2J111	(1)	223279R2
DIS0110	D7521	C-DIODE	1SS355	1	223269R2
DIS0110	D7521 or	C-DIODE	1SS352	(1)	223234R2
DIS0110	D7521 or	C-DIODE	KDS4148U	(1)	223283R2
DIS0110	D7521 or	C-DIODE	MA2J111	(1)	223279R2
DIS0110	D7522	C-DIODE	1SS355	1	223269R2
DIS0110	D7522 or	C-DIODE	1SS352	(1)	223234R2
DIS0110	D7522 or	C-DIODE	KDS4148U	(1)	223283R2
DIS0110	D7522 or	C-DIODE	MA2J111	(1)	223279R2
DIS0110	D7523	C-DIODE	1SS355	1	223269R2
DIS0110	D7523 or	C-DIODE	1SS352	(1)	223234R2
DIS0110	D7523 or	C-DIODE	KDS4148U	(1)	223283R2
DIS0110	D7523 or	C-DIODE	MA2J111	(1)	223279R2
DIS0110	D7530	ZENER D	UDZS5.1B	1	224550510R2
DIS0110	D7531	C-DIODE	1SS355	1	223269R2

DIS0110	D7531 or	C-DIODE	ISS352	(1)	223234R2
DIS0110	D7531 or	C-DIODE	KDS4148U	(1)	223283R2
DIS0110	D7531 or	C-DIODE	MA2J111	(1)	223279R2
DIS0110	D7532	C-DIODE	ISS355	1	223269R2
DIS0110	D7532 or	C-DIODE	ISS352	(1)	223234R2
DIS0110	D7532 or	C-DIODE	KDS4148U	(1)	223283R2
DIS0110	D7532 or	C-DIODE	MA2J111	(1)	223279R2
DIS0110	D7560	C-DIODE	ISS355	1	223269R2
DIS0110	D7560 or	C-DIODE	ISS352	(1)	223234R2
DIS0110	D7560 or	C-DIODE	KDS4148U	(1)	223283R2
DIS0110	D7560 or	C-DIODE	MA2J111	(1)	223279R2
DIS0110	D7561	C-DIODE	ISS355	1	223269R2
DIS0110	D7561 or	C-DIODE	ISS352	(1)	223234R2
DIS0110	D7561 or	C-DIODE	KDS4148U	(1)	223283R2
DIS0110	D7561 or	C-DIODE	MA2J111	(1)	223279R2
DIS0110	D7580	C-DIODE	ISS355	1	223269R2
DIS0110	D7580 or	C-DIODE	ISS352	(1)	223234R2
DIS0110	D7580 or	C-DIODE	KDS4148U	(1)	223283R2
DIS0110	D7580 or	C-DIODE	MA2J111	(1)	223279R2
DIS0110	D7581	C-DIODE	ISS355	1	223269R2
DIS0110	D7581 or	C-DIODE	ISS352	(1)	223234R2
DIS0110	D7581 or	C-DIODE	KDS4148U	(1)	223283R2
DIS0110	D7581 or	C-DIODE	MA2J111	(1)	223279R2
DIS0110	D7582	C-DIODE	ISS355	1	223269R2
DIS0110	D7582 or	C-DIODE	ISS352	(1)	223234R2
DIS0110	D7582 or	C-DIODE	KDS4148U	(1)	223283R2
DIS0110	D7582 or	C-DIODE	MA2J111	(1)	223279R2
DIS0110	D7583	C-DIODE	ISS355	1	223269R2
DIS0110	D7583 or	C-DIODE	ISS352	(1)	223234R2
DIS0110	D7583 or	C-DIODE	KDS4148U	(1)	223283R2
DIS0110	D7583 or	C-DIODE	MA2J111	(1)	223279R2
DIS0110	D7590	LED	SCB3318E-D2	1	225487
DIS0110	D7590A	HOLDER	(LED)LH-5-5	1	27191312

DIS0110	D7591	LED	SCB3318E-D2	1	225487	
DIS0110	D7591A	HOLDER	(LED)LH-5-5	1	27191312	
DIS0110	D7593	LED	SLR-342MGTE7P	1	225455T	
DIS0110	D7595	LED	SLI-343URC-TE7	1	225449T	
DIS0110	D7806	ZENER D	UDZS22B	1	224552200R2	
DIS0110	D7810	ZENER D	UDZS24B	1	224552400R2	
DIS0110	D7812	DIODE	RL1N4003	1	22380260T	
DIS0110	D7813	DIODE	RL1N4003	1	22380260T	
DIS0110	D7814	DIODE	RL1N4003	1	22380260T	
DIS0110	D7815	DIODE	RL1N4003	1	22380260T	
DIS0110	D7816	DIODE	RL1N4003	1	22380260T	
DIS0110	E7530	RETAINER	(EARTH)	1	27142136A	N
DIS0110	E7580	TRM-423(SCREW)	NEJITANSI ST3	1	25060495	
DIS0110	E7601	TRM-423(SCREW)	NEJITANSI ST3	1	25060495	
DIS0110	JL4103	JUMPER LEAD	JL5 300 H	1	5J300606H	
DIS0110	JL4103A	WIRE HOL	NSCT-5P896	1	25051109	
DIS0110	JL9303	JUMPER LEAD	JL5 150 B	1	5J150606B15	
DIS0110	JL9303A	WIRE HOL	NSCT-5P876	1	25051089	
DIS0110	JL9303B	WIRE TRAP	NPLG-5P588	1	25055626	
DIS0110	L7520	CHOKE COIL	LBC2518T2R2M	1	231364M022R2	
DIS0110	L7530	CHOKE COIL	LBC2518T2R2M	1	231364M022R2	
DIS0110	L7580	CHOKE COIL	LBC2518T2R2M	1	231364M022R2	
DIS0110	L7581	CHOKE COIL	LBC2518T2R2M	1	231364M022R2	
DIS0110	L7582	CHOKE COIL	LBC2518T2R2M	1	231364M022R2	
DIS0110	P7303A	PLUG	NPLG-2P130	1	25055146	
DIS0110	P7303B	SOCKET AS	NSAS-4P0867	1	2002E390415	
DIS0110	P7501B	PLUG	A2545WR2-2x20P(IDE40SIDE)	1	25056643	N
DIS0110	P7522	PIN JACK	NPJ-3PDB693	1	25045925	
DIS0110	P7523	ST JACK	MSJ-035-05A BAG SR LF	1	25045927	N
DIS0110	P7530	ST JACK	MSJ-035-05C B AG SR type	1	25045879	
DIS0110	P7560A	SOCKET	NSCT-3P2183	1	25052286	
DIS0110	P7560B	PLUG	NPLG-3P0958	1	25056008	
DIS0110	P7580	ST JACK	MSJ-064-05A SR	1	25045783	

DIS0110	P7590A	SOCKET AS	NSAS-18P1674	1	2009991072UL	
DIS0110	P7590B	PLUG	NPLG-9P356	1	25055373	
DIS0110	P9301A	PLUG	NPLG-6P120	1	25055136	
DIS0110	Q7500	FL TUBE	HNA-16SL05T	1	212271A	N
DIS0110	Q7500A	HOLDER	(FL)	1	27191303	
DIS0110	Q7501	IC	M66005-0001AHP	1	22242208R3	
DIS0110	Q7502	IC	M66005-0001AHP	1	22242208R3	
DIS0110	Q7503	TR	2SC2712-GR	1	2213145R2	
DIS0110	Q7504	TR	2SC2712-GR	1	2213145R2	
DIS0110	Q7530	IC	NJM4580M-D	1	22241448R2	
DIS0110	Q7532	TR	RN1441	1	2215410R2	
DIS0110	Q7533	TR	RN2403	1	2214540R2	
DIS0110	Q7533 or	TR	KRA103S	(1)	2216230R2	
DIS0110	Q7534	IC	NJM4580M-D	1	22241448R2	
DIS0110	Q7591	TR	DTC123JKA	1	2216690R2	
DIS0110	Q7593	TR	DTC123JKA	1	2216690R2	
DIS0110	Q7597	TR	DTC123JKA	1	2216690R2	
DIS0110	Q7598	TR	DTC123JKA	1	2216690R2	
DIS0110	Q7801	TR	2SC2235-O(TPE6_F)	1	2211653T	
DIS0110	Q7801 or	TR	2SC2235-Y(TPE6_F)	(1)	2211654T	
DIS0110	R7500	C-CARBON R	RN72K1J-221JE	1	435032214R1	
DIS0110	R7501	C-CARBON R	RN72K1J-221JE	1	435032214R1	
DIS0110	R7502	C-CARBON R	RN72K1J-273JE	1	435032734R1	
DIS0110	R7503	C-CARBON R	RN72K1J-222JE	1	435032224R1	
DIS0110	R7504	C-CARBON R	RN72K1J-222JE	1	435032224R1	
DIS0110	R7505	C-CARBON R	RN72K1J-222JE	1	435032224R1	
DIS0110	R7506	C-CARBON R	RN72K1J-222JE	1	435032224R1	
DIS0110	R7507	C-CARBON R	RN72K1J-222JE	1	435032224R1	
DIS0110	R7508	C-CARBON R	RN72K1J-222JE	1	435032224R1	
DIS0110	R7509	C-CARBON R	RN72K1J-222JE	1	435032224R1	
DIS0110	R7510	C-CARBON R	RN72K1J-222JE	1	435032224R1	
DIS0110	R7520	C-CARBON R	RN72K1J-221JE	1	435032214R1	
DIS0110	R7521	C-CARBON R	RN72K1J-331JE	1	435033314R1	

DIS0110	R7522	C-CARBON R	RN72K1J-331JE	1	435033314R1
DIS0110	R7523	C-CARBON R	RN72K1J-750JE	1	435037504R1
DIS0110	R7526	C-CARBON R	RN72K1J-223JE	1	435032234R1
DIS0110	R7527	C-CARBON R	RN72K1J-223JE	1	435032234R1
DIS0110	R7528	C-CARBON R	RN72K1J-224JE	1	435032244R1
DIS0110	R7529	C-CARBON R	RN72K1J-224JE	1	435032244R1
DIS0110	R7530	C-CARBON R	RN72K1J-472JE	1	435034724R1
DIS0110	R7531	C-CARBON R	RN72K1J-101JE	1	435031014R1
DIS0110	R7532	C-CARBON R	RN72K1J-331JE	1	435033314R1
DIS0110	R7533	C-CARBON R	RN72K1J-182JE	1	435031824R1
DIS0110	R7534	C-CARBON R	RN72K1J-104JE	1	435031044R1
DIS0110	R7535	C-CARBON R	RN72K1J-102JE	1	435031024R1
DIS0110	R7536	C-CARBON R	RN72K1J-333JE	1	435033334R1
DIS0110	R7537	C-CARBON R	RN72K1J-333JE	1	435033334R1
DIS0110	R7538	C-CARBON R	RN72K1J-221JE	1	435032214R1
DIS0110	R7539	C-CARBON R	RN72K1J-221JE	1	435032214R1
DIS0110	R7540	C-CARBON R	RN72K1J-473JE	1	435034734R1
DIS0110	R7560	C-CARBON R	RN72K1J-102JE	1	435031024R1
DIS0110	R7561	C-CARBON R	RN72K1J-101JE	1	435031014R1
DIS0110	R7580	METAL O R	RS1WBJ-33	1	443623304T
DIS0110	R7581	METAL O R	RS1WBJ-33	1	443623304T
DIS0110	R7590	C-CARBON R	RN72K1J-103JE	1	435031034R1
DIS0110	R7591	C-CARBON R	RN72K1J-103JE	1	435031034R1
DIS0110	R7592	C-CARBON R	RN72K1J-103JE	1	435031034R1
DIS0110	R7593	C-CARBON R	RN72K1J-103JE	1	435031034R1
DIS0110	R7594	C-CARBON R	RN72K1J-121JE	1	435031214R1
DIS0110	R7595	C-CARBON R	RN72K1J-121JE	1	435031214R1
DIS0110	R7597	C-CARBON R	RN72K1J-181JE	1	435031814R1
DIS0110	R7599	C-CARBON R	RN72K1J-102JE	1	435031024R1
DIS0110	R7611	C-CARBON R	RN72K1J-271JE	1	435032714R1
DIS0110	R7612	C-CARBON R	RN72K1J-331JE	1	435033314R1
DIS0110	R7613	C-CARBON R	RN72K1J-471JE	1	435034714R1
DIS0110	R7614	C-CARBON R	RN72K1J-561JE	1	435035614R1

DIS0110	R7615	C-CARBON R	RN72K1J-821JE	1	435038214R1
DIS0110	R7616	C-CARBON R	RN72K1J-122JE	1	435031224R1
DIS0110	R7617	C-CARBON R	RN72K1J-222JE	1	435032224R1
DIS0110	R7618	C-CARBON R	RN72K1J-392JE	1	435033924R1
DIS0110	R7619	C-CARBON R	RN72K1J-123JE	1	435031234R1
DIS0110	R7621	C-CARBON R	RN72K1J-271JE	1	435032714R1
DIS0110	R7622	C-CARBON R	RN72K1J-331JE	1	435033314R1
DIS0110	R7623	C-CARBON R	RN72K1J-471JE	1	435034714R1
DIS0110	R7624	C-CARBON R	RN72K1J-561JE	1	435035614R1
DIS0110	R7625	C-CARBON R	RN72K1J-821JE	1	435038214R1
DIS0110	R7626	C-CARBON R	RN72K1J-122JE	1	435031224R1
DIS0110	R7627	C-CARBON R	RN72K1J-222JE	1	435032224R1
DIS0110	R7628	C-CARBON R	RN72K1J-392JE	1	435033924R1
DIS0110	R7629	C-CARBON R	RN72K1J-123JE	1	435031234R1
DIS0110	R7631	C-CARBON R	RN72K1J-271JE	1	435032714R1
DIS0110	R7632	C-CARBON R	RN72K1J-331JE	1	435033314R1
DIS0110	R7633	C-CARBON R	RN72K1J-471JE	1	435034714R1
DIS0110	R7634	C-CARBON R	RN72K1J-561JE	1	435035614R1
DIS0110	R7635	C-CARBON R	RN72K1J-821JE	1	435038214R1
DIS0110	R7636	C-CARBON R	RN72K1J-122JE	1	435031224R1
DIS0110	R7637	C-CARBON R	RN72K1J-222JE	1	435032224R1
DIS0110	R7638	C-CARBON R	RN72K1J-392JE	1	435033924R1
DIS0110	R7639	C-CARBON R	RN72K1J-123JE	1	435031234R1
DIS0110	R7641	C-CARBON R	RN72K1J-271JE	1	435032714R1
DIS0110	R7642	C-CARBON R	RN72K1J-331JE	1	435033314R1
DIS0110	R7643	C-CARBON R	RN72K1J-471JE	1	435034714R1
DIS0110	R7644	C-CARBON R	RN72K1J-561JE	1	435035614R1
DIS0110	R7645	C-CARBON R	RN72K1J-821JE	1	435038214R1
DIS0110	R7646	C-CARBON R	RN72K1J-122JE	1	435031224R1
DIS0110	R7647	C-CARBON R	RN72K1J-222JE	1	435032224R1
DIS0110	R7648	C-CARBON R	RN72K1J-392JE	1	435033924R1
DIS0110	R7649	C-CARBON R	RN72K1J-123JE	1	435031234R1
DIS0110	R7802	C-CARBON R	RN72K1J-103JE	1	435031034R1

DIS0110	R7804	METAL O R	RS1/2WBJ-10	1	443521004T
DIS0110	R7805	C-CARBON R	RN72K1J-562JE	1	435035624R1
DIS0110	R7807	C-CARBON R	RN72K1J-333JE	1	435033334R1
DIS0110	R7808	METAL R	RNU1/2WCJ-1	1	453530104T
DIS0110	R7810	METAL O R	RS1/2WBJ-10	1	443521004T
DIS0110	R7939	C-CARBON R	RN72K1J-104JE	1	435031044R1
DIS0110	R7954	C-CARBON R	RN72K1J-104JE	1	435031044R1
DIS0110	S7590	R ENCODE	EC12E2425WITH WASHER	1	25065655W
DIS0110	S7611	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7611 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7612	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7612 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7613	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7613 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7616	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7616 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7618	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7618 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7619	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7619 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7620	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7620 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7621	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7621 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7622	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7622 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7624	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7624 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7625	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7625 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7626	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7626 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7627	PUSH SW	NPS-111-S681	1	25035718T

DIS0110	S7627 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7628	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7628 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7630	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7630 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7632	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7632 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7633	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7633 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7634	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7634 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7636	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7636 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7638	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7638 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7639	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7639 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7640	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7640 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7641	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7641 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7642	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7642 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7643	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7643 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7644	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7644 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7645	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7645 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7646	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7646 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7647	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7647 or	PUSH SW	NPS-111-S677	(1)	25035714T

DIS0110	S7648	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7648 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	S7650	PUSH SW	NPS-111-S681	1	25035718T
DIS0110	S7650 or	PUSH SW	NPS-111-S677	(1)	25035714T
DIS0110	U7520	PHT CP	JSR1321-001	1	24120138
DIS0110	U7560	REMO SENS	TSOP34338RF1F	1	24130017

U023 HDMI circuit PC board**BAHDM-0132-1A**

PCB	NO.	PART NAME	DESCRIPTION	Q'TY	PART NO.	REMARKS
HDM0132	C251	C-CERA C	CK725F1A-105Z1	1	332181050R1	
HDM0132	C252	C-CERA C	CK725F1A-105Z1	1	332181050R1	
HDM0132	C3001	C-CERA C	CK725F1A-105Z1	1	332181050R1	
HDM0132	C3002	C-CERA C	CK725F1A-105Z1	1	332181050R1	
HDM0132	C3003	C-CERA C	CK725B0J-106K	1	332091065R2	
HDM0132	C3004	C-CERA C	CK725B0J-106K	1	332091065R2	
HDM0132	C3005	C-CERA C	CK725F1A-105Z1	1	332181050R1	
HDM0132	C3006	C-CERA C	CC725CH1H-102J1	1	342101024R1	
HDM0132	C3007	C-CERA C	CK725F1A-105Z1	1	332181050R1	
HDM0132	C3008	C-CERA C	CC725CH1H-102J1	1	342101024R1	
HDM0132	C3009	C-CERA C	CK725F1A-105Z1	1	332181050R1	
HDM0132	C3010	C-CERA C	CK725F1A-105Z1	1	332181050R1	
HDM0132	C3011	C-CERA C	CK725F1A-105Z1	1	332181050R1	
HDM0132	C3012	C-CERA C	CC725CH1H-102J1	1	342101024R1	
HDM0132	C3013	C-CERA C	CK725F1A-105Z1	1	332181050R1	
HDM0132	C3014	C-CERA C	CC725CH1H-102J1	1	342101024R1	
HDM0132	C3015	C-CERA C	CC725CH1H-102J1	1	342101024R1	
HDM0132	C3016	C-CERA C	CK725F1A-105Z1	1	332181050R1	
HDM0132	C3017	C-CERA C	CK725F1A-105Z1	1	332181050R1	
HDM0132	C3018	C-CERA C	CK725F1A-105Z1	1	332181050R1	
HDM0132	C3019	C-CERA C	CC725CH1H-102J1	1	342101024R1	
HDM0132	C3020	C-CERA C	CK725F1A-105Z1	1	332181050R1	

HDM0132	C3021	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3022	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3023	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C3024	C-CERA C	CC725CH1H-102J1	1	342101024R1
HDM0132	C3025	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3026	C-CERA C	CK725B1C-104K1	1	332121045R1
HDM0132	C3027	C-CERA C	CC725CH1H-102J1	1	342101024R1
HDM0132	C3028	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3029	C-CERA C	CC725CH1H-102J1	1	342101024R1
HDM0132	C3030	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3031	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3032	C-CERA C	CC725CH1H-102J1	1	342101024R1
HDM0132	C3033	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3034	C-CERA C	CC725CH1H-120J1	1	342101204R1
HDM0132	C3035	C-CERA C	CC725CH1H-102J1	1	342101024R1
HDM0132	C3036	C-CERA C	CC725CH1H-120J1	1	342101204R1
HDM0132	C3037	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3038	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3039	C-CERA C	CK725B1H-103K1	1	332101035R1
HDM0132	C3040	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3041	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C3042	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3043	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3105	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3106	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C3107	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3108	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3109	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C3110	C-CERA C	CK725B1A-224K1	1	332132245R1
HDM0132	C3112	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C3113	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3114	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3115	C-CERA C	CK725B0J-106K	1	332091065R2

HDM0132	C3116	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C3117	C-CERA C	CC725CH1H-102J1	1	342101024R1
HDM0132	C3118	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3119	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3120	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C3121	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3122	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3123	CHIP ELECT C	CEWX10V-220M	1	398132217R2
HDM0132	C3124	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3125	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C3126	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C3127	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3128	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3129	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3131	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3133	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3136	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3137	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3138	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3140	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3146	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3147	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C3149	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3150	CHIP ELECT C	CEWX4V-22M	1	3981G2207R2
HDM0132	C3151	C-CERA C	CK725B1H-103K1	1	332101035R1
HDM0132	C3152	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C3153	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3155	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3157	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3158	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3159	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3202	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3204	C-CERA C	CK725B0J-106K	1	332091065R2

HDM0132	C3205	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3402	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3403	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3404	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3405	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3406	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3407	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3408	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3409	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3410	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3412	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3413	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3414	C-CERA C	CC725CH1H-102J1	1	342101024R1
HDM0132	C3415	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3416	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3417	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3418	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3419	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3420	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C3421	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3422	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3423	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3424	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3425	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3426	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3427	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3428	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3429	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3430	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3431	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3432	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3433	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3434	C-CERA C	CK725F1A-105Z1	1	332181050R1

HDM0132	C3435	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3436	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3437	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3438	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3439	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3440	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3441	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3442	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C3443	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3444	C-CERA C	CC725CH1H-102J1	1	342101024R1
HDM0132	C3445	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3446	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C3447	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C3448	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C3449	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3450	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3451	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3452	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3453	CHIP ELECT C	CEWX4V-22M	1	3981G2207R2
HDM0132	C3454	C-CERA C	CK725B1H-103K1	1	332101035R1
HDM0132	C3455	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3456	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C3457	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3458	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C3459	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3461	CHIP ELECT C	CEWX4V-220M	1	3981G2217R2
HDM0132	C3462	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C3463	C-CERA C	CC725CH1H-060D1	1	342100602R1
HDM0132	C3464	C-CERA C	CC725CH1H-060D1	1	342100602R1
HDM0132	C8000	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2
HDM0132	C8000 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2
HDM0132	C8001	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8002	C-CERA C	CK725F1E-104Z1	1	332161040R1

HDM0132	C8003	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2
HDM0132	C8003 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2
HDM0132	C8004	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2
HDM0132	C8004 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2
HDM0132	C8005	C-CERA C	CK725B1H-103K1	1	332101035R1
HDM0132	C8006	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8007	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8008	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8009	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8010	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8011	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8012	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8013	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8014	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8015	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8016	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8017	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8018	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8021	CHIP ELECT C	CEWX16V-100M	1	398141017R2
HDM0132	C8022	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8023	CHIP ELECT C	CEWX4V-100M	1	3981G1017R2
HDM0132	C8026	CHIP ELECT C	CEWX4V-220M	1	3981G2217R2
HDM0132	C8030	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2
HDM0132	C8030 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2
HDM0132	C8031	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8032	C-CERA C	CK725B1H-103K1	1	332101035R1
HDM0132	C8033	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8034	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2
HDM0132	C8034 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2
HDM0132	C8041	CHIP ELECT C	CEWX16V-100M	1	398141017R2
HDM0132	C8042	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8043	CHIP ELECT C	CEWX4V-220M	1	3981G2217R2
HDM0132	C8044	CHIP ELECT C	CEWX4V-220M	1	3981G2217R2

HDM0132	C8051	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8052	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8053	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8054	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8055	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8056	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8057	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8058	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8059	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8060	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8061	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8062	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8063	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8064	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8065	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8066	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8077	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8078	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8079	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8080	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8142	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	C8161	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8162	CHIP ELECT C	CEWX4V-100M	1	3981G1017R2
HDM0132	C8163	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8164	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C8165	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8166	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C8167	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8168	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C8169	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8170	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8171	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8172	C-CERA C	CK725F1E-104Z1	1	332161040R1

HDM0132	C8173	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8174	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8175	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8176	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8177	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8178	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8179	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8180	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8181	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8200	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2
HDM0132	C8200 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2
HDM0132	C8201	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2
HDM0132	C8201 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2
HDM0132	C8202	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8203	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8204	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8205	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8206	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8207	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8208	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8209	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8210	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8211	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8212	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8213	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8214	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8215	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8216	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8217	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8218	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8219	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2
HDM0132	C8219 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2
HDM0132	C8220	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2

HDM0132	C8220 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2
HDM0132	C8221	C-CERA C	CK725B1H-103K1	1	332101035R1
HDM0132	C8222	C-CERA C	CK725B1H-103K1	1	332101035R1
HDM0132	C8223	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8224	C-CERA C	CK725B1H-103K1	1	332101035R1
HDM0132	C8225	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8226	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8227	C-CERA C	CK725B1H-103K1	1	332101035R1
HDM0132	C8228	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8229	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8230	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8231	C-CERA C	CK725B1H-103K1	1	332101035R1
HDM0132	C8232	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8233	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8234	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8235	C-CERA C	CK725B1H-103K1	1	332101035R1
HDM0132	C8236	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2
HDM0132	C8236 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2
HDM0132	C8237	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2
HDM0132	C8237 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2
HDM0132	C8238	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8239	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8240	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8241	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8242	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8243	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8244	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8245	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8246	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8247	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8248	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8249	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8250	C-CERA C	CK725F1E-104Z1	1	332161040R1

HDM0132	C8251	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2
HDM0132	C8251 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2
HDM0132	C8252	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8253	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8254	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8255	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2
HDM0132	C8255 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2
HDM0132	C8256	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8257	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8258	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2
HDM0132	C8258 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2
HDM0132	C8259	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8260	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2
HDM0132	C8260 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2
HDM0132	C8261	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8262	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8263	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8264	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2
HDM0132	C8264 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2
HDM0132	C8265	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8266	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8267	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8268	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2
HDM0132	C8268 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2
HDM0132	C8269	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8270	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8271	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8272	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8273	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2
HDM0132	C8273 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2
HDM0132	C8274	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8275	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8276	C-CERA C	CK725B1H-103K1	1	332101035R1

HDM0132	C8284	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8288	C-CERA C	CC725CH1H-330J1	1	342103304R1
HDM0132	C8289	C-CERA C	CC725CH1H-330J1	1	342103304R1
HDM0132	C8290	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8291	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8326	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8327	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8328	CHIP ELECT C	CEWX16V-22M	1	398142207R2
HDM0132	C8329	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8330	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8332	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8341	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	C8342	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	C8348	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	C8349	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	C8362	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8364	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C8365	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8366	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C8367	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8368	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C8369	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8370	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8371	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8372	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8373	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8374	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8375	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8376	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8377	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8378	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8379	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8380	C-CERA C	CK725F1E-104Z1	1	332161040R1

HDM0132	C8381	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8401	CHIP ELECT C	CEWX4V-22M	1	3981G2207R2
HDM0132	C8402	CHIP ELECT C	CEWX4V-22M	1	3981G2207R2
HDM0132	C8403	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8404	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8405	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8406	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8408	CHIP ELECT C	CEWX4V-22M	1	3981G2207R2
HDM0132	C8409	CHIP ELECT C	CEWX4V-22M	1	3981G2207R2
HDM0132	C8410	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8411	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8412	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8413	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8414	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8415	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8416	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8417	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8418	CHIP ELECT C	CEWX4V-22M	1	3981G2207R2
HDM0132	C8419	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8420	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8421	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8422	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8423	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8424	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8425	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8426	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8427	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8428	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8429	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8430	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8431	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8432	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8433	C-CERA C	CK725B1H-102K1	1	332101025R1

HDM0132	C8434	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8435	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8436	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8437	CHIP ELECT C	CEWX4V-22M	1	3981G2207R2
HDM0132	C8438	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8439	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8440	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C8441	CHIP ELECT C	CEWX4V-220M	1	3981G2217R2
HDM0132	C8501	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8502	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C8503	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8504	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8505	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8506	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C8507	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8508	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8509	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8510	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8511	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8512	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8513	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8514	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8515	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8516	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8517	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8518	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8519	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8521	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8522	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C8525	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C8527	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8529	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C8530	C-CERA C	CK725F1A-105Z1	1	332181050R1

HDM0132	C8531	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8532	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8533	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8534	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8535	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8536	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8537	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8538	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8539	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8540	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8548	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8549	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8550	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8551	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8552	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8553	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8554	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8555	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8556	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8557	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8558	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8559	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8560	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C8563	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8564	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C8565	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C8566	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0132	C8567	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8573	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8574	C-CERA C	CC725CH1H-070D1	1	342100702R1
HDM0132	C8575	C-CERA C	CC725CH1H-070D1	1	342100702R1
HDM0132	C8584	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C8585	C-CERA C	CK725B0J-106K	1	332091065R2

HDM0132	C8605	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	C8608	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8609	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0132	C8611	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	C8612	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	C8621	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	C8622	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	C8631	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	C8632	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	C8675	CHIP ELECT C	CEWX4V-100M	1	3981G1017R2
HDM0132	C8676	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8701	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8702	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8703	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8704	CHIP ELECT C	CEWX50V-4.7M	1	398180477R2
HDM0132	C8705	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8706	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8707	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8708	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8709	CHIP ELECT C	CEWX4V-220M	1	3981G2217R2
HDM0132	C8710	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8838	C-CERA C	CC725CH1H-470J1	1	342104704R1
HDM0132	C8839	C-CERA C	CC725CH1H-470J1	1	342104704R1
HDM0132	C8840	C-CERA C	CC725CH1H-470J1	1	342104704R1
HDM0132	C8855	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8856	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8857	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8858	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8859	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8860	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8861	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8862	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8863	C-CERA C	CK725F1E-104Z1	1	332161040R1

HDM0132	C8864	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8865	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8866	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8867	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8868	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8869	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8870	C-CERA C	CK725F1E-104Z1	1	332161040R1
HDM0132	C8951	C-CERA C	CK725B1C-104K1	1	332121045R1
HDM0132	C8952	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8953	CD C	UCD1E221MNL1GS	1	396652217R2
HDM0132	C8954	C-CERA C	CK725B1H-103K1	1	332101035R1
HDM0132	C8955	C-CERA C	CK725B1H-332K1	1	332103325R1
HDM0132	C8956	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8957	CHIP ELECT C	CEWT10V-470M	1	395734717R2
HDM0132	C8958	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8961	C-CERA C	CK725B1A-224K1	1	332132245R1
HDM0132	C8962	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8963	CD C	UCD1E221MNL1GS	1	396652217R2
HDM0132	C8964	C-CERA C	CK725B1H-332K1	1	332103325R1
HDM0132	C8965	C-CERA C	CK725B1H-332K1	1	332103325R1
HDM0132	C8966	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8967	CHIP ELECT C	CEWT10V-470M	1	395734717R2
HDM0132	C8968	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8971	C-CERA C	CK725B1C-104K1	1	332121045R1
HDM0132	C8972	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8973	CD C	UCD1E221MNL1GS	1	396652217R2
HDM0132	C8974	C-CERA C	CK725B1H-332K1	1	332103325R1
HDM0132	C8975	C-CERA C	CK725B1H-332K1	1	332103325R1
HDM0132	C8976	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8977	CHIP ELECT C	CEWT10V-470M	1	395734717R2
HDM0132	C8978	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8979	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8981	C-CERA C	CK725B1H-223K1	1	332102235R1

HDM0132	C8982	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8983	CD C	UCD1E221MNL1GS	1	396652217R2
HDM0132	C8984	C-CERA C	CK725B1H-103K1	1	332101035R1
HDM0132	C8985	C-CERA C	CK725B1H-222K1	1	332102225R1
HDM0132	C8986	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	C8987	CHIP ELECT C	CEWT10V-470M	1	395734717R2
HDM0132	C8988	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0132	D3101	C-DIODE	KDS4148U	1	223283R2
HDM0132	D3101 or	C-DIODE	1SS352	(1)	223234R2
HDM0132	D3401	C-DIODE	KDS4148U	1	223283R2
HDM0132	D3401 or	C-DIODE	1SS352	(1)	223234R2
HDM0132	D8041	DIODE	RB070M-30	1	22380361R2
HDM0132	D8043	DIODE	RB070M-30	1	22380361R2
HDM0132	D8301	C-DIODE	1SS226(TE85L_F)	1	223266R2
HDM0132	D8302	C-DIODE	KDS4148U	1	223283R2
HDM0132	D8302 or	C-DIODE	1SS352	(1)	223234R2
HDM0132	D8652	C-DIODE	1SR154-400	1	22380284R2
HDM0132	D8653	C-DIODE	KDS4148U	1	223283R2
HDM0132	D8653 or	C-DIODE	1SS352	(1)	223234R2
HDM0132	D8701	C-DIODE	KDS4148U	1	223283R2
HDM0132	D8701 or	C-DIODE	1SS352	(1)	223234R2
HDM0132	D8951	DIODE	RSX501LA-20	1	22380364R2
HDM0132	D8952	DIODE	RSX501LA-20	1	22380364R2
HDM0132	D8953	DIODE	RSX501LA-20	1	22380364R2
HDM0132	D8954	DIODE	RSX501LA-20	1	22380364R2
HDM0132	D8958	C-DIODE	1SS352	1	223234R2
HDM0132	D8958 or	C-DIODE	KDS4148U	(1)	223283R2
HDM0132	D8958 or	C-DIODE	MA2J111	(1)	223279R2
HDM0132	JL8002B	SOCKET	NSCT-5P97	1	25050269
HDM0132	L251	CORE	BLM18PG181SN1D	1	2350005R1
HDM0132	L261	EMIFIL	BK1608LM182-T	1	230958R1
HDM0132	L3001	CORE	BLM18PG121SN1D	1	2350006R1
HDM0132	L3002	CORE	BLM18PG121SN1D	1	2350006R1

HDM0132	L3003	CORE	BLM18PG121SN1D	1	2350006R1
HDM0132	L3004	CORE	BLM18PG121SN1D	1	2350006R1
HDM0132	L3005	CORE	BLM18PG121SN1D	1	2350006R1
HDM0132	L3103	CORE	BLM18PG121SN1D	1	2350006R1
HDM0132	L3104	CORE	BLM18PG121SN1D	1	2350006R1
HDM0132	L3105	CORE	BLM18PG121SN1D	1	2350006R1
HDM0132	L3106	CORE	BLM18PG121SN1D	1	2350006R1
HDM0132	L3107	CORE	BLM18PG121SN1D	1	2350006R1
HDM0132	L3109	CORE	BLM18PG121SN1D	1	2350006R1
HDM0132	L3202	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	L3203	CORE	MMZ1608Y601BT	1	2350004R1
HDM0132	L3204	CORE	MMZ1608Y601BT	1	2350004R1
HDM0132	L3205	CORE	BLM18PG121SN1D	1	2350006R1
HDM0132	L3209	CORE	MMZ1608Y601BT	1	2350004R1
HDM0132	L3401	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	L3402	CORE	BLM18PG121SN1D	1	2350006R1
HDM0132	L3403	CORE	MMZ1608Y601BT	1	2350004R1
HDM0132	L3405	CORE	BLM18PG121SN1D	1	2350006R1
HDM0132	L3406	CORE	BLM18PG121SN1D	1	2350006R1
HDM0132	L3407	CORE	BLM18PG121SN1D	1	2350006R1
HDM0132	L3408	CORE	BLM18PG121SN1D	1	2350006R1
HDM0132	L3409	CORE	BLM18PG121SN1D	1	2350006R1
HDM0132	L3410	CORE	MMZ1608Y601BT	1	2350004R1
HDM0132	L3411	CORE	MMZ1608Y601BT	1	2350004R1
HDM0132	L8021	CHOKE COIL	BLM21PG221SN1	1	230949R2
HDM0132	L8022	CHOKE COIL	BLM21PG221SN1	1	230949R2
HDM0132	L8023	CHOKE COIL	BLM21PG221SN1	1	230949R2
HDM0132	L8024	CHOKE COIL	BLM21PG221SN1	1	230949R2
HDM0132	L8025	CHOKE COIL	BLM21PG221SN1	1	230949R2
HDM0132	L8026	CHOKE COIL	BLM21PG221SN1	1	230949R2
HDM0132	L8027	CHOKE COIL	BLM21PG221SN1	1	230949R2
HDM0132	L8041	CHOKE COIL	BLM21PG221SN1	1	230949R2
HDM0132	L8042	CHOKE COIL	BLM21PG221SN1	1	230949R2

HDM0132	L8043	CHOKE COIL	BLM21PG221SN1	1	230949R2
HDM0132	L8161	CORE	BLM18PG181SN1D	1	2350005R1
HDM0132	L8162	CORE	BLM18PG181SN1D	1	2350005R1
HDM0132	L8163	CORE	BLM18PG181SN1D	1	2350005R1
HDM0132	L8361	CORE	BLM18PG181SN1D	1	2350005R1
HDM0132	L8362	CORE	BLM18PG181SN1D	1	2350005R1
HDM0132	L8363	CORE	BLM18PG181SN1D	1	2350005R1
HDM0132	L8401	CORE	BLM18PG181SN1D	1	2350005R1
HDM0132	L8402	CORE	BLM18PG181SN1D	1	2350005R1
HDM0132	L8403	CORE	BLM18PG181SN1D	1	2350005R1
HDM0132	L8404	CORE	BLM18PG181SN1D	1	2350005R1
HDM0132	L8405	CORE	BLM18PG181SN1D	1	2350005R1
HDM0132	L8406	C-R NET	MNR12E0APJ000	1	43464900002R2
HDM0132	L8407	C-R NET	MNR12E0APJ000	1	43464900002R2
HDM0132	L8408	CORE	BLM18PG181SN1D	1	2350005R1
HDM0132	L8409	C-R NET	MNR12E0APJ000	1	43464900002R2
HDM0132	L8410	C-R NET	MNR12E0APJ000	1	43464900002R2
HDM0132	L8601	CORE	BLM18PG181SN1D	1	2350005R1
HDM0132	L8602	CORE	BLM18PG181SN1D	1	2350005R1
HDM0132	L8603	CORE	BLM18PG181SN1D	1	2350005R1
HDM0132	L8604	CORE	BLM18PG181SN1D	1	2350005R1
HDM0132	L8605	CORE	BLM18PG181SN1D	1	2350005R1
HDM0132	L8606	CORE	BLM18PG181SN1D	1	2350005R1
HDM0132	L8608	EMIFIL	BK1608LM182-T	1	230958R1
HDM0132	L8641	CORE	BLM18PG181SN1D	1	2350005R1
HDM0132	L8701	CORE	BLM18PG181SN1D	1	2350005R1
HDM0132	L8951	CHOKE COIL	0182-7E08Q-100M-RA	1	231396M100R2
HDM0132	L8952	CHOKE COIL	0182-7E08Q-6R8N-RA	1	231395P068R2
HDM0132	L8953	CHOKE COIL	0182-7E08Q-6R8N-RA	1	231395P068R2
HDM0132	L8954	CHOKE COIL	0182-7E08Q-100M-RA	1	231396M100R2
HDM0132	L8955	CHOKE COIL	BLM21PG221SN1	1	230949R2
HDM0132	L8956	CHOKE COIL	BLM21PG221SN1	1	230949R2
HDM0132	L8957	CHOKE COIL	BLM21PG221SN1	1	230949R2

HDM0132	L8958	CHOKE COIL	BLM21PG221SN1	1	230949R2	
HDM0132	L8959	CHOKE COIL	BLM21PG221SN1	1	230949R2	
HDM0132	L8960	CHOKE COIL	BLM21PG221SN1	1	230949R2	
HDM0132	L8961	CHOKE COIL	BLM21PG221SN1	1	230949R2	
HDM0132	L8962	CHOKE COIL	BLM21PG221SN1	1	230949R2	
HDM0132	L8963	CHOKE COIL	BLM21PG221SN1	1	230949R2	
HDM0132	L8964	CHOKE COIL	BLM21PG221SN1	1	230949R2	
HDM0132	L8965	CHOKE COIL	BLM21PG221SN1	1	230949R2	
HDM0132	L8966	CHOKE COIL	BLM21PG221SN1	1	230949R2	
HDM0132	P3001	SOCKET(B to B)	IMSA-9850S-20Y900	1	25052813R2	
HDM0132	P3102A	SOCKET	NSCT-9P2472	1	25052575R2	
HDM0132	P3605A	PLUG	IMSA-9142B-18A	1	25056599	
HDM0132	P3607A	PLUG	IMSA-9142B-16A	1	25056598	
HDM0132	P3608A	PLUG	IMSA-9142B-18A	1	25056599	
HDM0132	P3609	SOCKET	04FMN-SMT-A-TF	1	25052821R2	
HDM0132	P4104A	SOCKET	NSCT-19P2112	1	25052215	
HDM0132	P8005A	TRM-423(SCREW)	NEJITANSI ST3	1	25060495	
HDM0132	P8006	HOLDER	(クランプ) UA-0	1	27190432	
HDM0132	P8302	SOCKET	YKF45-7037V	1	25053253R3	MAIN OUT
HDM0132	P8341	SOCKET	YKF45-7037V	1	25053253R3	IN5
HDM0132	P8601	SOCKET	YKF45-7037V	1	25053253R3	IN1
HDM0132	P8611	SOCKET	YKF45-7037V	1	25053253R3	IN2
HDM0132	P8621	SOCKET	YKF45-7037V	1	25053253R3	IN3
HDM0132	P8631	SOCKET	YKF45-7037V	1	25053253R3	IN4
HDM0132	P8641B	SOCKET	FX16-31S-0.5SH	1	25053365R2	FRONT IN
HDM0132	P8702	SOCKET	NSCT-9P2472	1	25052575R2	
HDM0132	P8703	SOCKET	NSCT-9P2472	1	25052575R2	
HDM0132	P8704	SOCKET	04FMN-SMT-A-TF	1	25052821R2	
HDM0132	Q205	IC	TC74VHC157FT	1	22274157ER2TO	
HDM0132	Q3001	IC	D830K011AZKB300ZrevC	1	22242617R3	N
HDM0132	Q3002	IC(DSP)	NAND256W3A2BN6E(0309)	1	222W0092R303096	
HDM0132	Q3003	IC	IS42S16160C-7TL	1	22242592R3	
HDM0132	Q3003 or	IC	K4S561632J-UC75	(1)	22242524AR3	

HDM0132	Q3004	IC	IS42S16160C-7TL	1	22242592R3	
HDM0132	Q3004 or	IC	K4S561632J-UC75	(1)	22242524AR3	
HDM0132	Q3005	IC	TC7W32FU	1	22241162R2	
HDM0132	Q3006	IC	S-80127CNMC-JKM-T2	1	22241642R2	
HDM0132	Q3103	IC	BH18LB1WG-TR	1	22242562R2	
HDM0132	Q3106	IC	BH33FB1WG-TR	1	22242585R2	
HDM0132	Q3107	IC	BA33BC0FP	1	22278033DR2RH	
HDM0132	Q3107 or	IC	TA48033AF(TE16L_NQ)	(1)	22278033DR2TO	
HDM0132	Q3107 or	IC	TA48033BF(TE16L_NQ)	(1)	22278033DBR2TO	
HDM0132	Q3109	IC	BD7820	1	22242300R2	
HDM0132	Q3202	IC	TC74VHC157FT	1	22274157ER2TO	
HDM0132	Q3401	IC(DSP2)	ES29LV160ET-70TG(0324)	1	222W0069R303247	
HDM0132	Q3401 or	IC(DSP2)	S29AL016J70TFI010(0324)	(1)	222W0100R303247	
HDM0132	Q3401 or	IC(DSP2)	S29AL016D70TFI010(0324)	(1)	222W0063R303247	
HDM0132	Q3402	IC	D788E001BRFP266Z	1	22242502R3	
HDM0132	Q3403	IC	K4S641632K-UC60	1	22242462R2	
HDM0132	Q3403 or	IC	K4S641632N-LC60	(1)	22242603R2	
HDM0132	Q3403 or	IC	EM638165TS-7G	(1)	22242607R2	
HDM0132	Q3404	IC	BD7820	1	22242300R2	
HDM0132	Q3405	IC	TC7WU04FU(TE12L_F)	1	22240935R2	
HDM0132	Q3406	IC	TA48033AF(TE16L_NQ)	1	22278033DR2TO	
HDM0132	Q3406 or	IC	TA48033BF(TE16L_NQ)	(1)	22278033DBR2TO	
HDM0132	Q8000	IC	HY5DU561622ETP-4-C	1	22242450R3	Q8000 and Q8001 must use the same on
HDM0132	Q8000 or	IC	HY5DU561622FTP-4-C	(1)	22242577R3	
HDM0132	Q8001	IC	HY5DU561622ETP-4-C	1	22242450R3	Q8000 and Q8001 must use the same on
HDM0132	Q8001 or	IC	HY5DU561622FTP-4-C	(1)	22242577R3	
HDM0132	Q8005	IC(VSP)	MX29LV320CTTC-70G(0311)	1	222W0052R30311A	
HDM0132	Q8041	IC	TA48018BF(TE16L_NQ)	1	22278018DBR2TO	
HDM0132	Q8161	IC	TA48018BF(TE16L_NQ)	1	22278018DBR2TO	
HDM0132	Q8162	IC	SII9185ACTU	1	22242471R3	
HDM0132	Q8200	IC	FLI30336	1	22242469R3	
HDM0132	Q8201	IC	BR24S32FJ-WE2	1	22242569R2	
HDM0132	Q8201 or	IC	24LC32A-I/SN	(1)	22242521R2	

HDM0132	Q8305	IC	S-812C50BUC-C5ET2G	1	22242407R2	
HDM0132	Q8306	IC	NC7SZ08P5X_F042	1	22242482R2	
HDM0132	Q8306 or	IC	TC7SZ08FU(TE85L_F)	(1)	22242071R2TO	
HDM0132	Q8309	TR ARRAY	UM6K1N	1	226066R2	
HDM0132	Q8362	IC	SII9185ACTU	1	22242471R3	
HDM0132	Q8401	IC	SII9134CTU	1	22242394R3	
HDM0132	Q8404	IC	BH18LB1WG-TR	1	22242562R2	
HDM0132	Q8405	IC	SN74CB3Q3305PWR	1	22242258R2	
HDM0132	Q8501	IC	SII9233ACTU	1	22242582R3	
HDM0132	Q8595	IC	TA48018BF(TE16L_NQ)	1	22278018DBR2TO	
HDM0132	Q8652	IC	BH33FB1WG-TR	1	22242585R2	
HDM0132	Q8654	IC	BD7820	1	22242300R2	
HDM0132	Q8701	IC(HDMI/VIDEO)	MPD70F3739GC-UEU-AX(0299)	1	222W0102R302995	N
HDM0132	Q8813	IC	TC74VCX162827	1	22242395R2	
HDM0132	Q8814	IC	TC74VCX162827	1	22242395R2	
HDM0132	Q8817	IC	TC74VCX162827	1	22242395R2	
HDM0132	Q8818	IC	TC74VCX162827	1	22242395R2	
HDM0132	Q8951	IC	MP1593DN	1	22242601R2	N
HDM0132	Q8952	IC	MP1593DN	1	22242601R2	N
HDM0132	Q8953	IC	MP1593DN	1	22242601R2	N
HDM0132	Q8954	IC	MP1593DN	1	22242601R2	N
HDM0132	Q8955	TR	DTC144EE	1	2216390R2	
HDM0132	Q8955 or	TR	KRC404E	(1)	2216450R2	
HDM0132	Q8956	TR	DTC144EE	1	2216390R2	
HDM0132	Q8956 or	TR	KRC404E	(1)	2216450R2	
HDM0132	Q8957	TR	DTC144EE	1	2216390R2	
HDM0132	Q8957 or	TR	KRC404E	(1)	2216450R2	
HDM0132	Q8958	TR	DTC144EE	1	2216390R2	
HDM0132	Q8958 or	TR	KRC404E	(1)	2216450R2	
HDM0132	Q8963	TR	DTC144EE	1	2216390R2	
HDM0132	Q8963 or	TR	KRC404E	(1)	2216450R2	
HDM0132	R268	C-CARBON R	RN72K1J-331JE	1	435033314R1	
HDM0132	R269	C-CARBON R	RN72K1J-331JE	1	435033314R1	

HDM0132	R270	C-CARBON R	RN72K1J-331JE	1	435033314R1
HDM0132	R271	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R272	C-CARBON R	RN72K1J-331JE	1	435033314R1
HDM0132	R273	C-CARBON R	RN72K1J-331JE	1	435033314R1
HDM0132	R274	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R275	C-CARBON R	RN72K1J-221JE	1	435032214R1
HDM0132	R276	C-CARBON R	RN72K1J-221JE	1	435032214R1
HDM0132	R277	C-CARBON R	RN72K1J-151JE	1	435031514R1
HDM0132	R278	C-CARBON R	RN72K1J-331JE	1	435033314R1
HDM0132	R279	C-CARBON R	RN72K1J-331JE	1	435033314R1
HDM0132	R280	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3009	C-CARBON R	RN72K1J-330JE	1	435033304R1
HDM0132	R3010	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R3011	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R3012	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R3013	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R3014	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R3015	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R3016	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3017	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R3018	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3019	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R3020	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R3021	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3022	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3023	C-R NET	RM7LJ470X04	1	43484747004R2
HDM0132	R3024	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3025	C-CARBON R	RN72K1J-102JE	1	435031024R1
HDM0132	R3026	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3028	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3029	C-CARBON R	RN72K1J-102JE	1	435031024R1
HDM0132	R3032	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3033	C-CARBON R	RN72K1J-470JE	1	435034704R1

HDM0132	R3034	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3035	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3036	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3037	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3038	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3039	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3040	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3041	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R3042	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R3043	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	R3044	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R3045	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R3047	C-CARBON R	RN72K1J-560JE	1	435035604R1
HDM0132	R3048	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	R3049	C-CARBON R	RN72K1J-560JE	1	435035604R1
HDM0132	R3050	C-CARBON R	RN72K1J-560JE	1	435035604R1
HDM0132	R3051	C-CARBON R	RN72K1J-560JE	1	435035604R1
HDM0132	R3052	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3053	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3054	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3055	C-CARBON R	RN72K1J-472JE	1	435034724R1
HDM0132	R3056	C-CARBON R	RN72K1J-472JE	1	435034724R1
HDM0132	R3060	C-CARBON R	RN72K1J-680JE	1	435036804R1
HDM0132	R3061	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3062	C-CARBON R	RN72K1J-680JE	1	435036804R1
HDM0132	R3063	C-CARBON R	RN72K1J-680JE	1	435036804R1
HDM0132	R3064	C-CARBON R	RN72K1J-680JE	1	435036804R1
HDM0132	R3065	C-CARBON R	RN72K1J-680JE	1	435036804R1
HDM0132	R3066	C-CARBON R	RN72K1J-102JE	1	435031024R1
HDM0132	R3101	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3102	C-CARBON R	RN72K1J-153JE	1	435031534R1
HDM0132	R3108	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3110	C-CARBON R	RN72K1J-103JE	1	435031034R1

HDM0132	R3111	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3113	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3115	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3117	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3119	C-CARBON R	RN72K1J-472JE	1	435034724R1
HDM0132	R3121	C-CARBON R	RN72K1J-153JE	1	435031534R1
HDM0132	R3122	C-CARBON R	RN72K1J-102JE	1	435031024R1
HDM0132	R3123	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	R3124	C-CARBON R	RN72K1J-331JE	1	435033314R1
HDM0132	R3125	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3126	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3127	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3128	C-CARBON R	RN72K1J-472JE	1	435034724R1
HDM0132	R3129	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3130	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3131	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3132	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3133	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3134	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3135	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3136	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	R3137	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	R3139	C-CARBON R	RN72K1J-101JE	1	435031014R1
HDM0132	R3140	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3143	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3144	C-CARBON R	RN72K1J-101JE	1	435031014R1
HDM0132	R3145	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3146	C-CARBON R	RN72K1J-390JE	1	435033904R1
HDM0132	R3147	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	R3148	C-CARBON R	RN72K1J-390JE	1	435033904R1
HDM0132	R3149	C-CARBON R	RN72K1J-102JE	1	435031024R1
HDM0132	R3150	C-CARBON R	RN72K1J-330JE	1	435033304R1
HDM0132	R3151	C-CARBON R	RN72K1J-103JE	1	435031034R1

HDM0132	R3152	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3154	C-CARBON R	RN72K1J-390JE	1	435033904R1
HDM0132	R3155	C-CARBON R	RN72K1J-390JE	1	435033904R1
HDM0132	R3156	C-CARBON R	RN72K1J-390JE	1	435033904R1
HDM0132	R3157	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	R3158	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	R3159	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	R3160	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	R3162	C-CARBON R	RN72K1J-390JE	1	435033904R1
HDM0132	R3163	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R3185	C-CARBON R	RN72K1J-392FE	1	435033922R1
HDM0132	R3187	C-CARBON R	RN72K1J-223FE	1	435032232R1
HDM0132	R3188	C-CARBON R	RN72K1J-224FE	1	435032242R1
HDM0132	R3189	C-CARBON R	RN72K1J-103FE	1	435031032R1
HDM0132	R3190	C-CARBON R	RN72K1J-393FE	1	435033932R1
HDM0132	R3191	C-CARBON R	RN72K1J-105FE	1	435031052R1
HDM0132	R3200	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3201	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3202	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3203	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3204	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3205	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3208	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R3212	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R3215	C-CARBON R	RN72K1J-221JE	1	435032214R1
HDM0132	R3218	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R3219	C-CARBON R	RN72K1J-221JE	1	435032214R1
HDM0132	R3221	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3224	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R3225	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R3226	C-R NET	RM7LJ470X04	1	43484747004R2
HDM0132	R3227	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3228	C-CARBON R	RN72K1J-470JE	1	435034704R1

HDM0132	R3229	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3230	C-CARBON R	RN72K1J-221JE	1	435032214R1
HDM0132	R3231	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3232	C-CARBON R	RN72K1J-221JE	1	435032214R1
HDM0132	R3233	C-CARBON R	RN72K1J-221JE	1	435032214R1
HDM0132	R3234	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3236	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3237	C-CARBON R	RN72K1J-221JE	1	435032214R1
HDM0132	R3238	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3239	C-CARBON R	RN72K1J-221JE	1	435032214R1
HDM0132	R3240	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3241	C-CARBON R	RN72K1J-221JE	1	435032214R1
HDM0132	R3242	C-CARBON R	RN72K1J-221JE	1	435032214R1
HDM0132	R3243	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R3244	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3245	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3246	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3247	C-CARBON R	RN72K1J-331JE	1	435033314R1
HDM0132	R3248	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R3249	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3250	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3251	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3252	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R3253	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3254	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3255	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3256	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3257	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3259	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R3260	C-CARBON R	RN72K1J-390JE	1	435033904R1
HDM0132	R3261	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3262	C-CARBON R	RN72K1J-221JE	1	435032214R1
HDM0132	R3264	C-CARBON R	RN72K1J-470JE	1	435034704R1

HDM0132	R3265	C-CARBON R	RN72K1J-390JE	1	435033904R1
HDM0132	R3267	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3268	C-CARBON R	RN72K1J-390JE	1	435033904R1
HDM0132	R3270	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3271	C-CARBON R	RN72K1J-390JE	1	435033904R1
HDM0132	R3272	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3273	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3274	C-CARBON R	RN72K1J-390JE	1	435033904R1
HDM0132	R3275	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R3276	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3277	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R3278	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3279	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3280	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3281	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3282	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3283	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3284	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3285	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3286	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3401	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R3402	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R3403	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R3404	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R3405	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3406	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3407	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3408	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3409	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3410	C-CARBON R	RN72K1J-221JE	1	435032214R1
HDM0132	R3411	C-CARBON R	RN72K1J-221JE	1	435032214R1
HDM0132	R3412	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3413	C-CARBON R	RN72K1J-470JE	1	435034704R1

HDM0132	R3414	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3416	C-CARBON R	RN72K1J-331JE	1	435033314R1
HDM0132	R3417	C-CARBON R	RN72K1J-330JE	1	435033304R1
HDM0132	R3418	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3419	C-CARBON R	RN72K1J-750JE	1	435037504R1
HDM0132	R3420	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3421	C-CARBON R	RN72K1J-102JE	1	435031024R1
HDM0132	R3422	C-CARBON R	RN72K1J-330JE	1	435033304R1
HDM0132	R3423	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3424	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3425	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3426	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R3427	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3428	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3429	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R3430	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R3431	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3432	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3433	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3435	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R3436	C-CARBON R	RN72K1J-331JE	1	435033314R1
HDM0132	R3437	C-CARBON R	RN72K1J-331JE	1	435033314R1
HDM0132	R3438	C-CARBON R	RN72K1J-331JE	1	435033314R1
HDM0132	R3439	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R3440	C-CARBON R	RN72K1J-331JE	1	435033314R1
HDM0132	R3441	C-CARBON R	RN72K1J-331JE	1	435033314R1
HDM0132	R3442	C-CARBON R	RN72K1J-331JE	1	435033314R1
HDM0132	R3443	C-CARBON R	RN72K1J-331JE	1	435033314R1
HDM0132	R3444	C-CARBON R	RN72K1J-331JE	1	435033314R1
HDM0132	R3445	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R3446	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3447	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3448	C-CARBON R	RN72K1J-470JE	1	435034704R1

HDM0132	R3449	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3450	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3451	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3452	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3453	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3454	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3455	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R3456	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3457	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3458	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3459	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3460	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3461	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3462	C-CARBON R	RN72K1J-470JE	1	435034704R1
HDM0132	R3464	C-CARBON R	RN72K1J-102JE	1	435031024R1
HDM0132	R3465	C-CARBON R	RN72K1J-223FE	1	435032232R1
HDM0132	R3466	C-CARBON R	RN72K1J-392FE	1	435033922R1
HDM0132	R3467	C-CARBON R	RN72K1J-224FE	1	435032242R1
HDM0132	R3468	C-CARBON R	RN72K1J-103FE	1	435031032R1
HDM0132	R3469	C-CARBON R	RN72K1J-333FE	1	435033332R1
HDM0132	R3470	C-CARBON R	RN72K1J-391JE	1	435033914R1
HDM0132	R3471	C-CARBON R	RN72K1J-391JE	1	435033914R1
HDM0132	R3472	C-CARBON R	RN72K1J-105JE	1	435031054R1
HDM0132	R3473	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132-1A	R3570	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132-1A	R3622	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132-1A	R3623	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132-1A	R3624	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132-1A	R3625	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132-1A	R3626	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132-1A	R3627	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	R3670	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132-1A	R3671	C-CARBON R	RN72K1J-000JE	1	435030004R1

HDM0132-1A	R3672	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	R8000	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8001	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8002	C-CARBON R	RN72K1J-271JE	1	435032714R1
HDM0132	R8003	C-CARBON R	RN72K1J-271JE	1	435032714R1
HDM0132	R8010	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8011	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8012	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	R8013	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8014	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8015	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8016	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8017	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8018	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8019	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8020	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8021	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8022	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8026	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8028	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8029	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8033	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8034	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	R8035	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	R8036	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8038	C-CARBON R	RN72K1J-330JE	1	435033304R1
HDM0132	R8045	C-CARBON R	RN72K1J-750JE	1	435037504R1
HDM0132	R8046	C-CARBON R	RN72K1J-750JE	1	435037504R1
HDM0132	R8047	C-CARBON R	RN72K1J-750JE	1	435037504R1
HDM0132	R8048	C-CARBON R	RN72K1J-750JE	1	435037504R1
HDM0132	R8049	C-CARBON R	RN72K1J-750JE	1	435037504R1
HDM0132	R8050	C-CARBON R	RN72K1J-750JE	1	435037504R1
HDM0132	R8051	C-CARBON R	RN72K1J-680JE	1	435036804R1

HDM0132	R8052	C-CARBON R	RN72K1J-471JE	1	435034714R1
HDM0132	R8053	C-CARBON R	RN72K1J-680JE	1	435036804R1
HDM0132	R8054	C-CARBON R	RN72K1J-471JE	1	435034714R1
HDM0132	R8055	C-CARBON R	RN72K1J-680JE	1	435036804R1
HDM0132	R8056	C-CARBON R	RN72K1J-471JE	1	435034714R1
HDM0132	R8057	C-CARBON R	RN72K1J-680JE	1	435036804R1
HDM0132	R8058	C-CARBON R	RN72K1J-471JE	1	435034714R1
HDM0132	R8059	C-CARBON R	RN72K1J-680JE	1	435036804R1
HDM0132	R8060	C-CARBON R	RN72K1J-680JE	1	435036804R1
HDM0132	R8061	C-CARBON R	RN72K1J-680JE	1	435036804R1
HDM0132	R8062	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R8063	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R8064	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R8065	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8066	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8067	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8068	C-CARBON R	RN72K1J-750JE	1	435037504R1
HDM0132	R8069	C-CARBON R	RN72K1J-750JE	1	435037504R1
HDM0132	R8070	C-CARBON R	RN72K1J-750JE	1	435037504R1
HDM0132	R8071	C-CARBON R	RN72K1J-750JE	1	435037504R1
HDM0132	R8072	C-CARBON R	RN72K1J-750JE	1	435037504R1
HDM0132	R8073	C-CARBON R	RN72K1J-750JE	1	435037504R1
HDM0132	R8074	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8075	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8076	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8079	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R8080	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R8081	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R8082	C-CARBON R	RN72K1J-680JE	1	435036804R1
HDM0132	R8083	C-CARBON R	RN72K1J-471JE	1	435034714R1
HDM0132	R8084	C-CARBON R	RN72K1J-471JE	1	435034714R1
HDM0132	R8085	C-CARBON R	RN72K1J-471JE	1	435034714R1
HDM0132	R8086	C-CARBON R	RN72K1J-471JE	1	435034714R1

HDM0132	R8087	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R8088	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R8089	C-CARBON R	RN72K1J-102JE	1	435031024R1
HDM0132	R8090	C-CARBON R	RN72K1J-102JE	1	435031024R1
HDM0132	R8160	C-CARBON R	RN72K1J-332JE	1	435033324R1
HDM0132	R8161	C-CARBON R	RN72K1J-681JE	1	435036814R1
HDM0132	R8162	C-CARBON R	RN72K1J-101JE	1	435031014R1
HDM0132	R8165	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8201	C-CARBON R	RN72K1J-330JE	1	435033304R1
HDM0132	R8202	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	R8203	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	R8205	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R8206	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8207	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8208	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8209	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8210	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8212	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8213	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8214	C-CARBON R	RN72K1J-272JE	1	435032724R1
HDM0132	R8215	C-CARBON R	RN72K1J-272JE	1	435032724R1
HDM0132	R8219	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8223	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8224	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8230	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R8231	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R8232	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R8233	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R8234	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R8235	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R8236	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R8238	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R8239	C-R NET	RM7LJ330X04	1	43484733004R2

HDM0132	R8240	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R8241	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R8243	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R8245	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R8248	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R8249	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R8251	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8252	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8253	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8254	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8255	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8256	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8257	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8258	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8259	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8264	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8271	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8272	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8273	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8274	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8275	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8276	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8277	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8278	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8279	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8280	C-CARBON R	RN72K1J-120JE	1	435031204R1
HDM0132-1A	R8282	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	R8333	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8334	C-CARBON R	RN72K1J-222JE	1	435032224R1
HDM0132	R8335	C-CARBON R	RN72K1J-222JE	1	435032224R1
HDM0132	R8336	C-CARBON R	RN72K1J-472JE	1	435034724R1
HDM0132	R8337	C-CARBON R	RN72K1J-473JE	1	435034734R1
HDM0132	R8338	C-CARBON R	RN72K1J-473JE	1	435034734R1

HDM0132	R8339	C-CARBON R	RN72K2E-470JE	1	435224704R1
HDM0132	R8343	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8349	C-CARBON R	RN72K1J-473JE	1	435034734R1
HDM0132	R8350	C-CARBON R	RN72K1J-473JE	1	435034734R1
HDM0132	R8360	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8361	C-CARBON R	RN72K1J-681JE	1	435036814R1
HDM0132	R8362	C-CARBON R	RN72K1J-101JE	1	435031014R1
HDM0132	R8365	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8401	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8402	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R8403	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8404	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R8405	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R8408	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R8409	C-CARBON R	RN72K1J-101JE	1	435031014R1
HDM0132	R8410	C-CARBON R	RN72K1J-681JE	1	435036814R1
HDM0132	R8411	C-CARBON R	RN72K1J-472JE	1	435034724R1
HDM0132	R8416	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8417	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8418	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8419	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8420	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8421	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8422	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8423	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8424	C-R NET	RM7LJ220X04	1	43484722004R2
HDM0132	R8425	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R8429	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R8431	C-CARBON R	RN72K1J-472JE	1	435034724R1
HDM0132	R8432	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R8442	C-CARBON R	RN72K1J-102JE	1	435031024R1
HDM0132	R8501	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	R8502	C-CARBON R	RN72K1J-120JE	1	435031204R1

HDM0132	R8503	C-R NET	RM7LJ000X04	1	43484700004R2
HDM0132	R8504	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R8505	C-R NET	RM7LJ000X04	1	43484700004R2
HDM0132	R8507	C-R NET	RM7LJ000X04	1	43484700004R2
HDM0132	R8508	C-R NET	RM7LJ000X04	1	43484700004R2
HDM0132	R8509	C-R NET	RM7LJ000X04	1	43484700004R2
HDM0132	R8510	C-R NET	RM7LJ000X04	1	43484700004R2
HDM0132	R8511	C-R NET	RM7LJ000X04	1	43484700004R2
HDM0132	R8512	C-R NET	RM7LJ000X04	1	43484700004R2
HDM0132	R8513	C-R NET	RM7LJ000X04	1	43484700004R2
HDM0132	R8516	C-CARBON R	RN72K1J-101JE	1	435031014R1
HDM0132	R8517	C-CARBON R	RN72K1J-101JE	1	435031014R1
HDM0132	R8518	C-CARBON R	RN72K1J-472JE	1	435034724R1
HDM0132	R8519	C-CARBON R	RN72K1J-151JE	1	435031514R1
HDM0132	R8522	C-R NET	RM7LJ330X04	1	43484733004R2
HDM0132	R8523	C-CARBON R	RN72K1J-330JE	1	435033304R1
HDM0132	R8524	C-CARBON R	RN72K1J-330JE	1	435033304R1
HDM0132	R8525	C-CARBON R	RN72K1J-472JE	1	435034724R1
HDM0132	R8526	C-CARBON R	RN72K1J-472JE	1	435034724R1
HDM0132	R8527	C-CARBON R	RN72K1J-562JE	1	435035624R1
HDM0132	R8528	C-CARBON R	RN72K1J-562JE	1	435035624R1
HDM0132	R8529	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8530	C-CARBON R	RN72K1J-105JE	1	435031054R1
HDM0132	R8531	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	R8533	C-CARBON R	RN72K1J-562JE	1	435035624R1
HDM0132	R8534	C-CARBON R	RN72K1J-562JE	1	435035624R1
HDM0132	R8535	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	R8536	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	R8601	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	R8602	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	R8607	C-CARBON R	RN72K1J-473JE	1	435034734R1
HDM0132	R8608	C-CARBON R	RN72K1J-473JE	1	435034734R1
HDM0132	R8609	C-CARBON R	RN72K1J-000JE	1	435030004R1

HDM0132	R8617	C-CARBON R	RN72K1J-473JE	1	435034734R1
HDM0132	R8618	C-CARBON R	RN72K1J-473JE	1	435034734R1
HDM0132	R8619	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8627	C-CARBON R	RN72K1J-473JE	1	435034734R1
HDM0132	R8628	C-CARBON R	RN72K1J-473JE	1	435034734R1
HDM0132	R8629	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8637	C-CARBON R	RN72K1J-473JE	1	435034734R1
HDM0132	R8638	C-CARBON R	RN72K1J-473JE	1	435034734R1
HDM0132	R8639	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132-1A	R8647	C-CARBON R	RN72K1J-472JE	1	435034724R1
HDM0132-1A	R8648	C-CARBON R	RN72K1J-472JE	1	435034724R1
HDM0132-1A	R8649	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132-1A	R8650	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132-1A	R8651	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0132	R8654	C-CARBON R	RN72K1J-223JE	1	435032234R1
HDM0132	R8655	C-CARBON R	RN72K1J-224JE	1	435032244R1
HDM0132	R8656	C-CARBON R	RN72K1J-333JE	1	435033334R1
HDM0132	R8701	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8702	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8703	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8705	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R8706	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R8707	C-CARBON R	RN72K1J-220JE	1	435032204R1
HDM0132	R8708	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8709	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8710	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8711	C-CARBON R	RN72K1J-222JE	1	435032224R1
HDM0132	R8712	C-R NET	RM7LJ222X04	1	43484722204R2
HDM0132	R8713	C-R NET	RM7LJ222X04	1	43484722204R2
HDM0132	R8714	C-R NET	RM7LJ222X04	1	43484722204R2
HDM0132	R8715	C-R NET	RM7LJ103X04	1	43484710304R2
HDM0132	R8716	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0132	R8717	C-CARBON R	RN72K1J-103JE	1	435031034R1

HDM0132	R8718	C-CARBON R	RN72K1J-220JE	1	435032204R1	
HDM0132	R8719	C-CARBON R	RN72K1J-103JE	1	435031034R1	
HDM0132	R8720	C-CARBON R	RN72K1J-220JE	1	435032204R1	
HDM0132	R8721	C-CARBON R	RN72K1J-220JE	1	435032204R1	
HDM0132	R8722	C-CARBON R	RN72K1J-103JE	1	435031034R1	
HDM0132	R8723	C-CARBON R	RN72K1J-103JE	1	435031034R1	
HDM0132	R8733	C-CARBON R	RN72K1J-103JE	1	435031034R1	
HDM0132	R8742	C-CARBON R	RN72K1J-103JE	1	435031034R1	
HDM0132	R8744	C-CARBON R	RN72K1J-103JE	1	435031034R1	RXSWDEF UP
HDM0132-1A	R8746	C-CARBON R	RN72K1J-103JE	1	435031034R1	TXDEF DOWN
HDM0132	R8747	C-CARBON R	RN72K1J-103JE	1	435031034R1	VSPTYPE UP
HDM0132	R8749	C-CARBON R	RN72K1J-220JE	1	435032204R1	
HDM0132	R8750	C-CARBON R	RN72K1J-000JE	1	435030004R1	
HDM0132	R8751	C-CARBON R	RN72K1J-000JE	1	435030004R1	
HDM0132	R8752	C-CARBON R	RN72K1J-000JE	1	435030004R1	
HDM0132	R8823	C-CARBON R	RN72K1J-000JE	1	435030004R1	
HDM0132	R8824	C-CARBON R	RN72K1J-000JE	1	435030004R1	
HDM0132	R8937	C-CARBON R	RN72K1J-103JE	1	435031034R1	
HDM0132	R8951	C-CARBON R	RN72K1J-103JE	1	435031034R1	
HDM0132	R8952	C-CARBON R	RN72K1J-683JE	1	435036834R1	
HDM0132	R8953	C-CARBON R	RN72K1J-183FE	1	435031832R1	
HDM0132	R8954	C-CARBON R	RN72K1J-224FE	1	435032242R1	
HDM0132	R8955	C-CARBON R	RN72K1J-103FE	1	435031032R1	
HDM0132	R8957	C-CARBON R	RN72K1J-333JE	1	435033334R1	
HDM0132	R8958	C-CARBON R	RN72K1J-333FE	1	435033332R1	
HDM0132	R8959	C-CARBON R	RN72K1J-562FE	1	435035622R1	
HDM0132	R8960	C-CARBON R	RN72K1J-103FE	1	435031032R1	
HDM0132	R8962	C-CARBON R	RN72K1J-333JE	1	435033334R1	
HDM0132	R8963	C-CARBON R	RN72K1J-153FE	1	435031532R1	
HDM0132	R8964	C-CARBON R	RN72K1J-333FE	1	435033332R1	
HDM0132	R8965	C-CARBON R	RN72K1J-103FE	1	435031032R1	
HDM0132	R8967	C-CARBON R	RN72K1J-683JE	1	435036834R1	
HDM0132	R8968	C-CARBON R	RN72K1J-333FE	1	435033332R1	

HDM0132	R8969	C-CARBON R	RN72K1J-394FE	1	435033942R1	
HDM0132	R8970	C-CARBON R	RN72K1J-103FE	1	435031032R1	
HDM0132	R8971	C-CARBON R	RN72K1J-473JE	1	435034734R1	
HDM0132	R8972	C-CARBON R	RN72K1J-103JE	1	435031034R1	
HDM0132	R8973	C-CARBON R	RN72K1J-103JE	1	435031034R1	
HDM0132	R8974	C-CARBON R	RN72K1J-103JE	1	435031034R1	
HDM0132	R8976	C-CARBON R	RN72K1J-103JE	1	435031034R1	
HDM0132	R8977	C-CARBON R	RN72K1J-562JE	1	435035624R1	
HDM0132	R8978	C-CARBON R	RN72K1J-682JE	1	435036824R1	
HDM0132	R8979	C-CARBON R	RN72K1J-562JE	1	435035624R1	
HDM0132	X3001	CRYSTAL	HC-49SMD24.000MHz	1	3010479R2	
HDM0132	X3001 or	CRYSTAL	HC-49USSMD24.00MHz	(1)	3010471R2	
HDM0132	X3401	CRYSTAL	HC-49USSMD17.734MHz	1	3010442R2	
HDM0132	X8200	CRYSTAL	HC-49USSMD19.6608M	1	3010458R2	
HDM0132	X8501	CRYSTAL	DSX530GAK27.0000MHZ	1	3010474R2	N
HDM0132	X8701	CERA LOCK	CSTCR5M00G53-B0	1	3010356R2	

U024 Front HDMI terminal PC board**BAHDM-0290-1A**

PCB	NO.	PART NAME	DESCRIPTION	Q'TY	PART NO.	REMARKS
HDM0290-1A	D8661	C-DIODE	KDS4148U	1	223283R2	
HDM0290-1A	D8661 or	C-DIODE	1SS352	(1)	223234R2	
HDM0290-1A	D8662	C-DIODE	KDS4148U	1	223283R2	
HDM0290-1A	D8662 or	C-DIODE	1SS352	(1)	223234R2	
HDM0290-1A	Q8661	IC	TMDS141RHARG4	1	22242586R2	
HDM0290-1A	L8661	CORE	BLM18PG181SN1D	1	2350005R1	
HDM0290-1A	C8661	C-FILM C	ECHU16V-104J	1	373041044R2	
HDM0290-1A	C8663	C-CERA C	CK725F1A-105Z1	1	332181050R1	
HDM0290-1A	C8664	C-CERA C	CK725B1H-102K1	1	332101025R1	
HDM0290-1A	C8669	C-CERA C	CK725F1A-105Z1	1	332181050R1	
HDM0290-1A	C8670	C-CERA C	CK725B1H-102K1	1	332101025R1	
HDM0290-1A	C8671	C-CERA C	CK725F1A-105Z1	1	332181050R1	
HDM0290-1A	C8672	C-CERA C	CK725B1H-102K1	1	332101025R1	
HDM0290-1A	C8673	C-CERA C	CK725F1A-105Z1	1	332181050R1	

HDM0290-1A	C8674	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0290-1A	C8675	C-CERA C	CK725F1A-105Z1	1	332181050R1
HDM0290-1A	C8676	C-CERA C	CK725B1H-102K1	1	332101025R1
HDM0290-1A	C8677	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0290-1A	C8680	C-CERA C	CK725B0J-106K	1	332091065R2
HDM0290-1A	R8667	C-CARBON R	RN72K1J-473JE	1	435034734R1
HDM0290-1A	R8668	C-CARBON R	RN72K1J-473JE	1	435034734R1
HDM0290-1A	R8669	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0290-1A	R8670	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0290-1A	R8672	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0290-1A	R8673	C-CARBON R	RN72K1J-472JE	1	435034724R1
HDM0290-1A	R8674	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0290-1A	R8675	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0290-1A	R8676	C-CARBON R	RN72K1J-103JE	1	435031034R1
HDM0290-1A	R8680	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0290-1A	R8681	C-CARBON R	RN72K1J-000JE	1	435030004R1
HDM0290-1A	P8641C	SOCKET	FX16-31S-0.5SV	1	25053354R2
HDM0290-1A	P8661	SOCKET	YKF45-7037V	1	25053253R3
HDM0290-1A	P8663	CRIMP AS	CRIMP AS DX730	1	2063925100UL

ONKYO CORPORATION

Service Dept. Technical Support : 2-1, Nisshin-cho, Neyagawa-shi, OSAKA 572-8540, JAPAN
Tel: 072-831-8023 Fax: 072-831-8163

ONKYO U.S.A. CORPORATION

18 Park Way, Upper Saddle River, N.J. 07458, U.S.A.
Tel: 201-785-2600 Fax: 201-785-2650 <http://www.us.onkyo.com/>

ONKYO EUROPE ELECTRONICS GmbH (DUISBURG OFFICE)

Hafennr.7602, Logport Office-Center, Bliersheimerstr.80B, 47229 Duisburg, Germany
Tel: +49-2065-90198-00 Fax: +49-2065-90198-40 <http://www.eu.onkyo.com/>

ONKYO EUROPE UK Office

Suite 1, Gregories Court, Gregories Road, Beaconsfield, Buckinghamshire, HP9 1HQ
UNITED KINGDOM Tel: +44-(0)1494-681515 Fax: +44(0)-1494-680452

ONKYO CHINA LIMITED

Units 2102-2107, Metroplaza Tower I, 223 Hing Fong Road, Kwai Chung,
N.T., HONG KONG Tel: 852-2429-3118 Fax: 852-2428-9039
<http://www.ch.onkyo.com/>

