## FITTING INSTRUCTIONS FOR THE GARRARD MULTI-PURPOSE PLUG-IN PICKUP CASE TYPE MPM2

The Garrard Type MPM2 Multi-Purpose pickup case has been designed for use on Garrard Models R.C.90, R.C.80M and R.C.111 three speed automatic record changers, also the Model 'TA' three speed single record player.

This pickup case will, with the aid of the accessories supplied with it, enable a wide range of pickup cartridges to be fitted.

A thin bakelite section known as a knockout, which can be easily broken away, is provided in the front of the case through which can pass the knob of turnover type cartridges and a hole is located in the top of the case, covered by the Garrard name plate, for the knob of the turn round stylus type of cartridge.

As this pickup case can easily be plugged in and out of the pickup arm, single stylus cartridges can be fitted having a separate case for each type of cartridge.

The accessories comprise:—

2 Screws (assembled) Ref: A40295

2 Stand-off's - Ref: A50504 1 Sub Plate - Ref: A50525

2 Spacers - Ref: A45210 2 Washers - Ref: A40519


Most pickup cartridges will quite easily assemble into the case using the accessories provided.

The two spacers should be assembled under the harness of the cartridge should the stylus not project far enough below the edge of the case, such as with the Pickering turnover cartridge.


The two washers should be used under the screw heads as the holes in the harness of some pickups are larger than the screw heads, centralise the cartridge before tightening the screws.

For cartridges such as G.E. having the turn round type of stylus, the Garrard name plate should be removed from the case by pushing it out from inside and replacing it with the sub-plate. Be careful not to lose the two 6BA nuts immediately underneath the plate.

THE GARRARD ENGINEERING & MANUFACTURING Co., Ltd. NEWCASTLE STREET - SWINDON - WILTSHIRE - ENGLAND IN U.S.A. — GARRARD SALES CORPORATION 80 SHORE ROAD - PORT WASHINGTON - NEW YORK

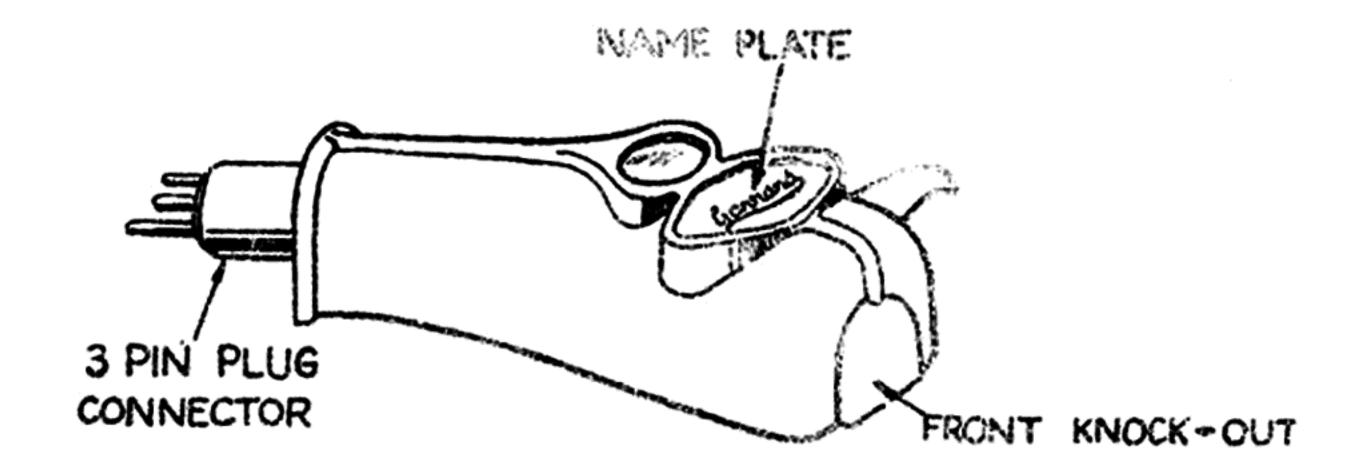

FIXING NUTS FOR STANDOFFS IN MOULDING RECESSES

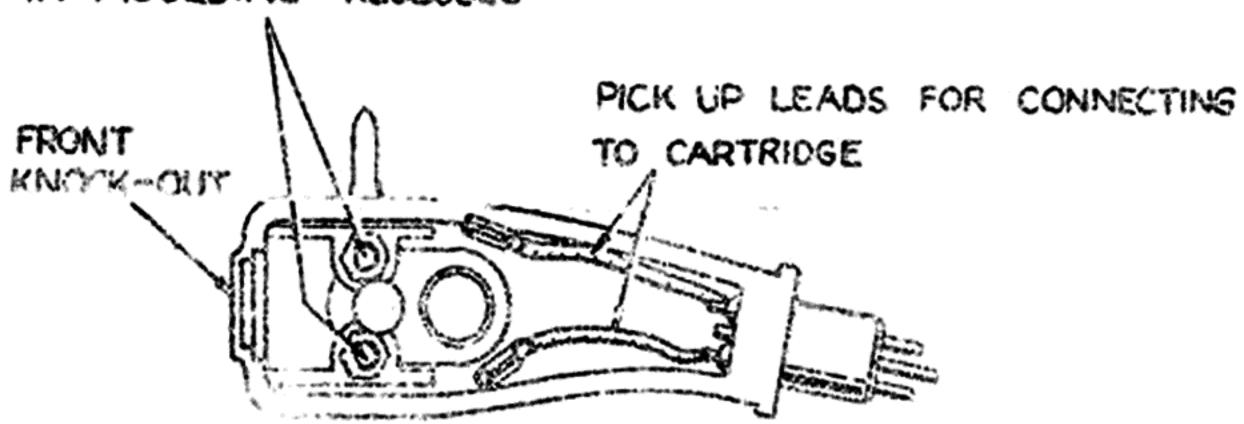


SUB PLATE A 50525 REPLACES NAME PLATE WHEN A CARTRIDGE IS FITTED HAVING STYLUS CHANGE OVER KNOB ON TOP



SPACERS A 45210











WASHERS

A 40519



